Contents

Preface 1

UNIT 1 MECHANICS

CHAPTER 1
Units and Measurement 5
Introduction 5
1.1 The Scope and Scale of Physics 6
1.2 Units and Standards 12
1.3 Unit Conversion 18
1.4 Dimensional Analysis 21
1.5 Estimates and Fermi Calculations 24
1.6 Significant Figures 27
1.7 Solving Problems in Physics 31
Chapter Review 34

CHAPTER 2
Vectors 43
Introduction 43
2.1 Scalars and Vectors 44
2.2 Coordinate Systems and Components of a Vector 55
2.3 Algebra of Vectors 65
2.4 Products of Vectors 74
Chapter Review 86

CHAPTER 3
Motion Along a Straight Line 99
Introduction 99
3.1 Position, Displacement, and Average Velocity 100
3.2 Instantaneous Velocity and Speed 104
3.3 Average and Instantaneous Acceleration 109
3.4 Motion with Constant Acceleration 117
3.5 Free Fall 129
3.6 Finding Velocity and Displacement from Acceleration 134
Chapter Review 138

CHAPTER 4
Motion in Two and Three Dimensions 149
Introduction 149
4.1 Displacement and Velocity Vectors 150
4.2 Acceleration Vector 157
4.3 Projectile Motion 162
4.4 Uniform Circular Motion 172
4.5 Relative Motion in One and Two Dimensions 179

Chapter Review 184

CHAPTER 5
Newton's Laws of Motion 195
Introduction 195
5.1 Forces 196
5.2 Newton's First Law 200
5.3 Newton's Second Law 204
5.4 Mass and Weight 215
5.5 Newton’s Third Law 217
5.6 Common Forces 223
5.7 Drawing Free-Body Diagrams 233
Chapter Review 238

CHAPTER 6
Applications of Newton's Laws 251
Introduction 251
6.1 Solving Problems with Newton’s Laws 252
6.2 Friction 267
6.3 Centripetal Force 279
6.4 Drag Force and Terminal Speed 288
Chapter Review 297

CHAPTER 7
Work and Kinetic Energy 315
Introduction 315
7.1 Work 316
7.2 Kinetic Energy 325
7.3 Work-Energy Theorem 329
7.4 Power 333
Chapter Review 336

CHAPTER 8
Potential Energy and Conservation of Energy 347
Introduction 347
8.1 Potential Energy of a System 348
8.2 Conservative and Non-Conservative Forces 356
8.3 Conservation of Energy 359
8.4 Potential Energy Diagrams and Stability 365
8.5 Sources of Energy 369
Chapter Review 373

CHAPTER 9
Linear Momentum and Collisions 385
Introduction 385
9.1 Linear Momentum 386
9.2 Impulse and Collisions 388
9.3 Conservation of Linear Momentum 401
9.4 Types of Collisions 411

9.5 Collisions in Multiple Dimensions 419
9.6 Center of Mass 426
9.7 Rocket Propulsion 441
Chapter Review 447

CHAPTER 10
Fixed-Axis Rotation 461
Introduction 461
10.1 Rotational Variables 462
10.2 Rotation with Constant Angular Acceleration 471
10.3 Relating Angular and Translational Quantities 476
10.4 Moment of Inertia and Rotational Kinetic Energy 481
10.5 Calculating Moments of Inertia 488
10.6 Torque 496
10.7 Newton's Second Law for Rotation 501
10.8 Work and Power for Rotational Motion 505
Chapter Review 511

CHAPTER 11
Angular Momentum 527
Introduction 527
11.1 Rolling Motion 528
11.2 Angular Momentum 535
11.3 Conservation of Angular Momentum 544
11.4 Precession of a Gyroscope 550
Chapter Review 554

CHAPTER 12
Static Equilibrium and Elasticity 565
Introduction 565
12.1 Conditions for Static Equilibrium 566
12.2 Examples of Static Equilibrium 574
12.3 Stress, Strain, and Elastic Modulus 587
12.4 Elasticity and Plasticity 597
Chapter Review 599

CHAPTER 13
Gravitation 611
Introduction 611
13.1 Newton's Law of Universal Gravitation 612
13.2 Gravitation Near Earth's Surface 617
13.3 Gravitational Potential Energy and Total Energy 624
13.4 Satellite Orbits and Energy 629
13.5 Kepler's Laws of Planetary Motion 636
13.6 Tidal Forces 642
13.7 Einstein's Theory of Gravity 648
Chapter Review 656

Appendix A Units 883

Appendix B Conversion Factors 887

Appendix C Fundamental Constants 891

Appendix D Astronomical Data 893

Appendix E Mathematical Formulas 895

Appendix F Chemistry 899

Appendix G The Greek Alphabet 901

Answer Key 902

Index 963

CHAPTER 2
Vectors



Figure 2.1 A signpost gives information about distances and directions to towns or to other locations relative to the location of the signpost. Distance is a scalar quantity. Knowing the distance alone is not enough to get to the town; we must also know the direction from the signpost to the town. The direction, together with the distance, is a vector quantity commonly called the displacement vector. A signpost, therefore, gives information about displacement vectors from the signpost to towns. (credit: modification of work by "studio tdes"/Flickr, thedailyenglishshow.com)

Chapter Outline

2.1 Scalars and Vectors

2.2 Coordinate Systems and Components of a Vector

2.3 Algebra of Vectors

2.4 Products of Vectors

INTRODUCTION Vectors are essential to physics and engineering. Many fundamental physical quantities are vectors, including displacement, velocity, force, and electric and magnetic vector fields. Scalar products of vectors define other fundamental scalar physical quantities, such as energy. Vector products of vectors define still other fundamental vector physical quantities, such as torque and angular momentum. In other words, vectors are a component part of physics in much the same way as sentences are a component part of literature.

In introductory physics, vectors are Euclidean quantities that have geometric representations as arrows in one dimension (in a line), in two dimensions (in a plane), or in three dimensions (in space). They can be added, subtracted, or multiplied. In this chapter, we explore elements of vector algebra for applications in mechanics and in electricity and magnetism. Vector operations also have numerous generalizations in other branches of physics.

2.1 Scalars and Vectors

Learning Objectives

By the end of this section, you will be able to:

- Describe the difference between vector and scalar quantities.
- Identify the magnitude and direction of a vector.
- Explain the effect of multiplying a vector quantity by a scalar.
- Describe how one-dimensional vector quantities are added or subtracted.
- Explain the geometric construction for the addition or subtraction of vectors in a plane.
- Distinguish between a vector equation and a scalar equation.

Many familiar physical quantities can be specified completely by giving a single number and the appropriate unit. For example, “a class period lasts 50 min” or “the gas tank in my car holds 65 L” or “the distance between two posts is 100 m.” A physical quantity that can be specified completely in this manner is called a **scalar quantity**. Scalar is a synonym of “number.” Time, mass, distance, length, volume, temperature, and energy are examples of **scalar** quantities.

Scalar quantities that have the same physical units can be added or subtracted according to the usual rules of algebra for numbers. For example, a class ending 10 min earlier than 50 min lasts $50\ \text{min} - 10\ \text{min} = 40\ \text{min}$. Similarly, a 60-cal serving of corn followed by a 200-cal serving of donuts gives $60\ \text{cal} + 200\ \text{cal} = 260\ \text{cal}$ of energy. When we multiply a scalar quantity by a number, we obtain the same scalar quantity but with a larger (or smaller) value. For example, if yesterday’s breakfast had 200 cal of energy and today’s breakfast has four times as much energy as it had yesterday, then today’s breakfast has $4(200\ \text{cal}) = 800\ \text{cal}$ of energy. Two scalar quantities can also be multiplied or divided by each other to form a derived scalar quantity. For example, if a train covers a distance of 100 km in 1.0 h, its speed is 100.0 km/1.0 h = 27.8 m/s, where the speed is a derived scalar quantity obtained by dividing distance by time.

Many physical quantities, however, cannot be described completely by just a single number of physical units. For example, when the U.S. Coast Guard dispatches a ship or a helicopter for a rescue mission, the rescue team must know not only the distance to the distress signal, but also the direction from which the signal is coming so they can get to its origin as quickly as possible. Physical quantities specified completely by giving a number of units (magnitude) and a direction are called **vector quantities**. Examples of vector quantities include displacement, velocity, position, force, and torque. In the language of mathematics, physical vector quantities are represented by mathematical objects called **vectors** (Figure 2.2). We can add or subtract two vectors, and we can multiply a vector by a scalar or by another vector, but we cannot divide by a vector. The operation of division by a vector is not defined.

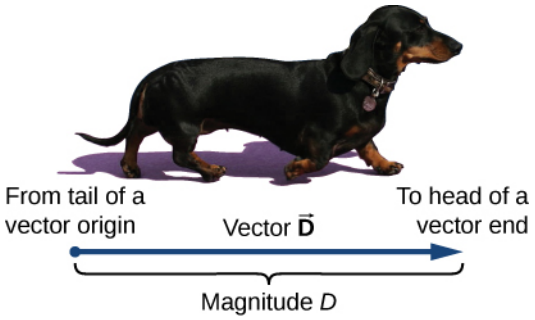


Figure 2.2 We draw a vector from the initial point or origin (called the “tail” of a vector) to the end or terminal point (called the “head” of a vector), marked by an arrowhead. Magnitude is the length of a vector and is always a positive scalar quantity. (credit "photo": modification of work by Cate Sevilla)

Let's examine vector algebra using a graphical method to be aware of basic terms and to develop a qualitative understanding. In practice, however, when it comes to solving physics problems, we use analytical methods, which we'll see in the next section. Analytical methods are more simple computationally and more accurate than graphical methods. From now on, to distinguish between a vector and a scalar quantity, we adopt the common convention that a letter in bold type with an arrow above it denotes a vector, and a letter without an arrow denotes a scalar. For example, a distance of 2.0 km, which is a scalar quantity, is denoted by $d = 2.0$ km, whereas a displacement of 2.0 km in some direction, which is a vector quantity, is denoted by $\vec{\mathbf{d}}$.

Suppose you tell a friend on a camping trip that you have discovered a terrific fishing hole 6 km from your tent. It is unlikely your friend would be able to find the hole easily unless you also communicate the direction in which it can be found with respect to your campsite. You may say, for example, "Walk about 6 km northeast from my tent." The key concept here is that you have to give not one but *two* pieces of information—namely, the distance or magnitude (6 km) *and* the direction (northeast).

Displacement is a general term used to describe a *change in position*, such as during a trip from the tent to the fishing hole. Displacement is an example of a vector quantity. If you walk from the tent (location *A*) to the hole (location *B*), as shown in Figure 2.3, the vector $\vec{\mathbf{D}}$, representing your **displacement**, is drawn as the arrow that originates at point *A* and ends at point *B*. The arrowhead marks the end of the vector. The direction of the displacement vector $\vec{\mathbf{D}}$ is the direction of the arrow. The length of the arrow represents the **magnitude** *D* of vector $\vec{\mathbf{D}}$. Here, $D = 6$ km. Since the magnitude of a vector is its length, which is a positive number, the magnitude is also indicated by placing the absolute value notation around the symbol that denotes the vector; so, we can write equivalently that $D \equiv |\vec{\mathbf{D}}|$. To solve a vector problem graphically, we need to draw the vector $\vec{\mathbf{D}}$ to scale. For example, if we assume 1 unit of distance (1 km) is represented in the drawing by a line segment of length $u = 2$ cm, then the total displacement in this example is represented by a vector of length $d = 6u = 6(2\text{ cm}) = 12$ cm, as shown in Figure 2.4. Notice that here, to avoid confusion, we used $D = 6$ km to denote the magnitude of the actual displacement and $d = 12$ cm to denote the length of its representation in the drawing.

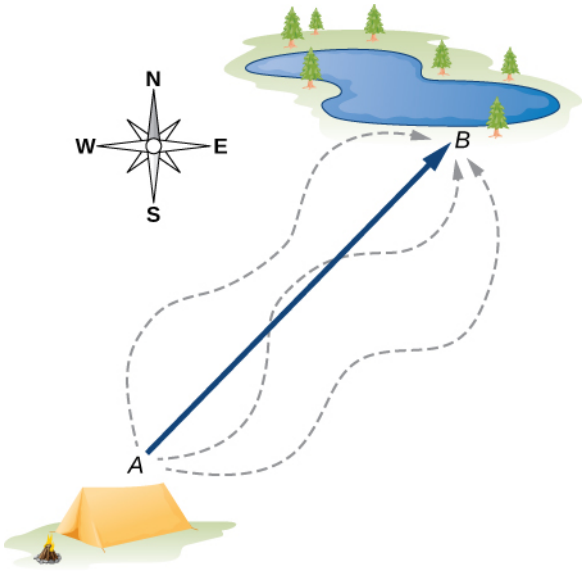


Figure 2.3 The displacement vector from point *A* (the initial position at the campsite) to point *B* (the final position at the fishing hole) is indicated by an arrow with origin at point *A* and end at point *B*. The displacement is the same for any of the actual paths (dashed curves) that may be taken between points *A* and *B*.

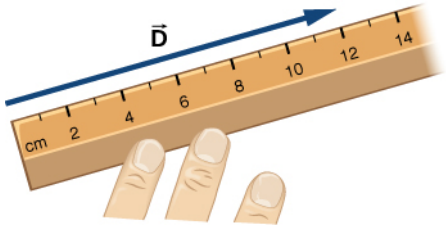


Figure 2.4 A displacement $\vec{\mathbf{D}}$ of magnitude 6 km is drawn to scale as a vector of length 12 cm when the length of 2 cm represents 1 unit of displacement (which in this case is 1 km).

Suppose your friend walks from the campsite at A to the fishing pond at B and then walks back: from the fishing pond at B to the campsite at A. The magnitude of the displacement vector $\vec{\mathbf{D}}_{AB}$ from A to B is the same as the magnitude of the displacement vector $\vec{\mathbf{D}}_{BA}$ from B to A (it equals 6 km in both cases), so we can write $D_{AB} = D_{BA}$. However, vector $\vec{\mathbf{D}}_{AB}$ is *not* equal to vector $\vec{\mathbf{D}}_{BA}$ because these two vectors have different directions: $\vec{\mathbf{D}}_{AB} \neq \vec{\mathbf{D}}_{BA}$. In Figure 2.3, vector $\vec{\mathbf{D}}_{BA}$ would be represented by a vector with an origin at point B and an end at point A, indicating vector $\vec{\mathbf{D}}_{BA}$ points to the southwest, which is exactly $180°$ opposite to the direction of vector $\vec{\mathbf{D}}_{AB}$. We say that vector $\vec{\mathbf{D}}_{BA}$ is **antiparallel** to vector $\vec{\mathbf{D}}_{AB}$ and write $\vec{\mathbf{D}}_{AB} = -\vec{\mathbf{D}}_{BA}$, where the minus sign indicates the antiparallel direction.

Two vectors that have identical directions are said to be **parallel vectors**—meaning, they are *parallel* to each other. Two parallel vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are equal, denoted by $\vec{\mathbf{A}} = \vec{\mathbf{B}}$, if and only if they have equal magnitudes $|\vec{\mathbf{A}}| = |\vec{\mathbf{B}}|$. Two vectors with directions perpendicular to each other are said to be **orthogonal vectors**. These relations between vectors are illustrated in Figure 2.5.

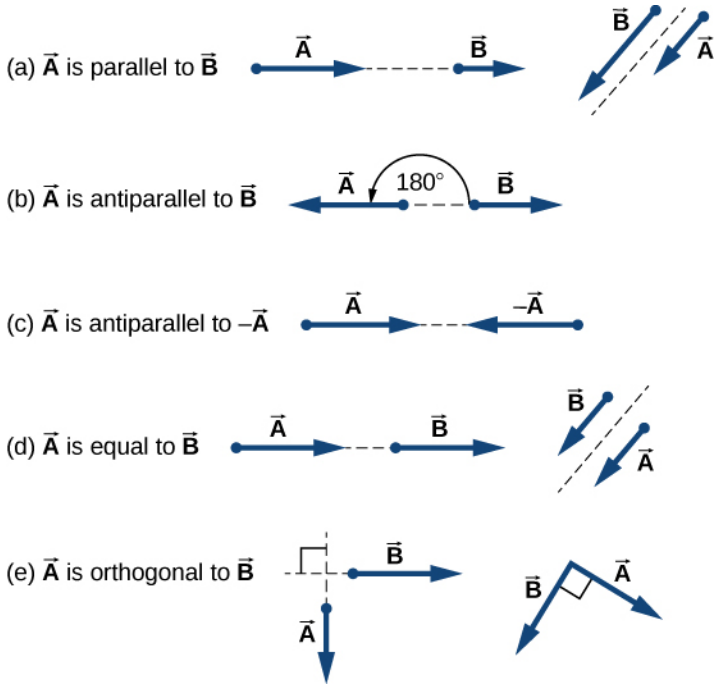


Figure 2.5 Various relations between two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$. (a) $\vec{\mathbf{A}} \neq \vec{\mathbf{B}}$ because $A \neq B$. (b) $\vec{\mathbf{A}} \neq \vec{\mathbf{B}}$ because they are not parallel and $A \neq B$. (c) $\vec{\mathbf{A}} \neq -\vec{\mathbf{A}}$ because they have different directions (even though $|\vec{\mathbf{A}}| = |-\vec{\mathbf{A}}| = A$). (d) $\vec{\mathbf{A}} = \vec{\mathbf{B}}$ because they are parallel *and* have identical magnitudes $A = B$. (e) $\vec{\mathbf{A}} \neq \vec{\mathbf{B}}$ because they have different directions (are not parallel); here, their directions differ by $90°$ —meaning, they are orthogonal.

CHECK YOUR UNDERSTANDING 2.1

Two motorboats named *Alice* and *Bob* are moving on a lake. Given the information about their velocity vectors

in each of the following situations, indicate whether their velocity vectors are equal or otherwise. (a) *Alice* moves north at 6 knots and *Bob* moves west at 6 knots. (b) *Alice* moves west at 6 knots and *Bob* moves west at 3 knots. (c) *Alice* moves northeast at 6 knots and *Bob* moves south at 3 knots. (d) *Alice* moves northeast at 6 knots and *Bob* moves southwest at 6 knots. (e) *Alice* moves northeast at 2 knots and *Bob* moves closer to the shore northeast at 2 knots.

Algebra of Vectors in One Dimension

Vectors can be multiplied by scalars, added to other vectors, or subtracted from other vectors. We can illustrate these vector concepts using an example of the fishing trip seen in Figure 2.6.

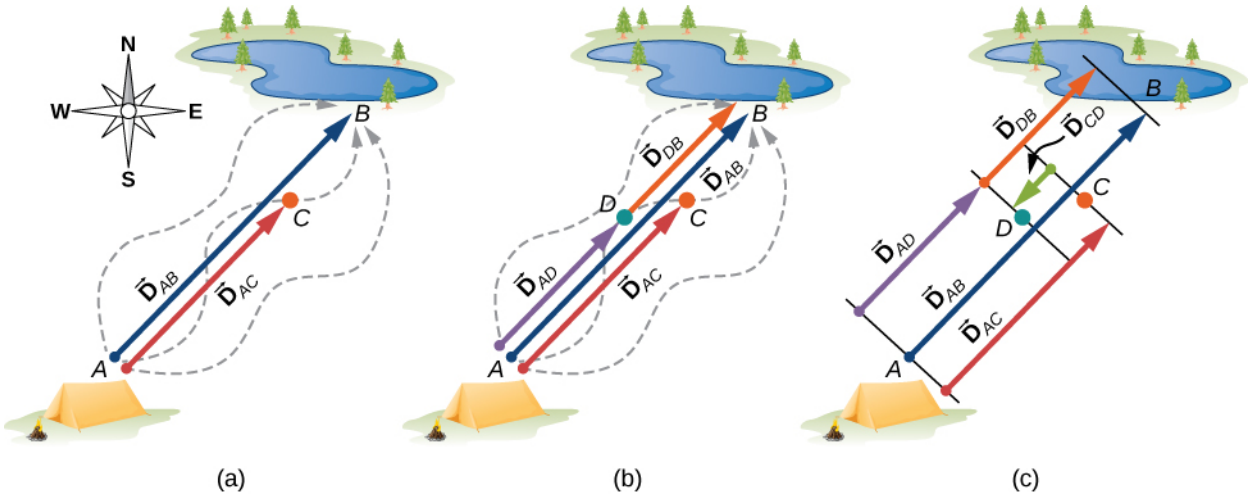


Figure 2.6 Displacement vectors for a fishing trip. (a) Stopping to rest at point *C* while walking from camp (point *A*) to the pond (point *B*). (b) Going back for the dropped tackle box (point *D*). (c) Finishing up at the fishing pond.

Suppose your friend departs from point *A* (the campsite) and walks in the direction to point *B* (the fishing pond), but, along the way, stops to rest at some point *C* located three-quarters of the distance between *A* and *B*, beginning from point *A* (Figure 2.6(a)). What is his displacement vector $\vec{\mathbf{D}}_{AC}$ when he reaches point *C*? We know that if he walks all the way to *B*, his displacement vector relative to *A* is $\vec{\mathbf{D}}_{AB}$, which has magnitude $D_{AB} = 6$ km and a direction of northeast. If he walks only a 0.75 fraction of the total distance, maintaining the northeasterly direction, at point *C* he must be $0.75D_{AB} = 4.5$ km away from the campsite at *A*. So, his displacement vector at the rest point *C* has magnitude $D_{AC} = 4.5 \text{ km} = 0.75D_{AB}$ and is parallel to the displacement vector $\vec{\mathbf{D}}_{AB}$. All of this can be stated succinctly in the form of the following **vector equation**:

$$\vec{\mathbf{D}}_{AC} = 0.75\vec{\mathbf{D}}_{AB}.$$

In a vector equation, both sides of the equation are vectors. The previous equation is an example of a vector multiplied by a positive scalar (number) $\alpha = 0.75$. The result, $\vec{\mathbf{D}}_{AC}$, of such a multiplication is a new vector with a direction parallel to the direction of the original vector $\vec{\mathbf{D}}_{AB}$.

In general, when a vector $\vec{\mathbf{A}}$ is multiplied by a *positive* scalar α, the result is a new vector $\vec{\mathbf{B}}$ that is *parallel* to $\vec{\mathbf{A}}$:

$$\vec{\mathbf{B}} = \alpha\vec{\mathbf{A}}. \qquad 2.1$$

The magnitude $|\vec{\mathbf{B}}|$ of this new vector is obtained by multiplying the magnitude $|\vec{\mathbf{A}}|$ of the original vector, as expressed by the **scalar equation**:

$$B = |\alpha|A. \qquad 2.2$$

In a scalar equation, both sides of the equation are numbers. Equation 2.2 is a scalar equation because the

magnitudes of vectors are scalar quantities (and positive numbers). If the scalar α is *negative* in the vector equation Equation 2.1, then the magnitude $|\vec{\mathbf{B}}|$ of the new vector is still given by Equation 2.2, but the direction of the new vector $\vec{\mathbf{B}}$ is *antiparallel* to the direction of $\vec{\mathbf{A}}$. These principles are illustrated in Figure 2.7(a) by two examples where the length of vector $\vec{\mathbf{A}}$ is 1.5 units. When $\alpha = 2$, the new vector $\vec{\mathbf{B}} = 2\vec{\mathbf{A}}$ has length $B = 2A = 3.0$ units (twice as long as the original vector) and is parallel to the original vector. When $\alpha = -2$, the new vector $\vec{\mathbf{C}} = -2\vec{\mathbf{A}}$ has length $C = |-2|A = 3.0$ units (twice as long as the original vector) and is antiparallel to the original vector.

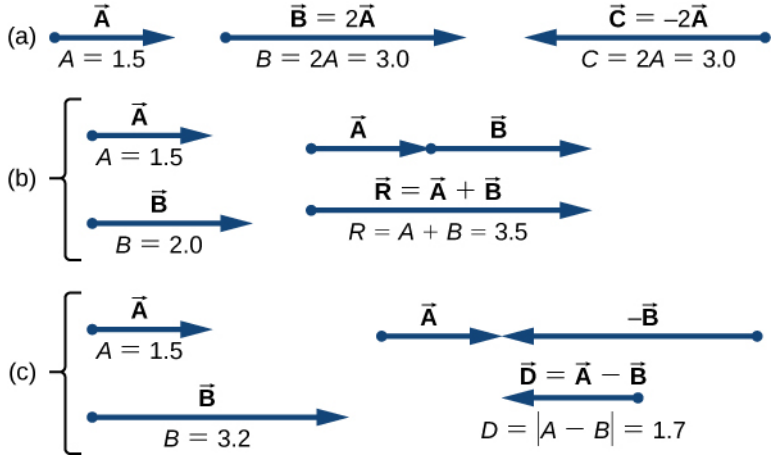


Figure 2.7 Algebra of vectors in one dimension. (a) Multiplication by a scalar. (b) Addition of two vectors ($\vec{\mathbf{R}}$ is called the *resultant* of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$). (c) Subtraction of two vectors ($\vec{\mathbf{D}}$ is the difference of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$).

Now suppose your fishing buddy departs from point A (the campsite), walking in the direction to point B (the fishing hole), but he realizes he lost his tackle box when he stopped to rest at point C (located three-quarters of the distance between A and B, beginning from point A). So, he turns back and retraces his steps in the direction toward the campsite and finds the box lying on the path at some point D only 1.2 km away from point C (see Figure 2.6(b)). What is his displacement vector $\vec{\mathbf{D}}_{AD}$ when he finds the box at point D? What is his displacement vector $\vec{\mathbf{D}}_{DB}$ from point D to the hole? We have already established that at rest point C his displacement vector is $\vec{\mathbf{D}}_{AC} = 0.75\vec{\mathbf{D}}_{AB}$. Starting at point C, he walks southwest (toward the campsite), which means his new displacement vector $\vec{\mathbf{D}}_{CD}$ from point C to point D is antiparallel to $\vec{\mathbf{D}}_{AB}$. Its magnitude $|\vec{\mathbf{D}}_{CD}|$ is $D_{CD} = 1.2\text{ km} = 0.2D_{AB}$, so his second displacement vector is $\vec{\mathbf{D}}_{CD} = -0.2\vec{\mathbf{D}}_{AB}$. His total displacement $\vec{\mathbf{D}}_{AD}$ relative to the campsite is the **vector sum** of the two displacement vectors: vector $\vec{\mathbf{D}}_{AC}$ (from the campsite to the rest point) and vector $\vec{\mathbf{D}}_{CD}$ (from the rest point to the point where he finds his box):

$$\vec{\mathbf{D}}_{AD} = \vec{\mathbf{D}}_{AC} + \vec{\mathbf{D}}_{CD}. \tag{2.3}$$

The vector sum of two (or more) vectors is called the **resultant vector** or, for short, the *resultant*. When the vectors on the right-hand-side of Equation 2.3 are known, we can find the resultant $\vec{\mathbf{D}}_{AD}$ as follows:

$$\vec{\mathbf{D}}_{AD} = \vec{\mathbf{D}}_{AC} + \vec{\mathbf{D}}_{CD} = 0.75\vec{\mathbf{D}}_{AB} - 0.2\,\vec{\mathbf{D}}_{AB} = (0.75 - 0.2)\vec{\mathbf{D}}_{AB} = 0.55\vec{\mathbf{D}}_{AB}. \tag{2.4}$$

When your friend finally reaches the pond at B, his displacement vector $\vec{\mathbf{D}}_{AB}$ from point A is the vector sum of his displacement vector $\vec{\mathbf{D}}_{AD}$ from point A to point D and his displacement vector $\vec{\mathbf{D}}_{DB}$ from point D to the fishing hole: $\vec{\mathbf{D}}_{AB} = \vec{\mathbf{D}}_{AD} + \vec{\mathbf{D}}_{DB}$ (see Figure 2.6(c)). This means his displacement vector $\vec{\mathbf{D}}_{DB}$ is the **difference of two vectors**:

$$\vec{\mathbf{D}}_{DB} = \vec{\mathbf{D}}_{AB} - \vec{\mathbf{D}}_{AD} = \vec{\mathbf{D}}_{AB} + (-\vec{\mathbf{D}}_{AD}). \tag{2.5}$$

Notice that a difference of two vectors is nothing more than a vector sum of two vectors because the second term in Equation 2.5 is vector $-\vec{\mathbf{D}}_{AD}$ (which is antiparallel to $\vec{\mathbf{D}}_{AD}$). When we substitute Equation 2.4 into

Equation 2.5, we obtain the second displacement vector:

$$\vec{\mathbf{D}}_{DB} = \vec{\mathbf{D}}_{AB} - \vec{\mathbf{D}}_{AD} = \vec{\mathbf{D}}_{AB} - 0.55\vec{\mathbf{D}}_{AB} = (1.0 - 0.55)\vec{\mathbf{D}}_{AB} = 0.45\vec{\mathbf{D}}_{AB}. \quad 2.6$$

This result means your friend walked $D_{DB} = 0.45D_{AB} = 0.45(6.0\,\text{km}) = 2.7\,\text{km}$ from the point where he finds his tackle box to the fishing hole.

When vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ lie along a line (that is, in one dimension), such as in the camping example, their resultant $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}}$ and their difference $\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}}$ both lie along the same direction. We can illustrate the addition or subtraction of vectors by drawing the corresponding vectors to scale in one dimension, as shown in Figure 2.7.

To illustrate the resultant when $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are two parallel vectors, we draw them along one line by placing the origin of one vector at the end of the other vector in head-to-tail fashion (see Figure 2.7(b)). The magnitude of this resultant is the sum of their magnitudes: $R = A + B$. The direction of the resultant is parallel to both vectors. When vector $\vec{\mathbf{A}}$ is antiparallel to vector $\vec{\mathbf{B}}$, we draw them along one line in either head-to-head fashion (Figure 2.7(c)) or tail-to-tail fashion. The magnitude of the vector difference, then, is the *absolute value* $D = |A - B|$ of the difference of their magnitudes. The direction of the difference vector $\vec{\mathbf{D}}$ is parallel to the direction of the longer vector.

In general, in one dimension—as well as in higher dimensions, such as in a plane or in space—we can add any number of vectors and we can do so in any order because the addition of vectors is **commutative**,

$$\vec{\mathbf{A}} + \vec{\mathbf{B}} = \vec{\mathbf{B}} + \vec{\mathbf{A}}, \quad 2.7$$

and **associative**,

$$(\vec{\mathbf{A}} + \vec{\mathbf{B}}) + \vec{\mathbf{C}} = \vec{\mathbf{A}} + (\vec{\mathbf{B}} + \vec{\mathbf{C}}). \quad 2.8$$

Moreover, multiplication by a scalar is **distributive**:

$$\alpha_1\vec{\mathbf{A}} + \alpha_2\vec{\mathbf{A}} = (\alpha_1 + \alpha_2)\vec{\mathbf{A}}. \quad 2.9$$

We used the distributive property in Equation 2.4 and Equation 2.6.

When adding many vectors in one dimension, it is convenient to use the concept of a **unit vector**. A unit vector, which is denoted by a letter symbol with a hat, such as $\hat{\mathbf{u}}$, has a magnitude of one and does not have any physical unit so that $|\hat{\mathbf{u}}| \equiv u = 1$. The only role of a unit vector is to specify direction. For example, instead of saying vector $\vec{\mathbf{D}}_{AB}$ has a magnitude of 6.0 km and a direction of northeast, we can introduce a unit vector $\hat{\mathbf{u}}$ that points to the northeast and say succinctly that $\vec{\mathbf{D}}_{AB} = (6.0\,\text{km})\hat{\mathbf{u}}$. Then the southwesterly direction is simply given by the unit vector $-\hat{\mathbf{u}}$. In this way, the displacement of 6.0 km in the southwesterly direction is expressed by the vector

$$\vec{\mathbf{D}}_{BA} = (-6.0\,\text{km})\hat{\mathbf{u}}.$$

EXAMPLE 2.1

A Ladybug Walker

A long measuring stick rests against a wall in a physics laboratory with its 200-cm end at the floor. A ladybug lands on the 100-cm mark and crawls randomly along the stick. It first walks 15 cm toward the floor, then it walks 56 cm toward the wall, then it walks 3 cm toward the floor again. Then, after a brief stop, it continues for 25 cm toward the floor and then, again, it crawls up 19 cm toward the wall before coming to a complete rest (Figure 2.8). Find the vector of its total displacement and its final resting position on the stick.

Strategy

If we choose the direction along the stick toward the floor as the direction of unit vector $\hat{\mathbf{u}}$, then the direction toward the floor is $+\hat{\mathbf{u}}$ and the direction toward the wall is $-\hat{\mathbf{u}}$. The ladybug makes a total of five displacements:

$$\begin{aligned}\vec{\mathbf{D}}_1 &= (15\text{ cm})(+\hat{\mathbf{u}}),\\ \vec{\mathbf{D}}_2 &= (56\text{ cm})(-\hat{\mathbf{u}}),\\ \vec{\mathbf{D}}_3 &= (3\text{ cm})(+\hat{\mathbf{u}}),\\ \vec{\mathbf{D}}_4 &= (25\text{ cm})(+\hat{\mathbf{u}}),\text{ and}\\ \vec{\mathbf{D}}_5 &= (19\text{ cm})(-\hat{\mathbf{u}}).\end{aligned}$$

The total displacement $\vec{\mathbf{D}}$ is the resultant of all its displacement vectors.

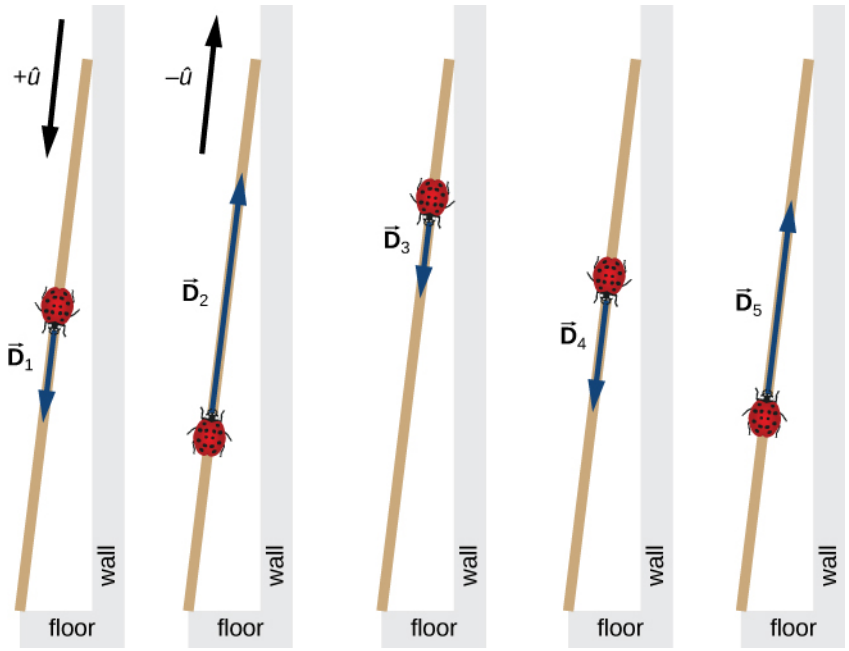


Figure 2.8 Five displacements of the ladybug. Note that in this schematic drawing, magnitudes of displacements are not drawn to scale. (credit "ladybug": modification of work by “Persian Poet Gal”/Wikimedia Commons)

Solution

The resultant of all the displacement vectors is

$$\begin{aligned}\vec{\mathbf{D}} &= \vec{\mathbf{D}}_1 + \vec{\mathbf{D}}_2 + \vec{\mathbf{D}}_3 + \vec{\mathbf{D}}_4 + \vec{\mathbf{D}}_5\\ &= (15\text{ cm})(+\hat{\mathbf{u}}) + (56\text{ cm})(-\hat{\mathbf{u}}) + (3\text{ cm})(+\hat{\mathbf{u}}) + (25\text{ cm})(+\hat{\mathbf{u}}) + (19\text{ cm})(-\hat{\mathbf{u}})\\ &= (15 - 56 + 3 + 25 - 19)\text{cm}\hat{\mathbf{u}}\\ &= -32\text{ cm}\hat{\mathbf{u}}.\end{aligned}$$

In this calculation, we use the distributive law given by Equation 2.9. The result reads that the total displacement vector points away from the 100-cm mark (initial landing site) toward the end of the meter stick that touches the wall. The end that touches the wall is marked 0 cm, so the final position of the ladybug is at the (100 – 32)cm = 68-cm mark.

CHECK YOUR UNDERSTANDING 2.2

A cave diver enters a long underwater tunnel. When her displacement with respect to the entry point is 20 m, she accidentally drops her camera, but she doesn’t notice it missing until she is some 6 m farther into the tunnel. She swims back 10 m but cannot find the camera, so she decides to end the dive. How far from the

entry point is she? Taking the positive direction out of the tunnel, what is her displacement vector relative to the entry point?

Algebra of Vectors in Two Dimensions

When vectors lie in a plane—that is, when they are in two dimensions—they can be multiplied by scalars, added to other vectors, or subtracted from other vectors in accordance with the general laws expressed by Equation 2.1, Equation 2.2, Equation 2.7, and Equation 2.8. However, the addition rule for two vectors in a plane becomes more complicated than the rule for vector addition in one dimension. We have to use the laws of geometry to construct resultant vectors, followed by trigonometry to find vector magnitudes and directions. This geometric approach is commonly used in navigation (Figure 2.9). In this section, we need to have at hand two rulers, a triangle, a protractor, a pencil, and an eraser for drawing vectors to scale by geometric constructions.



Figure 2.9 In navigation, the laws of geometry are used to draw resultant displacements on nautical maps.

For a geometric construction of the sum of two vectors in a plane, we follow **the parallelogram rule**. Suppose two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are at the arbitrary positions shown in Figure 2.10. Translate either one of them in parallel to the beginning of the other vector, so that after the translation, both vectors have their origins at the same point. Now, at the end of vector $\vec{\mathbf{A}}$ we draw a line parallel to vector $\vec{\mathbf{B}}$ and at the end of vector $\vec{\mathbf{B}}$ we draw a line parallel to vector $\vec{\mathbf{A}}$ (the dashed lines in Figure 2.10). In this way, we obtain a parallelogram. From the origin of the two vectors we draw a diagonal that is the resultant $\vec{\mathbf{R}}$ of the two vectors: $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}}$ (Figure 2.10(a)). The other diagonal of this parallelogram is the vector difference of the two vectors $\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}}$, as shown in Figure 2.10(b). Notice that the end of the difference vector is placed at the end of vector $\vec{\mathbf{A}}$.

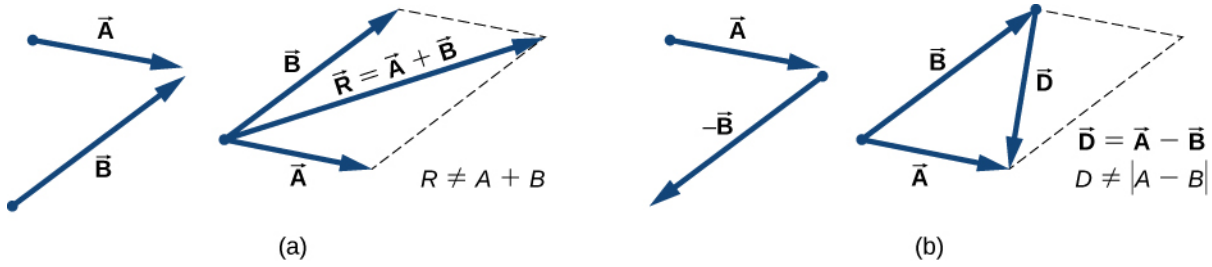


Figure 2.10 The parallelogram rule for the addition of two vectors. Make the parallel translation of each vector to a point where their

origins (marked by the dot) coincide and construct a parallelogram with two sides on the vectors and the other two sides (indicated by dashed lines) parallel to the vectors. (a) Draw the resultant vector $\vec{\mathbf{R}}$ along the diagonal of the parallelogram from the common point to the opposite corner. Length R of the resultant vector is *not* equal to the sum of the magnitudes of the two vectors. (b) Draw the difference vector $\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}}$ along the diagonal connecting the ends of the vectors. Place the origin of vector $\vec{\mathbf{D}}$ at the end of vector $\vec{\mathbf{B}}$ and the end (arrowhead) of vector $\vec{\mathbf{D}}$ at the end of vector $\vec{\mathbf{A}}$. Length D of the difference vector is *not* equal to the difference of magnitudes of the two vectors.

It follows from the parallelogram rule that neither the magnitude of the resultant vector nor the magnitude of the difference vector can be expressed as a simple sum or difference of magnitudes A and B, because the length of a diagonal cannot be expressed as a simple sum of side lengths. When using a geometric construction to find magnitudes $\left|\vec{\mathbf{R}}\right|$ and $\left|\vec{\mathbf{D}}\right|$, we have to use trigonometry laws for triangles, which may lead to complicated algebra. There are two ways to circumvent this algebraic complexity. One way is to use the method of components, which we examine in the next section. The other way is to draw the vectors to scale, as is done in navigation, and read approximate vector lengths and angles (directions) from the graphs. In this section we examine the second approach.

If we need to add three or more vectors, we repeat the parallelogram rule for the pairs of vectors until we find the resultant of all of the resultants. For three vectors, for example, we first find the resultant of vector 1 and vector 2, and then we find the resultant of this resultant and vector 3. The order in which we select the pairs of vectors does not matter because the operation of vector addition is commutative and associative (see Equation 2.7 and Equation 2.8). Before we state a general rule that follows from repetitive applications of the parallelogram rule, let's look at the following example.

Suppose you plan a vacation trip in Florida. Departing from Tallahassee, the state capital, you plan to visit your uncle Joe in Jacksonville, see your cousin Vinny in Daytona Beach, stop for a little fun in Orlando, see a circus performance in Tampa, and visit the University of Florida in Gainesville. Your route may be represented by five displacement vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, $\vec{\mathbf{C}}$, $\vec{\mathbf{D}}$, and $\vec{\mathbf{E}}$, which are indicated by the red vectors in Figure 2.11. What is your total displacement when you reach Gainesville? The total displacement is the vector sum of all five displacement vectors, which may be found by using the parallelogram rule four times. Alternatively, recall that the displacement vector has its beginning at the initial position (Tallahassee) and its end at the final position (Gainesville), so the total displacement vector can be drawn directly as an arrow connecting Tallahassee with Gainesville (see the green vector in Figure 2.11). When we use the parallelogram rule four times, the resultant $\vec{\mathbf{R}}$ we obtain is exactly this green vector connecting Tallahassee with Gainesville: $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}} + \vec{\mathbf{D}} + \vec{\mathbf{E}}$.

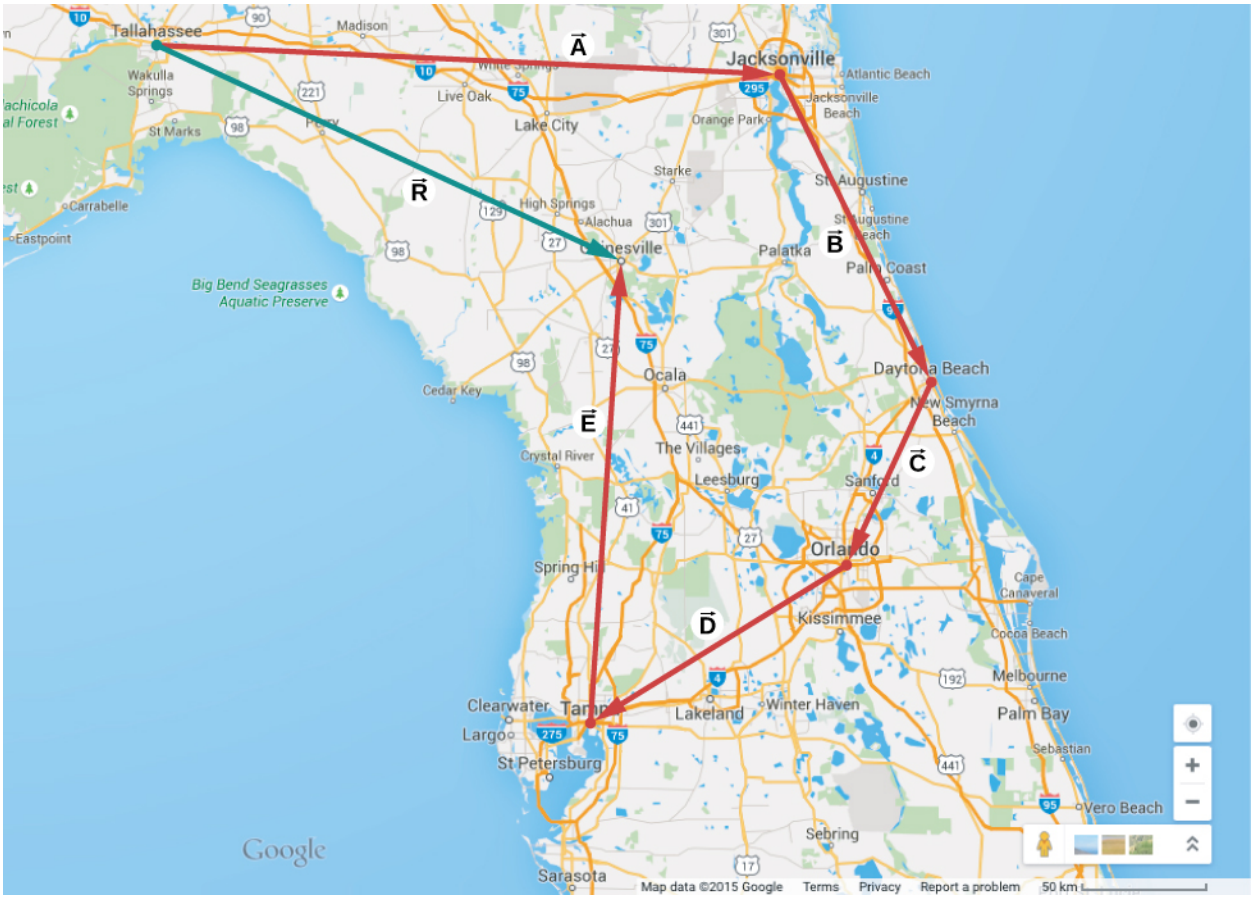


Figure 2.11 When we use the parallelogram rule four times, we obtain the resultant vector $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}} + \vec{\mathbf{D}} + \vec{\mathbf{E}}$, which is the green vector connecting Tallahassee with Gainesville.

Drawing the resultant vector of many vectors can be generalized by using the following **tail-to-head geometric construction**. Suppose we want to draw the resultant vector $\vec{\mathbf{R}}$ of four vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, $\vec{\mathbf{C}}$, and $\vec{\mathbf{D}}$ (Figure 2.12(a)). We select any one of the vectors as the first vector and make a parallel translation of a second vector to a position where the origin ("tail") of the second vector coincides with the end ("head") of the first vector. Then, we select a third vector and make a parallel translation of the third vector to a position where the origin of the third vector coincides with the end of the second vector. We repeat this procedure until all the vectors are in a head-to-tail arrangement like the one shown in Figure 2.12. We draw the resultant vector $\vec{\mathbf{R}}$ by connecting the origin ("tail") of the first vector with the end ("head") of the last vector. The end of the resultant vector is at the end of the last vector. Because the addition of vectors is associative and commutative, we obtain the same resultant vector regardless of which vector we choose to be first, second, third, or fourth in this construction.

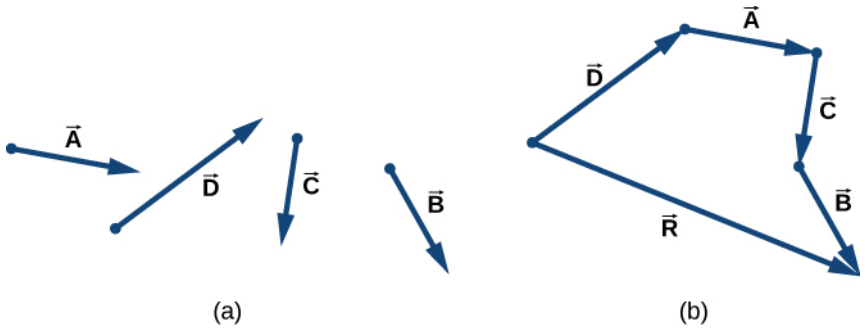


Figure 2.12 Tail-to-head method for drawing the resultant vector $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}} + \vec{\mathbf{D}}$. (a) Four vectors of different magnitudes and directions. (b) Vectors in (a) are translated to new positions where the origin ("tail") of one vector is at the end ("head") of another vector. The resultant vector is drawn from the origin ("tail") of the first vector to the end ("head") of the last vector in this arrangement.

EXAMPLE 2.2

Geometric Construction of the Resultant

The three displacement vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, and $\vec{\mathbf{C}}$ in Figure 2.13 are specified by their magnitudes $A = 10.0$, $B = 7.0$, and $C = 8.0$, respectively, and by their respective direction angles with the horizontal direction $\alpha = 35°$, $\beta = -110°$, and $\gamma = 30°$. The physical units of the magnitudes are centimeters. Choose a convenient scale and use a ruler and a protractor to find the following vector sums: (a) $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}}$, (b) $\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}}$, and (c) $\vec{\mathbf{S}} = \vec{\mathbf{A}} - 3\vec{\mathbf{B}} + \vec{\mathbf{C}}$.

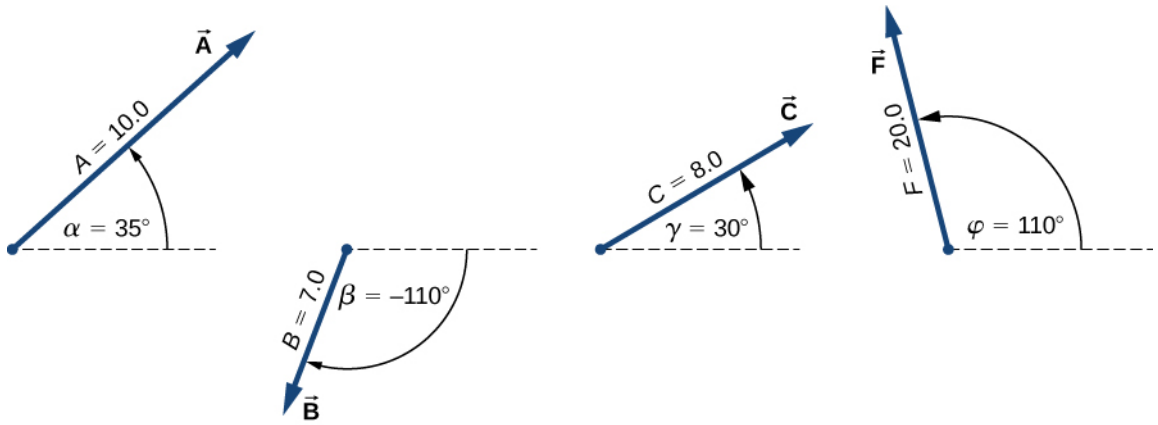


Figure 2.13 Vectors used in Example 2.2 and in the Check Your Understanding feature that follows.

Strategy

In geometric construction, to find a vector means to find its magnitude and its direction angle with the horizontal direction. The strategy is to draw to scale the vectors that appear on the right-hand side of the equation and construct the resultant vector. Then, use a ruler and a protractor to read the magnitude of the resultant and the direction angle. For parts (a) and (b) we use the parallelogram rule. For (c) we use the tail-to-head method.

Solution

For parts (a) and (b), we attach the origin of vector $\vec{\mathbf{B}}$ to the origin of vector $\vec{\mathbf{A}}$, as shown in Figure 2.14, and construct a parallelogram. The shorter diagonal of this parallelogram is the sum $\vec{\mathbf{A}} + \vec{\mathbf{B}}$. The longer of the diagonals is the difference $\vec{\mathbf{A}} - \vec{\mathbf{B}}$. We use a ruler to measure the lengths of the diagonals, and a protractor to measure the angles with the horizontal. For the resultant $\vec{\mathbf{R}}$, we obtain $R = 5.8$ cm and $\theta_R \approx 0°$. For the difference $\vec{\mathbf{D}}$, we obtain $D = 16.2$ cm and $\theta_D = 49.3°$, which are shown in Figure 2.14.

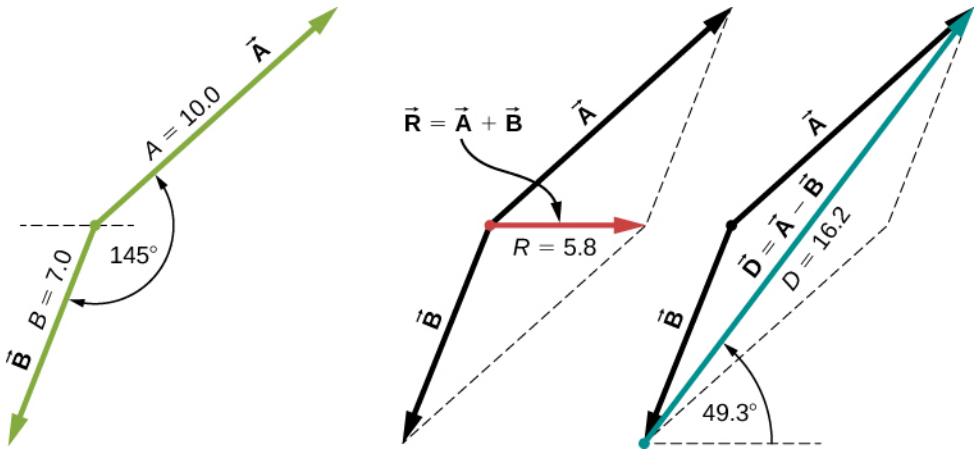


Figure 2.14 Using the parallelogram rule to solve (a) (finding the resultant, red) and (b) (finding the difference, blue).

For (c), we can start with vector $-3\vec{\mathbf{B}}$ and draw the remaining vectors tail-to-head as shown in Figure 2.15. In vector addition, the order in which we draw the vectors is unimportant, but drawing the vectors to scale is very important. Next, we draw vector $\vec{\mathbf{S}}$ from the origin of the first vector to the end of the last vector and place the arrowhead at the end of $\vec{\mathbf{S}}$. We use a ruler to measure the length of $\vec{\mathbf{S}}$, and find that its magnitude is $S = 36.9$ cm. We use a protractor and find that its direction angle is $\theta_S = 52.9°$. This solution is shown in Figure 2.15.

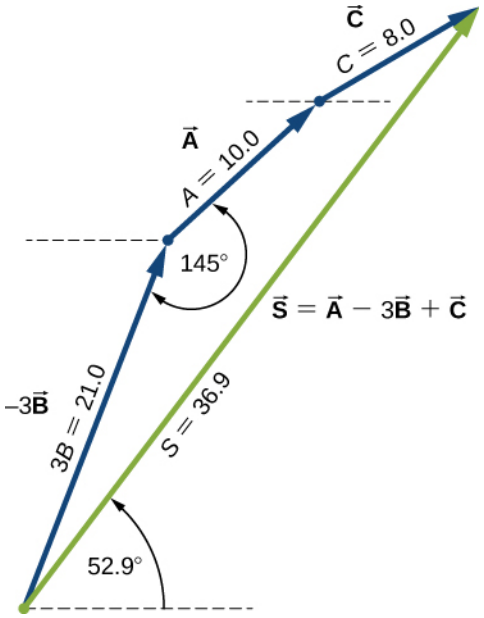


Figure 2.15 Using the tail-to-head method to solve (c) (finding vector $\vec{\mathbf{S}}$, green).

CHECK YOUR UNDERSTANDING 2.3

Using the three displacement vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, and $\vec{\mathbf{F}}$ in Figure 2.13, choose a convenient scale, and use a ruler and a protractor to find vector $\vec{\mathbf{G}}$ given by the vector equation $\vec{\mathbf{G}} = \vec{\mathbf{A}} + 2\vec{\mathbf{B}} - \vec{\mathbf{F}}$.

INTERACTIVE

Observe the addition of vectors in a plane by visiting this vector calculator (https://openstax.org/l/21compveccalc) and this Phet simulation (https://openstax.org/l/21phetvecaddsim) .

2.2 Coordinate Systems and Components of a Vector

Learning Objectives

By the end of this section, you will be able to:

- Describe vectors in two and three dimensions in terms of their components, using unit vectors along the axes.
- Distinguish between the vector components of a vector and the scalar components of a vector.
- Explain how the magnitude of a vector is defined in terms of the components of a vector.
- Identify the direction angle of a vector in a plane.
- Explain the connection between polar coordinates and Cartesian coordinates in a plane.

Vectors are usually described in terms of their components in a coordinate system. Even in everyday life we naturally invoke the concept of orthogonal projections in a rectangular coordinate system. For example, if you ask someone for directions to a particular location, you will more likely be told to go 40 km east and 30 km north than 50 km in the direction 37° north of east.

In a rectangular (Cartesian) *xy*-coordinate system in a plane, a point in a plane is described by a pair of coordinates (x, y). In a similar fashion, a vector $\vec{\mathbf{A}}$ in a plane is described by a pair of its *vector* coordinates. The *x*-coordinate of vector $\vec{\mathbf{A}}$ is called its *x*-component and the *y*-coordinate of vector $\vec{\mathbf{A}}$ is called its *y*-component. The vector *x*-component is a vector denoted by $\vec{\mathbf{A}}_x$. The vector *y*-component is a vector denoted by $\vec{\mathbf{A}}_y$. In the Cartesian system, the *x* and *y* **vector components** of a vector are the orthogonal projections of this vector onto the *x*- and *y*-axes, respectively. In this way, following the parallelogram rule for vector addition, each vector on a Cartesian plane can be expressed as the vector sum of its vector components:

$$\vec{\mathbf{A}} = \vec{\mathbf{A}}_x + \vec{\mathbf{A}}_y. \tag{2.10}$$

As illustrated in Figure 2.16, vector $\vec{\mathbf{A}}$ is the diagonal of the rectangle where the *x*-component $\vec{\mathbf{A}}_x$ is the side parallel to the *x*-axis and the *y*-component $\vec{\mathbf{A}}_y$ is the side parallel to the *y*-axis. Vector component $\vec{\mathbf{A}}_x$ is orthogonal to vector component $\vec{\mathbf{A}}_y$.

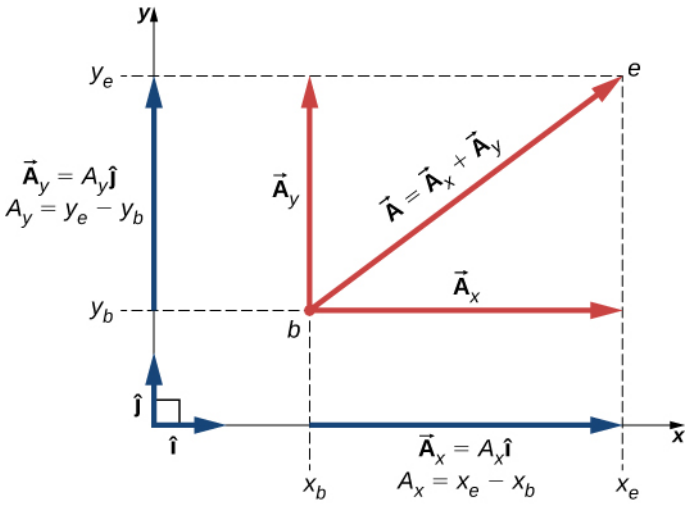


Figure 2.16 Vector $\vec{\mathbf{A}}$ in a plane in the Cartesian coordinate system is the vector sum of its vector *x*- and *y*-components. The *x*-vector component $\vec{\mathbf{A}}_x$ is the orthogonal projection of vector $\vec{\mathbf{A}}$ onto the *x*-axis. The *y*-vector component $\vec{\mathbf{A}}_y$ is the orthogonal projection of vector $\vec{\mathbf{A}}$ onto the *y*-axis. The numbers A_x and A_y that multiply the unit vectors are the scalar components of the vector.

It is customary to denote the positive direction on the *x*-axis by the unit vector $\hat{\mathbf{i}}$ and the positive direction on the *y*-axis by the unit vector $\hat{\mathbf{j}}$. **Unit vectors of the axes**, $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$, define two orthogonal directions in the plane. As shown in Figure 2.16, the *x*- and *y*- components of a vector can now be written in terms of the unit vectors of the axes:

$$\begin{cases} \vec{\mathbf{A}}_x = A_x\hat{\mathbf{i}} \\ \vec{\mathbf{A}}_y = A_y\hat{\mathbf{j}}. \end{cases} \tag{2.11}$$

The vectors $\vec{\mathbf{A}}_x$ and $\vec{\mathbf{A}}_y$ defined by Equation 2.11 are the *vector components* of vector $\vec{\mathbf{A}}$. The numbers A_x and A_y that define the vector components in Equation 2.11 are the **scalar components** of vector $\vec{\mathbf{A}}$. Combining Equation 2.10 with Equation 2.11, we obtain **the component form of a vector**:

$$\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}}. \tag{2.12}$$

If we know the coordinates b(x_b, y_b) of the origin point of a vector (where *b* stands for "beginning") and the coordinates e(x_e, y_e) of the end point of a vector (where *e* stands for "end"), we can obtain the scalar components of a vector simply by subtracting the origin point coordinates from the end point coordinates:

$$\begin{cases} A_x = x_e - x_b \\ A_y = y_e - y_b. \end{cases} \qquad 2.13$$

EXAMPLE 2.3

Displacement of a Mouse Pointer

A mouse pointer on the display monitor of a computer at its initial position is at point (6.0 cm, 1.6 cm) with respect to the lower left-side corner. If you move the pointer to an icon located at point (2.0 cm, 4.5 cm), what is the displacement vector of the pointer?

Strategy

The origin of the *xy*-coordinate system is the lower left-side corner of the computer monitor. Therefore, the unit vector $\hat{\mathbf{i}}$ on the *x*-axis points horizontally to the right and the unit vector $\hat{\mathbf{j}}$ on the *y*-axis points vertically upward. The origin of the displacement vector is located at point b(6.0, 1.6) and the end of the displacement vector is located at point e(2.0, 4.5). Substitute the coordinates of these points into Equation 2.13 to find the scalar components D_x and D_y of the displacement vector $\vec{\mathbf{D}}$. Finally, substitute the coordinates into Equation 2.12 to write the displacement vector in the vector component form.

Solution

We identify $x_b = 6.0$, $x_e = 2.0$, $y_b = 1.6$, and $y_e = 4.5$, where the physical unit is 1 cm. The scalar *x*- and *y*-components of the displacement vector are

$$\begin{aligned} D_x &= x_e - x_b = (2.0 - 6.0)\text{cm} = -4.0\text{ cm}, \\ D_y &= y_e - y_b = (4.5 - 1.6)\text{cm} = +2.9\text{ cm}. \end{aligned}$$

The vector component form of the displacement vector is

$$\vec{\mathbf{D}} = D_x\hat{\mathbf{i}} + D_y\hat{\mathbf{j}} = (-4.0\text{ cm})\hat{\mathbf{i}} + (2.9\text{ cm})\hat{\mathbf{j}} = (-4.0\hat{\mathbf{i}} + 2.9\hat{\mathbf{j}})\text{cm}. \qquad 2.14$$

This solution is shown in Figure 2.17.

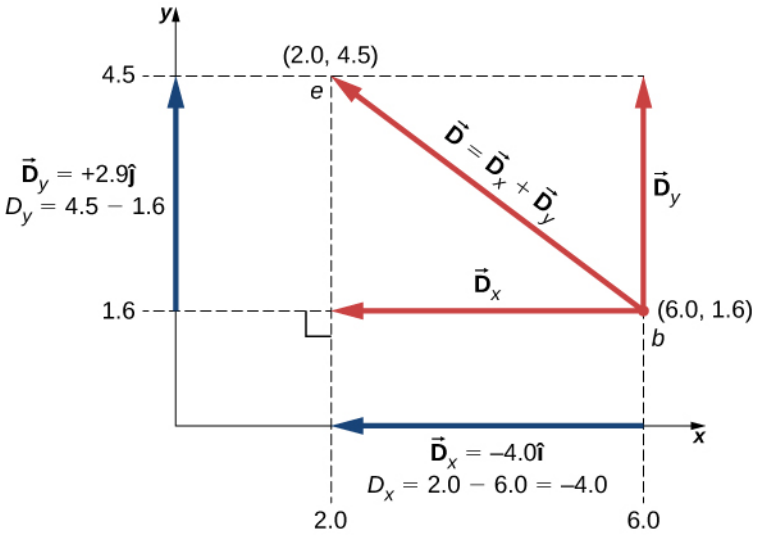


Figure 2.17 The graph of the displacement vector. The vector points from the origin point at *b* to the end point at *e*.

Significance

Notice that the physical unit—here, 1 cm—can be placed either with each component immediately before the unit vector or globally for both components, as in Equation 2.14. Often, the latter way is more convenient because it is simpler.

The vector x-component $\vec{\mathbf{D}}_x = -4.0\hat{\mathbf{i}} = 4.0(-\hat{\mathbf{i}})$ of the displacement vector has the magnitude $\left|\vec{\mathbf{D}}_x\right| = \left|-4.0\right|\left|\hat{\mathbf{i}}\right| = 4.0$ because the magnitude of the unit vector is $\left|\hat{\mathbf{i}}\right| = 1$. Notice, too, that the direction of the x-component is $-\hat{\mathbf{i}}$, which is antiparallel to the direction of the $+x$-axis; hence, the x-component vector $\vec{\mathbf{D}}_x$ points to the left, as shown in Figure 2.17. The scalar x-component of vector $\vec{\mathbf{D}}$ is $D_x = -4.0$.

Similarly, the vector y-component $\vec{\mathbf{D}}_y = +2.9\hat{\mathbf{j}}$ of the displacement vector has magnitude $\left|\vec{\mathbf{D}}_y\right| = \left|2.9\right|\left|\hat{\mathbf{j}}\right| = 2.9$ because the magnitude of the unit vector is $\left|\hat{\mathbf{j}}\right| = 1$. The direction of the y-component is $+\hat{\mathbf{j}}$, which is parallel to the direction of the $+y$-axis. Therefore, the y-component vector $\vec{\mathbf{D}}_y$ points up, as seen in Figure 2.17. The scalar y-component of vector $\vec{\mathbf{D}}$ is $D_y = +2.9$. The displacement vector $\vec{\mathbf{D}}$ is the resultant of its two *vector* components.

The vector component form of the displacement vector Equation 2.14 tells us that the mouse pointer has been moved on the monitor 4.0 cm to the left and 2.9 cm upward from its initial position.

CHECK YOUR UNDERSTANDING 2.4

A blue fly lands on a sheet of graph paper at a point located 10.0 cm to the right of its left edge and 8.0 cm above its bottom edge and walks slowly to a point located 5.0 cm from the left edge and 5.0 cm from the bottom edge. Choose the rectangular coordinate system with the origin at the lower left-side corner of the paper and find the displacement vector of the fly. Illustrate your solution by graphing.

When we know the scalar components A_x and A_y of a vector $\vec{\mathbf{A}}$, we can find its magnitude A and its direction angle θ_A. The **direction angle**—or direction, for short—is the angle the vector forms with the positive direction on the x-axis. The angle θ_A is measured in the *counterclockwise direction* from the $+x$-axis to the vector (Figure 2.18). Because the lengths A, A_x, and A_y form a right triangle, they are related by the Pythagorean theorem:

$$A^2 = A_x^2 + A_y^2 \;\Leftrightarrow\; A = \sqrt{A_x^2 + A_y^2}. \qquad 2.15$$

This equation works even if the scalar components of a vector are negative. The direction angle θ_A of a vector is defined via the tangent function of angle θ_A in the triangle shown in Figure 2.18:

$$\tan\theta = \frac{A_y}{A_x} \qquad 2.16$$

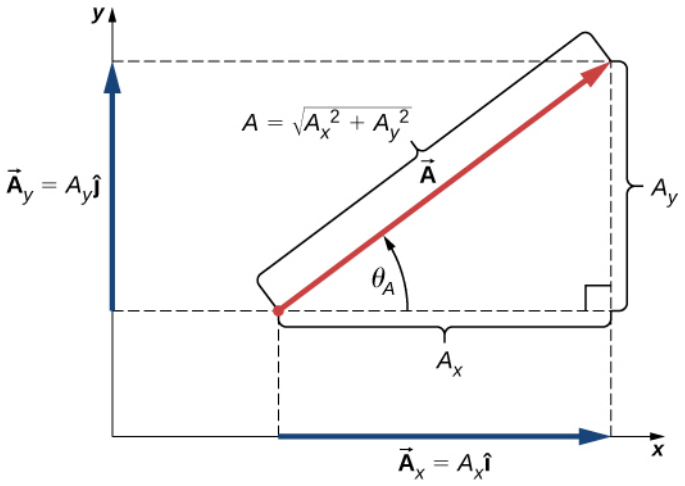


Figure 2.18 When the vector lies either in the first quadrant or in the fourth quadrant, where component A_x is positive (Figure 2.19), the

direction angle θ_A in Equation 2.16) is identical to the angle θ.

When the vector lies either in the first quadrant or in the fourth quadrant, where component A_x is positive (Figure 2.19), the angle θ in Equation 2.16 is identical to the direction angle θ_A. For vectors in the fourth quadrant, angle θ is negative, which means that for these vectors, direction angle θ_A is measured *clockwise* from the positive x-axis. Similarly, for vectors in the second quadrant, angle θ is negative. When the vector lies in either the second or third quadrant, where component A_x is negative, the direction angle is $\theta_A = \theta + 180°$ (Figure 2.19).

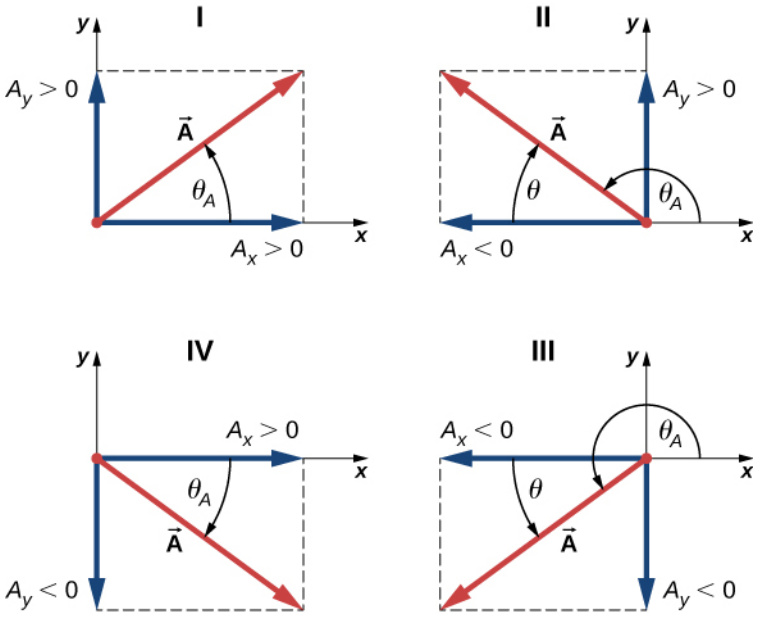


Figure 2.19 Scalar components of a vector may be positive or negative. Vectors in the first quadrant (I) have both scalar components positive and vectors in the third quadrant have both scalar components negative. For vectors in quadrants II and III, the direction angle of a vector is $\theta_A = \theta + 180°$.

EXAMPLE 2.4

Magnitude and Direction of the Displacement Vector

You move a mouse pointer on the display monitor from its initial position at point (6.0 cm, 1.6 cm) to an icon located at point (2.0 cm, 4.5 cm). What are the magnitude and direction of the displacement vector of the pointer?

Strategy

In Example 2.3, we found the displacement vector $\vec{\mathbf{D}}$ of the mouse pointer (see Equation 2.14). We identify its scalar components $D_x = -4.0$ cm and $D_y = +2.9$ cm and substitute into Equation 2.15 and Equation 2.16 to find the magnitude D and direction θ_D, respectively.

Solution

The magnitude of vector $\vec{\mathbf{D}}$ is

$$D = \sqrt{D_x^2 + D_y^2} = \sqrt{(-4.0\text{ cm})^2 + (2.9\text{ cm})^2} = \sqrt{(4.0)^2 + (2.9)^2}\text{ cm} = 4.9\text{ cm}.$$

The direction angle is

$$\tan\theta = \frac{D_y}{D_x} = \frac{+2.9\text{ cm}}{-4.0\text{ cm}} = -0.725 \quad \Rightarrow \quad \theta = \tan^{-1}(-0.725) = -35.9°.$$

Vector $\vec{\mathbf{D}}$ lies in the second quadrant, so its direction angle is

$$\theta_D = \theta + 180° = -35.9° + 180° = 144.1°.$$

CHECK YOUR UNDERSTANDING 2.5

If the displacement vector of a blue fly walking on a sheet of graph paper is $\vec{\mathbf{D}} = (-5.00\hat{\mathbf{i}} - 3.00\hat{\mathbf{j}})$cm, find its magnitude and direction.

In many applications, the magnitudes and directions of vector quantities are known and we need to find the resultant of many vectors. For example, imagine 400 cars moving on the Golden Gate Bridge in San Francisco in a strong wind. Each car gives the bridge a different push in various directions and we would like to know how big the resultant push can possibly be. We have already gained some experience with the geometric construction of vector sums, so we know the task of finding the resultant by drawing the vectors and measuring their lengths and angles may become intractable pretty quickly, leading to huge errors. Worries like this do not appear when we use analytical methods. The very first step in an analytical approach is to find vector components when the direction and magnitude of a vector are known.

Let us return to the right triangle in Figure 2.18. The quotient of the adjacent side A_x to the hypotenuse A is the cosine function of direction angle θ_A, $A_x/A = \cos\theta_A$, and the quotient of the opposite side A_y to the hypotenuse A is the sine function of θ_A, $A_y/A = \sin\theta_A$. When magnitude A and direction θ_A are known, we can solve these relations for the scalar components:

$$\begin{cases} A_x = A\cos\theta_A \\ A_y = A\sin\theta_A \end{cases}. \qquad 2.17$$

When calculating vector components with Equation 2.17, care must be taken with the angle. The direction angle θ_A of a vector is the angle measured *counterclockwise* from the positive direction on the x-axis to the vector. The clockwise measurement gives a negative angle.

EXAMPLE 2.5

Components of Displacement Vectors

A rescue party for a missing child follows a search dog named Trooper. Trooper wanders a lot and makes many trial sniffs along many different paths. Trooper eventually finds the child and the story has a happy ending, but his displacements on various legs seem to be truly convoluted. On one of the legs he walks 200.0 m southeast, then he runs north some 300.0 m. On the third leg, he examines the scents carefully for 50.0 m in the direction 30° west of north. On the fourth leg, Trooper goes directly south for 80.0 m, picks up a fresh scent and turns 23° west of south for 150.0 m. Find the scalar components of Trooper's displacement vectors and his displacement vectors in vector component form for each leg.

Strategy

Let's adopt a rectangular coordinate system with the positive x-axis in the direction of geographic east, with the positive y-direction pointed to geographic north. Explicitly, the unit vector $\hat{\mathbf{i}}$ of the x-axis points east and the unit vector $\hat{\mathbf{j}}$ of the y-axis points north. Trooper makes five legs, so there are five displacement vectors. We start by identifying their magnitudes and direction angles, then we use Equation 2.17 to find the scalar components of the displacements and Equation 2.12 for the displacement vectors.

Solution

On the first leg, the displacement magnitude is $L_1 = 200.0$ m and the direction is southeast. For direction angle θ_1 we can take either 45° measured clockwise from the east direction or 45° + 270° measured counterclockwise from the east direction. With the first choice, $\theta_1 = -45°$. With the second choice, $\theta_1 = +315°$. We can use either one of these two angles. The components are

$$L_{1x} = L_1 \cos\theta_1 = (200.0\text{ m})\cos 315° = 141.4\text{ m},$$
$$L_{1y} = L_1 \sin\theta_1 = (200.0\text{ m})\sin 315° = -141.4\text{ m}.$$

The displacement vector of the first leg is

$$\vec{\mathbf{L}}_1 = L_{1x}\hat{\mathbf{i}} + L_{1y}\hat{\mathbf{j}} = (141.4\hat{\mathbf{i}} - 141.4\hat{\mathbf{j}})\text{ m}.$$

On the second leg of Trooper's wanderings, the magnitude of the displacement is $L_2 = 300.0$ m and the direction is north. The direction angle is $\theta_2 = +90°$. We obtain the following results:

$$\begin{aligned} L_{2x} &= L_2\cos\theta_2 = (300.0\text{ m})\cos 90° = 0.0\,, \\ L_{2y} &= L_2\sin\theta_2 = (300.0\text{ m})\sin 90° = 300.0\text{ m}, \\ \vec{\mathbf{L}}_2 &= L_{2x}\hat{\mathbf{i}} + L_{2y}\hat{\mathbf{j}} = (300.0\text{ m})\hat{\mathbf{j}}. \end{aligned}$$

On the third leg, the displacement magnitude is $L_3 = 50.0$ m and the direction is 30° west of north. The direction angle measured counterclockwise from the eastern direction is $\theta_3 = 30° + 90° = +120°$. This gives the following answers:

$$\begin{aligned} L_{3x} &= L_3\cos\theta_3 = (50.0\text{ m})\cos 120° = -25.0\text{ m}, \\ L_{3y} &= L_3\sin\theta_3 = (50.0\text{ m})\sin 120° = +43.3\text{ m}, \\ \vec{\mathbf{L}}_3 &= L_{3x}\hat{\mathbf{i}} + L_{3y}\hat{\mathbf{j}} = (-25.0\hat{\mathbf{i}} + 43.3\hat{\mathbf{j}})\text{m}. \end{aligned}$$

On the fourth leg of the excursion, the displacement magnitude is $L_4 = 80.0$ m and the direction is south. The direction angle can be taken as either $\theta_4 = -90°$ or $\theta_4 = +270°$. We obtain

$$\begin{aligned} L_{4x} &= L_4\cos\theta_4 = (80.0\text{ m})\cos(-90°) = 0\,, \\ L_{4y} &= L_4\sin\theta_4 = (80.0\text{ m})\sin(-90°) = -80.0\text{ m}, \\ \vec{\mathbf{L}}_4 &= L_{4x}\hat{\mathbf{i}} + L_{4y}\hat{\mathbf{j}} = (-80.0\text{ m})\hat{\mathbf{j}}. \end{aligned}$$

On the last leg, the magnitude is $L_5 = 150.0$ m and the angle is $\theta_5 = -23° + 270° = +247°$ (23° west of south), which gives

$$\begin{aligned} L_{5x} &= L_5\cos\theta_5 = (150.0\text{ m})\cos 247° = -58.6\text{ m}, \\ L_{5y} &= L_5\sin\theta_5 = (150.0\text{ m})\sin 247° = -138.1\text{ m}, \\ \vec{\mathbf{L}}_5 &= L_{5x}\hat{\mathbf{i}} + L_{5y}\hat{\mathbf{j}} = (-58.6\hat{\mathbf{i}} - 138.1\hat{\mathbf{j}})\text{m}. \end{aligned}$$

CHECK YOUR UNDERSTANDING 2.6

If Trooper runs 20 m west before taking a rest, what is his displacement vector?

Polar Coordinates

To describe locations of points or vectors in a plane, we need two orthogonal directions. In the Cartesian coordinate system these directions are given by unit vectors $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ along the x-axis and the y-axis, respectively. The Cartesian coordinate system is very convenient to use in describing displacements and velocities of objects and the forces acting on them. However, it becomes cumbersome when we need to describe the rotation of objects. When describing rotation, we usually work in the **polar coordinate system**.

In the polar coordinate system, the location of point P in a plane is given by two **polar coordinates** (Figure 2.20). The first polar coordinate is the **radial coordinate** r, which is the distance of point P from the origin. The second polar coordinate is an angle φ that the radial vector makes with some chosen direction, usually the positive x-direction. In polar coordinates, angles are measured in radians, or rads. The radial vector is attached at the origin and points away from the origin to point P. This radial direction is described by a unit radial vector $\hat{\mathbf{r}}$. The second unit vector $\hat{\mathbf{t}}$ is a vector orthogonal to the radial direction $\hat{\mathbf{r}}$. The positive $+\hat{\mathbf{t}}$ direction indicates how the angle φ changes in the counterclockwise direction. In this way, a point P that has

coordinates (x, y) in the rectangular system can be described equivalently in the polar coordinate system by the two polar coordinates (r, φ). Equation 2.17 is valid for any vector, so we can use it to express the x- and y-coordinates of vector $\vec{\mathbf{r}}$. In this way, we obtain the connection between the polar coordinates and rectangular coordinates of point P:

$$\begin{cases} x = r\cos\varphi \\ y = r\sin\varphi \end{cases}. \qquad 2.18$$

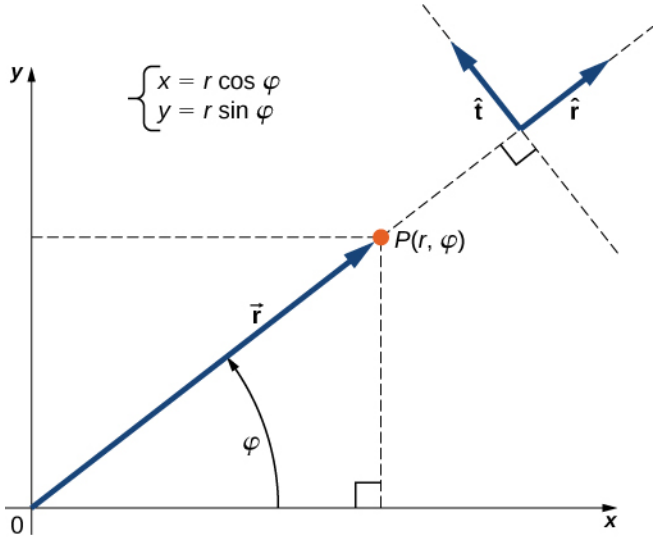


Figure 2.20 Using polar coordinates, the unit vector $\hat{\mathbf{r}}$ defines the positive direction along the radius r (radial direction) and, orthogonal to it, the unit vector $\hat{\mathbf{t}}$ defines the positive direction of rotation by the angle φ.

EXAMPLE 2.6

Polar Coordinates

A treasure hunter finds one silver coin at a location 20.0 m away from a dry well in the direction 20° north of east and finds one gold coin at a location 10.0 m away from the well in the direction 20° north of west. What are the polar and rectangular coordinates of these findings with respect to the well?

Strategy

The well marks the origin of the coordinate system and east is the $+x$-direction. We identify radial distances from the locations to the origin, which are $r_S = 20.0$ m (for the silver coin) and $r_G = 10.0$ m (for the gold coin). To find the angular coordinates, we convert 20° to radians: $20° = \pi 20/180 = \pi/9$. We use Equation 2.18 to find the x- and y-coordinates of the coins.

Solution

The angular coordinate of the silver coin is $\varphi_S = \pi/9$, whereas the angular coordinate of the gold coin is $\varphi_G = \pi - \pi/9 = 8\pi/9$. Hence, the polar coordinates of the silver coin are $(r_S, \varphi_S) = (20.0\text{ m}, \pi/9)$ and those of the gold coin are $(r_G, \varphi_G) = (10.0\text{ m}, 8\pi/9)$. We substitute these coordinates into Equation 2.18 to obtain rectangular coordinates. For the gold coin, the coordinates are

$$\begin{cases} x_G = r_G\cos\varphi_G = (10.0\text{ m})\cos 8\pi/9 = -9.4\text{ m} \\ y_G = r_G\sin\varphi_G = (10.0\text{ m})\sin 8\pi/9 = 3.4\text{ m} \end{cases} \Rightarrow (x_G, y_G) = (-9.4\text{ m}, 3.4\text{ m}).$$

For the silver coin, the coordinates are

$$\begin{cases} x_S = r_S\cos\varphi_S = (20.0\text{ m})\cos\pi/9 = 18.9\text{ m} \\ y_S = r_S\sin\varphi_S = (20.0\text{ m})\sin\pi/9 = 6.8\text{ m} \end{cases} \Rightarrow (x_S, y_S) = (18.9\text{ m}, 6.8\text{ m}).$$

Vectors in Three Dimensions

To specify the location of a point in space, we need three coordinates (x, y, z), where coordinates x and y specify locations in a plane, and coordinate z gives a vertical position above or below the plane. Three-dimensional space has three orthogonal directions, so we need not two but *three* unit vectors to define a three-dimensional coordinate system. In the Cartesian coordinate system, the first two unit vectors are the unit vector of the x-axis $\hat{\mathbf{i}}$ and the unit vector of the y-axis $\hat{\mathbf{j}}$. The third unit vector $\hat{\mathbf{k}}$ is the direction of the z-axis (Figure 2.21). The order in which the axes are labeled, which is the order in which the three unit vectors appear, is important because it defines the orientation of the coordinate system. The order x-y-z, which is equivalent to the order $\hat{\mathbf{i}}$ - $\hat{\mathbf{j}}$ - $\hat{\mathbf{k}}$, defines the standard right-handed coordinate system (positive orientation).

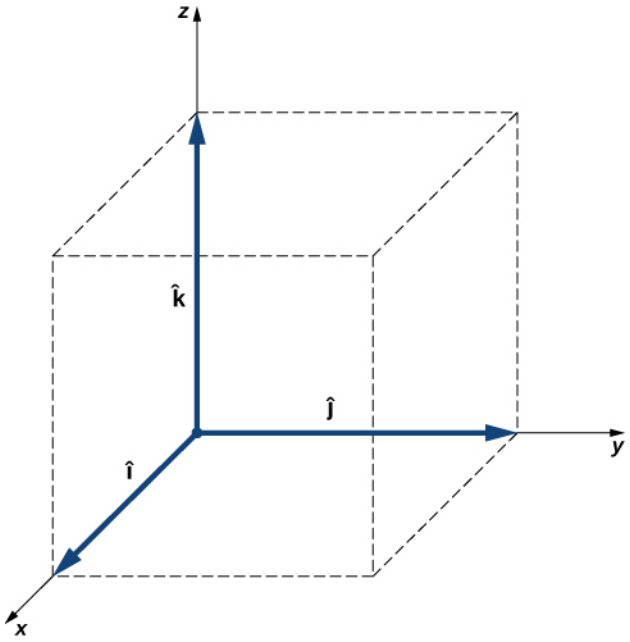


Figure 2.21 Three unit vectors define a Cartesian system in three-dimensional space. The order in which these unit vectors appear defines the orientation of the coordinate system. The order shown here defines the right-handed orientation.

In three-dimensional space, vector $\vec{\mathbf{A}}$ has three vector components: the x-component $\vec{\mathbf{A}}_x = A_x\hat{\mathbf{i}}$, which is the part of vector $\vec{\mathbf{A}}$ along the x-axis; the y-component $\vec{\mathbf{A}}_y = A_y\hat{\mathbf{j}}$, which is the part of $\vec{\mathbf{A}}$ along the y-axis; and the z-component $\vec{\mathbf{A}}_z = A_z\hat{\mathbf{k}}$, which is the part of the vector along the z-axis. A vector in three-dimensional space is the vector sum of its three vector components (Figure 2.22):

$$\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}. \tag{2.19}$$

If we know the coordinates of its origin $b(x_b, y_b, z_b)$ and of its end $e(x_e, y_e, z_e)$, its scalar components are obtained by taking their differences: A_x and A_y are given by Equation 2.13 and the z-component is given by

$$A_z = z_e - z_b. \tag{2.20}$$

Magnitude A is obtained by generalizing Equation 2.15 to three dimensions:

$$A = \sqrt{A_x^2 + A_y^2 + A_z^2}. \tag{2.21}$$

This expression for the vector magnitude comes from applying the Pythagorean theorem twice. As seen in Figure 2.22, the diagonal in the xy-plane has length $\sqrt{A_x^2 + A_y^2}$ and its square adds to the square A_z^2 to give A^2. Note that when the z-component is zero, the vector lies entirely in the xy-plane and its description is

reduced to two dimensions.

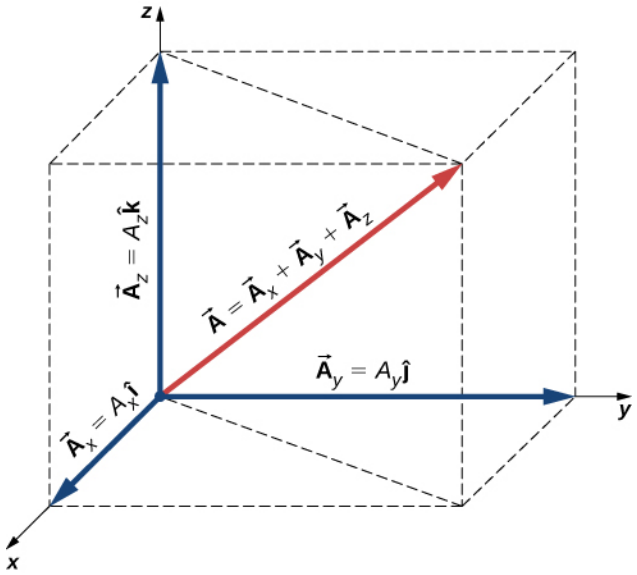


Figure 2.22 A vector in three-dimensional space is the vector sum of its three vector components.

EXAMPLE 2.7

Takeoff of a Drone

During a takeoff of IAI Heron (Figure 2.23), its position with respect to a control tower is 100 m above the ground, 300 m to the east, and 200 m to the north. One minute later, its position is 250 m above the ground, 1200 m to the east, and 2100 m to the north. What is the drone's displacement vector with respect to the control tower? What is the magnitude of its displacement vector?



Figure 2.23 The drone IAI Heron in flight. (credit: SSgt Reynaldo Ramon, USAF)

Strategy

We take the origin of the Cartesian coordinate system as the control tower. The direction of the $+x$-axis is given by unit vector $\hat{\mathbf{i}}$ to the east, the direction of the $+y$-axis is given by unit vector $\hat{\mathbf{j}}$ to the north, and the direction of the $+z$-axis is given by unit vector $\hat{\mathbf{k}}$, which points up from the ground. The drone's first position is the origin (or, equivalently, the beginning) of the displacement vector and its second position is the end of the displacement vector.

Solution

We identify b(300.0 m, 200.0 m, 100.0 m) and e(1200 m, 2100 m, 250 m), and use Equation 2.13 and Equation 2.20 to find the scalar components of the drone's displacement vector:

$$\begin{cases} D_x = x_e - x_b = 1200.0\,\text{m} - 300.0\,\text{m} = 900.0\,\text{m}, \\ D_y = y_e - y_b = 2100.0\,\text{m} - 200.0\,\text{m} = 1900.0\,\text{m}, \\ D_z = z_e - z_b = 250.0\,\text{m} - 100.0\,\text{m} = 150.0\,\text{m}. \end{cases}$$

We substitute these components into Equation 2.19 to find the displacement vector:

$$\vec{\mathbf{D}} = D_x\hat{\mathbf{i}} + D_y\hat{\mathbf{j}} + D_z\hat{\mathbf{k}} = 900.0\,\text{m}\hat{\mathbf{i}} + 1900.0\,\text{m}\hat{\mathbf{j}} + 150.0\,\text{m}\hat{\mathbf{k}} = (0.90\hat{\mathbf{i}} + 1.90\hat{\mathbf{j}} + 0.15\hat{\mathbf{k}})\,\text{km}.$$

We substitute into Equation 2.21 to find the magnitude of the displacement:

$$D = \sqrt{D_x^2 + D_y^2 + D_z^2} = \sqrt{(0.90\,\text{km})^2 + (1.90\,\text{km})^2 + (0.15\,\text{km})^2} = 2.11\,\text{km}.$$

CHECK YOUR UNDERSTANDING 2.7

If the average velocity vector of the drone in the displacement in Example 2.7 is $\vec{\mathbf{u}} = (15.0\hat{\mathbf{i}} + 31.7\hat{\mathbf{j}} + 2.5\hat{\mathbf{k}})$m/s, what is the magnitude of the drone's velocity vector?

2.3 Algebra of Vectors

Learning Objectives

By the end of this section, you will be able to:

- Apply analytical methods of vector algebra to find resultant vectors and to solve vector equations for unknown vectors.
- Interpret physical situations in terms of vector expressions.

Vectors can be added together and multiplied by scalars. Vector addition is associative (Equation 2.8) and commutative (Equation 2.7), and vector multiplication by a sum of scalars is distributive (Equation 2.9). Also, scalar multiplication by a sum of vectors is distributive:

$$\alpha(\vec{\mathbf{A}} + \vec{\mathbf{B}}) = \alpha\vec{\mathbf{A}} + \alpha\vec{\mathbf{B}}. \tag{2.22}$$

In this equation, α is any number (a scalar). For example, a vector antiparallel to vector $\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}$ can be expressed simply by multiplying $\vec{\mathbf{A}}$ by the scalar $\alpha = -1$:

$$-\vec{\mathbf{A}} = -A_x\hat{\mathbf{i}} - A_y\hat{\mathbf{j}} - A_z\hat{\mathbf{k}}. \tag{2.23}$$

EXAMPLE 2.8

Direction of Motion

In a Cartesian coordinate system where $\hat{\mathbf{i}}$ denotes geographic east, $\hat{\mathbf{j}}$ denotes geographic north, and $\hat{\mathbf{k}}$ denotes altitude above sea level, a military convoy advances its position through unknown territory with velocity $\vec{\mathbf{v}} = (4.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 0.1\hat{\mathbf{k}})$km/h. If the convoy had to retreat, in what geographic direction would it be moving?

Solution

The velocity vector has the third component $\vec{\mathbf{v}}_z = (+0.1\text{km/h})\hat{\mathbf{k}}$, which says the convoy is climbing at a rate of 100 m/h through mountainous terrain. At the same time, its velocity is 4.0 km/h to the east and 3.0 km/h to the north, so it moves on the ground in direction $\tan^{-1}(3/4) \approx 37°$ north of east. If the convoy had to retreat, its new velocity vector $\vec{\mathbf{u}}$ would have to be antiparallel to $\vec{\mathbf{v}}$ and be in the form $\vec{\mathbf{u}} = -\alpha\vec{\mathbf{v}}$, where α is a positive number. Thus, the velocity of the retreat would be $\vec{\mathbf{u}} = \alpha(-4.0\hat{\mathbf{i}} - 3.0\hat{\mathbf{j}} - 0.1\hat{\mathbf{k}})$km/h. The negative sign of the third component indicates the convoy would be descending. The direction angle of the retreat velocity is $\tan^{-1}(-3\alpha/-4\alpha) \approx 37°$ south of west. Therefore, the convoy would be moving on the ground in direction 37°

south of west while descending on its way back.

The generalization of the number zero to vector algebra is called the **null vector**, denoted by $\vec{\mathbf{0}}$. All components of the null vector are zero, $\vec{\mathbf{0}} = 0\hat{\mathbf{i}} + 0\hat{\mathbf{j}} + 0\hat{\mathbf{k}}$, so the null vector has no length and no direction.

Two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are **equal vectors** if and only if their difference is the null vector:

$$\vec{\mathbf{0}} = \vec{\mathbf{A}} - \vec{\mathbf{B}} = (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}) - (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) = (A_x - B_x)\hat{\mathbf{i}} + (A_y - B_y)\hat{\mathbf{j}} + (A_z - B_z)\hat{\mathbf{k}}.$$

This vector equation means we must have simultaneously $A_x - B_x = 0$, $A_y - B_y = 0$, and $A_z - B_z = 0$. Hence, we can write $\vec{\mathbf{A}} = \vec{\mathbf{B}}$ if and only if the corresponding components of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are equal:

$$\vec{\mathbf{A}} = \vec{\mathbf{B}} \;\Leftrightarrow\; \begin{cases} A_x = B_x \\ A_y = B_y \\ A_z = B_z \end{cases}. \tag{2.24}$$

Two vectors are equal when their corresponding scalar components are equal.

Resolving vectors into their scalar components (i.e., finding their scalar components) and expressing them analytically in vector component form (given by Equation 2.19) allows us to use vector algebra to find sums or differences of many vectors *analytically* (i.e., without using graphical methods). For example, to find the resultant of two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$, we simply add them component by component, as follows:

$$\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} = (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}) + (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) = (A_x + B_x)\hat{\mathbf{i}} + (A_y + B_y)\hat{\mathbf{j}} + (A_z + B_z)\hat{\mathbf{k}}.$$

In this way, using Equation 2.24, scalar components of the resultant vector $\vec{\mathbf{R}} = R_x\hat{\mathbf{i}} + R_y\hat{\mathbf{j}} + R_z\hat{\mathbf{k}}$ are the sums of corresponding scalar components of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$:

$$\begin{cases} R_x = A_x + B_x, \\ R_y = A_y + B_y, \\ R_z = A_z + B_z. \end{cases}$$

Analytical methods can be used to find components of a resultant of many vectors. For example, if we are to sum up N vectors $\vec{\mathbf{F}}_1, \vec{\mathbf{F}}_2, \vec{\mathbf{F}}_3, \ldots, \vec{\mathbf{F}}_N$, where each vector is $\vec{\mathbf{F}}_k = F_{kx}\hat{\mathbf{i}} + F_{ky}\hat{\mathbf{j}} + F_{kz}\hat{\mathbf{k}}$, the resultant vector $\vec{\mathbf{F}}_R$ is

$$\begin{aligned} \vec{\mathbf{F}}_R = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 + \vec{\mathbf{F}}_3 + \ldots + \vec{\mathbf{F}}_N &= \sum_{k=1}^{N} \vec{\mathbf{F}}_k = \sum_{k=1}^{N} \left(F_{kx}\hat{\mathbf{i}} + F_{ky}\hat{\mathbf{j}} + F_{kz}\hat{\mathbf{k}}\right) \\ &= \left(\sum_{k=1}^{N} F_{kx}\right)\hat{\mathbf{i}} + \left(\sum_{k=1}^{N} F_{ky}\right)\hat{\mathbf{j}} + \left(\sum_{k=1}^{N} F_{kz}\right)\hat{\mathbf{k}}. \end{aligned}$$

Therefore, scalar components of the resultant vector are

$$\begin{cases} F_{Rx} = \sum_{k=1}^{N} F_{kx} = F_{1x} + F_{2x} + \ldots + F_{Nx} \\ F_{Ry} = \sum_{k=1}^{N} F_{ky} = F_{1y} + F_{2y} + \ldots + F_{Ny} \\ F_{Rz} = \sum_{k=1}^{N} F_{kz} = F_{1z} + F_{2z} + \ldots + F_{Nz}. \end{cases} \tag{2.25}$$

Having found the scalar components, we can write the resultant in vector component form:

$$\vec{\mathbf{F}}_R = F_{Rx}\hat{\mathbf{i}} + F_{Ry}\hat{\mathbf{j}} + F_{Rz}\hat{\mathbf{k}}.$$

Analytical methods for finding the resultant and, in general, for solving vector equations are very important in physics because many physical quantities are vectors. For example, we use this method in kinematics to find resultant displacement vectors and resultant velocity vectors, in mechanics to find resultant force vectors and the resultants of many derived vector quantities, and in electricity and magnetism to find resultant electric or magnetic vector fields.

EXAMPLE 2.9

Analytical Computation of a Resultant

Three displacement vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, and $\vec{\mathbf{C}}$ in a plane (Figure 2.13) are specified by their magnitudes $A = 10.0$, $B = 7.0$, and $C = 8.0$, respectively, and by their respective direction angles with the horizontal direction $\alpha = 35°$, $\beta = -110°$, and $\gamma = 30°$. The physical units of the magnitudes are centimeters. Resolve the vectors to their scalar components and find the following vector sums: (a) $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}}$, (b) $\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}}$, and (c) $\vec{\mathbf{S}} = \vec{\mathbf{A}} - 3\vec{\mathbf{B}} + \vec{\mathbf{C}}$.

Strategy

First, we use Equation 2.17 to find the scalar components of each vector and then we express each vector in its vector component form given by Equation 2.12. Then, we use analytical methods of vector algebra to find the resultants.

Solution

We resolve the given vectors to their scalar components:

$$\begin{cases} A_x = A\cos\alpha = (10.0\text{ cm})\cos 35° = 8.19\text{ cm} \\ A_y = A\sin\alpha = (10.0\text{ cm})\sin 35° = 5.73\text{ cm} \end{cases}$$
$$\begin{cases} B_x = B\cos\beta = (7.0\text{ cm})\cos(-110°) = -2.39\text{ cm} \\ B_y = B\sin\beta = (7.0\text{ cm})\sin(-110°) = -6.58\text{ cm} \end{cases}.$$
$$\begin{cases} C_x = C\cos\gamma = (8.0\text{ cm})\cos 30° = 6.93\text{ cm} \\ C_y = C\sin\gamma = (8.0\text{ cm})\sin 30° = 4.00\text{ cm} \end{cases}$$

For (a) we may substitute directly into Equation 2.25 to find the scalar components of the resultant:

$$\begin{cases} R_x = A_x + B_x + C_x = 8.19\text{ cm} - 2.39\text{ cm} + 6.93\text{ cm} = 12.73\text{ cm} \\ R_y = A_y + B_y + C_y = 5.73\text{ cm} - 6.58\text{ cm} + 4.00\text{ cm} = 3.15\text{ cm} \end{cases}.$$

Therefore, the resultant vector is $\vec{\mathbf{R}} = R_x\hat{\mathbf{i}} + R_y\hat{\mathbf{j}} = (12.7\hat{\mathbf{i}} + 3.1\hat{\mathbf{j}})$cm.

For (b), we may want to write the vector difference as

$$\vec{\mathbf{D}} = \vec{\mathbf{A}} - \vec{\mathbf{B}} = (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}}) - (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}}) = (A_x - B_x)\hat{\mathbf{i}} + (A_y - B_y)\hat{\mathbf{j}}.$$

Then, the scalar components of the vector difference are

$$\begin{cases} D_x = A_x - B_x = 8.19\text{ cm} - (-2.39\text{ cm}) = 10.58\text{ cm} \\ D_y = A_y - B_y = 5.73\text{ cm} - (-6.58\text{ cm}) = 12.31\text{ cm} \end{cases}.$$

Hence, the difference vector is $\vec{\mathbf{D}} = D_x\hat{\mathbf{i}} + D_y\hat{\mathbf{j}} = (10.6\hat{\mathbf{i}} + 12.3\hat{\mathbf{j}})$cm.

For (c), we can write vector $\vec{\mathbf{S}}$ in the following explicit form:

$$\begin{aligned} \vec{\mathbf{S}} &= \vec{\mathbf{A}} - 3\vec{\mathbf{B}} + \vec{\mathbf{C}} = (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}}) - 3(B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}}) + (C_x\hat{\mathbf{i}} + C_y\hat{\mathbf{j}}) \\ &= (A_x - 3B_x + C_x)\hat{\mathbf{i}} + (A_y - 3B_y + C_y)\hat{\mathbf{j}}. \end{aligned}$$

Then, the scalar components of $\vec{\mathbf{S}}$ are

$$\begin{cases} S_x = A_x - 3B_x + C_x = 8.19\text{ cm} - 3(-2.39\text{ cm}) + 6.93\text{ cm} = 22.29\text{ cm} \\ S_y = A_y - 3B_y + C_y = 5.73\text{ cm} - 3(-6.58\text{ cm}) + 4.00\text{ cm} = 29.47\text{ cm} \end{cases}.$$

The vector is $\vec{\mathbf{S}} = S_x\hat{\mathbf{i}} + S_y\hat{\mathbf{j}} = (22.3\hat{\mathbf{i}} + 29.5\hat{\mathbf{j}})\text{cm}$.

Significance

Having found the vector components, we can illustrate the vectors by graphing or we can compute magnitudes and direction angles, as shown in Figure 2.24. Results for the magnitudes in (b) and (c) can be compared with results for the same problems obtained with the graphical method, shown in Figure 2.14 and Figure 2.15. Notice that the analytical method produces exact results and its accuracy is not limited by the resolution of a ruler or a protractor, as it was with the graphical method used in Example 2.2 for finding this same resultant.

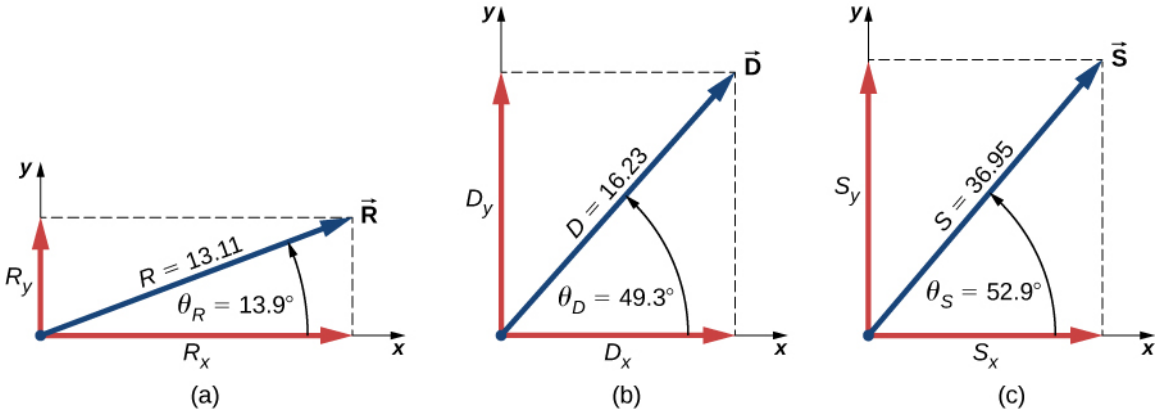


Figure 2.24 Graphical illustration of the solutions obtained analytically in Example 2.9.

CHECK YOUR UNDERSTANDING 2.8

Three displacement vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, and $\vec{\mathbf{F}}$ (Figure 2.13) are specified by their magnitudes $A = 10.00$, $B = 7.00$, and $F = 20.00$, respectively, and by their respective direction angles with the horizontal direction $\alpha = 35°$, $\beta = -110°$, and $\varphi = 110°$. The physical units of the magnitudes are centimeters. Use the analytical method to find vector $\vec{\mathbf{G}} = \vec{\mathbf{A}} + 2\vec{\mathbf{B}} - \vec{\mathbf{F}}$. Verify that $G = 28.15$ cm and that $\theta_G = -68.65°$.

EXAMPLE 2.10

The Tug-of-War Game

Four dogs named Astro, Balto, Clifford, and Dug play a tug-of-war game with a toy (Figure 2.25). Astro pulls on the toy in direction $\alpha = 55°$ south of east, Balto pulls in direction $\beta = 60°$ east of north, and Clifford pulls in direction $\gamma = 55°$ west of north. Astro pulls strongly with 160.0 units of force (N), which we abbreviate as $A = 160.0$ N. Balto pulls even stronger than Astro with a force of magnitude $B = 200.0$ N, and Clifford pulls with a force of magnitude $C = 140.0$ N. When Dug pulls on the toy in such a way that his force balances out the resultant of the other three forces, the toy does not move in any direction. With how big a force and in what direction must Dug pull on the toy for this to happen?

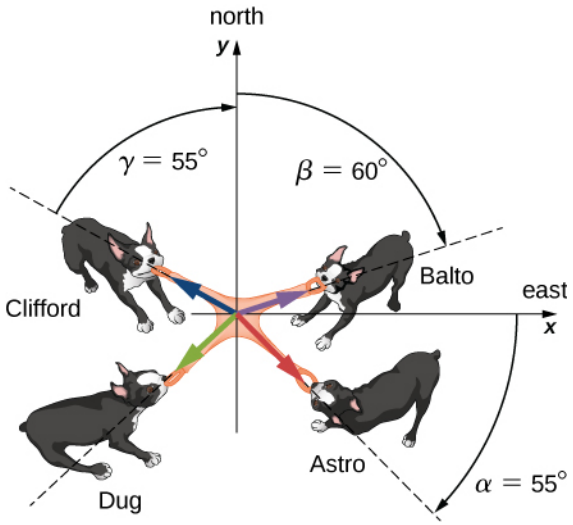


Figure 2.25 Four dogs play a tug-of-war game with a toy.

Strategy

We assume that east is the direction of the positive x-axis and north is the direction of the positive y-axis. As in Example 2.9, we have to resolve the three given forces— $\vec{\mathbf{A}}$ (the pull from Astro), $\vec{\mathbf{B}}$ (the pull from Balto), and $\vec{\mathbf{C}}$ (the pull from Clifford)—into their scalar components and then find the scalar components of the resultant vector $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}}$. When the pulling force $\vec{\mathbf{D}}$ from Dug balances out this resultant, the sum of $\vec{\mathbf{D}}$ and $\vec{\mathbf{R}}$ must give the null vector $\vec{\mathbf{D}} + \vec{\mathbf{R}} = \vec{\mathbf{0}}$. This means that $\vec{\mathbf{D}} = -\vec{\mathbf{R}}$, so the pull from Dug must be antiparallel to $\vec{\mathbf{R}}$.

Solution

The direction angles are $\theta_A = -\alpha = -55°$, $\theta_B = 90° - \beta = 30°$, and $\theta_C = 90° + \gamma = 145°$, and substituting them into Equation 2.17 gives the scalar components of the three given forces:

$$\begin{cases} A_x = A\cos\theta_A = (160.0\text{ N})\cos(-55°) = +91.8\text{ N} \\ A_y = A\sin\theta_A = (160.0\text{ N})\sin(-55°) = -131.1\text{ N} \end{cases}$$

$$\begin{cases} B_x = B\cos\theta_B = (200.0\text{ N})\cos 30° = +173.2\text{ N} \\ B_y = B\sin\theta_B = (200.0\text{ N})\sin 30° = +100.0\text{ N} \end{cases}$$

$$\begin{cases} C_x = C\cos\theta_C = (140.0\text{ N})\cos 145° = -114.7\text{ N} \\ C_y = C\sin\theta_C = (140.0\text{ N})\sin 145° = +80.3\text{ N} \end{cases}$$

Now we compute scalar components of the resultant vector $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}} + \vec{\mathbf{C}}$:

$$\begin{cases} R_x = A_x + B_x + C_x = +91.8\text{ N} + 173.2\text{ N} - 114.7\text{ N} = +150.3\text{ N} \\ R_y = A_y + B_y + C_y = -131.1\text{ N} + 100.0\text{ N} + 80.3\text{ N} = +49.2\text{ N} \end{cases}$$

The antiparallel vector to the resultant $\vec{\mathbf{R}}$ is

$$\vec{\mathbf{D}} = -\vec{\mathbf{R}} = -R_x\hat{\mathbf{i}} - R_y\hat{\mathbf{j}} = (-150.3\hat{\mathbf{i}} - 49.2\hat{\mathbf{j}})\text{ N}.$$

The magnitude of Dug's pulling force is

$$D = \sqrt{D_x^2 + D_y^2} = \sqrt{(-150.3)^2 + (-49.2)^2}\text{ N} = 158.1\text{ N}.$$

The direction of Dug's pulling force is

$$\theta = \tan^{-1}\left(\frac{D_y}{D_x}\right) = \tan^{-1}\left(\frac{-49.2\text{ N}}{-150.3\text{ N}}\right) = \tan^{-1}\left(\frac{49.2}{150.3}\right) = 18.1°.$$

Dug pulls in the direction $18.1°$ south of west because both components are negative, which means the pull

vector lies in the third quadrant (Figure 2.19).

CHECK YOUR UNDERSTANDING 2.9

Suppose that Balto in Example 2.10 leaves the game to attend to more important matters, but Astro, Clifford, and Dug continue playing. Astro and Clifford's pull on the toy does not change, but Dug runs around and bites on the toy in a different place. With how big a force and in what direction must Dug pull on the toy now to balance out the combined pulls from Clifford and Astro? Illustrate this situation by drawing a vector diagram indicating all forces involved.

EXAMPLE 2.11

Vector Algebra

Find the magnitude of the vector $\vec{\mathbf{C}}$ that satisfies the equation $2\vec{\mathbf{A}} - 6\vec{\mathbf{B}} + 3\vec{\mathbf{C}} = 2\hat{\mathbf{j}}$, where $\vec{\mathbf{A}} = \hat{\mathbf{i}} - 2\hat{\mathbf{k}}$ and $\vec{\mathbf{B}} = -\hat{\mathbf{j}} + \hat{\mathbf{k}}/2$.

Strategy

We first solve the given equation for the unknown vector $\vec{\mathbf{C}}$. Then we substitute $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$; group the terms along each of the three directions $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$, and $\hat{\mathbf{k}}$; and identify the scalar components C_x, C_y, and C_z. Finally, we substitute into Equation 2.21 to find magnitude C.

Solution

$$\begin{aligned} 2\vec{\mathbf{A}} - 6\vec{\mathbf{B}} + 3\vec{\mathbf{C}} &= 2\hat{\mathbf{j}} \\ 3\vec{\mathbf{C}} &= 2\hat{\mathbf{j}} - 2\vec{\mathbf{A}} + 6\vec{\mathbf{B}} \\ \vec{\mathbf{C}} &= \tfrac{2}{3}\hat{\mathbf{j}} - \tfrac{2}{3}\vec{\mathbf{A}} + 2\vec{\mathbf{B}} \\ &= \tfrac{2}{3}\hat{\mathbf{j}} - \tfrac{2}{3}(\hat{\mathbf{i}} - 2\hat{\mathbf{k}}) + 2\left(-\hat{\mathbf{j}} + \tfrac{\hat{\mathbf{k}}}{2}\right) = \tfrac{2}{3}\hat{\mathbf{j}} - \tfrac{2}{3}\hat{\mathbf{i}} + \tfrac{4}{3}\hat{\mathbf{k}} - 2\hat{\mathbf{j}} + \hat{\mathbf{k}} \\ &= -\tfrac{2}{3}\hat{\mathbf{i}} + \left(\tfrac{2}{3} - 2\right)\hat{\mathbf{j}} + \left(\tfrac{4}{3} + 1\right)\hat{\mathbf{k}} \\ &= -\tfrac{2}{3}\hat{\mathbf{i}} - \tfrac{4}{3}\hat{\mathbf{j}} + \tfrac{7}{3}\hat{\mathbf{k}}. \end{aligned}$$

The components are $C_x = -2/3$, $C_y = -4/3$, and $C_z = 7/3$, and substituting into Equation 2.21 gives

$$C = \sqrt{C_x^2 + C_y^2 + C_z^2} = \sqrt{(-2/3)^2 + (-4/3)^2 + (7/3)^2} = \sqrt{23/3}.$$

EXAMPLE 2.12

Displacement of a Skier

Starting at a ski lodge, a cross-country skier goes 5.0 km north, then 3.0 km west, and finally 4.0 km southwest before taking a rest. Find his total displacement vector relative to the lodge when he is at the rest point. How far and in what direction must he ski from the rest point to return directly to the lodge?

Strategy

We assume a rectangular coordinate system with the origin at the ski lodge and with the unit vector $\hat{\mathbf{i}}$ pointing east and the unit vector $\hat{\mathbf{j}}$ pointing north. There are three displacements: $\vec{\mathbf{D}}_1$, $\vec{\mathbf{D}}_2$, and $\vec{\mathbf{D}}_3$. We identify their magnitudes as $D_1 = 5.0$ km, $D_2 = 3.0$ km, and $D_3 = 4.0$ km. We identify their directions are the angles $\theta_1 = 90°$, $\theta_2 = 180°$, and $\theta_3 = 180° + 45° = 225°$. We resolve each displacement vector to its scalar components and substitute the components into Equation 2.25 to obtain the scalar components of the

resultant displacement $\vec{\mathbf{D}}$ from the lodge to the rest point. On the way back from the rest point to the lodge, the displacement is $\vec{\mathbf{B}} = -\vec{\mathbf{D}}$. Finally, we find the magnitude and direction of $\vec{\mathbf{B}}$.

Solution

Scalar components of the displacement vectors are

$$\begin{cases} D_{1x} = D_1 \cos\theta_1 = (5.0\,\text{km})\cos 90^\circ = 0 \\ D_{1y} = D_1 \sin\theta_1 = (5.0\,\text{km})\sin 90^\circ = 5.0\,\text{km} \end{cases}$$
$$\begin{cases} D_{2x} = D_2 \cos\theta_2 = (3.0\,\text{km})\cos 180^\circ = -3.0\,\text{km} \\ D_{2y} = D_2 \sin\theta_2 = (3.0\,\text{km})\sin 180^\circ = 0 \end{cases}.$$
$$\begin{cases} D_{3x} = D_3 \cos\theta_3 = (4.0\,\text{km})\cos 225^\circ = -2.8\,\text{km} \\ D_{3y} = D_3 \sin\theta_3 = (4.0\,\text{km})\sin 225^\circ = -2.8\,\text{km} \end{cases}$$

Scalar components of the net displacement vector are

$$\begin{cases} D_x = D_{1x} + D_{2x} + D_{3x} = (0 - 3.0 - 2.8)\text{km} = -5.8\,\text{km} \\ D_y = D_{1y} + D_{2y} + D_{3y} = (5.0 + 0 - 2.8)\text{km} = +2.2\,\text{km} \end{cases}.$$

Hence, the skier's net displacement vector is $\vec{\mathbf{D}} = D_x\hat{\mathbf{i}} + D_y\hat{\mathbf{j}} = (-5.8\hat{\mathbf{i}} + 2.2\hat{\mathbf{j}})\text{km}$. On the way back to the lodge, his displacement is $\vec{\mathbf{B}} = -\vec{\mathbf{D}} = -(-5.8\hat{\mathbf{i}} + 2.2\hat{\mathbf{j}})\text{km} = (5.8\hat{\mathbf{i}} - 2.2\hat{\mathbf{j}})\text{km}$. Its magnitude is $B = \sqrt{B_x^2 + B_y^2} = \sqrt{(5.8)^2 + (-2.2)^2}\,\text{km} = 6.2\,\text{km}$ and its direction angle is $\theta = \tan^{-1}(-2.2/5.8) = -20.8^\circ$. Therefore, to return to the lodge, he must go 6.2 km in a direction about 21° south of east.

Significance

Notice that no figure is needed to solve this problem by the analytical method. Figures are required when using a graphical method; however, we can check if our solution makes sense by sketching it, which is a useful final step in solving any vector problem.

EXAMPLE 2.13

Displacement of a Jogger

A jogger runs up a flight of 200 identical steps to the top of a hill and then runs along the top of the hill 50.0 m before he stops at a drinking fountain (Figure 2.26). His displacement vector from point *A* at the bottom of the steps to point *B* at the fountain is $\vec{\mathbf{D}}_{AB} = (-90.0\hat{\mathbf{i}} + 30.0\hat{\mathbf{j}})\text{m}$. What is the height and width of each step in the flight? What is the actual distance the jogger covers? If he makes a loop and returns to point *A*, what is his net displacement vector?

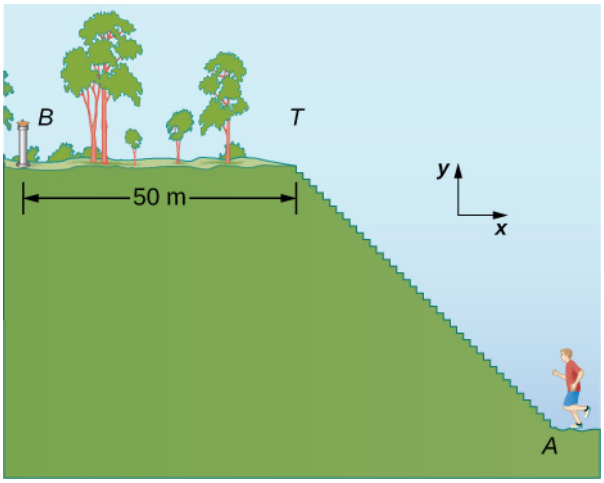


Figure 2.26 A jogger runs up a flight of steps.

Strategy

The displacement vector $\vec{\mathbf{D}}_{AB}$ is the vector sum of the jogger's displacement vector $\vec{\mathbf{D}}_{AT}$ along the stairs (from point A at the bottom of the stairs to point T at the top of the stairs) and his displacement vector $\vec{\mathbf{D}}_{TB}$ on the top of the hill (from point A at the top of the stairs to the fountain at point T). We must find the horizontal and the vertical components of $\vec{\mathbf{D}}_{AT}$. If each step has width w and height h, the horizontal component of $\vec{\mathbf{D}}_{AT}$ must have a length of $200w$ and the vertical component must have a length of $200h$. The actual distance the jogger covers is the sum of the distance he runs up the stairs and the distance of 50.0 m that he runs along the top of the hill.

Solution

In the coordinate system indicated in Figure 2.26, the jogger's displacement vector on the top of the hill is $\vec{\mathbf{D}}_{TB} = (-50.0\text{ m})\hat{\mathbf{i}}$. His net displacement vector is

$$\vec{\mathbf{D}}_{AB} = \vec{\mathbf{D}}_{AT} + \vec{\mathbf{D}}_{TB}.$$

Therefore, his displacement vector $\vec{\mathbf{D}}_{TB}$ along the stairs is

$$\begin{aligned}\vec{\mathbf{D}}_{AT} &= \vec{\mathbf{D}}_{AB} - \vec{\mathbf{D}}_{TB} = (-90.0\hat{\mathbf{i}} + 30.0\hat{\mathbf{j}})\text{m} - (-50.0\text{ m})\hat{\mathbf{i}} = [(-90.0 + 50.0)\hat{\mathbf{i}} + 30.0\hat{\mathbf{j}})]\text{m} \\ &= (-40.0\hat{\mathbf{i}} + 30.0\hat{\mathbf{j}})\text{m}.\end{aligned}$$

Its scalar components are $D_{ATx} = -40.0$ m and $D_{ATy} = 30.0$ m. Therefore, we must have

$$200w = |-40.0|\text{m and } 200h = 30.0\text{ m}.$$

Hence, the step width is w = 40.0 m/200 = 0.2 m = 20 cm, and the step height is h = 30.0 m/200 = 0.15 m = 15 cm. The distance that the jogger covers along the stairs is

$$D_{AT} = \sqrt{D_{ATx}^2 + D_{ATy}^2} = \sqrt{(-40.0)^2 + (30.0)^2}\text{ m} = 50.0\text{ m}.$$

Thus, the actual distance he runs is $D_{AT} + D_{TB} = 50.0\text{ m} + 50.0\text{ m} = 100.0\text{ m}$. When he makes a loop and comes back from the fountain to his initial position at point A, the total distance he covers is twice this distance, or 200.0 m. However, his net displacement vector is zero, because when his final position is the same as his initial position, the scalar components of his net displacement vector are zero (Equation 2.13).

In many physical situations, we often need to know the direction of a vector. For example, we may want to know the direction of a magnetic field vector at some point or the direction of motion of an object. We have already said direction is given by a unit vector, which is a dimensionless entity—that is, it has no physical units associated with it. When the vector in question lies along one of the axes in a Cartesian system of coordinates, the answer is simple, because then its unit vector of direction is either parallel or antiparallel to the direction

of the unit vector of an axis. For example, the direction of vector $\vec{\mathbf{d}} = -5\ \text{m}\hat{\mathbf{i}}$ is unit vector $\hat{\mathbf{d}} = -\hat{\mathbf{i}}$. The general rule of finding the unit vector $\hat{\mathbf{V}}$ of direction for any vector $\vec{\mathbf{V}}$ is to divide it by its magnitude V:

$$\hat{\mathbf{V}} = \frac{\vec{\mathbf{V}}}{V}. \tag{2.26}$$

We see from this expression that the unit vector of direction is indeed dimensionless because the numerator and the denominator in Equation 2.26 have the same physical unit. In this way, Equation 2.26 allows us to express the unit vector of direction in terms of unit vectors of the axes. The following example illustrates this principle.

EXAMPLE 2.14

The Unit Vector of Direction

If the velocity vector of the military convoy in Example 2.8 is $\vec{\mathbf{v}} = (4.000\hat{\mathbf{i}} + 3.000\hat{\mathbf{j}} + 0.100\hat{\mathbf{k}})\text{km/h}$, what is the unit vector of its direction of motion?

Strategy

The unit vector of the convoy's direction of motion is the unit vector $\hat{\mathbf{v}}$ that is parallel to the velocity vector. The unit vector is obtained by dividing a vector by its magnitude, in accordance with Equation 2.26.

Solution

The magnitude of the vector $\vec{\mathbf{v}}$ is

$$v = \sqrt{v_x^2 + v_y^2 + v_z^2} = \sqrt{4.000^2 + 3.000^2 + 0.100^2}\text{km/h} = 5.001\text{km/h}.$$

To obtain the unit vector $\hat{\mathbf{v}}$, divide $\vec{\mathbf{v}}$ by its magnitude:

$$\begin{aligned}\hat{\mathbf{v}} &= \frac{\vec{\mathbf{v}}}{v} = \frac{(4.000\hat{\mathbf{i}}+3.000\hat{\mathbf{j}}+0.100\hat{\mathbf{k}})\text{km/h}}{5.001\text{km/h}} \\ &= \frac{(4.000\hat{\mathbf{i}}+3.000\hat{\mathbf{j}}+0.100\hat{\mathbf{k}})}{5.001} \\ &= \frac{4.000}{5.001}\hat{\mathbf{i}} + \frac{3.000}{5.001}\hat{\mathbf{j}} + \frac{0.100}{5.001}\hat{\mathbf{k}} \\ &= (79.98\hat{\mathbf{i}} + 59.99\hat{\mathbf{j}} + 2.00\hat{\mathbf{k}}) \times 10^{-2}.\end{aligned}$$

Significance

Note that when using the analytical method with a calculator, it is advisable to carry out your calculations to at least three decimal places and then round off the final answer to the required number of significant figures, which is the way we performed calculations in this example. If you round off your partial answer too early, you risk your final answer having a huge numerical error, and it may be far off from the exact answer or from a value measured in an experiment.

CHECK YOUR UNDERSTANDING 2.10

Verify that vector $\hat{\mathbf{v}}$ obtained in Example 2.14 is indeed a unit vector by computing its magnitude. If the convoy in Example 2.8 was moving across a desert flatland—that is, if the third component of its velocity was zero—what is the unit vector of its direction of motion? Which geographic direction does it represent?

2.4 Products of Vectors

Learning Objectives

By the end of this section, you will be able to:

- Explain the difference between the scalar product and the vector product of two vectors.
- Determine the scalar product of two vectors.
- Determine the vector product of two vectors.
- Describe how the products of vectors are used in physics.

A vector can be multiplied by another vector but may not be divided by another vector. There are two kinds of products of vectors used broadly in physics and engineering. One kind of multiplication is a *scalar multiplication of two vectors*. Taking a scalar product of two vectors results in a number (a scalar), as its name indicates. Scalar products are used to define work and energy relations. For example, the work that a force (a vector) performs on an object while causing its displacement (a vector) is defined as a scalar product of the force vector with the displacement vector. A quite different kind of multiplication is a *vector multiplication of vectors*. Taking a vector product of two vectors returns as a result a vector, as its name suggests. Vector products are used to define other derived vector quantities. For example, in describing rotations, a vector quantity called *torque* is defined as a vector product of an applied force (a vector) and its distance from pivot to force (a vector). It is important to distinguish between these two kinds of vector multiplications because the scalar product is a scalar quantity and a vector product is a vector quantity.

The Scalar Product of Two Vectors (the Dot Product)

Scalar multiplication of two vectors yields a scalar product.

Scalar Product (Dot Product)

The **scalar product** $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}$ of two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ is a number defined by the equation

$$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB\cos\varphi, \tag{2.27}$$

where φ is the angle between the vectors (shown in Figure 2.27). The scalar product is also called the **dot product** because of the dot notation that indicates it.

In the definition of the dot product, the direction of angle φ does not matter, and φ can be measured from either of the two vectors to the other because $\cos\varphi = \cos(-\varphi) = \cos(2\pi - \varphi)$. The dot product is a negative number when $90° < \varphi \leq 180°$ and is a positive number when $0° \leq \varphi < 90°$. Moreover, the dot product of two parallel vectors is $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB\cos 0° = AB$, and the dot product of two antiparallel vectors is $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB\cos 180° = -AB$. The scalar product of two *orthogonal vectors* vanishes: $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB\cos 90° = 0$. The scalar product of a vector with itself is the square of its magnitude:

$$\vec{\mathbf{A}}^2 \equiv \vec{\mathbf{A}} \cdot \vec{\mathbf{A}} = AA\cos 0° = A^2. \tag{2.28}$$

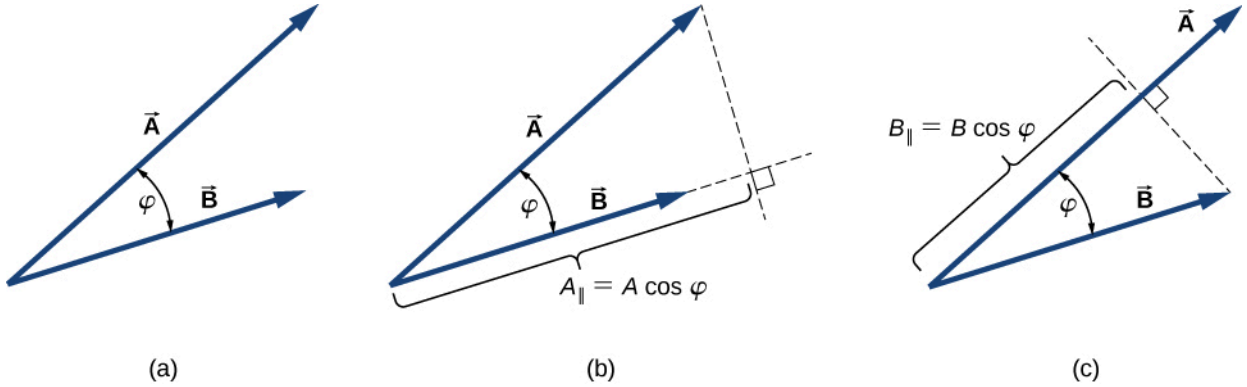


Figure 2.27 The scalar product of two vectors. (a) The angle between the two vectors. (b) The orthogonal projection $A_{||}$ of vector $\vec{\mathbf{A}}$ onto the direction of vector $\vec{\mathbf{B}}$. (c) The orthogonal projection $B_{||}$ of vector $\vec{\mathbf{B}}$ onto the direction of vector $\vec{\mathbf{A}}$.

EXAMPLE 2.15

The Scalar Product

For the vectors shown in Figure 2.13, find the scalar product $\vec{\mathbf{A}} \cdot \vec{\mathbf{F}}$.

Strategy

From Figure 2.13, the magnitudes of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{F}}$ are $A = 10.0$ and $F = 20.0$. Angle θ, between them, is the difference: $\theta = \varphi - \alpha = 110° - 35° = 75°$. Substituting these values into Equation 2.27 gives the scalar product.

Solution

A straightforward calculation gives us

$$\vec{\mathbf{A}} \cdot \vec{\mathbf{F}} = AF\cos\theta = (10.0)(20.0)\cos 75° = 51.76.$$

CHECK YOUR UNDERSTANDING 2.11

For the vectors given in Figure 2.13, find the scalar products $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}$ and $\vec{\mathbf{F}} \cdot \vec{\mathbf{C}}$.

In the Cartesian coordinate system, scalar products of the unit vector of an axis with other unit vectors of axes always vanish because these unit vectors are orthogonal:

$$\begin{aligned} \hat{\mathbf{i}} \cdot \hat{\mathbf{j}} &= \left|\hat{\mathbf{i}}\right|\left|\hat{\mathbf{j}}\right|\cos 90° = (1)(1)(0) = 0, \\ \hat{\mathbf{i}} \cdot \hat{\mathbf{k}} &= \left|\hat{\mathbf{i}}\right|\left|\hat{\mathbf{k}}\right|\cos 90° = (1)(1)(0) = 0, \\ \hat{\mathbf{k}} \cdot \hat{\mathbf{j}} &= \left|\hat{\mathbf{k}}\right|\left|\hat{\mathbf{j}}\right|\cos 90° = (1)(1)(0) = 0. \end{aligned} \qquad \textbf{2.29}$$

In these equations, we use the fact that the magnitudes of all unit vectors are one: $\left|\hat{\mathbf{i}}\right| = \left|\hat{\mathbf{j}}\right| = \left|\hat{\mathbf{k}}\right| = 1$. For unit vectors of the axes, Equation 2.28 gives the following identities:

$$\hat{\mathbf{i}} \cdot \hat{\mathbf{i}} = i^2 = \hat{\mathbf{j}} \cdot \hat{\mathbf{j}} = j^2 = \hat{\mathbf{k}} \cdot \hat{\mathbf{k}} = k^2 = 1. \qquad \textbf{2.30}$$

The scalar product $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}$ can also be interpreted as either the product of B with the projection $A_{\parallel}$ of vector $\vec{\mathbf{A}}$ onto the direction of vector $\vec{\mathbf{B}}$ (Figure 2.27(b)) or the product of A with the projection $B_{\parallel}$ of vector $\vec{\mathbf{B}}$ onto the direction of vector $\vec{\mathbf{A}}$ (Figure 2.27(c)):

$$\begin{aligned}\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} &= AB\cos\varphi \\ &= B(A\cos\varphi) = BA_{\parallel} \\ &= A(B\cos\varphi) = AB_{\parallel}.\end{aligned}$$

For example, in the rectangular coordinate system in a plane, the scalar x-component of a vector is its dot product with the unit vector $\hat{\mathbf{i}}$, and the scalar y-component of a vector is its dot product with the unit vector $\hat{\mathbf{j}}$:

$$\begin{cases}\vec{\mathbf{A}} \cdot \hat{\mathbf{i}} = \left|\vec{\mathbf{A}}\right|\left|\hat{\mathbf{i}}\right|\cos\theta_A = A\cos\theta_A = A_x \\ \vec{\mathbf{A}} \cdot \hat{\mathbf{j}} = \left|\vec{\mathbf{A}}\right|\left|\hat{\mathbf{j}}\right|\cos(90^\circ - \theta_A) = A\sin\theta_A = A_y\end{cases}.$$

Scalar multiplication of vectors is commutative,

$$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = \vec{\mathbf{B}} \cdot \vec{\mathbf{A}}, \tag{2.31}$$

and obeys the distributive law:

$$\vec{\mathbf{A}} \cdot (\vec{\mathbf{B}} + \vec{\mathbf{C}}) = \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} + \vec{\mathbf{A}} \cdot \vec{\mathbf{C}}. \tag{2.32}$$

We can use the commutative and distributive laws to derive various relations for vectors, such as expressing the dot product of two vectors in terms of their scalar components.

CHECK YOUR UNDERSTANDING 2.12

For vector $\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}$ in a rectangular coordinate system, use Equation 2.29 through Equation 2.32 to show that $\vec{\mathbf{A}} \cdot \hat{\mathbf{i}} = A_x$ $\vec{\mathbf{A}} \cdot \hat{\mathbf{j}} = A_y$ and $\vec{\mathbf{A}} \cdot \hat{\mathbf{k}} = A_z$.

When the vectors in Equation 2.27 are given in their vector component forms,

$$\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}} \text{ and } \vec{\mathbf{B}} = B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}},$$

we can compute their scalar product as follows:

$$\begin{aligned}\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} &= (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}) \cdot (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) \\ &= A_xB_x\hat{\mathbf{i}} \cdot \hat{\mathbf{i}} + A_xB_y\hat{\mathbf{i}} \cdot \hat{\mathbf{j}} + A_xB_z\hat{\mathbf{i}} \cdot \hat{\mathbf{k}} \\ &\quad + A_yB_x\hat{\mathbf{j}} \cdot \hat{\mathbf{i}} + A_yB_y\hat{\mathbf{j}} \cdot \hat{\mathbf{j}} + A_yB_z\hat{\mathbf{j}} \cdot \hat{\mathbf{k}} \\ &\quad + A_zB_x\hat{\mathbf{k}} \cdot \hat{\mathbf{i}} + A_zB_y\hat{\mathbf{k}} \cdot \hat{\mathbf{j}} + A_zB_z\hat{\mathbf{k}} \cdot \hat{\mathbf{k}}.\end{aligned}$$

Since scalar products of two different unit vectors of axes give zero, and scalar products of unit vectors with themselves give one (see Equation 2.29 and Equation 2.30), there are only three nonzero terms in this expression. Thus, the scalar product simplifies to

$$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_xB_x + A_yB_y + A_zB_z. \tag{2.33}$$

We can use Equation 2.33 for the scalar product in terms of scalar components of vectors to find the angle between two vectors. When we divide Equation 2.27 by AB, we obtain the equation for $\cos\varphi$, into which we substitute Equation 2.33:

$$\cos\varphi = \frac{\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}}{AB} = \frac{A_xB_x + A_yB_y + A_zB_z}{AB}. \tag{2.34}$$

Angle φ between vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ is obtained by taking the inverse cosine of the expression in Equation 2.34.

EXAMPLE 2.16

Angle between Two Forces

Three dogs are pulling on a stick in different directions, as shown in Figure 2.28. The first dog pulls with force $\vec{\mathbf{F}}_1 = (10.0\hat{\mathbf{i}} - 20.4\hat{\mathbf{j}} + 2.0\hat{\mathbf{k}})$N, the second dog pulls with force $\vec{\mathbf{F}}_2 = (-15.0\hat{\mathbf{i}} - 6.2\hat{\mathbf{k}})$N, and the third dog pulls with force $\vec{\mathbf{F}}_3 = (5.0\hat{\mathbf{i}} + 12.5\hat{\mathbf{j}})$N. What is the angle between forces $\vec{\mathbf{F}}_1$ and $\vec{\mathbf{F}}_2$?

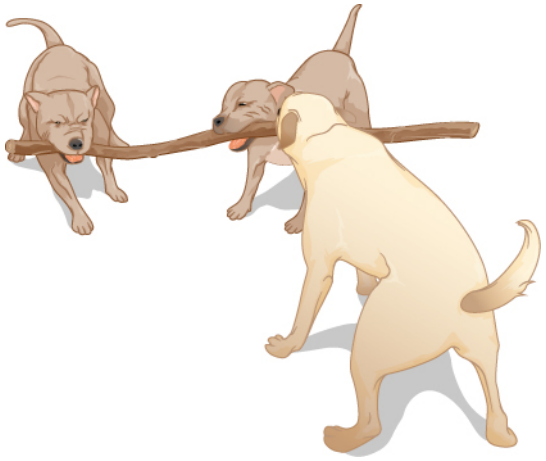


Figure 2.28 Three dogs are playing with a stick.

Strategy

The components of force vector $\vec{\mathbf{F}}_1$ are $F_{1x} = 10.0$ N, $F_{1y} = -20.4$ N, and $F_{1z} = 2.0$ N, whereas those of force vector $\vec{\mathbf{F}}_2$ are $F_{2x} = -15.0$ N, $F_{2y} = 0.0$ N, and $F_{2z} = -6.2$ N. Computing the scalar product of these vectors and their magnitudes, and substituting into Equation 2.34 gives the angle of interest.

Solution

The magnitudes of forces $\vec{\mathbf{F}}_1$ and $\vec{\mathbf{F}}_2$ are

$$F_1 = \sqrt{F_{1x}^2 + F_{1y}^2 + F_{1z}^2} = \sqrt{10.0^2 + 20.4^2 + 2.0^2}\ \text{N} = 22.8\ \text{N}$$

and

$$F_2 = \sqrt{F_{2x}^2 + F_{2y}^2 + F_{2z}^2} = \sqrt{15.0^2 + 6.2^2}\ \text{N} = 16.2\ \text{N}.$$

Substituting the scalar components into Equation 2.33 yields the scalar product

$$\begin{aligned}\vec{\mathbf{F}}_1 \cdot \vec{\mathbf{F}}_2 &= F_{1x}F_{2x} + F_{1y}F_{2y} + F_{1z}F_{2z} \\ &= (10.0\ \text{N})(-15.0\ \text{N}) + (-20.4\ \text{N})(0.0\ \text{N}) + (2.0\ \text{N})(-6.2\ \text{N}) \\ &= -162.4\ \text{N}^2.\end{aligned}$$

Finally, substituting everything into Equation 2.34 gives the angle

$$\cos\varphi = \frac{\vec{\mathbf{F}}_1 \cdot \vec{\mathbf{F}}_2}{F_1 F_2} = \frac{-162.4\,\text{N}^2}{(22.8\ \text{N})(16.2\ \text{N})} = -0.439 \Rightarrow \quad \varphi = \cos^{-1}(-0.439) = 116.0°.$$

Significance

Notice that when vectors are given in terms of the unit vectors of axes, we can find the angle between them without knowing the specifics about the geographic directions the unit vectors represent. Here, for example, the $+x$-direction might be to the east and the $+y$-direction might be to the north. But, the angle between the forces in the problem is the same if the $+x$-direction is to the west and the $+y$-direction is to the south.

CHECK YOUR UNDERSTANDING 2.13

Find the angle between forces $\vec{\mathbf{F}}_1$ and $\vec{\mathbf{F}}_3$ in Example 2.16.

EXAMPLE 2.17

The Work of a Force

When force $\vec{\mathbf{F}}$ pulls on an object and when it causes its displacement $\vec{\mathbf{D}}$, we say the force performs work. The amount of work the force does is the scalar product $\vec{\mathbf{F}} \cdot \vec{\mathbf{D}}$. If the stick in Example 2.16 moves momentarily and gets displaced by vector $\vec{\mathbf{D}} = (-7.9\hat{\mathbf{j}} - 4.2\hat{\mathbf{k}})$ cm, how much work is done by the third dog in Example 2.16?

Strategy

We compute the scalar product of displacement vector $\vec{\mathbf{D}}$ with force vector $\vec{\mathbf{F}}_3 = (5.0\hat{\mathbf{i}} + 12.5\hat{\mathbf{j}})$N, which is the pull from the third dog. Let's use W_3 to denote the work done by force $\vec{\mathbf{F}}_3$ on displacement $\vec{\mathbf{D}}$.

Solution

Calculating the work is a straightforward application of the dot product:

$$\begin{aligned} W_3 &= \vec{\mathbf{F}}_3 \cdot \vec{\mathbf{D}} = F_{3x} D_x + F_{3y} D_y + F_{3z} D_z \\ &= (5.0\,\text{N})(0.0\,\text{cm}) + (12.5\,\text{N})(-7.9\,\text{cm}) + (0.0\,\text{N})(-4.2\,\text{cm}) \\ &= -98.7\,\text{N} \cdot \text{cm}. \end{aligned}$$

Significance

The SI unit of work is called the joule (J), where 1 J = 1 N · m. The unit cm · N can be written as $10^{-2}\,\text{m} \cdot \text{N} = 10^{-2}\,\text{J}$, so the answer can be expressed as $W_3 = -0.9875\,\text{J} \approx -1.0\,\text{J}$.

CHECK YOUR UNDERSTANDING 2.14

How much work is done by the first dog and by the second dog in Example 2.16 on the displacement in Example 2.17?

The Vector Product of Two Vectors (the Cross Product)

Vector multiplication of two vectors yields a vector product.

Vector Product (Cross Product)

The **vector product** of two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ is denoted by $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$ and is often referred to as a **cross product**. The vector product is a vector that has its direction perpendicular to both vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$. In other words, vector $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$ is perpendicular to the plane that contains vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$, as shown in Figure 2.29. The magnitude of the vector product is defined as

$$\left|\vec{\mathbf{A}} \times \vec{\mathbf{B}}\right| = AB \sin\varphi, \qquad 2.35$$

where angle φ, between the two vectors, is measured from vector $\vec{\mathbf{A}}$ (first vector in the product) to vector $\vec{\mathbf{B}}$ (second vector in the product), as indicated in Figure 2.29, and is between 0° and 180°.

According to Equation 2.35, the vector product vanishes for pairs of vectors that are either parallel ($\varphi = 0°$) or antiparallel ($\varphi = 180°$) because $\sin 0° = \sin 180° = 0$.

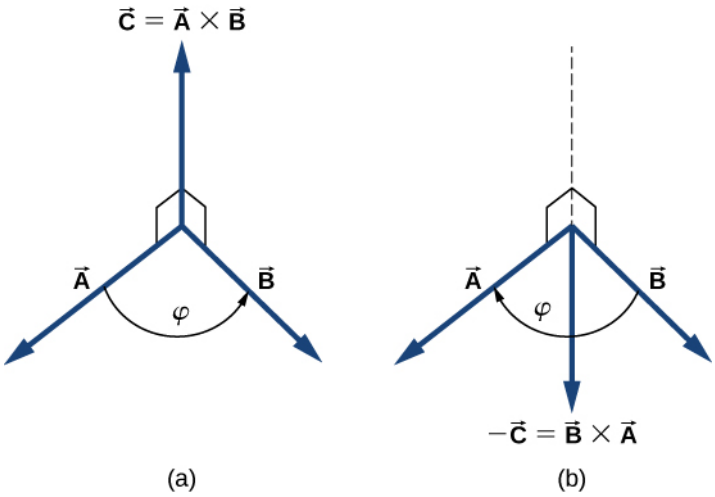


Figure 2.29 The vector product of two vectors is drawn in three-dimensional space. (a) The vector product $\vec{A} \times \vec{B}$ is a vector perpendicular to the plane that contains vectors $\vec{A}$ and $\vec{B}$. Small squares drawn in perspective mark right angles between $\vec{A}$ and $\vec{C}$, and between $\vec{B}$ and $\vec{C}$ so that if $\vec{A}$ and $\vec{B}$ lie on the floor, vector $\vec{C}$ points vertically upward to the ceiling. (b) The vector product $\vec{B} \times \vec{A}$ is a vector antiparallel to vector $\vec{A} \times \vec{B}$.

On the line perpendicular to the plane that contains vectors $\vec{A}$ and $\vec{B}$ there are two alternative directions—either up or down, as shown in Figure 2.29—and the direction of the vector product may be either one of them. In the standard right-handed orientation, where the angle between vectors is measured counterclockwise from the first vector, vector $\vec{A} \times \vec{B}$ points *upward*, as seen in Figure 2.29(a). If we reverse the order of multiplication, so that now $\vec{B}$ comes first in the product, then vector $\vec{B} \times \vec{A}$ must point *downward*, as seen in Figure 2.29(b). This means that vectors $\vec{A} \times \vec{B}$ and $\vec{B} \times \vec{A}$ are *antiparallel* to each other and that vector multiplication is *not* commutative but *anticommutative*. The **anticommutative property** means the vector product reverses the sign when the order of multiplication is reversed:

$$\vec{A} \times \vec{B} = -\vec{B} \times \vec{A}. \tag{2.36}$$

The **corkscrew right-hand rule** is a common mnemonic used to determine the direction of the vector product. As shown in Figure 2.30, a corkscrew is placed in a direction perpendicular to the plane that contains vectors $\vec{A}$ and $\vec{B}$, and its handle is turned in the direction from the first to the second vector in the product. The direction of the cross product is given by the progression of the corkscrew.

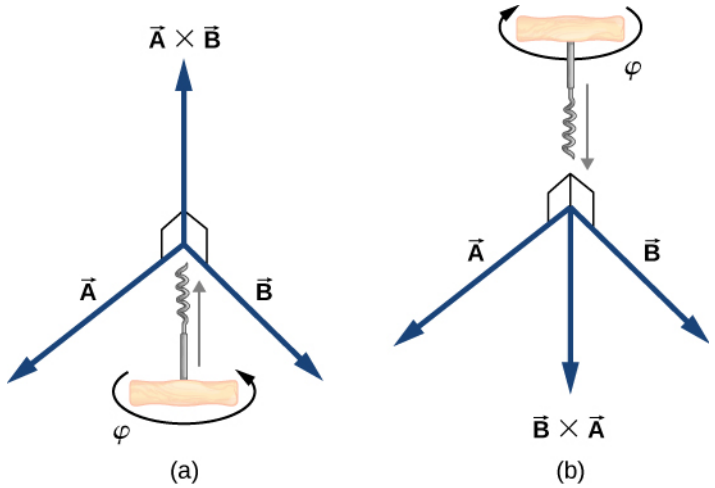


Figure 2.30 The corkscrew right-hand rule can be used to determine the direction of the cross product $\vec{A} \times \vec{B}$. Place a corkscrew in the direction perpendicular to the plane that contains vectors $\vec{A}$ and $\vec{B}$, and turn it in the direction from the first to the second vector in the

product. The direction of the cross product is given by the progression of the corkscrew. (a) Upward movement means the cross-product vector points up. (b) Downward movement means the cross-product vector points downward.

EXAMPLE 2.18

The Torque of a Force

The mechanical advantage that a familiar tool called a *wrench* provides (Figure 2.31) depends on magnitude F of the applied force, on its direction with respect to the wrench handle, and on how far from the nut this force is applied. The distance R from the nut to the point where force vector $\vec{\mathbf{F}}$ is attached is represented by the radial vector $\vec{\mathbf{R}}$. The physical vector quantity that makes the nut turn is called *torque* (denoted by $\vec{\tau}$), and it is the vector product of the distance between the pivot to force with the force: $\vec{\tau} = \vec{\mathbf{R}} \times \vec{\mathbf{F}}$.

To loosen a rusty nut, a 20.00-N force is applied to the wrench handle at angle $\varphi = 40°$ and at a distance of 0.25 m from the nut, as shown in Figure 2.31(a). Find the magnitude and direction of the torque applied to the nut. What would the magnitude and direction of the torque be if the force were applied at angle $\varphi = 45°$, as shown in Figure 2.31(b)? For what value of angle φ does the torque have the largest magnitude?

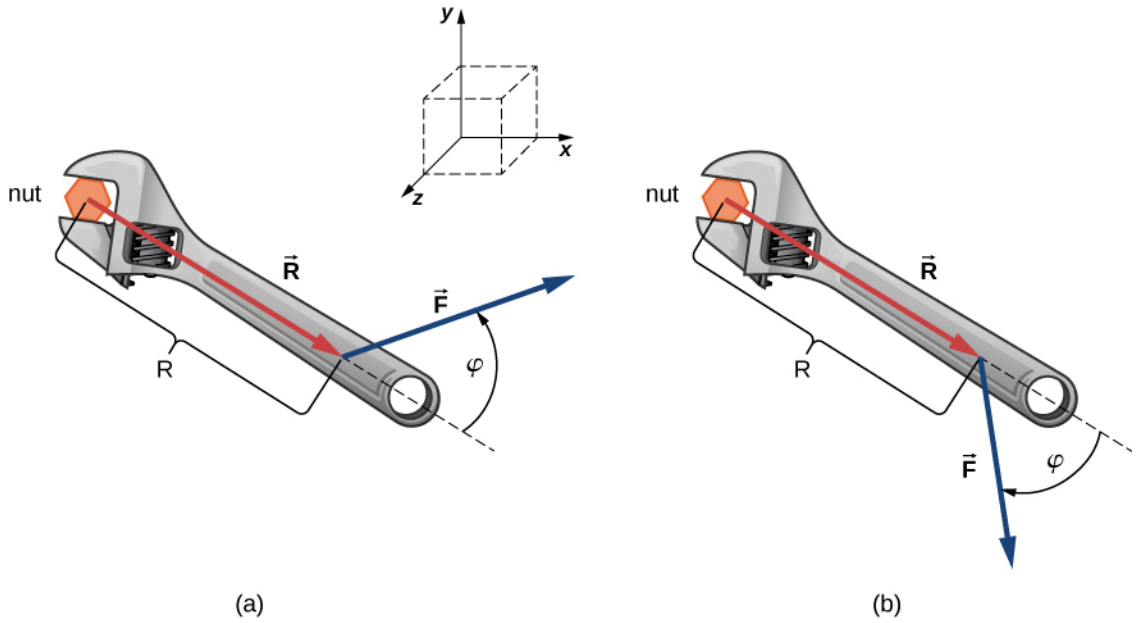


Figure 2.31 A wrench provides grip and mechanical advantage in applying torque to turn a nut. (a) Turn counterclockwise to loosen the nut. (b) Turn clockwise to tighten the nut.

Strategy

We adopt the frame of reference shown in Figure 2.31, where vectors $\vec{\mathbf{R}}$ and $\vec{\mathbf{F}}$ lie in the xy-plane and the origin is at the position of the nut. The radial direction along vector $\vec{\mathbf{R}}$ (pointing away from the origin) is the reference direction for measuring the angle φ because $\vec{\mathbf{R}}$ is the first vector in the vector product $\vec{\tau} = \vec{\mathbf{R}} \times \vec{\mathbf{F}}$. Vector $\vec{\tau}$ must lie along the z-axis because this is the axis that is perpendicular to the xy-plane, where both $\vec{\mathbf{R}}$ and $\vec{\mathbf{F}}$ lie. To compute the magnitude τ, we use Equation 2.35. To find the direction of $\vec{\tau}$, we use the corkscrew right-hand rule (Figure 2.30).

Solution

For the situation in (a), the corkscrew rule gives the direction of $\vec{\mathbf{R}} \times \vec{\mathbf{F}}$ in the positive direction of the z-axis. Physically, it means the torque vector $\vec{\tau}$ points out of the page, perpendicular to the wrench handle. We identify $F = 20.00$ N and $R = 0.25$ m, and compute the magnitude using Equation 2.35:

$$\tau = \left|\vec{\mathbf{R}} \times \vec{\mathbf{F}}\right| = RF \sin\varphi = (0.25\ \text{m})(20.00\ \text{N}) \sin 40° = 3.21\ \text{N} \cdot \text{m}.$$

For the situation in (b), the corkscrew rule gives the direction of $\vec{\mathbf{R}} \times \vec{\mathbf{F}}$ in the negative direction of the z-axis. Physically, it means the vector $\vec{\tau}$ points into the page, perpendicular to the wrench handle. The magnitude of this torque is

$$\tau = \left|\vec{\mathbf{R}} \times \vec{\mathbf{F}}\right| = RF \sin\varphi = (0.25\ \text{m})(20.00\ \text{N}) \sin 45° = 3.53\ \text{N} \cdot \text{m}.$$

The torque has the largest value when $\sin\varphi = 1$, which happens when $\varphi = 90°$. Physically, it means the wrench is most effective—giving us the best mechanical advantage—when we apply the force perpendicular to the wrench handle. For the situation in this example, this best-torque value is $\tau_{\text{best}} = RF = (0.25\ \text{m})(20.00\ \text{N}) = 5.00\ \text{N} \cdot \text{m}$.

Significance

When solving mechanics problems, we often do not need to use the corkscrew rule at all, as we'll see now in the following equivalent solution. Notice that once we have identified that vector $\vec{\mathbf{R}} \times \vec{\mathbf{F}}$ lies along the z-axis, we can write this vector in terms of the unit vector $\hat{\mathbf{k}}$ of the z-axis:

$$\vec{\mathbf{R}} \times \vec{\mathbf{F}} = RF \sin\varphi \hat{\mathbf{k}}.$$

In this equation, the number that multiplies $\hat{\mathbf{k}}$ is the scalar z-component of the vector $\vec{\mathbf{R}} \times \vec{\mathbf{F}}$. In the computation of this component, care must be taken that the angle φ is measured *counterclockwise* from $\vec{\mathbf{R}}$ (first vector) to $\vec{\mathbf{F}}$ (second vector). Following this principle for the angles, we obtain $RF \sin(+40°) = +3.2\ \text{N} \cdot \text{m}$ for the situation in (a), and we obtain $RF \sin(-45°) = -3.5\ \text{N} \cdot \text{m}$ for the situation in (b). In the latter case, the angle is negative because the graph in Figure 2.31 indicates the angle is measured clockwise; but, the same result is obtained when this angle is measured counterclockwise because $+(360° - 45°) = +315°$ and $\sin(+315°) = \sin(-45°)$. In this way, we obtain the solution without reference to the corkscrew rule. For the situation in (a), the solution is $\vec{\mathbf{R}} \times \vec{\mathbf{F}} = +3.2\ \text{N} \cdot \text{m}\hat{\mathbf{k}}$; for the situation in (b), the solution is $\vec{\mathbf{R}} \times \vec{\mathbf{F}} = -3.5\ \text{N} \cdot \text{m}\hat{\mathbf{k}}$.

CHECK YOUR UNDERSTANDING 2.15

For the vectors given in Figure 2.13, find the vector products $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$ and $\vec{\mathbf{C}} \times \vec{\mathbf{F}}$.

Similar to the dot product (Equation 2.32), the cross product has the following distributive property:

$$\vec{\mathbf{A}} \times (\vec{\mathbf{B}} + \vec{\mathbf{C}}) = \vec{\mathbf{A}} \times \vec{\mathbf{B}} + \vec{\mathbf{A}} \times \vec{\mathbf{C}}. \tag{2.37}$$

The distributive property is applied frequently when vectors are expressed in their component forms, in terms of unit vectors of Cartesian axes.

When we apply the definition of the cross product, Equation 2.35, to unit vectors $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$, and $\hat{\mathbf{k}}$ that define the positive x-, y-, and z-directions in space, we find that

$$\hat{\mathbf{i}} \times \hat{\mathbf{i}} = \hat{\mathbf{j}} \times \hat{\mathbf{j}} = \hat{\mathbf{k}} \times \hat{\mathbf{k}} = 0. \tag{2.38}$$

All other cross products of these three unit vectors must be vectors of unit magnitudes because $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$, and $\hat{\mathbf{k}}$ are orthogonal. For example, for the pair $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$, the magnitude is $\left|\hat{\mathbf{i}} \times \hat{\mathbf{j}}\right| = ij \sin 90° = (1)(1)(1) = 1$. The direction of the vector product $\hat{\mathbf{i}} \times \hat{\mathbf{j}}$ must be orthogonal to the xy-plane, which means it must be along the z-axis. The only unit vectors along the z-axis are $-\hat{\mathbf{k}}$ or $+\hat{\mathbf{k}}$. By the corkscrew rule, the direction of vector $\hat{\mathbf{i}} \times \hat{\mathbf{j}}$ must be parallel to the positive z-axis. Therefore, the result of the multiplication $\hat{\mathbf{i}} \times \hat{\mathbf{j}}$ is identical to $+\hat{\mathbf{k}}$. We can repeat similar reasoning for the remaining pairs of unit vectors. The results of these multiplications are

$$\begin{cases} \hat{\mathbf{i}} \times \hat{\mathbf{j}} = +\hat{\mathbf{k}}, \\ \hat{\mathbf{j}} \times \hat{\mathbf{k}} = +\hat{\mathbf{i}}, \\ \hat{\mathbf{k}} \times \hat{\mathbf{i}} = +\hat{\mathbf{j}}. \end{cases} \quad 2.39$$

Notice that in Equation 2.39, the three unit vectors $\hat{\mathbf{i}}$, $\hat{\mathbf{j}}$, and $\hat{\mathbf{k}}$ appear in the *cyclic order* shown in a diagram in Figure 2.32(a). The cyclic order means that in the product formula, $\hat{\mathbf{i}}$ follows $\hat{\mathbf{k}}$ and comes before $\hat{\mathbf{j}}$, or $\hat{\mathbf{k}}$ follows $\hat{\mathbf{j}}$ and comes before $\hat{\mathbf{i}}$, or $\hat{\mathbf{j}}$ follows $\hat{\mathbf{i}}$ and comes before $\hat{\mathbf{k}}$. The cross product of two different unit vectors is always a third unit vector. When two unit vectors in the cross product appear in the cyclic order, the result of such a multiplication is the remaining unit vector, as illustrated in Figure 2.32(b). When unit vectors in the cross product appear in a different order, the result is a unit vector that is antiparallel to the remaining unit vector (i.e., the result is with the minus sign, as shown by the examples in Figure 2.32(c) and Figure 2.32(d). In practice, when the task is to find cross products of vectors that are given in vector component form, this rule for the cross-multiplication of unit vectors is very useful.

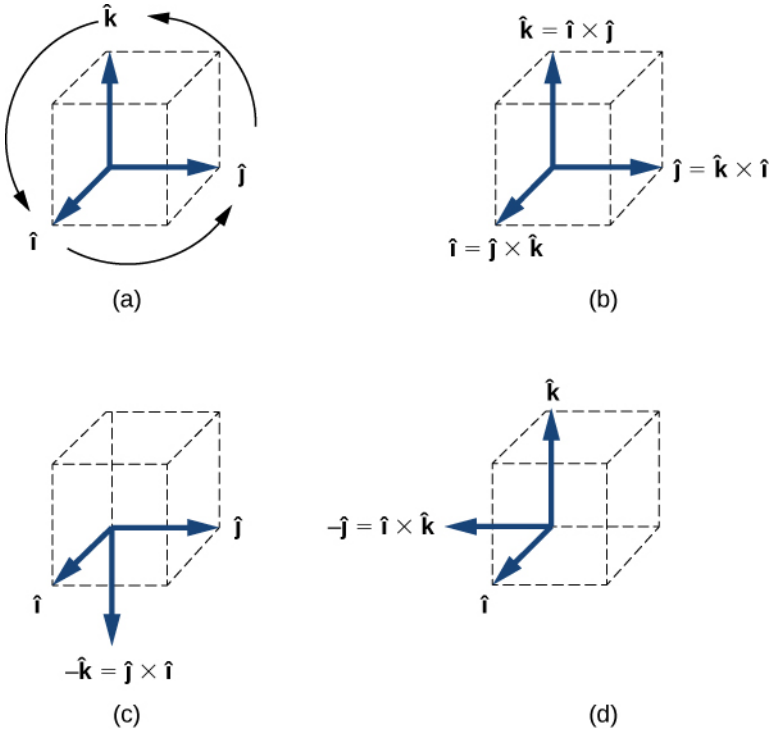


Figure 2.32 (a) The diagram of the cyclic order of the unit vectors of the axes. (b) The only cross products where the unit vectors appear in the cyclic order. These products have the positive sign. (c, d) Two examples of cross products where the unit vectors do not appear in the cyclic order. These products have the negative sign.

Suppose we want to find the cross product $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$ for vectors $\vec{\mathbf{A}} = A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}$ and $\vec{\mathbf{B}} = B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}$. We can use the distributive property (Equation 2.37), the anticommutative property (Equation 2.36), and the results in Equation 2.38 and Equation 2.39 for unit vectors to perform the following algebra:

$$\begin{aligned}\vec{\mathbf{A}} \times \vec{\mathbf{B}} &= (A_x\hat{\mathbf{i}} + A_y\hat{\mathbf{j}} + A_z\hat{\mathbf{k}}) \times (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) \\ &= A_x\hat{\mathbf{i}} \times (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) + A_y\hat{\mathbf{j}} \times (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) + A_z\hat{\mathbf{k}} \times (B_x\hat{\mathbf{i}} + B_y\hat{\mathbf{j}} + B_z\hat{\mathbf{k}}) \\ &= A_xB_x\hat{\mathbf{i}} \times \hat{\mathbf{i}} + A_xB_y\hat{\mathbf{i}} \times \hat{\mathbf{j}} + A_xB_z\hat{\mathbf{i}} \times \hat{\mathbf{k}} \\ &\quad + A_yB_x\hat{\mathbf{j}} \times \hat{\mathbf{i}} + A_yB_y\hat{\mathbf{j}} \times \hat{\mathbf{j}} + A_yB_z\hat{\mathbf{j}} \times \hat{\mathbf{k}} \\ &\quad + A_zB_x\hat{\mathbf{k}} \times \hat{\mathbf{i}} + A_zB_y\hat{\mathbf{k}} \times \hat{\mathbf{j}} + A_zB_z\hat{\mathbf{k}} \times \hat{\mathbf{k}} \\ &= A_xB_x(0) + A_xB_y(+\hat{\mathbf{k}}) + A_xB_z(-\hat{\mathbf{j}}) \\ &\quad + A_yB_x(-\hat{\mathbf{k}}) + A_yB_y(0) + A_yB_z(+\hat{\mathbf{i}}) \\ &\quad + A_zB_x(+\hat{\mathbf{j}}) + A_zB_y(-\hat{\mathbf{i}}) + A_zB_z(0).\end{aligned}$$

When performing algebraic operations involving the cross product, be very careful about keeping the correct order of multiplication because the cross product is anticommutative. The last two steps that we still have to do to complete our task are, first, grouping the terms that contain a common unit vector and, second, factoring. In this way we obtain the following very useful expression for the computation of the cross product:

$$\vec{\mathbf{C}} = \vec{\mathbf{A}} \times \vec{\mathbf{B}} = (A_yB_z - A_zB_y)\hat{\mathbf{i}} + (A_zB_x - A_xB_z)\hat{\mathbf{j}} + (A_xB_y - A_yB_x)\hat{\mathbf{k}}. \tag{2.40}$$

In this expression, the scalar components of the cross-product vector are

$$\begin{cases} C_x = A_yB_z - A_zB_y, \\ C_y = A_zB_x - A_xB_z, \\ C_z = A_xB_y - A_yB_x. \end{cases} \tag{2.41}$$

When finding the cross product, in practice, we can use either Equation 2.35 or Equation 2.40, depending on which one of them seems to be less complex computationally. They both lead to the same final result. One way to make sure if the final result is correct is to use them both.

EXAMPLE 2.19

A Particle in a Magnetic Field

When moving in a magnetic field, some particles may experience a magnetic force. Without going into details—a detailed study of magnetic phenomena comes in later chapters—let's acknowledge that the magnetic field $\vec{\mathbf{B}}$ is a vector, the magnetic force $\vec{\mathbf{F}}$ is a vector, and the velocity $\vec{\mathbf{u}}$ of the particle is a vector. The magnetic force vector is proportional to the vector product of the velocity vector with the magnetic field vector, which we express as $\vec{\mathbf{F}} = \zeta\vec{\mathbf{u}} \times \vec{\mathbf{B}}$. In this equation, a constant ζ takes care of the consistency in physical units, so we can omit physical units on vectors $\vec{\mathbf{u}}$ and $\vec{\mathbf{B}}$. In this example, let's assume the constant ζ is positive.

A particle moving in space with velocity vector $\vec{\mathbf{u}} = -5.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}} + 3.5\hat{\mathbf{k}}$ enters a region with a magnetic field and experiences a magnetic force. Find the magnetic force $\vec{\mathbf{F}}$ on this particle at the entry point to the region where the magnetic field vector is (a) $\vec{\mathbf{B}} = 7.2\hat{\mathbf{i}} - \hat{\mathbf{j}} - 2.4\hat{\mathbf{k}}$ and (b) $\vec{\mathbf{B}} = 4.5\hat{\mathbf{k}}$. In each case, find magnitude F of the magnetic force and angle θ the force vector $\vec{\mathbf{F}}$ makes with the given magnetic field vector $\vec{\mathbf{B}}$.

Strategy

First, we want to find the vector product $\vec{\mathbf{u}} \times \vec{\mathbf{B}}$, because then we can determine the magnetic force using $\vec{\mathbf{F}} = \zeta\vec{\mathbf{u}} \times \vec{\mathbf{B}}$. Magnitude F can be found either by using components, $F = \sqrt{F_x^2 + F_y^2 + F_z^2}$, or by computing the magnitude $\left|\vec{\mathbf{u}} \times \vec{\mathbf{B}}\right|$ directly using Equation 2.35. In the latter approach, we would have to find the angle between vectors $\vec{\mathbf{u}}$ and $\vec{\mathbf{B}}$. When we have $\vec{\mathbf{F}}$, the general method for finding the direction angle θ involves the computation of the scalar product $\vec{\mathbf{F}} \cdot \vec{\mathbf{B}}$ and substitution into Equation 2.34. To compute the vector product we can either use Equation 2.40 or compute the product directly, whichever way is simpler.

Solution

The components of the velocity vector are $u_x = -5.0$, $u_y = -2.0$, and $u_z = 3.5$.

(a) The components of the magnetic field vector are $B_x = 7.2$, $B_y = -1.0$, and $B_z = -2.4$. Substituting them into Equation 2.41 gives the scalar components of vector $\vec{\mathbf{F}} = \zeta\vec{\mathbf{u}} \times \vec{\mathbf{B}}$:

$$\begin{cases} F_x = \zeta(u_y B_z - u_z B_y) = \zeta[(-2.0)(-2.4) - (3.5)(-1.0)] = 8.3\zeta \\ F_y = \zeta(u_z B_x - u_x B_z) = \zeta[(3.5)(7.2) - (-5.0)(-2.4)] = 13.2\zeta \\ F_z = \zeta(u_x B_y - u_y B_x) = \zeta[(-5.0)(-1.0) - (-2.0)(7.2)] = 19.4\zeta \end{cases}.$$

Thus, the magnetic force is $\vec{\mathbf{F}} = \zeta(8.3\hat{\mathbf{i}} + 13.2\hat{\mathbf{j}} + 19.4\hat{\mathbf{k}})$ and its magnitude is

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} = \zeta\sqrt{(8.3)^2 + (13.2)^2 + (19.4)^2} = 24.9\zeta.$$

To compute angle θ, we may need to find the magnitude of the magnetic field vector,

$$B = \sqrt{B_x^2 + B_y^2 + B_z^2} = \sqrt{(7.2)^2 + (-1.0)^2 + (-2.4)^2} = 7.6,$$

and the scalar product $\vec{\mathbf{F}} \cdot \vec{\mathbf{B}}$:

$$\vec{\mathbf{F}} \cdot \vec{\mathbf{B}} = F_x B_x + F_y B_y + F_z B_z = (8.3\zeta)(7.2) + (13.2\zeta)(-1.0) + (19.4\zeta)(-2.4) = 0.$$

Now, substituting into Equation 2.34 gives angle θ:

$$\cos\theta = \frac{\vec{\mathbf{F}} \cdot \vec{\mathbf{B}}}{FB} = \frac{0}{(24.9\zeta)(7.6)} = 0 \;\Rightarrow\; \theta = 90°.$$

Hence, the magnetic force vector is perpendicular to the magnetic field vector. (We could have saved some time if we had computed the scalar product earlier.)

(b) Because vector $\vec{\mathbf{B}} = 4.5\hat{\mathbf{k}}$ has only one component, we can perform the algebra quickly and find the vector product directly:

$$\begin{aligned} \vec{\mathbf{F}} &= \zeta\vec{\mathbf{u}} \times \vec{\mathbf{B}} = \zeta(-5.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}} + 3.5\hat{\mathbf{k}}) \times (4.5\hat{\mathbf{k}}) \\ &= \zeta[(-5.0)(4.5)\hat{\mathbf{i}} \times \hat{\mathbf{k}} + (-2.0)(4.5)\hat{\mathbf{j}} \times \hat{\mathbf{k}} + (3.5)(4.5)\hat{\mathbf{k}} \times \hat{\mathbf{k}}] \\ &= \zeta[-22.5(-\hat{\mathbf{j}}) - 9.0(+\hat{\mathbf{i}}) + 0] = \zeta(-9.0\hat{\mathbf{i}} + 22.5\hat{\mathbf{j}}). \end{aligned}$$

The magnitude of the magnetic force is

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2} = \zeta\sqrt{(-9.0)^2 + (22.5)^2 + (0.0)^2} = 24.2\zeta.$$

Because the scalar product is

$$\vec{\mathbf{F}} \cdot \vec{\mathbf{B}} = F_x B_x + F_y B_y + F_z B_z = (-9.0\zeta)(0) + (22.5\zeta)(0) + (0)(4.5) = 0,$$

the magnetic force vector $\vec{\mathbf{F}}$ is perpendicular to the magnetic field vector $\vec{\mathbf{B}}$.

Significance

Even without actually computing the scalar product, we can predict that the magnetic force vector must always be perpendicular to the magnetic field vector because of the way this vector is constructed. Namely, the magnetic force vector is the vector product $\vec{\mathbf{F}} = \zeta\vec{\mathbf{u}} \times \vec{\mathbf{B}}$ and, by the definition of the vector product (see Figure 2.29), vector $\vec{\mathbf{F}}$ must be perpendicular to both vectors $\vec{\mathbf{u}}$ and $\vec{\mathbf{B}}$.

CHECK YOUR UNDERSTANDING 2.16

Given two vectors $\vec{\mathbf{A}} = -\hat{\mathbf{i}} + \hat{\mathbf{j}}$ and $\vec{\mathbf{B}} = 3\hat{\mathbf{i}} - \hat{\mathbf{j}}$, find (a) $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$, (b) $\left|\vec{\mathbf{A}} \times \vec{\mathbf{B}}\right|$, (c) the angle between $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$, and (d) the angle between $\vec{\mathbf{A}} \times \vec{\mathbf{B}}$ and vector $\vec{\mathbf{C}} = \hat{\mathbf{i}} + \hat{\mathbf{k}}$.

In conclusion to this section, we want to stress that “dot product” and “cross product” are entirely different mathematical objects that have different meanings. The dot product is a scalar; the cross product is a vector. Later chapters use the terms *dot product* and *scalar product* interchangeably. Similarly, the terms *cross product* and *vector product* are used interchangeably.

CHAPTER REVIEW

Key Terms

anticommutative property change in the order of operation introduces the minus sign
antiparallel vectors two vectors with directions that differ by $180°$
associative terms can be grouped in any fashion
commutative operations can be performed in any order
component form of a vector a vector written as the vector sum of its components in terms of unit vectors
corkscrew right-hand rule a rule used to determine the direction of the vector product
cross product the result of the vector multiplication of vectors is a vector called a cross product; also called a vector product
difference of two vectors vector sum of the first vector with the vector antiparallel to the second
direction angle in a plane, an angle between the positive direction of the x-axis and the vector, measured counterclockwise from the axis to the vector
displacement change in position
distributive multiplication can be distributed over terms in summation
dot product the result of the scalar multiplication of two vectors is a scalar called a dot product; also called a scalar product
equal vectors two vectors are equal if and only if all their corresponding components are equal; alternately, two parallel vectors of equal magnitudes
magnitude length of a vector
null vector a vector with all its components equal to zero
orthogonal vectors two vectors with directions that differ by exactly $90°$, synonymous with perpendicular vectors
parallel vectors two vectors with exactly the same direction angles
parallelogram rule geometric construction of the vector sum in a plane
polar coordinate system an orthogonal coordinate system where location in a plane is given by polar coordinates
polar coordinates a radial coordinate and an angle
radial coordinate distance to the origin in a polar coordinate system
resultant vector vector sum of two (or more) vectors
scalar a number, synonymous with a scalar quantity in physics
scalar component a number that multiplies a unit vector in a vector component of a vector
scalar equation equation in which the left-hand and right-hand sides are numbers
scalar product the result of the scalar multiplication of two vectors is a scalar called a scalar product; also called a dot product
scalar quantity quantity that can be specified completely by a single number with an appropriate physical unit
tail-to-head geometric construction geometric construction for drawing the resultant vector of many vectors
unit vector vector of a unit magnitude that specifies direction; has no physical unit
unit vectors of the axes unit vectors that define orthogonal directions in a plane or in space
vector mathematical object with magnitude and direction
vector components orthogonal components of a vector; a vector is the vector sum of its vector components.
vector equation equation in which the left-hand and right-hand sides are vectors
vector product the result of the vector multiplication of vectors is a vector called a vector product; also called a cross product
vector quantity physical quantity described by a mathematical vector—that is, by specifying both its magnitude and its direction; synonymous with a vector in physics
vector sum resultant of the combination of two (or more) vectors

Key Equations

Multiplication by a scalar (vector equation)	$\vec{\mathbf{B}} = \alpha\vec{\mathbf{A}}$

Multiplication by a scalar (scalar equation for magnitudes)	$B = \lvert\alpha\rvert A$
Resultant of two vectors	$\vec{\mathbf{D}}_{AD} = \vec{\mathbf{D}}_{AC} + \vec{\mathbf{D}}_{CD}$
Commutative law	$\vec{\mathbf{A}} + \vec{\mathbf{B}} = \vec{\mathbf{B}} + \vec{\mathbf{A}}$
Associative law	$(\vec{\mathbf{A}} + \vec{\mathbf{B}}) + \vec{\mathbf{C}} = \vec{\mathbf{A}} + (\vec{\mathbf{B}} + \vec{\mathbf{C}})$
Distributive law	$\alpha_1 \vec{\mathbf{A}} + \alpha_2 \vec{\mathbf{A}} = (\alpha_1 + \alpha_2)\vec{\mathbf{A}}$
The component form of a vector in two dimensions	$\vec{\mathbf{A}} = A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}}$
Scalar components of a vector in two dimensions	$\begin{cases} A_x = x_e - x_b \\ A_y = y_e - y_b \end{cases}$
Magnitude of a vector in a plane	$A = \sqrt{A_x^2 + A_y^2}$
The direction angle of a vector in a plane	$\theta_A = \tan^{-1}\left(\frac{A_y}{A_x}\right)$
Scalar components of a vector in a plane	$\begin{cases} A_x = A\cos\theta_A \\ A_y = A\sin\theta_A \end{cases}$
Polar coordinates in a plane	$\begin{cases} x = r\cos\varphi \\ y = r\sin\varphi \end{cases}$
The component form of a vector in three dimensions	$\vec{\mathbf{A}} = A_x \hat{\mathbf{i}} + A_y \hat{\mathbf{j}} + A_z \hat{\mathbf{k}}$
The scalar z-component of a vector in three dimensions	$A_z = z_e - z_b$
Magnitude of a vector in three dimensions	$A = \sqrt{A_x^2 + A_y^2 + A_z^2}$
Distributive property	$\alpha(\vec{\mathbf{A}} + \vec{\mathbf{B}}) = \alpha\vec{\mathbf{A}} + \alpha\vec{\mathbf{B}}$
Antiparallel vector to $\vec{\mathbf{A}}$	$-\vec{\mathbf{A}} = -A_x \hat{\mathbf{i}} - A_y \hat{\mathbf{j}} - A_z \hat{\mathbf{k}}$
Equal vectors	$\vec{\mathbf{A}} = \vec{\mathbf{B}} \Leftrightarrow \begin{cases} A_x = B_x \\ A_y = B_y \\ A_z = B_z \end{cases}$

Components of the resultant of N vectors	$\begin{cases} F_{Rx} = \sum_{k=1}^{N} F_{kx} = F_{1x} + F_{2x} + \ldots + F_{Nx} \\ F_{Ry} = \sum_{k=1}^{N} F_{ky} = F_{1y} + F_{2y} + \ldots + F_{Ny} \\ F_{Rz} = \sum_{k=1}^{N} F_{kz} = F_{1z} + F_{2z} + \ldots + F_{Nz} \end{cases}$
General unit vector	$\widehat{\mathbf{V}} = \frac{\vec{\mathbf{V}}}{V}$
Definition of the scalar product	$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = AB\cos\varphi$
Commutative property of the scalar product	$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = \vec{\mathbf{B}} \cdot \vec{\mathbf{A}}$
Distributive property of the scalar product	$\vec{\mathbf{A}} \cdot (\vec{\mathbf{B}} + \vec{\mathbf{C}}) = \vec{\mathbf{A}} \cdot \vec{\mathbf{B}} + \vec{\mathbf{A}} \cdot \vec{\mathbf{C}}$
Scalar product in terms of scalar components of vectors	$\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = A_x B_x + A_y B_y + A_z B_z$
Cosine of the angle between two vectors	$\cos\varphi = \frac{\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}}{AB}$
Dot products of unit vectors	$\hat{\mathbf{i}} \cdot \hat{\mathbf{j}} = \hat{\mathbf{j}} \cdot \hat{\mathbf{k}} = \hat{\mathbf{k}} \cdot \hat{\mathbf{i}} = 0$
Magnitude of the vector product (definition)	$\left\vert \vec{\mathbf{A}} \times \vec{\mathbf{B}} \right\vert = AB\sin\varphi$
Anticommutative property of the vector product	$\vec{\mathbf{A}} \times \vec{\mathbf{B}} = -\vec{\mathbf{B}} \times \vec{\mathbf{A}}$
Distributive property of the vector product	$\vec{\mathbf{A}} \times (\vec{\mathbf{B}} + \vec{\mathbf{C}}) = \vec{\mathbf{A}} \times \vec{\mathbf{B}} + \vec{\mathbf{A}} \times \vec{\mathbf{C}}$
Cross products of unit vectors	$\begin{cases} \hat{\mathbf{i}} \times \hat{\mathbf{j}} = +\hat{\mathbf{k}}, \\ \hat{\mathbf{j}} \times \hat{\mathbf{k}} = +\hat{\mathbf{i}}, \\ \hat{\mathbf{k}} \times \hat{\mathbf{i}} = +\hat{\mathbf{j}}. \end{cases}$
The cross product in terms of scalar components of vectors	$\vec{\mathbf{A}} \times \vec{\mathbf{B}} = (A_y B_z - A_z B_y)\hat{\mathbf{i}} + (A_z B_x - A_x B_z)\hat{\mathbf{j}} + (A_x B_y - A_y B_x)\hat{\mathbf{k}}$

Summary

2.1 Scalars and Vectors

- A vector quantity is any quantity that has magnitude and direction, such as displacement or velocity. Vector quantities are represented by mathematical objects called vectors.
- Geometrically, vectors are represented by

arrows, with the end marked by an arrowhead. The length of the vector is its magnitude, which is a positive scalar. On a plane, the direction of a vector is given by the angle the vector makes with a reference direction, often an angle with the horizontal. The direction angle of a vector is a scalar.

- Two vectors are equal if and only if they have the same magnitudes and directions. Parallel vectors have the same direction angles but may have different magnitudes. Antiparallel vectors have direction angles that differ by $180°$. Orthogonal vectors have direction angles that differ by $90°$.
- When a vector is multiplied by a scalar, the result is another vector of a different length than the length of the original vector. Multiplication by a positive scalar does not change the original direction; only the magnitude is affected. Multiplication by a negative scalar reverses the original direction. The resulting vector is antiparallel to the original vector. Multiplication by a scalar is distributive. Vectors can be divided by nonzero scalars but cannot be divided by vectors.
- Two or more vectors can be added to form another vector. The vector sum is called the resultant vector. We can add vectors to vectors or scalars to scalars, but we cannot add scalars to vectors. Vector addition is commutative and associative.
- To construct a resultant vector of two vectors in a plane geometrically, we use the parallelogram rule. To construct a resultant vector of many vectors in a plane geometrically, we use the tail-to-head method.

2.2 Coordinate Systems and Components of a Vector

- Vectors are described in terms of their components in a coordinate system. In two dimensions (in a plane), vectors have two components. In three dimensions (in space), vectors have three components.
- A vector component of a vector is its part in an axis direction. The vector component is the product of the unit vector of an axis with its scalar component along this axis. A vector is the resultant of its vector components.
- Scalar components of a vector are differences of coordinates, where coordinates of the origin are subtracted from end point coordinates of a vector. In a rectangular system, the magnitude of a vector is the square root of the sum of the squares of its components.
- In a plane, the direction of a vector is given by an angle the vector has with the positive x-axis. This direction angle is measured counterclockwise. The scalar x-component of a vector can be expressed as the product of its magnitude with the cosine of its direction angle, and the scalar y-component can be expressed as the product of its magnitude with the sine of its direction angle.
- In a plane, there are two equivalent coordinate systems. The Cartesian coordinate system is defined by unit vectors $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ along the x-axis and the y-axis, respectively. The polar coordinate system is defined by the radial unit vector $\hat{\mathbf{r}}$, which gives the direction from the origin, and a unit vector $\hat{\mathbf{t}}$, which is perpendicular (orthogonal) to the radial direction.

2.3 Algebra of Vectors

- Analytical methods of vector algebra allow us to find resultants of sums or differences of vectors without having to draw them. Analytical methods of vector addition are exact, contrary to graphical methods, which are approximate.
- Analytical methods of vector algebra are used routinely in mechanics, electricity, and magnetism. They are important mathematical tools of physics.

2.4 Products of Vectors

- There are two kinds of multiplication for vectors. One kind of multiplication is the scalar product, also known as the dot product. The other kind of multiplication is the vector product, also known as the cross product. The scalar product of vectors is a number (scalar). The vector product of vectors is a vector.
- Both kinds of multiplication have the distributive property, but only the scalar product has the commutative property. The vector product has the anticommutative property, which means that when we change the order in which two vectors are multiplied, the result acquires a minus sign.
- The scalar product of two vectors is obtained by multiplying their magnitudes with the cosine of the angle between them. The scalar product of orthogonal vectors vanishes; the scalar product of antiparallel vectors is negative.
- The vector product of two vectors is a vector

perpendicular to both of them. Its magnitude is obtained by multiplying their magnitudes by the sine of the angle between them. The direction of the vector product can be determined by the corkscrew right-hand rule. The vector product of two either parallel or antiparallel vectors vanishes. The magnitude of the vector product is largest for orthogonal vectors.

- The scalar product of vectors is used to find angles between vectors and in the definitions of derived scalar physical quantities such as work or energy.
- The cross product of vectors is used in definitions of derived vector physical quantities such as torque or magnetic force, and in describing rotations.

Conceptual Questions

2.1 Scalars and Vectors

1. A weather forecast states the temperature is predicted to be $-5\ ^\circ\text{C}$ the following day. Is this temperature a vector or a scalar quantity? Explain.

2. Which of the following is a vector: a person's height, the altitude on Mt. Everest, the velocity of a fly, the age of Earth, the boiling point of water, the cost of a book, Earth's population, or the acceleration of gravity?

3. Give a specific example of a vector, stating its magnitude, units, and direction.

4. What do vectors and scalars have in common? How do they differ?

5. Suppose you add two vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$. What relative direction between them produces the resultant with the greatest magnitude? What is the maximum magnitude? What relative direction between them produces the resultant with the smallest magnitude? What is the minimum magnitude?

6. Is it possible to add a scalar quantity to a vector quantity?

7. Is it possible for two vectors of different magnitudes to add to zero? Is it possible for three vectors of different magnitudes to add to zero? Explain.

8. Does the odometer in an automobile indicate a scalar or a vector quantity?

9. When a 10,000-m runner competing on a 400-m track crosses the finish line, what is the runner's net displacement? Can this displacement be zero? Explain.

10. A vector has zero magnitude. Is it necessary to specify its direction? Explain.

11. Can a magnitude of a vector be negative?

12. Can the magnitude of a particle's displacement be greater that the distance traveled?

13. If two vectors are equal, what can you say about their components? What can you say about their magnitudes? What can you say about their directions?

14. If three vectors sum up to zero, what geometric condition do they satisfy?

2.2 Coordinate Systems and Components of a Vector

15. Give an example of a nonzero vector that has a component of zero.

16. Explain why a vector cannot have a component greater than its own magnitude.

17. If two vectors are equal, what can you say about their components?

18. If vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are orthogonal, what is the component of $\vec{\mathbf{B}}$ along the direction of $\vec{\mathbf{A}}$? What is the component of $\vec{\mathbf{A}}$ along the direction of $\vec{\mathbf{B}}$?

19. If one of the two components of a vector is not zero, can the magnitude of the other vector component of this vector be zero?

20. If two vectors have the same magnitude, do their components have to be the same?

2.4 Products of Vectors

21. What is wrong with the following expressions? How can you correct them? (a) $C = \vec{\mathbf{A}}\vec{\mathbf{B}}$, (b) $\vec{\mathbf{C}} = \vec{\mathbf{A}}\vec{\mathbf{B}}$, (c) $C = \vec{\mathbf{A}} \times \vec{\mathbf{B}}$, (d) $C = A\vec{\mathbf{B}}$, (e) $C + 2\vec{\mathbf{A}} = B$, (f) $\vec{\mathbf{C}} = A \times \vec{\mathbf{B}}$, (g) $\vec{\mathbf{A}} \cdot \vec{\mathbf{B}} = \vec{\mathbf{A}} \times \vec{\mathbf{B}}$, (h) $\vec{\mathbf{C}} = 2\vec{\mathbf{A}} \cdot \vec{\mathbf{B}}$, (i) $C = \vec{\mathbf{A}}/\vec{\mathbf{B}}$, and (j) $C = \vec{\mathbf{A}}/B$.

22. If the cross product of two vectors vanishes, what can you say about their directions?

23. If the dot product of two vectors vanishes, what can you say about their directions?

24. What is the dot product of a vector with the cross product that this vector has with another vector?

Problems


2.1 Scalars and Vectors

25. A scuba diver makes a slow descent into the depths of the ocean. His vertical position with respect to a boat on the surface changes several times. He makes the first stop 9.0 m from the boat but has a problem with equalizing the pressure, so he ascends 3.0 m and then continues descending for another 12.0 m to the second stop. From there, he ascends 4 m and then descends for 18.0 m, ascends again for 7 m and descends again for 24.0 m, where he makes a stop, waiting for his buddy. Assuming the positive direction up to the surface, express his net vertical displacement vector in terms of the unit vector. What is his distance to the boat?

26. In a tug-of-war game on one campus, 15 students pull on a rope at both ends in an effort to displace the central knot to one side or the other. Two students pull with force 196 N each to the right, four students pull with force 98 N each to the left, five students pull with force 62 N each to the left, three students pull with force 150 N each to the right, and one student pulls with force 250 N to the left. Assuming the positive direction to the right, express the net pull on the knot in terms of the unit vector. How big is the net pull on the knot? In what direction?

27. Suppose you walk 18.0 m straight west and then 25.0 m straight north. How far are you from your starting point and what is the compass direction of a line connecting your starting point to your final position? Use a graphical method.

28. For the vectors given in the following figure, use a graphical method to find the following resultants: (a) $\vec{\mathbf{A}}+\vec{\mathbf{B}}$, (b) $\vec{\mathbf{C}}+\vec{\mathbf{B}}$, (c) $\vec{\mathbf{D}}+\vec{\mathbf{F}}$, (d) $\vec{\mathbf{A}}-\vec{\mathbf{B}}$, (e) $\vec{\mathbf{D}}-\vec{\mathbf{F}}$, (f) $\vec{\mathbf{A}}+2\vec{\mathbf{F}}$, (g)$\vec{\mathbf{C}}-2\vec{\mathbf{D}}+3\vec{\mathbf{F}}$; and (h) $\vec{\mathbf{A}}-4\vec{\mathbf{D}}+2\vec{\mathbf{F}}$.

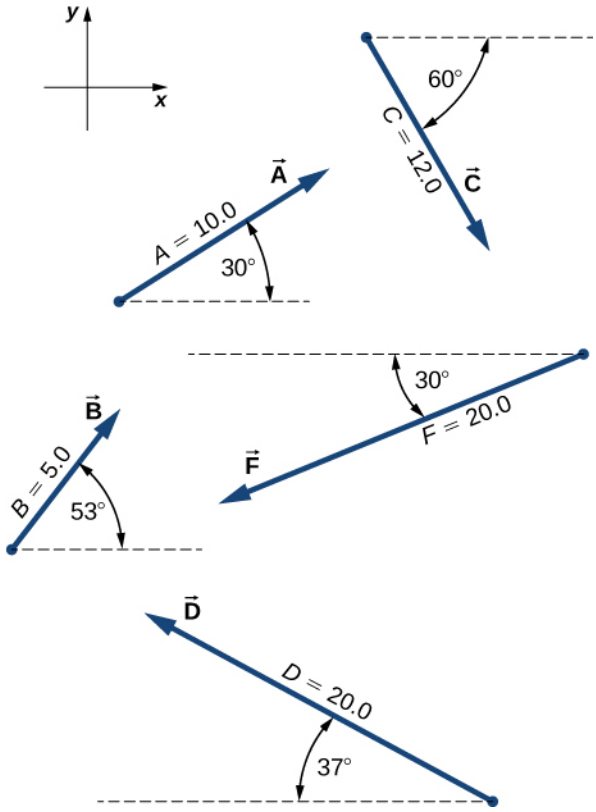

29. A delivery man starts at the post office, drives 40 km north, then 20 km west, then 60 km northeast, and finally 50 km north to stop for lunch. Use a graphical method to find his net displacement vector.


30. An adventurous dog strays from home, runs three blocks east, two blocks north, one block east, one block north, and two blocks west. Assuming that each block is about 100 m, how far from home and in what direction is the dog? Use a graphical method.

31. In an attempt to escape a desert island, a castaway builds a raft and sets out to sea. The wind shifts a great deal during the day and he is blown along the following directions: 2.50 km and $45.0°$ north of west, then 4.70 km and $60.0°$ south of east, then 1.30 km and $25.0°$ south of west, then 5.10 km straight east, then 1.70 km and $5.00°$ east of north, then 7.20 km and $55.0°$ south of west, and finally 2.80 km and $10.0°$ north of east. Use a graphical method to find the castaway's final position relative to the island.

32. A small plane flies 40.0 km in a direction $60°$ north of east and then flies 30.0 km in a direction $15°$ north of east. Use a graphical method to find the total distance the plane covers from the starting point and the direction

of the path to the final position.

33. A trapper walks a 5.0-km straight-line distance from his cabin to the lake, as shown in the following figure. Use a graphical method (the parallelogram rule) to determine the trapper's displacement directly to the east and displacement directly to the north that sum up to his resultant displacement vector. If the trapper walked only in directions east and north, zigzagging his way to the lake, how many kilometers would he have to walk to get to the lake?

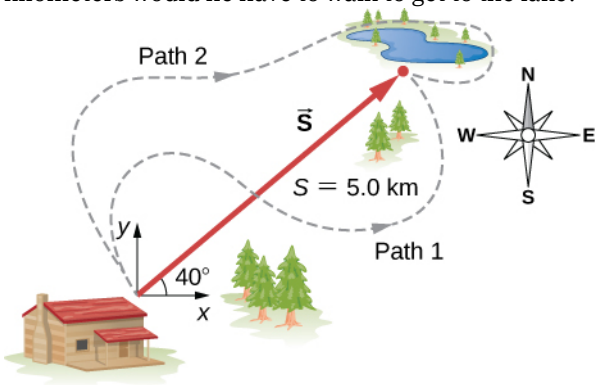


34. A surveyor measures the distance across a river that flows straight north by the following method. Starting directly across from a tree on the opposite bank, the surveyor walks 100 m along the river to establish a baseline. She then sights across to the tree and reads that the angle from the baseline to the tree is 35°. How wide is the river?

35. A pedestrian walks 6.0 km east and then 13.0 km north. Use a graphical method to find the pedestrian's resultant displacement and geographic direction.

36. The magnitudes of two displacement vectors are $A = 20$ m and $B = 6$ m. What are the largest and the smallest values of the magnitude of the resultant $\vec{\mathbf{R}} = \vec{\mathbf{A}} + \vec{\mathbf{B}}$?

2.2 Coordinate Systems and Components of a Vector

37. Assuming the $+x$-axis is horizontal and points to the right, resolve the vectors given in the following figure to their scalar components and express them in vector component form.

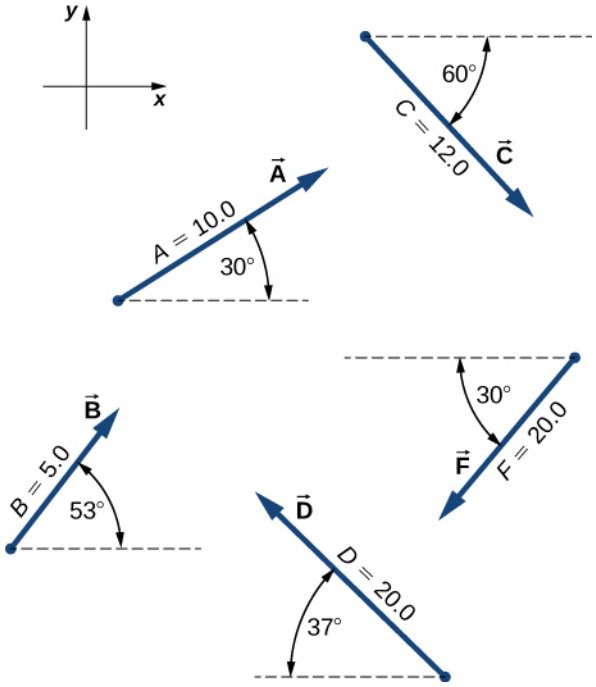


38. Suppose you walk 18.0 m straight west and then 25.0 m straight north. How far are you from your starting point? What is your displacement vector? What is the direction of your displacement? Assume the $+x$-axis is to the east.

39. You drive 7.50 km in a straight line in a direction $15°$ east of north. (a) Find the distances you would have to drive straight east and then straight north to arrive at the same point. (b) Show that you still arrive at the same point if the east and north legs are reversed in order. Assume the $+x$-axis is to the east.

40. A sledge is being pulled by two horses on a flat terrain. The net force on the sledge can be expressed in the Cartesian coordinate system as vector $\vec{\mathbf{F}} = (-2980.0\hat{\mathbf{i}} + 8200.0\hat{\mathbf{j}})$N, where $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ denote directions to the east and north, respectively. Find the magnitude and direction of the pull.

41. A trapper walks a 5.0-km straight-line distance from her cabin to the lake, as shown in the following figure. Determine the east and north components of her displacement vector. How many more kilometers would she have to walk if she walked along the component displacements? What is her displacement vector?

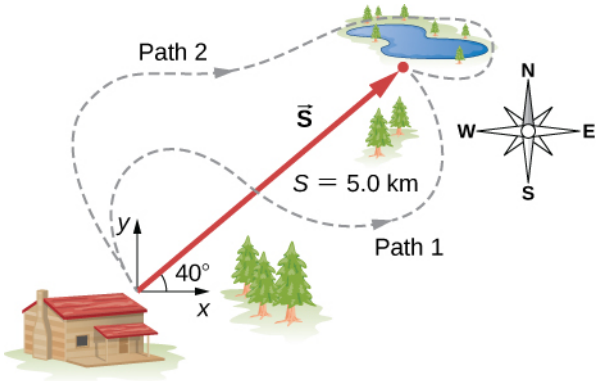

42. The polar coordinates of a point are $4\pi/3$ and 5.50 m. What are its Cartesian coordinates?

43. Two points in a plane have polar coordinates $P_1(2.500\text{ m}, \pi/6)$ and $P_2(3.800\text{ m}, 2\pi/3)$. Determine their Cartesian coordinates and the distance between them in the Cartesian coordinate system. Round the distance to a nearest centimeter.

44. A chameleon is resting quietly on a lanai screen, waiting for an insect to come by. Assume the origin of a Cartesian coordinate system at the lower left-hand corner of the screen and the horizontal direction to the right as the $+x$-direction. If its coordinates are (2.000 m, 1.000 m), (a) how far is it from the corner of the screen? (b) What is its location in polar coordinates?

45. Two points in the Cartesian plane are A(2.00 m, −4.00 m) and B(−3.00 m, 3.00 m). Find the distance between them and their polar coordinates.

46. A fly enters through an open window and zooms around the room. In a Cartesian coordinate system with three axes along three edges of the room, the fly changes its position from point b(4.0 m, 1.5 m, 2.5 m) to point e(1.0 m, 4.5 m, 0.5 m). Find the scalar components of the fly's displacement vector and express its displacement vector in vector component form. What is its magnitude?

2.3 Algebra of Vectors

47. For vectors $\vec{\mathbf{B}} = -\hat{\mathbf{i}} - 4\hat{\mathbf{j}}$ and $\vec{\mathbf{A}} = -3\hat{\mathbf{i}} - 2\hat{\mathbf{j}}$, calculate (a) $\vec{\mathbf{A}} + \vec{\mathbf{B}}$ and its magnitude and direction angle, and (b) $\vec{\mathbf{A}} - \vec{\mathbf{B}}$ and its magnitude and direction angle.

48. A particle undergoes three consecutive displacements given by vectors $\vec{\mathbf{D}}_1 = (3.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} - 2.0\hat{\mathbf{k}})$mm, $\vec{\mathbf{D}}_2 = (1.0\hat{\mathbf{i}} - 7.0\hat{\mathbf{j}} + 4.0\hat{\mathbf{k}})$mm, and $\vec{\mathbf{D}}_3 = (-7.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 1.0\hat{\mathbf{k}})$mm. (a) Find the resultant displacement vector of the particle. (b) What is the magnitude of the resultant displacement? (c) If all displacements were along one line, how far would the particle travel?

49. Given two displacement vectors $\vec{\mathbf{A}} = (3.00\hat{\mathbf{i}} - 4.00\hat{\mathbf{j}} + 4.00\hat{\mathbf{k}})$m and $\vec{\mathbf{B}} = (2.00\hat{\mathbf{i}} + 3.00\hat{\mathbf{j}} - 7.00\hat{\mathbf{k}})$m, find the displacements and their magnitudes for (a) $\vec{\mathbf{C}} = \vec{\mathbf{A}} + \vec{\mathbf{B}}$ and (b) $\vec{\mathbf{D}} = 2\vec{\mathbf{A}} - \vec{\mathbf{B}}$.

50. A small plane flies 40.0 km in a direction 60° north of east and then flies 30.0 km in a direction 15° north of east. Use the analytical method to find the total distance the plane covers from the starting point, and the geographic direction of its displacement vector. What is its displacement vector?

51. In an attempt to escape a desert island, a castaway builds a raft and sets out to sea. The wind shifts a great deal during the day, and she is blown along the following straight lines: 2.50 km and 45.0° north of west, then 4.70 km and 60.0° south of east, then 1.30 km and 25.0° south of west, then 5.10 km due east, then 1.70 km and 5.00° east of north, then 7.20 km and 55.0° south of west, and finally 2.80 km and 10.0° north of east. Use the analytical method to find the resultant vector of all her displacement vectors. What is its magnitude and direction?

52. Assuming the $+x$-axis is horizontal to the right for the vectors given in the following figure, use the analytical method to find the following resultants: (a) $\vec{\mathbf{A}} + \vec{\mathbf{B}}$, (b) $\vec{\mathbf{C}} + \vec{\mathbf{B}}$, (c) $\vec{\mathbf{D}} + \vec{\mathbf{F}}$, (d) $\vec{\mathbf{A}} - \vec{\mathbf{B}}$, (e) $\vec{\mathbf{D}} - \vec{\mathbf{F}}$, (f) $\vec{\mathbf{A}} + 2\vec{\mathbf{F}}$, (g) $\vec{\mathbf{C}} - 2\vec{\mathbf{D}} + 3\vec{\mathbf{F}}$, and (h) $\vec{\mathbf{A}} - 4\vec{\mathbf{D}} + 2\vec{\mathbf{F}}$.

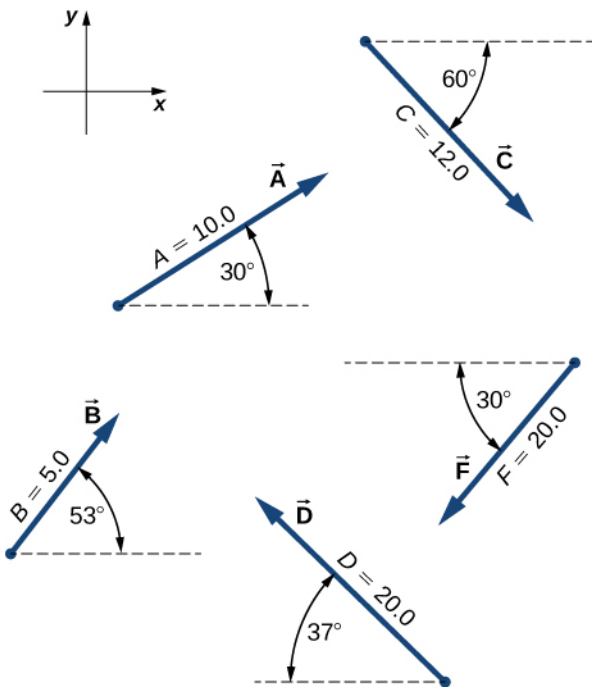


Figure 2.33

53. Given the vectors in the preceding figure, find vector $\vec{\mathbf{R}}$ that solves equations (a) $\vec{\mathbf{D}} + \vec{\mathbf{R}} = \vec{\mathbf{F}}$ and (b) $\vec{\mathbf{C}} - 2\vec{\mathbf{D}} + 5\vec{\mathbf{R}} = 3\vec{\mathbf{F}}$. Assume the +*x*-axis is horizontal to the right.

54. A delivery man starts at the post office, drives 40 km north, then 20 km west, then 60 km northeast, and finally 50 km north to stop for lunch. Use the analytical method to determine the following: (a) Find his net displacement vector. (b) How far is the restaurant from the post office? (c) If he returns directly from the restaurant to the post office, what is his displacement vector on the return trip? (d) What is his compass heading on the return trip? Assume the +*x*-axis is to the east.

55. An adventurous dog strays from home, runs three blocks east, two blocks north, and one block east, one block north, and two blocks west. Assuming that each block is about a 100 yd, use the analytical method to find the dog's net displacement vector, its magnitude, and its direction. Assume the +*x*-axis is to the east. How would your answer be affected if each block was about 100 m?

56. If $\vec{\mathbf{D}} = (6.00\hat{\mathbf{i}} - 8.00\hat{\mathbf{j}})$m, $\vec{\mathbf{B}} = (-8.00\hat{\mathbf{i}} + 3.00\hat{\mathbf{j}})$m, and $\vec{\mathbf{A}} = (26.0\hat{\mathbf{i}} + 19.0\hat{\mathbf{j}})$m, find the unknown constants *a* and *b* such that $a\vec{\mathbf{D}} + b\vec{\mathbf{B}} + \vec{\mathbf{A}} = \vec{\mathbf{0}}$.

57. Given the displacement vector $\vec{\mathbf{D}} = (3\hat{\mathbf{i}} - 4\hat{\mathbf{j}})$m, find the displacement vector $\vec{\mathbf{R}}$ so that $\vec{\mathbf{D}} + \vec{\mathbf{R}} = -4D\hat{\mathbf{j}}$.

58. Find the unit vector of direction for the following vector quantities: (a) Force $\vec{\mathbf{F}} = (3.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}})$N, (b) displacement $\vec{\mathbf{D}} = (-3.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}})$m, and (c) velocity $\vec{\mathbf{v}} = (-5.00\hat{\mathbf{i}} + 4.00\hat{\mathbf{j}})$m/s.

59. At one point in space, the direction of the electric field vector is given in the Cartesian system by the unit vector $\hat{\mathbf{E}} = 1/\sqrt{5}\hat{\mathbf{i}} - 2/\sqrt{5}\hat{\mathbf{j}}$. If the magnitude of the electric field vector is E = 400.0 V/m, what are the scalar components E_x, E_y, and E_z of the electric field vector $\vec{\mathbf{E}}$ at this point? What is the direction angle θ_E of the electric field vector at this point?

60. A barge is pulled by the two tugboats shown in the following figure. One tugboat pulls on the barge with a force of magnitude 4000 units of force at 15° above the line AB (see the figure and the other tugboat pulls on the barge with a force of magnitude 5000 units of force at 12° below the line AB. Resolve the pulling forces to their scalar components and find the components of the resultant force pulling on the barge. What is the magnitude of the resultant pull? What is its direction relative to the line AB?


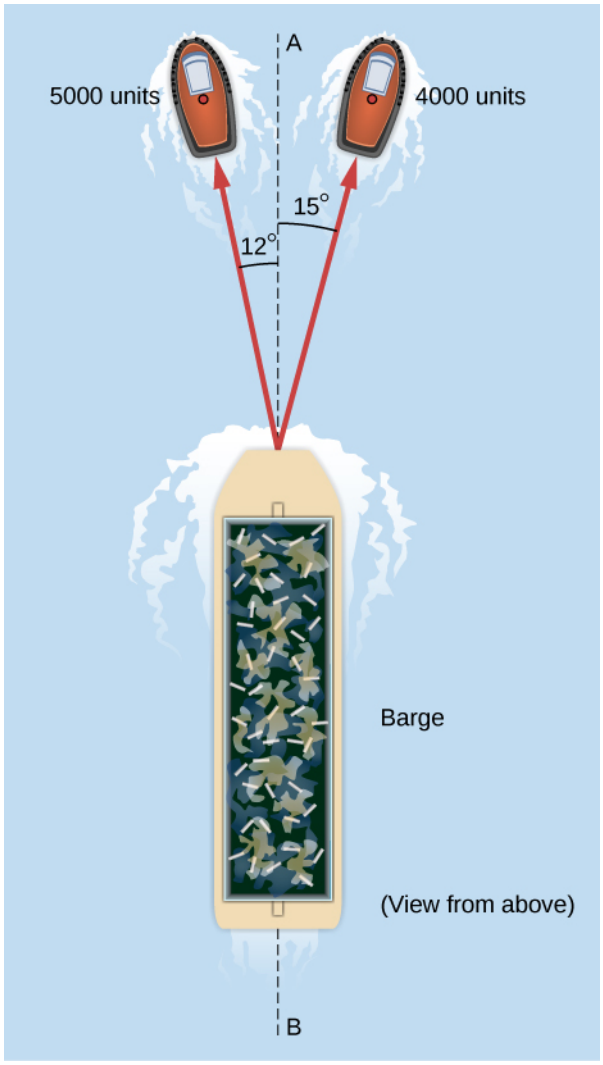


Figure 2.34

61. In the control tower at a regional airport, an air traffic controller monitors two aircraft as their positions change with respect to the control tower. One plane is a cargo carrier Boeing 747 and the other plane is a Douglas DC-3. The Boeing is at an altitude of 2500 m, climbing at 10° above the horizontal, and moving 30° north of west. The DC-3 is at an altitude of 3000 m, climbing at 5° above the horizontal, and cruising directly west. (a) Find the position vectors of the planes relative to the control tower. (b) What is the distance between the planes at the moment the air traffic controller makes a note about their positions?

2.4 Products of Vectors

62. Assuming the $+x$-axis is horizontal to the right for the vectors in the following figure, find the following scalar products: (a) $\vec{\mathbf{A}} \cdot \vec{\mathbf{C}}$, (b) $\vec{\mathbf{A}} \cdot \vec{\mathbf{F}}$, (c) $\vec{\mathbf{D}} \cdot \vec{\mathbf{C}}$, (d) $\vec{\mathbf{A}} \cdot (\vec{\mathbf{F}} + 2\vec{\mathbf{C}})$, (e) $\hat{\mathbf{i}} \cdot \vec{\mathbf{B}}$, (f) $\hat{\mathbf{j}} \cdot \vec{\mathbf{B}}$, (g) $(3\hat{\mathbf{i}} - \hat{\mathbf{j}}) \cdot \vec{\mathbf{B}}$, and (h) $\widehat{\mathbf{B}} \cdot \vec{\mathbf{B}}$.

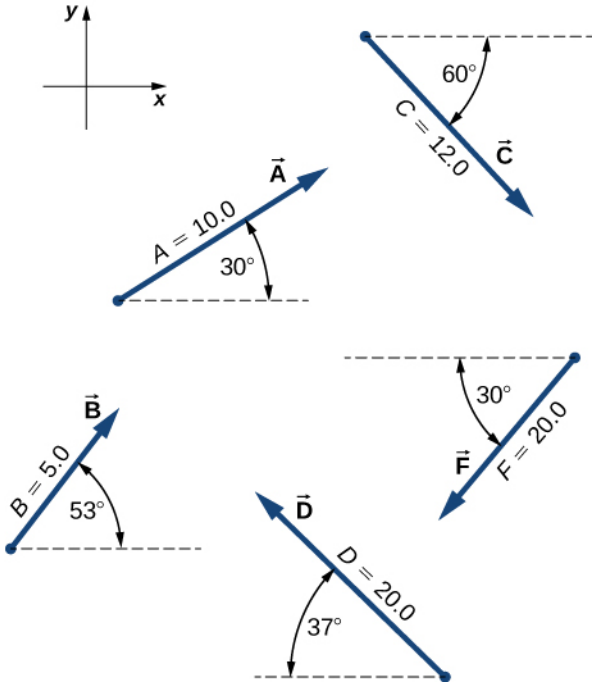

63. Assuming the $+x$-axis is horizontal to the right for the vectors in the preceding figure, find (a) the component of vector $\vec{\mathbf{A}}$ along vector $\vec{\mathbf{C}}$, (b) the component of vector $\vec{\mathbf{C}}$ along vector $\vec{\mathbf{A}}$, (c) the component of vector $\hat{\mathbf{i}}$ along vector $\vec{\mathbf{F}}$, and (d) the component of vector $\vec{\mathbf{F}}$ along vector $\hat{\mathbf{i}}$.

64. Find the angle between vectors for (a) $\vec{\mathbf{D}} = (-3.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}})\text{m}$ and $\vec{\mathbf{A}} = (-3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}})\text{m}$ and (b) $\vec{\mathbf{D}} = (2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + \hat{\mathbf{k}})\text{m}$ and $\vec{\mathbf{B}} = (-2.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 2.0\hat{\mathbf{k}})\text{m}$.

65. Find the angles that vector $\vec{\mathbf{D}} = (2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + \hat{\mathbf{k}})\text{m}$ makes with the x-, y-, and z- axes.

66. Show that the force vector $\vec{\mathbf{D}} = (2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + \hat{\mathbf{k}})\text{N}$ is orthogonal to the force vector $\vec{\mathbf{G}} = (3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 10.0\hat{\mathbf{k}})\text{N}$.

67. Assuming the $+x$-axis is horizontal to the right for the vectors in the previous figure, find the following vector products: (a) $\vec{\mathbf{A}} \times \vec{\mathbf{C}}$, (b) $\vec{\mathbf{A}} \times \vec{\mathbf{F}}$, (c) $\vec{\mathbf{D}} \times \vec{\mathbf{C}}$, (d) $\vec{\mathbf{A}} \times (\vec{\mathbf{F}} + 2\vec{\mathbf{C}})$, (e) $\hat{\mathbf{i}} \times \vec{\mathbf{B}}$, (f) $\hat{\mathbf{j}} \times \vec{\mathbf{B}}$, (g) $(3\hat{\mathbf{i}} - \hat{\mathbf{j}}) \times \vec{\mathbf{B}}$, and (h) $\widehat{\mathbf{B}} \times \vec{\mathbf{B}}$.

68. Find the cross product $\vec{\mathbf{A}} \times \vec{\mathbf{C}}$ for (a) $\vec{\mathbf{A}} = 2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + \hat{\mathbf{k}}$ and $\vec{\mathbf{C}} = 3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 10.0\hat{\mathbf{k}}$, (b) $\vec{\mathbf{A}} = 3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 10.0\hat{\mathbf{k}}$ and $\vec{\mathbf{C}} = 2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + \hat{\mathbf{k}}$, (c) $\vec{\mathbf{A}} = -3.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}}$ and $\vec{\mathbf{C}} = -3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}$, and (d)

$\vec{\mathbf{C}} = -2.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 2.0\hat{\mathbf{k}}$ and $\vec{\mathbf{A}} = -9.0\hat{\mathbf{j}}$.

69. For the vectors in the earlier figure, find (a) $(\vec{\mathbf{A}} \times \vec{\mathbf{F}}) \cdot \vec{\mathbf{D}}$, (b) $(\vec{\mathbf{A}} \times \vec{\mathbf{F}}) \cdot (\vec{\mathbf{D}} \times \vec{\mathbf{B}})$, and (c) $(\vec{\mathbf{A}} \cdot \vec{\mathbf{F}})(\vec{\mathbf{D}} \times \vec{\mathbf{B}})$.

70. (a) If $\vec{\mathbf{A}} \times \vec{\mathbf{F}} = \vec{\mathbf{B}} \times \vec{\mathbf{F}}$, can we conclude $\vec{\mathbf{A}} = \vec{\mathbf{B}}$? (b) If $\vec{\mathbf{A}} \cdot \vec{\mathbf{F}} = \vec{\mathbf{B}} \cdot \vec{\mathbf{F}}$, can we conclude $\vec{\mathbf{A}} = \vec{\mathbf{B}}$? (c) If $F\vec{\mathbf{A}} = \vec{\mathbf{B}}F$, can we conclude $\vec{\mathbf{A}} = \vec{\mathbf{B}}$? Why or why not?

Additional Problems

71. You fly 32.0 km in a straight line in still air in the direction 35.0° south of west. (a) Find the distances you would have to fly due south and then due west to arrive at the same point. (b) Find the distances you would have to fly first in a direction 45.0° south of west and then in a direction 45.0° west of north. Note these are the components of the displacement along a different set of axes—namely, the one rotated by 45° with respect to the axes in (a).

72. Rectangular coordinates of a point are given by $(2, y)$ and its polar coordinates are given by $(r, \pi/6)$. Find y and r.

73. If the polar coordinates of a point are (r, φ) and its rectangular coordinates are (x, y), determine the polar coordinates of the following points: (a) $(-x, y)$, (b) $(-2x, -2y)$, and (c) $(3x, -3y)$.

74. Vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ have identical magnitudes of 5.0 units. Find the angle between them if $\vec{\mathbf{A}} + \vec{\mathbf{B}} = 5\sqrt{2}\hat{\mathbf{j}}$.

75. Starting at the island of Moi in an unknown archipelago, a fishing boat makes a round trip with two stops at the islands of Noi and Poi. It sails from Moi for 4.76 nautical miles (nmi) in a direction 37° north of east to Noi. From Noi, it sails 69° west of north to Poi. On its return leg from Poi, it sails 28° east of south. What distance does the boat sail between Noi and Poi? What distance does it sail between Moi and Poi? Express your answer both in nautical miles and in kilometers. Note: 1 nmi = 1852 m.

76. An air traffic controller notices two signals from two planes on the radar monitor. One plane is at altitude 800 m and in a 19.2-km horizontal distance to the tower in a direction 25° south of west. The second plane is at altitude 1100 m and its horizontal distance is 17.6 km and 20° south of west. What is the distance between these planes?

77. Show that when $\vec{\mathbf{A}} + \vec{\mathbf{B}} = \vec{\mathbf{C}}$, then $C^2 = A^2 + B^2 + 2AB\cos\varphi$, where φ is the angle between vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$.


78. Four force vectors each have the same magnitude f. What is the largest magnitude the resultant force vector may have when these forces are added? What is the smallest magnitude of the resultant? Make a graph of both situations.


79. A skater glides along a circular path of radius 5.00 m in clockwise direction. When he coasts around one-half of the circle, starting from the west point, find (a) the magnitude of his displacement vector and (b) how far he actually skated. (c) What is the magnitude of his displacement vector when he skates all the way around the circle and comes back to the west point?

80. A stubborn dog is being walked on a leash by its owner. At one point, the dog encounters an interesting scent at some spot on the ground and wants to explore it in detail, but the owner gets impatient and pulls on the leash with force $\vec{\mathbf{F}} = (98.0\hat{\mathbf{i}} + 132.0\hat{\mathbf{j}} + 32.0\hat{\mathbf{k}})$N along the leash. (a) What is the magnitude of the pulling force? (b) What angle does the leash make with the vertical?

81. If the velocity vector of a polar bear is $\vec{\mathbf{u}} = (-18.0\hat{\mathbf{i}} - 13.0\hat{\mathbf{j}})$km/h, how fast and in what geographic direction is it heading? Here, $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ are directions to geographic east and north, respectively.

82. Find the scalar components of three-dimensional vectors $\vec{\mathbf{G}}$ and $\vec{\mathbf{H}}$ in the following figure and write the vectors in vector component form in terms of the unit vectors of the axes.

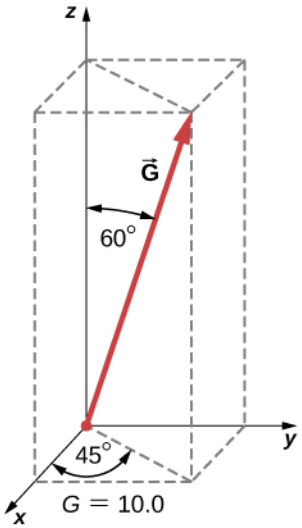

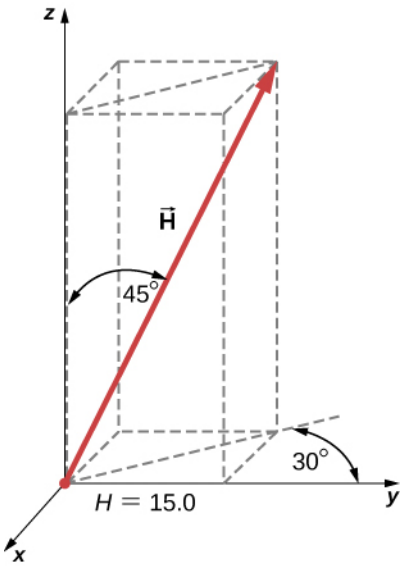



83. A diver explores a shallow reef off the coast of Belize. She initially swims 90.0 m north, makes a turn to the east and continues for 200.0 m, then follows a big grouper for 80.0 m in the direction 30° north of east. In the meantime, a local current displaces her by 150.0 m south. Assuming the current is no longer present, in what direction and how far should she now swim to come back to the point where she started?

84. A force vector $\vec{\mathbf{A}}$ has x- and y-components, respectively, of −8.80 units of force and 15.00 units of force. The x- and y-components of force vector $\vec{\mathbf{B}}$ are, respectively, 13.20 units of force and −6.60 units of force. Find the components of force vector $\vec{\mathbf{C}}$ that satisfies the vector equation $\vec{\mathbf{A}} - \vec{\mathbf{B}} + 3\vec{\mathbf{C}} = 0$.


85. Vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$ are two orthogonal vectors in the xy-plane and they have identical magnitudes. If $\vec{\mathbf{A}} = 3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}$, find $\vec{\mathbf{B}}$.

86. For the three-dimensional vectors in the following figure, find (a) $\vec{\mathbf{G}} \times \vec{\mathbf{H}}$, (b) $\left|\vec{\mathbf{G}} \times \vec{\mathbf{H}}\right|$, and (c) $\vec{\mathbf{G}} \cdot \vec{\mathbf{H}}$.

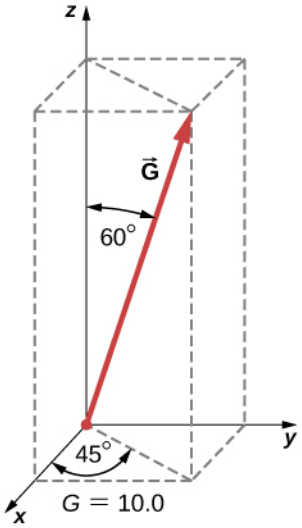

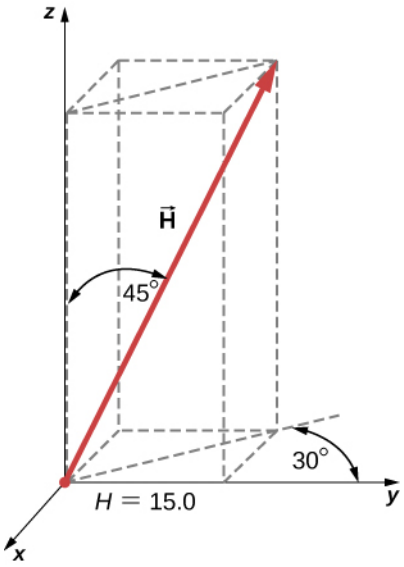

87. Show that $(\vec{\mathbf{B}} \times \vec{\mathbf{C}}) \cdot \vec{\mathbf{A}}$ is the volume of the parallelepiped, with edges formed by the three vectors in the following figure.

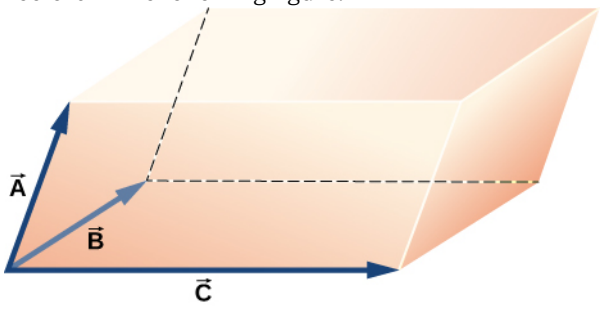


Challenge Problems

88. Vector $\vec{\mathbf{B}}$ is 5.0 cm long and vector $\vec{\mathbf{A}}$ is 4.0 cm long. Find the angle between these two vectors when $|\vec{\mathbf{A}} + \vec{\mathbf{B}}| = 3.0$ cm and $|\vec{\mathbf{A}} - \vec{\mathbf{B}}| = 3.0$ cm.

89. What is the component of the force vector $\vec{\mathbf{G}} = (3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 10.0\hat{\mathbf{k}})$N along the force vector $\vec{\mathbf{H}} = (1.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}})$N?

90. The following figure shows a triangle formed by the three vectors $\vec{\mathbf{A}}$, $\vec{\mathbf{B}}$, and $\vec{\mathbf{C}}$. If vector $\vec{\mathbf{C}}'$ is drawn between the midpoints of vectors $\vec{\mathbf{A}}$ and $\vec{\mathbf{B}}$, show that $\vec{\mathbf{C}}' = \vec{\mathbf{C}}/2$.

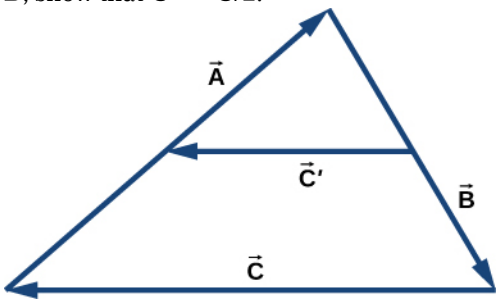

91. Distances between points in a plane do not change when a coordinate system is rotated. In other words, the magnitude of a vector is *invariant* under rotations of the coordinate system. Suppose a coordinate system S is rotated about its origin by angle φ to become a new coordinate system S′, as shown in the following figure. A point in a plane has coordinates (x, y) in S and coordinates (x', y') in S′.

(a) Show that, during the transformation of rotation, the coordinates in S′ are expressed in terms of the coordinates in S by the following relations:


$$\begin{cases} x' = x\cos\varphi + y\sin\varphi \\ y' = -x\sin\varphi + y\cos\varphi \end{cases}.$$

(b) Show that the distance of point P to the origin is invariant under rotations of the coordinate system. Here, you have to show that

$$\sqrt{x^2 + y^2} = \sqrt{x'^2 + y'^2}.$$

(c) Show that the distance between points P and Q is invariant under rotations of the coordinate system. Here, you have to show that

$$\sqrt{(x_P - x_Q)^2 + (y_P - y_Q)^2} = \sqrt{(x'_P - x'_Q)^2 + (y'_P - y'_Q)^2}.$$

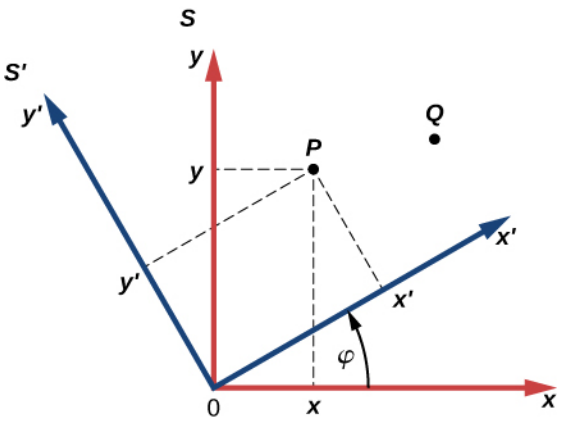

CHAPTER 3
Motion Along a Straight Line



Figure 3.1 A JR Central L0 series five-car maglev (magnetic levitation) train undergoing a test run on the Yamanashi Test Track. The maglev train's motion can be described using kinematics, the subject of this chapter. (credit: modification of work by "Maryland GovPics"/Flickr)

Chapter Outline

3.1 Position, Displacement, and Average Velocity

3.2 Instantaneous Velocity and Speed

3.3 Average and Instantaneous Acceleration

3.4 Motion with Constant Acceleration

3.5 Free Fall

3.6 Finding Velocity and Displacement from Acceleration

INTRODUCTION Our universe is full of objects in motion. From the stars, planets, and galaxies; to the motion of people and animals; down to the microscopic scale of atoms and molecules—everything in our universe is in motion. We can describe motion using the two disciplines of kinematics and dynamics. We study dynamics, which is concerned with the causes of motion, in Newton's Laws of Motion; but, there is much to be learned about motion without referring to what causes it, and this is the study of kinematics. Kinematics involves describing motion through properties such as position, time, velocity, and acceleration.

A full treatment of **kinematics** considers motion in two and three dimensions. For now, we discuss motion in

one dimension, which provides us with the tools necessary to study multidimensional motion. A good example of an object undergoing one-dimensional motion is the maglev (magnetic levitation) train depicted at the beginning of this chapter. As it travels, say, from Tokyo to Kyoto, it is at different positions along the track at various times in its journey, and therefore has displacements, or changes in position. It also has a variety of velocities along its path and it undergoes accelerations (changes in velocity). With the skills learned in this chapter we can calculate these quantities and average velocity. All these quantities can be described using kinematics, without knowing the train's mass or the forces involved.

3.1 Position, Displacement, and Average Velocity

Learning Objectives

By the end of this section, you will be able to:

- Define position, displacement, and distance traveled.
- Calculate the total displacement given the position as a function of time.
- Determine the total distance traveled.
- Calculate the average velocity given the displacement and elapsed time.

When you're in motion, the basic questions to ask are: Where are you? Where are you going? How fast are you getting there? The answers to these questions require that you specify your position, your displacement, and your average velocity—the terms we define in this section.

Position

To describe the motion of an object, you must first be able to describe its **position** (x): *where it is at any particular time*. More precisely, we need to specify its position relative to a convenient frame of reference. A frame of reference is an arbitrary set of axes from which the position and motion of an object are described. Earth is often used as a frame of reference, and we often describe the position of an object as it relates to stationary objects on Earth. For example, a rocket launch could be described in terms of the position of the rocket with respect to Earth as a whole, whereas a cyclist's position could be described in terms of where she is in relation to the buildings she passes Figure 3.2. In other cases, we use reference frames that are not stationary but are in motion relative to Earth. To describe the position of a person in an airplane, for example, we use the airplane, not Earth, as the reference frame. To describe the position of an object undergoing one-dimensional motion, we often use the variable x. Later in the chapter, during the discussion of free fall, we use the variable y.



Figure 3.2 These cyclists in Vietnam can be described by their position relative to buildings or a canal. Their motion can be described by their change in position, or displacement, in a frame of reference. (credit: modification of work by Suzan Black)

Displacement

If an object moves relative to a frame of reference—for example, if a professor moves to the right relative to a whiteboard Figure 3.3—then the object's position changes. This change in position is called **displacement**. The

word *displacement* implies that an object has moved, or has been displaced. Although position is the numerical value of *x* along a straight line where an object might be located, displacement gives the *change* in position along this line. Since displacement indicates direction, it is a vector and can be either positive or negative, depending on the choice of positive direction. Also, an analysis of motion can have many displacements embedded in it. If right is positive and an object moves 2 m to the right, then 4 m to the left, the individual displacements are 2 m and −4 m, respectively.

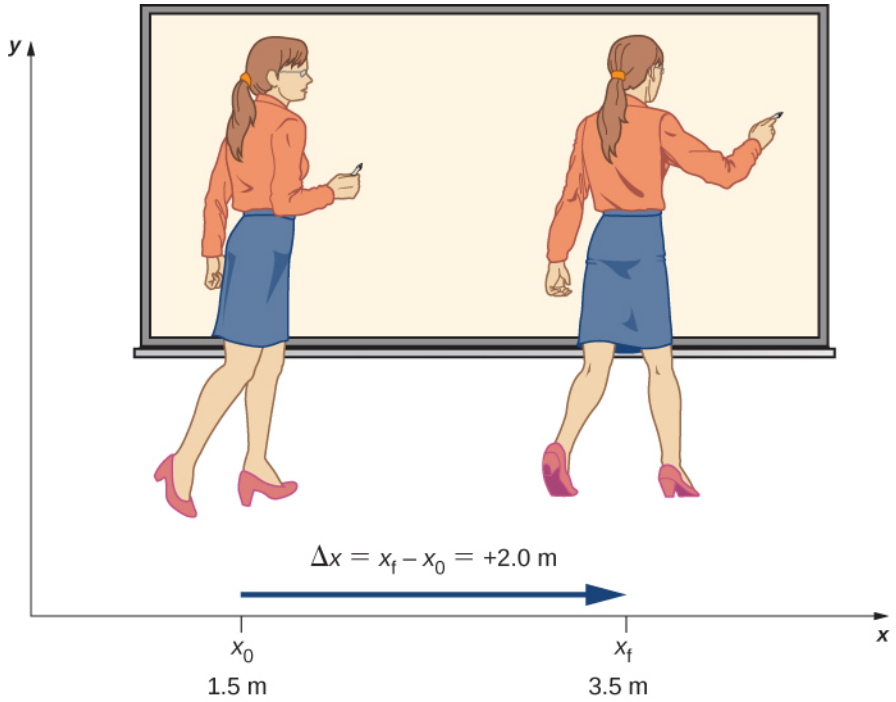


Figure 3.3 A professor paces left and right while lecturing. Her position relative to Earth is given by *x*. The +2.0-m displacement of the professor relative to Earth is represented by an arrow pointing to the right.

Displacement

Displacement Δx is the change in position of an object:

$$\Delta x = x_f - x_0, \tag{3.1}$$

where Δx is displacement, x_f is the final position, and x_0 is the initial position.

We use the uppercase Greek letter delta (Δ) to mean "change in" whatever quantity follows it; thus, Δx means *change in position* (final position less initial position). We always solve for displacement by subtracting initial position x_0 from final position x_f. Note that the SI unit for displacement is the meter, but sometimes we use kilometers or other units of length. Keep in mind that when units other than meters are used in a problem, you may need to convert them to meters to complete the calculation (see Appendix B).

Objects in motion can also have a series of displacements. In the previous example of the pacing professor, the individual displacements are 2 m and −4 m, giving a total displacement of −2 m. We define **total displacement** Δx_{Total}, as *the sum of the individual displacements*, and express this mathematically with the equation

$$\Delta x_{\text{Total}} = \sum \Delta x_i, \tag{3.2}$$

where Δx_i are the individual displacements. In the earlier example,

$$\Delta x_1 = x_1 - x_0 = 2 - 0 = 2 \text{ m}.$$

Similarly,

$$\Delta x_2 = x_2 - x_1 = -2 - (2) = -4 \text{ m}.$$

Thus,

$$\Delta x_{\text{Total}} = \Delta x_1 + \Delta x_2 = 2 - 4 = -2 \text{ m} \quad .$$

The total displacement is 2 – 4 = –2 m along the *x*-axis. It is also useful to calculate the magnitude of the displacement, or its size. The magnitude of the displacement is always positive. This is the absolute value of the displacement, because displacement is a vector and cannot have a negative value of magnitude. In our example, the magnitude of the total displacement is 2 m, whereas the magnitudes of the individual displacements are 2 m and 4 m.

The magnitude of the total displacement should not be confused with the distance traveled. Distance traveled x_{Total}, is the total length of the path traveled between two positions. In the previous problem, the **distance traveled** is the sum of the magnitudes of the individual displacements:

$$x_{\text{Total}} = |\Delta x_1| + |\Delta x_2| = 2 + 4 = 6 \text{ m}.$$

Average Velocity

To calculate the other physical quantities in kinematics we must introduce the time variable. The time variable allows us not only to state where the object is (its position) during its motion, but also how fast it is moving. How fast an object is moving is given by the rate at which the position changes with time.

For each position x_i, we assign a particular time t_i. If the details of the motion at each instant are not important, the rate is usually expressed as the **average velocity** $\bar{v}$. This vector quantity is simply the total displacement between two points divided by the time taken to travel between them. The time taken to travel between two points is called the **elapsed time** Δt.

Average Velocity

If x_1 and x_2 are the positions of an object at times t_1 and t_2, respectively, then

$$\text{Average velocity} = \bar{v} = \frac{\text{Displacement between two points}}{\text{Elapsed time between two points}} \tag{3.3}$$

$$\bar{v} = \frac{\Delta x}{\Delta t} = \frac{x_2 - x_1}{t_2 - t_1}.$$

It is important to note that the average velocity is a vector and can be negative, depending on positions x_1 and x_2.

EXAMPLE 3.1

Delivering Flyers

Jill sets out from her home to deliver flyers for her yard sale, traveling due east along her street lined with houses. At 0.5 km and 9 minutes later she runs out of flyers and has to retrace her steps back to her house to get more. This takes an additional 9 minutes. After picking up more flyers, she sets out again on the same path, continuing where she left off, and ends up 1.0 km from her house. This third leg of her trip takes 15 minutes. At this point she turns back toward her house, heading west. After 1.75 km and 25 minutes she stops to rest.

a. What is Jill's total displacement to the point where she stops to rest?
b. What is the magnitude of the final displacement?
c. What is the average velocity during her entire trip?

d. What is the total distance traveled?
e. Make a graph of position versus time.

A sketch of Jill's movements is shown in Figure 3.4.

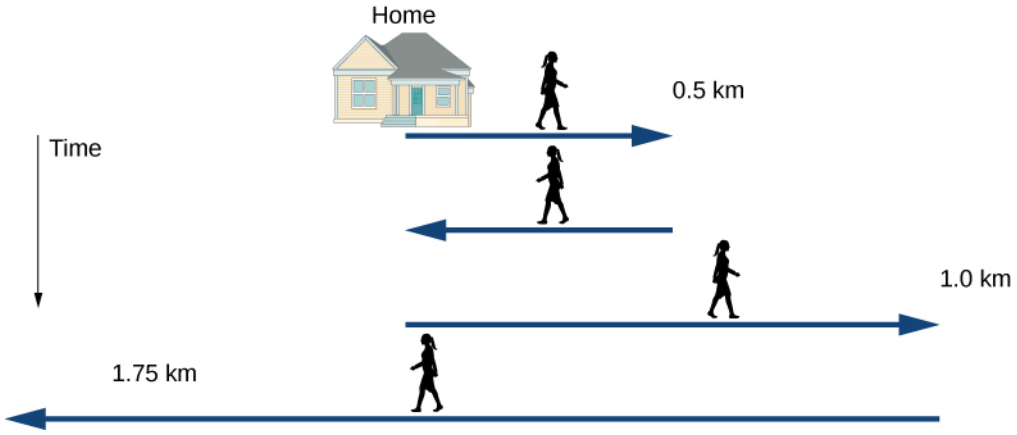


Figure 3.4 Timeline of Jill's movements.

Strategy

The problem contains data on the various legs of Jill's trip, so it would be useful to make a table of the physical quantities. We are given position and time in the wording of the problem so we can calculate the displacements and the elapsed time. We take east to be the positive direction. From this information we can find the total displacement and average velocity. Jill's home is the starting point x_0. The following table gives Jill's time and position in the first two columns, and the displacements are calculated in the third column.

Time t_i (min)	Position x_i (km)	Displacement Δx_i (km)
$t_0 = 0$	$x_0 = 0$	$\Delta x_0 = 0$
$t_1 = 9$	$x_1 = 0.5$	$\Delta x_1 = x_1 - x_0 = 0.5$
$t_2 = 18$	$x_2 = 0$	$\Delta x_2 = x_2 - x_1 = -0.5$
$t_3 = 33$	$x_3 = 1.0$	$\Delta x_3 = x_3 - x_2 = 1.0$
$t_4 = 58$	$x_4 = -0.75$	$\Delta x_4 = x_4 - x_3 = -1.75$

Solution

a. From the above table, the total displacement is
$$\sum \Delta x_i = 0.5 - 0.5 + 1.0 - 1.75 \text{ km} = -0.75 \text{ km}.$$
b. The magnitude of the total displacement is $|-0.75|$ km $= 0.75$ km.
c. Average velocity $= \frac{\text{Total displacement}}{\text{Elapsed time}} = \bar{v} = \frac{-0.75 \text{ km}}{58 \text{ min}} = -0.013 \text{ km/min}$
d. The total distance traveled (sum of magnitudes of individual displacements) is
$x_{\text{Total}} = \sum |\Delta x_i| = 0.5 + 0.5 + 1.0 + 1.75 \text{ km} = 3.75 \text{ km}.$
e. We can graph Jill's position versus time as a useful aid to see the motion; the graph is shown in Figure 3.5.

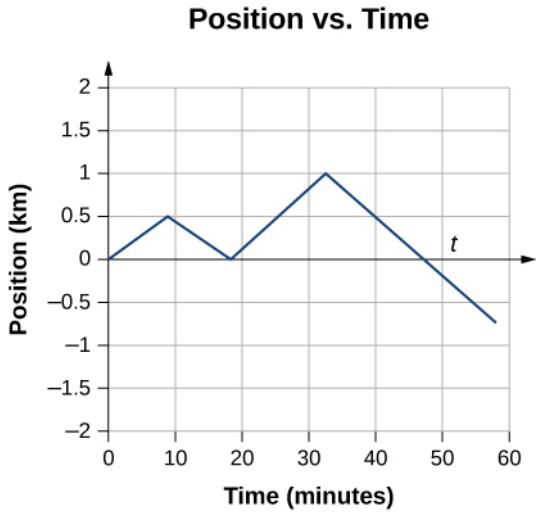



Figure 3.5 This graph depicts Jill's position versus time. The average velocity is the slope of a line connecting the initial and final points.

Significance

Jill's total displacement is −0.75 km, which means at the end of her trip she ends up 0.75 km due west of her home. The average velocity means if someone was to walk due west at 0.013 km/min starting at the same time Jill left her home, they both would arrive at the final stopping point at the same time. Note that if Jill were to end her trip at her house, her total displacement would be zero, as well as her average velocity. The total distance traveled during the 58 minutes of elapsed time for her trip is 3.75 km.

CHECK YOUR UNDERSTANDING 3.1

A cyclist rides 3 km west and then turns around and rides 2 km east. (a) What is his displacement? (b) What is the distance traveled? (c) What is the magnitude of his displacement?

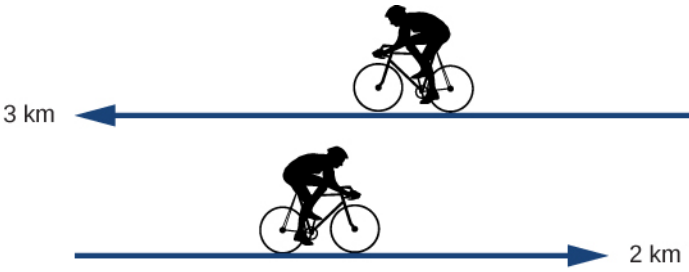

3.2 Instantaneous Velocity and Speed

Learning Objectives

By the end of this section, you will be able to:

- Explain the difference between average velocity and instantaneous velocity.
- Describe the difference between velocity and speed.
- Calculate the instantaneous velocity given the mathematical equation for the velocity.
- Calculate the speed given the instantaneous velocity.

We have now seen how to calculate the average velocity between two positions. However, since objects in the real world move continuously through space and time, we would like to find the velocity of an object at any single point. We can find the velocity of the object anywhere along its path by using some fundamental principles of calculus. This section gives us better insight into the physics of motion and will be useful in later chapters.

Instantaneous Velocity

The quantity that tells us how fast an object is moving anywhere along its path is the **instantaneous velocity**, usually called simply *velocity*. It is the average velocity between two points on the path in the limit that the time (and therefore the displacement) between the two points approaches zero. To illustrate this idea mathematically, we need to express position x as a continuous function of t denoted by $x(t)$. The expression for the average velocity between two points using this notation is $\overline{v} = \frac{x(t_2)-x(t_1)}{t_2-t_1}$. To find the instantaneous velocity at any position, we let $t_1 = t$ and $t_2 = t + \Delta t$. After inserting these expressions into the equation for the average velocity and taking the limit as $\Delta t \to 0$, we find the expression for the instantaneous velocity:

$$v(t) = \lim_{\Delta t \to 0} \frac{x(t+\Delta t) - x(t)}{\Delta t} = \frac{dx(t)}{dt}.$$

Instantaneous Velocity

The instantaneous velocity of an object is the limit of the average velocity as the elapsed time approaches zero, or the derivative of x with respect to t:

$$v(t) = \frac{d}{dt}x(t). \qquad 3.4$$

Like average velocity, instantaneous velocity is a vector with dimension of length per time. The instantaneous velocity at a specific time point t_0 is the rate of change of the position function, which is the slope of the position function $x(t)$ at t_0. Figure 3.6 shows how the average velocity $\overline{v} = \frac{\Delta x}{\Delta t}$ between two times approaches the instantaneous velocity at t_0. The instantaneous velocity is shown at time t_0, which happens to be at the maximum of the position function. The slope of the position graph is zero at this point, and thus the instantaneous velocity is zero. At other times, t_1, t_2, and so on, the instantaneous velocity is not zero because the slope of the position graph would be positive or negative. If the position function had a minimum, the slope of the position graph would also be zero, giving an instantaneous velocity of zero there as well. Thus, the zeros of the velocity function give the minimum and maximum of the position function.

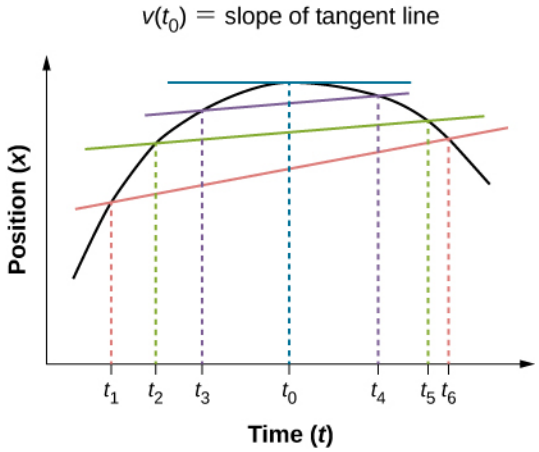


Figure 3.6 In a graph of position versus time, the instantaneous velocity is the slope of the tangent line at a given point. The average velocities $\overline{v} = \frac{\Delta x}{\Delta t} = \frac{x_f - x_i}{t_f - t_i}$ between times $\Delta t = t_6 - t_1$, $\Delta t = t_5 - t_2$, and $\Delta t = t_4 - t_3$ are shown. When $\Delta t \to 0$, the average velocity approaches the instantaneous velocity at $t = t_0$.

EXAMPLE 3.2

Finding Velocity from a Position-Versus-Time Graph

Given the position-versus-time graph of Figure 3.7, find the velocity-versus-time graph.

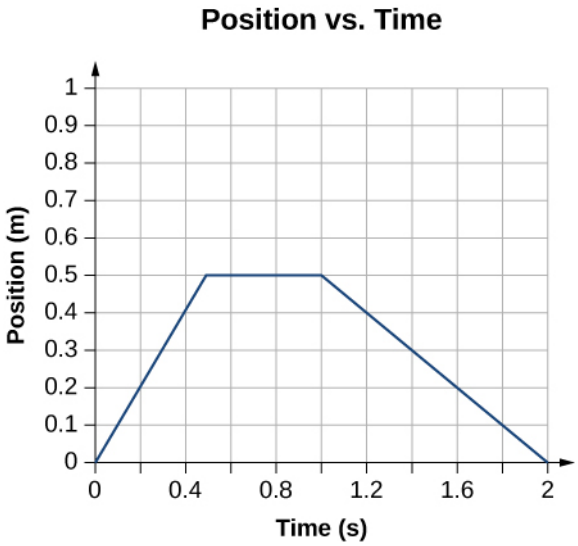


Figure 3.7 The object starts out in the positive direction, stops for a short time, and then reverses direction, heading back toward the origin. Notice that the object comes to rest instantaneously, which would require an infinite force. Thus, the graph is an approximation of motion in the real world. (The concept of force is discussed in Newton's Laws of Motion.)

Strategy

The graph contains three straight lines during three time intervals. We find the velocity during each time interval by taking the slope of the line using the grid.

Solution

Time interval 0 s to 0.5 s: $\overline{v} = \frac{\Delta x}{\Delta t} = \frac{0.5\text{ m} - 0.0\text{ m}}{0.5\text{ s} - 0.0\text{ s}} = 1.0\text{ m/s}$

Time interval 0.5 s to 1.0 s: $\overline{v} = \frac{\Delta x}{\Delta t} = \frac{0.5\text{ m} - 0.5\text{ m}}{1.0\text{ s} - 0.5\text{ s}} = 0.0\text{ m/s}$

Time interval 1.0 s to 2.0 s: $\overline{v} = \frac{\Delta x}{\Delta t} = \frac{0.0\text{ m} - 0.5\text{ m}}{2.0\text{ s} - 1.0\text{ s}} = -0.5\text{ m/s}$

The graph of these values of velocity versus time is shown in Figure 3.8.

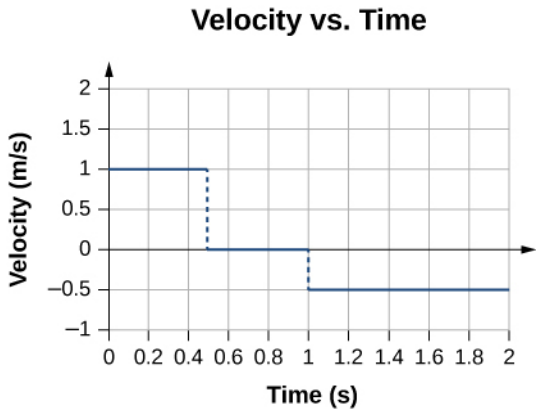


Figure 3.8 The velocity is positive for the first part of the trip, zero when the object is stopped, and negative when the object reverses direction.

Significance

During the time interval between 0 s and 0.5 s, the object's position is moving away from the origin and the position-versus-time curve has a positive slope. At any point along the curve during this time interval, we can find the instantaneous velocity by taking its slope, which is +1 m/s, as shown in Figure 3.8. In the subsequent time interval, between 0.5 s and 1.0 s, the position doesn't change and we see the slope is zero. From 1.0 s to 2.0 s, the object is moving back toward the origin and the slope is −0.5 m/s. The object has reversed direction

and has a negative velocity.

Speed

In everyday language, most people use the terms *speed* and *velocity* interchangeably. In physics, however, they do not have the same meaning and are distinct concepts. One major difference is that speed has no direction; that is, speed is a scalar.

We can calculate the **average speed** by finding the total distance traveled divided by the elapsed time:

$$\text{Average speed} = \overline{s} = \frac{\text{Total distance}}{\text{Elapsed time}}. \tag{3.5}$$

Average speed is not necessarily the same as the magnitude of the average velocity, which is found by dividing the magnitude of the total displacement by the elapsed time. For example, if a trip starts and ends at the same location, the total displacement is zero, and therefore the average velocity is zero. The average speed, however, is not zero, because the total distance traveled is greater than zero. If we take a road trip of 300 km and need to be at our destination at a certain time, then we would be interested in our average speed.

However, we can calculate the **instantaneous speed** from the magnitude of the instantaneous velocity:

$$\text{Instantaneous speed} = |v(t)|\,. \tag{3.6}$$

If a particle is moving along the x-axis at +7.0 m/s and another particle is moving along the same axis at −7.0 m/s, they have different velocities, but both have the same speed of 7.0 m/s. Some typical speeds are shown in the following table.

Speed	m/s	mi/h
Continental drift	10^{-7}	2×10^{-7}
Brisk walk	1.7	3.9
Cyclist	4.4	10
Sprint runner	12.2	27
Rural speed limit	24.6	56
Official land speed record	341.1	763
Speed of sound at sea level	343	768
Space shuttle on reentry	7800	17,500
Escape velocity of Earth*	11,200	25,000
Orbital speed of Earth around the Sun	29,783	66,623
Speed of light in a vacuum	299,792,458	670,616,629

Table 3.1 Speeds of Various Objects *Escape velocity is the velocity at which an object must be launched so that it overcomes Earth's gravity and is not pulled back toward Earth.

Calculating Instantaneous Velocity

When calculating instantaneous velocity, we need to specify the explicit form of the position function $x(t)$. If each term in the $x(t)$ equation has the form of At^n where A is a constant and n is an integer, this can be differentiated using the power rule to be:

$$\frac{d(At^n)}{dt} = Ant^{n-1}. \qquad 3.7$$

Note that if there are additional terms added together, this power rule of differentiation can be done multiple times and the solution is the sum of those terms. The following example illustrates the use of Equation 3.7.

EXAMPLE 3.3

Instantaneous Velocity Versus Average Velocity

The position of a particle is given by $x(t) = 3.0t + 0.5t^3$ m.

a. Using Equation 3.4 and Equation 3.7, find the instantaneous velocity at $t = 2.0$ s.
b. Calculate the average velocity between 1.0 s and 3.0 s.

Strategy

Equation 3.4 gives the instantaneous velocity of the particle as the derivative of the position function. Looking at the form of the position function given, we see that it is a polynomial in t. Therefore, we can use Equation 3.7, the power rule from calculus, to find the solution. We use Equation 3.6 to calculate the average velocity of the particle.

Solution

a. $v(t) = \frac{dx(t)}{dt} = 3.0 + 1.5t^2$ m/s.
Substituting $t = 2.0$ s into this equation gives $v(2.0\text{ s}) = [3.0 + 1.5(2.0)^2]$ m/s $= 9.0$ m/s.
b. To determine the average velocity of the particle between 1.0 s and 3.0 s, we calculate the values of $x(1.0\text{ s})$ and $x(3.0\text{ s})$:

$$x(1.0\text{ s}) = \left[(3.0)(1.0) + 0.5(1.0)^3\right]\text{ m} = 3.5\text{ m}$$

$$x(3.0\text{ s}) = \left[(3.0)(3.0) + 0.5(3.0)^3\right]\text{ m} = 22.5\text{ m}.$$

Then the average velocity is

$$\bar{v} = \frac{x(3.0\text{ s}) - x(1.0\text{ s})}{t(3.0\text{ s}) - t(1.0\text{ s})} = \frac{22.5 - 3.5\text{ m}}{3.0 - 1.0\text{ s}} = 9.5\text{ m/s}.$$

Significance

In the limit that the time interval used to calculate $\bar{v}$ goes to zero, the value obtained for $\bar{v}$ converges to the value of v.

EXAMPLE 3.4

Instantaneous Velocity Versus Speed

Consider the motion of a particle in which the position is $x(t) = 3.0t - 3t^2$ m.

a. What is the instantaneous velocity at $t = 0.25$ s, $t = 0.50$ s, and $t = 1.0$ s?
b. What is the speed of the particle at these times?

Strategy

The instantaneous velocity is the derivative of the position function and the speed is the magnitude of the

instantaneous velocity. We use Equation 3.4 and Equation 3.7 to solve for instantaneous velocity.

Solution

a. $v(t) = \frac{dx(t)}{dt} = 3.0 - 6.0t$ m/s $v(0.25\text{ s}) = 1.50$ m/s, $v(0.5\text{ s}) = 0$ m/s, $v(1.0\text{ s}) = -3.0$ m/s
b. Speed $= |v(t)| = 1.50$ m/s, 0.0 m/s, and 3.0 m/s

Significance

The velocity of the particle gives us direction information, indicating the particle is moving to the left (west) or right (east). The speed gives the magnitude of the velocity. By graphing the position, velocity, and speed as functions of time, we can understand these concepts visually Figure 3.9. In (a), the graph shows the particle moving in the positive direction until $t = 0.5$ s, when it reverses direction. The reversal of direction can also be seen in (b) at 0.5 s where the velocity is zero and then turns negative. At 1.0 s it is back at the origin where it started. The particle's velocity at 1.0 s in (b) is negative, because it is traveling in the negative direction. But in (c), however, its speed is positive and remains positive throughout the travel time. We can also interpret velocity as the slope of the position-versus-time graph. The slope of $x(t)$ is decreasing toward zero, becoming zero at 0.5 s and increasingly negative thereafter. This analysis of comparing the graphs of position, velocity, and speed helps catch errors in calculations. The graphs must be consistent with each other and help interpret the calculations.

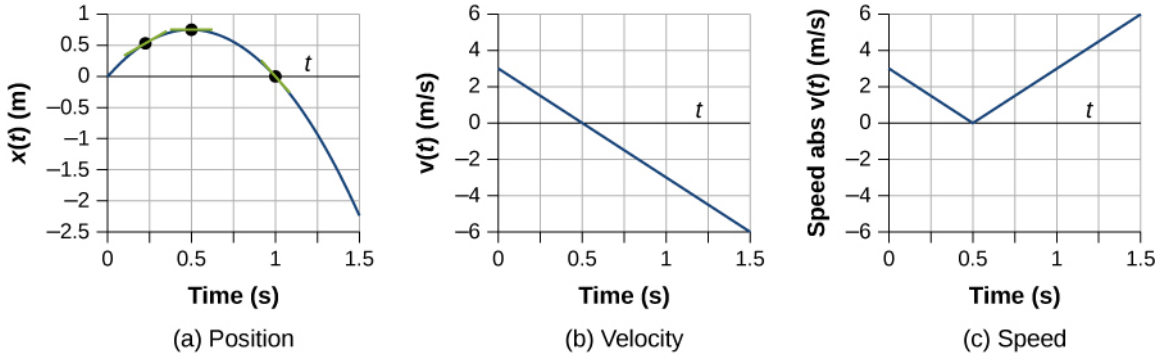


Figure 3.9 (a) Position: $x(t)$ versus time. (b) Velocity: $v(t)$ versus time. The slope of the position graph is the velocity. A rough comparison of the slopes of the tangent lines in (a) at 0.25 s, 0.5 s, and 1.0 s with the values for velocity at the corresponding times indicates they are the same values. (c) Speed: $|v(t)|$ versus time. Speed is always a positive number.

CHECK YOUR UNDERSTANDING 3.2

The position of an object as a function of time is $x(t) = -3t^2$ m. (a) What is the velocity of the object as a function of time? (b) Is the velocity ever positive? (c) What are the velocity and speed at $t = 1.0$ s?

3.3 Average and Instantaneous Acceleration

Learning Objectives

By the end of this section, you will be able to:

- Calculate the average acceleration between two points in time.
- Calculate the instantaneous acceleration given the functional form of velocity.
- Explain the vector nature of instantaneous acceleration and velocity.
- Explain the difference between average acceleration and instantaneous acceleration.
- Find instantaneous acceleration at a specified time on a graph of velocity versus time.

The importance of understanding acceleration spans our day-to-day experience, as well as the vast reaches of outer space and the tiny world of subatomic physics. In everyday conversation, to *accelerate* means to speed up; applying the brake pedal causes a vehicle to slow down. We are familiar with the acceleration of our car, for example. The greater the acceleration, the greater the change in velocity over a given time. Acceleration is

widely seen in experimental physics. In linear particle accelerator experiments, for example, subatomic particles are accelerated to very high velocities in collision experiments, which tell us information about the structure of the subatomic world as well as the origin of the universe. In space, cosmic rays are subatomic particles that have been accelerated to very high energies in supernovas (exploding massive stars) and active galactic nuclei. It is important to understand the processes that accelerate cosmic rays because these rays contain highly penetrating radiation that can damage electronics flown on spacecraft, for example.

Average Acceleration

The formal definition of acceleration is consistent with these notions just described, but is more inclusive.

Average Acceleration

Average acceleration is the rate at which velocity changes:

$$\overline{a} = \frac{\Delta v}{\Delta t} = \frac{v_f - v_0}{t_f - t_0}, \tag{3.8}$$

where $\overline{a}$ is **average acceleration**, v is velocity, and t is time. (The bar over the a means *average* acceleration.)

Because acceleration is velocity in meters per second divided by time in seconds, the SI units for acceleration are often abbreviated m/s^2—that is, meters per second squared or meters per second per second. This literally means by how many meters per second the velocity changes every second. Recall that velocity is a vector—it has both magnitude and direction—which means that a change in velocity can be a change in magnitude (or speed), but it can also be a change in direction. For example, if a runner traveling at 10 km/h due east slows to a stop, reverses direction, and continues her run at 10 km/h due west, her velocity has changed as a result of the change in direction, although the *magnitude* of the velocity is the same in both directions. Thus, acceleration occurs when velocity changes in magnitude (an increase or decrease in speed) or in direction, or both.

Acceleration as a Vector

Acceleration is a vector in the same direction as the *change* in velocity, Δv. Since velocity is a vector, it can change in magnitude or in direction, or both. Acceleration is, therefore, a change in speed or direction, or both.

Keep in mind that although acceleration is in the direction of the change in velocity, it is not always in the direction of motion. When an object slows down, its acceleration is opposite to the direction of its motion. Although this is commonly referred to as *deceleration* Figure 3.10, we say the train is accelerating in a direction opposite to its direction of motion.



Figure 3.10 A subway train in Sao Paulo, Brazil, accelerates opposite to the motion as it comes into a station. It is accelerating in a direction opposite to its direction of motion. (credit: modification of work by Yusuke Kawasaki)

The term *deceleration* can cause confusion in our analysis because it is not a vector and it does not point to a specific direction with respect to a coordinate system, so we do not use it. Acceleration is a vector, so we must choose the appropriate sign for it in our chosen coordinate system. In the case of the train in Figure 3.10, acceleration is *in the negative direction in the chosen coordinate system*, so we say the train is undergoing negative acceleration.

If an object in motion has a velocity in the positive direction with respect to a chosen origin and it acquires a constant negative acceleration, the object eventually comes to a rest and reverses direction. If we wait long enough, the object passes through the origin going in the opposite direction. This is illustrated in Figure 3.11.

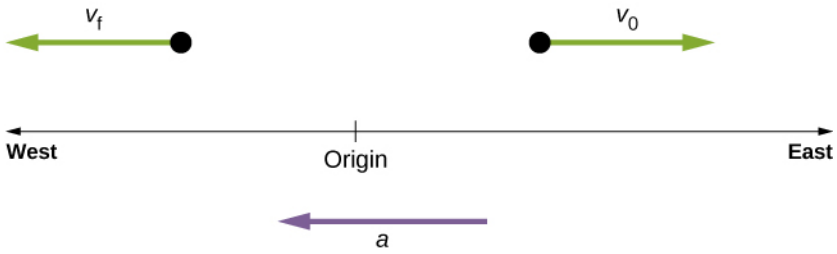


Figure 3.11 An object in motion with a velocity vector toward the east under negative acceleration comes to a rest and reverses direction. It passes the origin going in the opposite direction after a long enough time.

EXAMPLE 3.5

Calculating Average Acceleration: A Racehorse Leaves the Gate

A racehorse coming out of the gate accelerates from rest to a velocity of 15.0 m/s due west in 1.80 s. What is its average acceleration?



Figure 3.12 Racehorses accelerating out of the gate. (credit: modification of work by Jon Sullivan)

Strategy

First we draw a sketch and assign a coordinate system to the problem Figure 3.13. This is a simple problem, but it always helps to visualize it. Notice that we assign east as positive and west as negative. Thus, in this case, we have negative velocity.

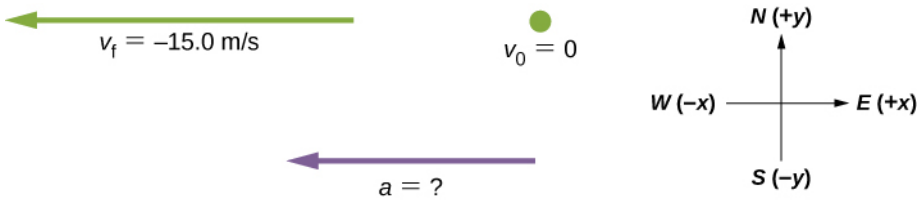


Figure 3.13 Identify the coordinate system, the given information, and what you want to determine.

We can solve this problem by identifying Δv and Δt from the given information, and then calculating the average acceleration directly from the equation $\overline{a} = \frac{\Delta v}{\Delta t} = \frac{v_f - v_0}{t_f - t_0}$.

Solution

First, identify the knowns: $v_0 = 0$, $v_f = -15.0$ m/s (the negative sign indicates direction toward the west), $\Delta t =$ 1.80 s.

Second, find the change in velocity. Since the horse is going from zero to –15.0 m/s, its change in velocity equals its final velocity:

$$\Delta v = v_f - v_0 = v_f = -15.0 \text{ m/s}.$$

Last, substitute the known values (Δv and Δt) and solve for the unknown $\overline{a}$:

$$\overline{a} = \frac{\Delta v}{\Delta t} = \frac{-15.0 \text{ m/s}}{1.80 \text{ s}} = -8.33 \text{m/s}^2.$$

Significance

The negative sign for acceleration indicates that acceleration is toward the west. An acceleration of 8.33 m/s^2 due west means the horse increases its velocity by 8.33 m/s due west each second; that is, 8.33 meters per second per second, which we write as 8.33 m/s^2. This is truly an average acceleration, because the ride is not smooth. We see later that an acceleration of this magnitude would require the rider to hang on with a force nearly equal to his weight.

CHECK YOUR UNDERSTANDING 3.3

Protons in a linear accelerator are accelerated from rest to 2.0×10^7 m/s in 10^{-4} s. What is the average acceleration of the protons?

Instantaneous Acceleration

Instantaneous acceleration a, or *acceleration at a specific instant in time*, is obtained using the same process discussed for instantaneous velocity. That is, we calculate the average acceleration between two points in time separated by Δt and let Δt approach zero. The result is the derivative of the velocity function $v(t)$, which is **instantaneous acceleration** and is expressed mathematically as

$$a(t) = \frac{d}{dt}v(t). \tag{3.9}$$

Thus, similar to velocity being the derivative of the position function, instantaneous acceleration is the derivative of the velocity function. We can show this graphically in the same way as instantaneous velocity. In Figure 3.14, instantaneous acceleration at time t_0 is the slope of the tangent line to the velocity-versus-time graph at time t_0. We see that average acceleration $\overline{a} = \frac{\Delta v}{\Delta t}$ approaches instantaneous acceleration as Δt approaches zero. Also in part (a) of the figure, we see that velocity has a maximum when its slope is zero. This time corresponds to the zero of the acceleration function. In part (b), instantaneous acceleration at the minimum velocity is shown, which is also zero, since the slope of the curve is zero there, too. Thus, for a given velocity function, the zeros of the acceleration function give either the minimum or the maximum velocity.

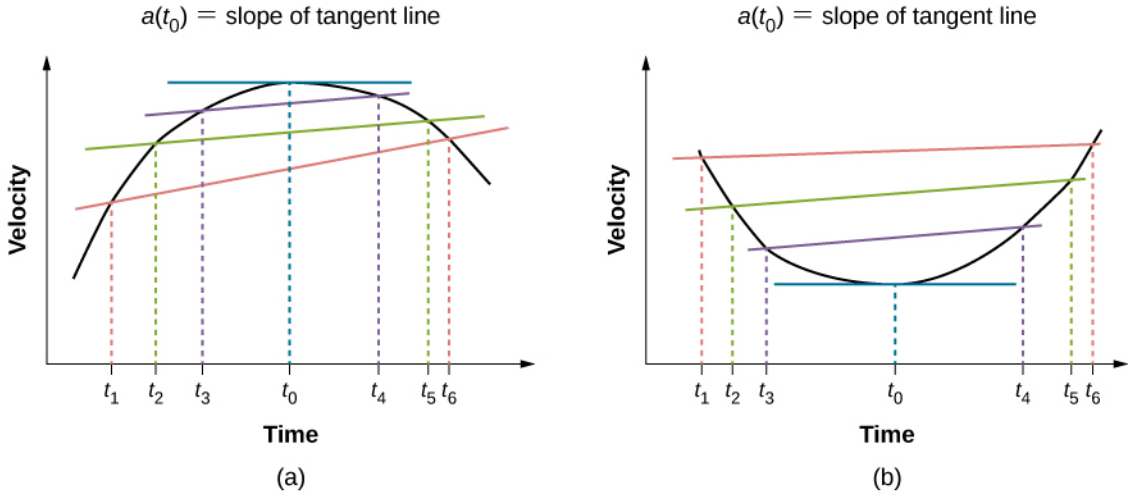


Figure 3.14 In a graph of velocity versus time, instantaneous acceleration is the slope of the tangent line. (a) Shown is average acceleration $\overline{a} = \frac{\Delta v}{\Delta t} = \frac{v_f - v_i}{t_f - t_i}$ between times $\Delta t = t_6 - t_1$, $\Delta t = t_5 - t_2$, and $\Delta t = t_4 - t_3$. When $\Delta t \to 0$, the average acceleration approaches instantaneous acceleration at time t_0. In view (a), instantaneous acceleration is shown for the point on the velocity curve at maximum velocity. At this point, instantaneous acceleration is the slope of the tangent line, which is zero. At any other time, the slope of the tangent line—and thus instantaneous acceleration—would not be zero. (b) Same as (a) but shown for instantaneous acceleration at minimum velocity.

To illustrate this concept, let's look at two examples. First, a simple example is shown using Figure 3.9(b), the velocity-versus-time graph of Example 3.4, to find acceleration graphically. This graph is depicted in Figure 3.15(a), which is a straight line. The corresponding graph of acceleration versus time is found from the slope of velocity and is shown in Figure 3.15(b). In this example, the velocity function is a straight line with a constant slope, thus acceleration is a constant. In the next example, the velocity function has a more complicated functional dependence on time.

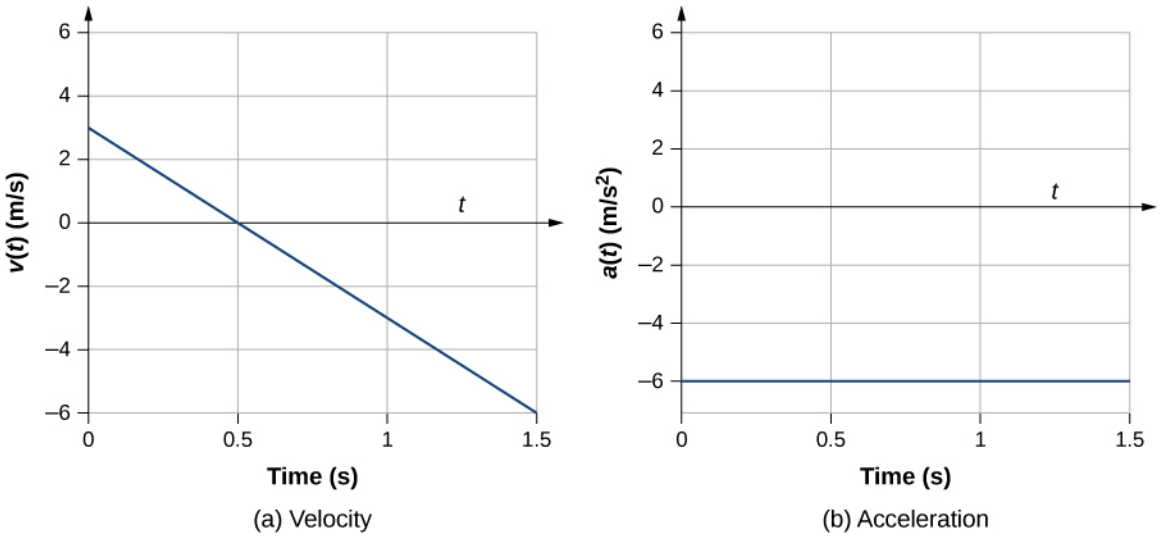


Figure 3.15 (a, b) The velocity-versus-time graph is linear and has a negative constant slope (a) that is equal to acceleration, shown in (b).

If we know the functional form of velocity, $v(t)$, we can calculate instantaneous acceleration $a(t)$ at any time point in the motion using Equation 3.9.

EXAMPLE 3.6

Calculating Instantaneous Acceleration

A particle is in motion and is accelerating. The functional form of the velocity is $v(t) = 20t - 5t^2$ m/s.

a. Find the functional form of the acceleration.
b. Find the instantaneous velocity at $t = 1$, 2, 3, and 5 s.
c. Find the instantaneous acceleration at $t = 1$, 2, 3, and 5 s.
d. Interpret the results of (c) in terms of the directions of the acceleration and velocity vectors.

Strategy

We find the functional form of acceleration by taking the derivative of the velocity function. Then, we calculate the values of instantaneous velocity and acceleration from the given functions for each. For part (d), we need to compare the directions of velocity and acceleration at each time.

Solution


a. $a(t) = \frac{dv(t)}{dt} = 20 - 10t \text{ m/s}^2$
b. $v(1 \text{ s}) = 15 \text{ m/s}$, $v(2 \text{ s}) = 20 \text{ m/s}$, $v(3 \text{ s}) = 15 \text{ m/s}$, $v(5 \text{ s}) = -25 \text{ m/s}$
c. $a(1 \text{ s}) = 10 \text{ m/s}^2$, $a(2 \text{ s}) = 0 \text{ m/s}^2$, $a(3 \text{ s}) = -10 \text{ m/s}^2$, $a(5 \text{ s}) = -30 \text{ m/s}^2$
d. At $t = 1$ s, velocity $v(1 \text{ s}) = 15$ m/s is positive and acceleration is positive, so both velocity and acceleration are in the same direction. The particle is moving faster.

At $t = 2$ s, velocity has increased to$v(2 \text{ s}) = 20$ m/s, where it is maximum, which corresponds to the time when the acceleration is zero. We see that the maximum velocity occurs when the slope of the velocity function is zero, which is just the zero of the acceleration function.


At $t = 3$ s, velocity is $v(3 \text{ s}) = 15$ m/s and acceleration is negative. The particle has reduced its velocity and the acceleration vector is negative. The particle is slowing down.

At $t = 5$ s, velocity is $v(5 \text{ s}) = -25$ m/s and acceleration is increasingly negative. Between the times $t = 3$ s and $t = 5$ s the particle has decreased its velocity to zero and then become negative, thus reversing its direction. The particle is now speeding up again, but in the opposite direction.

We can see these results graphically in Figure 3.16.

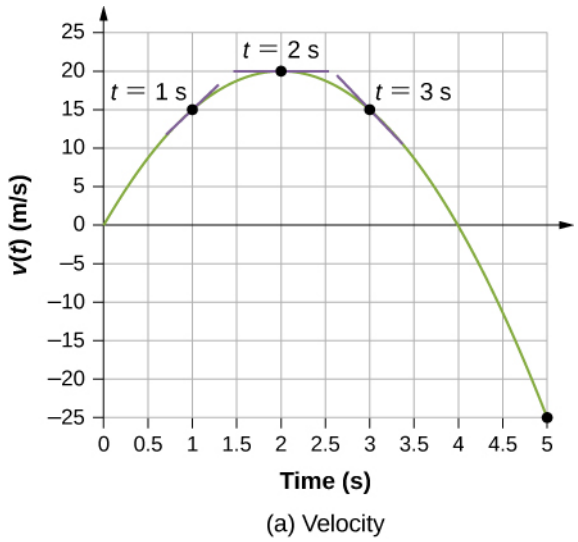

(a) Velocity

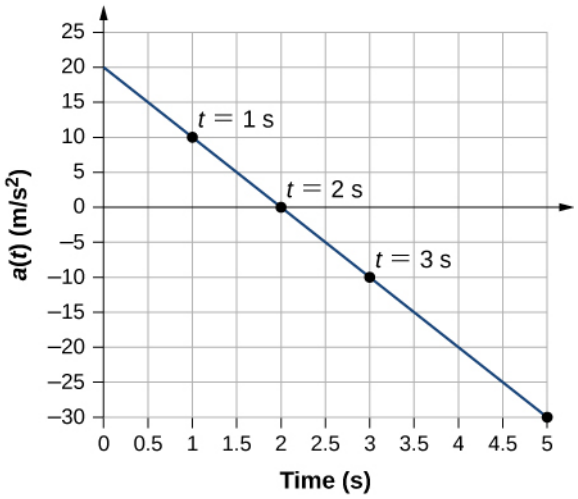

(b) Acceleration

Figure 3.16 (a) Velocity versus time. Tangent lines are indicated at times 1, 2, and 3 s. The slopes of the tangent lines are the accelerations. At t = 3 s, velocity is positive. At t = 5 s, velocity is negative, indicating the particle has reversed direction. (b) Acceleration versus time. Comparing the values of accelerations given by the black dots with the corresponding slopes of the tangent lines (slopes of lines through black dots) in (a), we see they are identical.

Significance

By doing both a numerical and graphical analysis of velocity and acceleration of the particle, we can learn much about its motion. The numerical analysis complements the graphical analysis in giving a total view of the motion. The zero of the acceleration function corresponds to the maximum of the velocity in this example. Also in this example, when acceleration is positive and in the same direction as velocity, velocity increases. As acceleration tends toward zero, eventually becoming negative, the velocity reaches a maximum, after which it starts decreasing. If we wait long enough, velocity also becomes negative, indicating a reversal of direction. A real-world example of this type of motion is a car with a velocity that is increasing to a maximum, after which it starts slowing down, comes to a stop, then reverses direction.

CHECK YOUR UNDERSTANDING 3.4

An airplane lands on a runway traveling east. Describe its acceleration.

Getting a Feel for Acceleration

You are probably used to experiencing acceleration when you step into an elevator, or step on the gas pedal in your car. However, acceleration is happening to many other objects in our universe with which we don't have direct contact. Table 3.2 presents the acceleration of various objects. We can see the magnitudes of the accelerations extend over many orders of magnitude.

Acceleration	Value (m/s^2)
High-speed train	0.25
Elevator	2
Cheetah	5
Object in a free fall without air resistance near the surface of Earth	9.8
Space shuttle maximum during launch	29
Parachutist peak during normal opening of parachute	59
F16 aircraft pulling out of a dive	79
Explosive seat ejection from aircraft	147
Sprint missile	982
Fastest rocket sled peak acceleration	1540
Jumping flea	3200
Baseball struck by a bat	30,000
Closing jaws of a trap-jaw ant	1,000,000
Proton in the large Hadron collider	1.9×10^9

Table 3.2 Typical Values of Acceleration (credit: Wikipedia: Orders of Magnitude (acceleration))

In this table, we see that typical accelerations vary widely with different objects and have nothing to do with object size or how massive it is. Acceleration can also vary widely with time during the motion of an object. A drag racer has a large acceleration just after its start, but then it tapers off as the vehicle reaches a constant velocity. Its average acceleration can be quite different from its instantaneous acceleration at a particular time during its motion. Figure 3.17 compares graphically average acceleration with instantaneous acceleration for two very different motions.

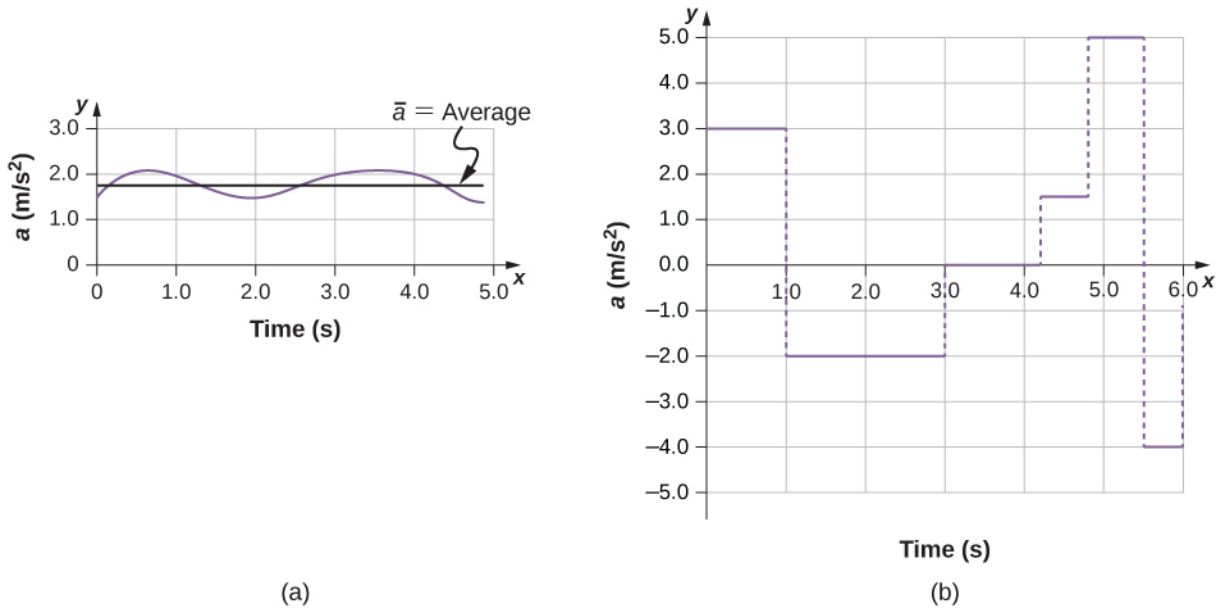


Figure 3.17 Graphs of instantaneous acceleration versus time for two different one-dimensional motions. (a) Acceleration varies only slightly and is always in the same direction, since it is positive. The average over the interval is nearly the same as the acceleration at any given time. (b) Acceleration varies greatly, perhaps representing a package on a post office conveyor belt that is accelerated forward and backward as it bumps along. It is necessary to consider small time intervals (such as from 0–1.0 s) with constant or nearly constant acceleration in such a situation.

INTERACTIVE

Learn about position, velocity, and acceleration graphs. Move the little man back and forth with a mouse and plot his motion. Set the position, velocity, or acceleration and let the simulation move the man for you. Visit this link (https://openstax.org/l/21movmansimul) to use the moving man simulation.

3.4 Motion with Constant Acceleration

Learning Objectives

By the end of this section, you will be able to:

- Identify which equations of motion are to be used to solve for unknowns.
- Use appropriate equations of motion to solve a two-body pursuit problem.

You might guess that the greater the acceleration of, say, a car moving away from a stop sign, the greater the car's displacement in a given time. But, we have not developed a specific equation that relates acceleration and displacement. In this section, we look at some convenient equations for kinematic relationships, starting from the definitions of displacement, velocity, and acceleration. We first investigate a single object in motion, called single-body motion. Then we investigate the motion of two objects, called **two-body pursuit problems**.

Notation

First, let us make some simplifications in notation. Taking the initial time to be zero, as if time is measured with a stopwatch, is a great simplification. Since elapsed time is $\Delta t = t_f - t_0$, taking $t_0 = 0$ means that $\Delta t = t_f$, the final time on the stopwatch. When initial time is taken to be zero, we use the subscript 0 to denote initial values of position and velocity. That is, x_0 *is the initial position* and v_0 *is the initial velocity*. We put no subscripts on the final values. That is, t *is the final time*, x *is the final position*, and v *is the final velocity*. This gives a simpler expression for elapsed time, $\Delta t = t$. It also simplifies the expression for x displacement, which is now $\Delta x = x - x_0$. Also, it simplifies the expression for change in velocity, which is now $\Delta v = v - v_0$. To summarize, using the simplified notation, with the initial time taken to be zero,

$$\Delta t = t$$
$$\Delta x = x - x_0$$
$$\Delta v = v - v_0,$$

where the subscript 0 denotes an initial value and the absence of a subscript denotes a final value in whatever motion is under consideration.

We now make the important assumption that *acceleration is constant*. This assumption allows us to avoid using calculus to find instantaneous acceleration. Since acceleration is constant, the average and instantaneous accelerations are equal—that is,

$$\bar{a} = a = \text{constant}.$$

Thus, we can use the symbol *a* for acceleration at all times. Assuming acceleration to be constant does not seriously limit the situations we can study nor does it degrade the accuracy of our treatment. For one thing, acceleration *is* constant in a great number of situations. Furthermore, in many other situations we can describe motion accurately by assuming a constant acceleration equal to the average acceleration for that motion. Lastly, for motion during which acceleration changes drastically, such as a car accelerating to top speed and then braking to a stop, motion can be considered in separate parts, each of which has its own constant acceleration.

Displacement and Position from Velocity

To get our first two equations, we start with the definition of average velocity:

$$\bar{v} = \frac{\Delta x}{\Delta t}.$$

Substituting the simplified notation for Δx and Δt yields

$$\bar{v} = \frac{x - x_0}{t}.$$

Solving for x gives us

$$x = x_0 + \bar{v}t, \tag{3.10}$$

where the average velocity is

$$\bar{v} = \frac{v_0 + v}{2}. \tag{3.11}$$

The equation $\bar{v} = \frac{v_0+v}{2}$ reflects the fact that when acceleration is constant, $\bar{v}$ is just the simple average of the initial and final velocities. Figure 3.18 illustrates this concept graphically. In part (a) of the figure, acceleration is constant, with velocity increasing at a constant rate. The average velocity during the 1-h interval from 40 km/h to 80 km/h is 60 km/h:

$$\bar{v} = \frac{v_0 + v}{2} = \frac{40\ \text{km/h} + 80\ \text{km/h}}{2} = 60\ \text{km/h}.$$

In part (b), acceleration is not constant. During the 1-h interval, velocity is closer to 80 km/h than 40 km/h. Thus, the average velocity is greater than in part (a).

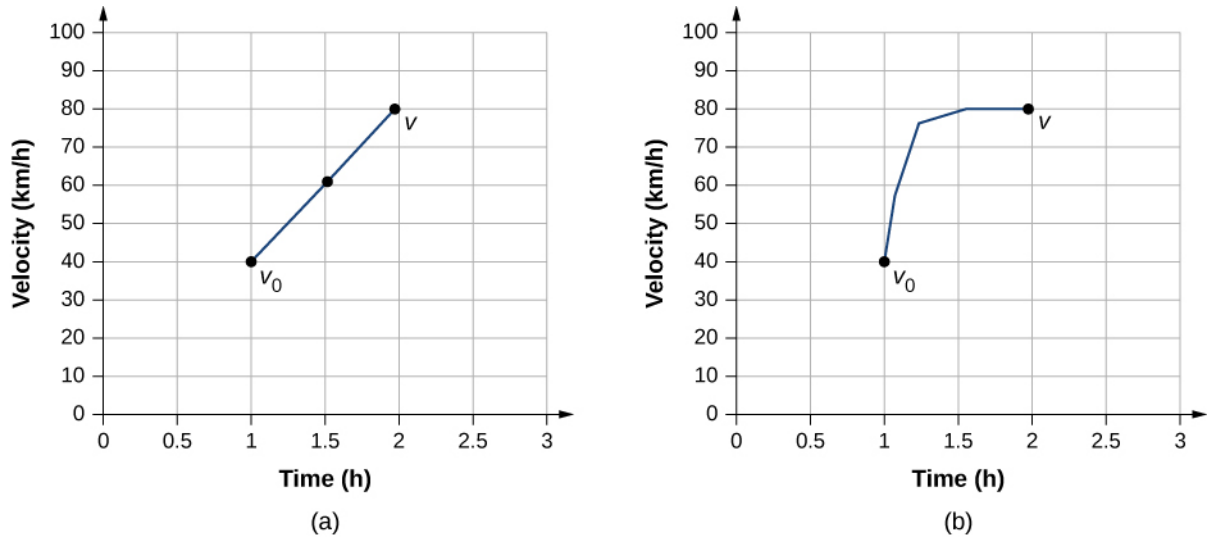


Figure 3.18 (a) Velocity-versus-time graph with constant acceleration showing the initial and final velocities v_0 and v. The average velocity is $\frac{1}{2}(v_0 + v) = 60$ km/h. (b) Velocity-versus-time graph with an acceleration that changes with time. The average velocity is not given by $\frac{1}{2}(v_0 + v)$, but is greater than 60 km/h.

Solving for Final Velocity from Acceleration and Time

We can derive another useful equation by manipulating the definition of acceleration:

$$a = \frac{\Delta v}{\Delta t}.$$

Substituting the simplified notation for Δv and Δt gives us

$$a = \frac{v - v_0}{t} \quad (\text{constant } a)\,.$$

Solving for v yields

$$v = v_0 + at \quad (\text{constant } a)\,. \tag{3.12}$$

EXAMPLE 3.7

Calculating Final Velocity

An airplane lands with an initial velocity of 70.0 m/s and then accelerates opposite to the motion at 1.50 m/s^2 for 40.0 s. What is its final velocity?

Strategy

First, we identify the knowns: $v_0 = 70$ m/s, $a = -1.50$ m/s^2, $t = 40$ s.

Second, we identify the unknown; in this case, it is final velocity v_f.

Last, we determine which equation to use. To do this we figure out which kinematic equation gives the unknown in terms of the knowns. We calculate the final velocity using Equation 3.12, $v = v_0 + at$.

Solution

Substitute the known values and solve:

$$v = v_0 + at = 70.0 \text{ m/s} + \left(-1.50 \text{ m/s}^2\right)(40.0 \text{ s}) = 10.0 \text{ m/s}.$$

Figure 3.19 is a sketch that shows the acceleration and velocity vectors.

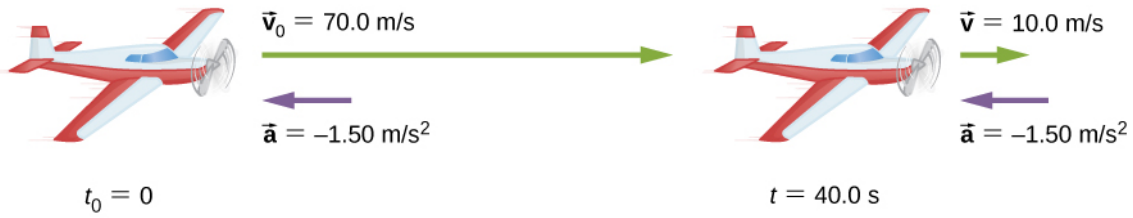


Figure 3.19 The airplane lands with an initial velocity of 70.0 m/s and slows to a final velocity of 10.0 m/s before heading for the terminal. Note the acceleration is negative because its direction is opposite to its velocity, which is positive.

Significance

The final velocity is much less than the initial velocity, as desired when slowing down, but is still positive (see figure). With jet engines, reverse thrust can be maintained long enough to stop the plane and start moving it backward, which is indicated by a negative final velocity, but is not the case here.

In addition to being useful in problem solving, the equation $v = v_0 + at$ gives us insight into the relationships among velocity, acceleration, and time. We can see, for example, that

- Final velocity depends on how large the acceleration is and how long it lasts
- If the acceleration is zero, then the final velocity equals the initial velocity ($v = v_0$), as expected (in other words, velocity is constant)
- If a is negative, then the final velocity is less than the initial velocity

All these observations fit our intuition. Note that it is always useful to examine basic equations in light of our intuition and experience to check that they do indeed describe nature accurately.

Solving for Final Position with Constant Acceleration

We can combine the previous equations to find a third equation that allows us to calculate the final position of an object experiencing constant acceleration. We start with

$$v = v_0 + at.$$

Adding v_0 to each side of this equation and dividing by 2 gives

$$\frac{v_0 + v}{2} = v_0 + \frac{1}{2}at.$$

Since $\frac{v_0+v}{2} = \bar{v}$ for constant acceleration, we have

$$\bar{v} = v_0 + \frac{1}{2}at.$$

Now we substitute this expression for $\bar{v}$ into the equation for displacement, $x = x_0 + \bar{v}t$, yielding

$$x = x_0 + v_0 t + \frac{1}{2}at^2 \quad (\text{constant } a)\,. \tag{3.13}$$

EXAMPLE 3.8

Calculating Displacement of an Accelerating Object

Dragsters can achieve an average acceleration of 26.0 m/s^2. Suppose a dragster accelerates from rest at this rate for 5.56 s Figure 3.20. How far does it travel in this time?



Figure 3.20 U.S. Army Top Fuel pilot Tony "The Sarge" Schumacher begins a race with a controlled burnout. (credit: Lt. Col. William Thurmond. Photo Courtesy of U.S. Army.)

Strategy

First, let's draw a sketch Figure 3.21. We are asked to find displacement, which is x if we take x_0 to be zero. (Think about x_0 as the starting line of a race. It can be anywhere, but we call it zero and measure all other positions relative to it.) We can use the equation $x = x_0 + v_0 t + \frac{1}{2}at^2$ when we identify v_0, a, and t from the statement of the problem.

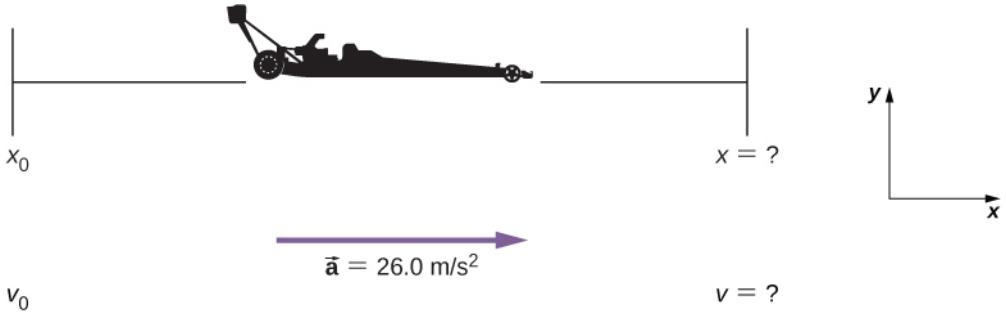


Figure 3.21 Sketch of an accelerating dragster.

Solution

First, we need to identify the knowns. Starting from rest means that $v_0 = 0$, a is given as 26.0 m/s^2 and t is given as 5.56 s.

Second, we substitute the known values into the equation to solve for the unknown:

$$x = x_0 + v_0 t + \frac{1}{2}at^2.$$

Since the initial position and velocity are both zero, this equation simplifies to

$$x = \frac{1}{2}at^2.$$

Substituting the identified values of a and t gives

$$x = \frac{1}{2}(26.0\ \text{m/s}^2)(5.56\ \text{s})^2 = 402\ \text{m}.$$

Significance

If we convert 402 m to miles, we find that the distance covered is very close to one-quarter of a mile, the

standard distance for drag racing. So, our answer is reasonable. This is an impressive displacement to cover in only 5.56 s, but top-notch dragsters can do a quarter mile in even less time than this. If the dragster were given an initial velocity, this would add another term to the distance equation. If the same acceleration and time are used in the equation, the distance covered would be much greater.

What else can we learn by examining the equation $x = x_0 + v_0 t + \frac{1}{2}at^2$? We can see the following relationships:

- Displacement depends on the square of the elapsed time when acceleration is not zero. In Example 3.8, the dragster covers only one-fourth of the total distance in the first half of the elapsed time.
- If acceleration is zero, then initial velocity equals average velocity ($v_0 = \bar{v}$), and $x = x_0 + v_0 t + \frac{1}{2}at^2$ becomes $x = x_0 + v_0 t$.

Solving for Final Velocity from Distance and Acceleration

A fourth useful equation can be obtained from another algebraic manipulation of previous equations. If we solve $v = v_0 + at$ for t, we get

$$t = \frac{v - v_0}{a}.$$

Substituting this and $\bar{v} = \frac{v_0 + v}{2}$ into $x = x_0 + \bar{v}t$, we get

$$v^2 = v_0^2 + 2a(x - x_0) \text{ (constant } a\text{).} \quad 3.14$$

EXAMPLE 3.9

Calculating Final Velocity

Calculate the final velocity of the dragster in Example 3.8 without using information about time.

Strategy

The equation $v^2 = v_0^2 + 2a(x - x_0)$ is ideally suited to this task because it relates velocities, acceleration, and displacement, and no time information is required.

Solution

First, we identify the known values. We know that $v_0 = 0$, since the dragster starts from rest. We also know that $x - x_0 = 402$ m (this was the answer in Example 3.8). The average acceleration was given by $a = 26.0\ \text{m/s}^2$.

Second, we substitute the knowns into the equation $v^2 = v_0^2 + 2a(x - x_0)$ and solve for v:

$$v^2 = 0 + 2\left(26.0\ \text{m/s}^2\right)(402\ \text{m}).$$

Thus,

$$v^2 = 2.09 \times 10^4\ \text{m}^2/\text{s}^2$$

$$v = \sqrt{2.09 \times 10^4\ \text{m}^2/\text{s}^2} = 145\ \text{m/s}.$$

Significance

A velocity of 145 m/s is about 522 km/h, or about 324 mi/h, but even this breakneck speed is short of the record for the quarter mile. Also, note that a square root has two values; we took the positive value to indicate a velocity in the same direction as the acceleration.

An examination of the equation $v^2 = v_0^2 + 2a(x - x_0)$ can produce additional insights into the general

relationships among physical quantities:

- The final velocity depends on how large the acceleration is and the distance over which it acts.
- For a fixed acceleration, a car that is going twice as fast doesn't simply stop in twice the distance. It takes much farther to stop. (This is why we have reduced speed zones near schools.)

Putting Equations Together

In the following examples, we continue to explore one-dimensional motion, but in situations requiring slightly more algebraic manipulation. The examples also give insight into problem-solving techniques. The note that follows is provided for easy reference to the equations needed. Be aware that these equations are not independent. In many situations we have two unknowns and need two equations from the set to solve for the unknowns. We need as many equations as there are unknowns to solve a given situation.

Summary of Kinematic Equations (constant *a*)

$$x = x_0 + \bar{v}t$$

$$\bar{v} = \frac{v_0 + v}{2}$$

$$v = v_0 + at$$

$$x = x_0 + v_0 t + \frac{1}{2}at^2$$

$$v^2 = v_0^2 + 2a(x - x_0)$$

Before we get into the examples, let's look at some of the equations more closely to see the behavior of acceleration at extreme values. Rearranging Equation 3.12, we have

$$a = \frac{v - v_0}{t}.$$

From this we see that, for a finite time, if the difference between the initial and final velocities is small, the acceleration is small, approaching zero in the limit that the initial and final velocities are equal. On the contrary, in the limit $t \to 0$ for a finite difference between the initial and final velocities, acceleration becomes infinite.

Similarly, rearranging Equation 3.14, we can express acceleration in terms of velocities and displacement:

$$a = \frac{v^2 - v_0^2}{2(x - x_0)}.$$

Thus, for a finite difference between the initial and final velocities acceleration becomes infinite in the limit the displacement approaches zero. Acceleration approaches zero in the limit the difference in initial and final velocities approaches zero for a finite displacement.

EXAMPLE 3.10

How Far Does a Car Go?

On dry concrete, a car can accelerate opposite to the motion at a rate of 7.00 m/s^2, whereas on wet concrete it can accelerate opposite to the motion at only 5.00 m/s^2. Find the distances necessary to stop a car moving at 30.0 m/s (about 110 km/h) on (a) dry concrete and (b) wet concrete. (c) Repeat both calculations and find the displacement from the point where the driver sees a traffic light turn red, taking into account his reaction time of 0.500 s to get his foot on the brake.

Strategy

First, we need to draw a sketch Figure 3.22. To determine which equations are best to use, we need to list all the known values and identify exactly what we need to solve for.

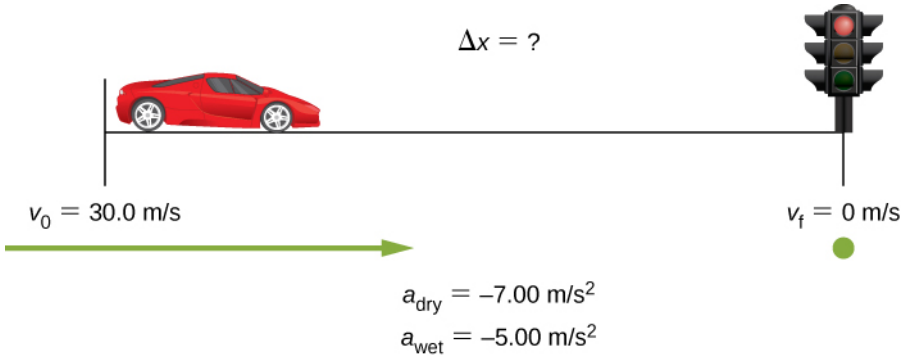


Figure 3.22 Sample sketch to visualize acceleration opposite to the motion and stopping distance of a car.

Solution

a. First, we need to identify the knowns and what we want to solve for. We know that $v_0 = 30.0$ m/s, $v = 0$, and $a = -7.00$ m/s^2 (a is negative because it is in a direction opposite to velocity). We take x_0 to be zero. We are looking for displacement Δx, or $x - x_0$.
Second, we identify the equation that will help us solve the problem. The best equation to use is

$$v^2 = v_0^2 + 2a(x - x_0).$$

This equation is best because it includes only one unknown, x. We know the values of all the other variables in this equation. (Other equations would allow us to solve for x, but they require us to know the stopping time, t, which we do not know. We could use them, but it would entail additional calculations.)
Third, we rearrange the equation to solve for x:

$$x - x_0 = \frac{v^2 - v_0^2}{2a}$$

and substitute the known values:

$$x - 0 = \frac{0^2 - (30.0\ \text{m/s})^2}{2(-7.00\text{m/s}^2)}.$$

Thus,

$$x = 64.3\ \text{m on dry concrete.}$$

b. This part can be solved in exactly the same manner as (a). The only difference is that the acceleration is −5.00 m/s^2. The result is

$$x_{\text{wet}} = 90.0\ \text{m on wet concrete.}$$

c. When the driver reacts, the stopping distance is the same as it is in (a) and (b) for dry and wet concrete. So, to answer this question, we need to calculate how far the car travels during the reaction time, and then add that to the stopping time. It is reasonable to assume the velocity remains constant during the driver's reaction time.
To do this, we, again, identify the knowns and what we want to solve for. We know that $\bar{v} = 30.0$ m/s, $t_{\text{reaction}} = 0.500$ s, and $a_{\text{reaction}} = 0$. We take $x_{0\text{-reaction}}$ to be zero. We are looking for x_{reaction}.
Second, as before, we identify the best equation to use. In this case, $x = x_0 + \bar{v}t$ works well because the only unknown value is x, which is what we want to solve for.
Third, we substitute the knowns to solve the equation:

$$x = 0 + (30.0\ \text{m/s})\,(0.500\ \text{s}) = 15.0\ \text{m}.$$

This means the car travels 15.0 m while the driver reacts, making the total displacements in the two cases of dry and wet concrete 15.0 m greater than if he reacted instantly.
Last, we then add the displacement during the reaction time to the displacement when braking (Figure

3.23),

$$x_{\text{braking}} + x_{\text{reaction}} = x_{\text{total}},$$

and find (a) to be 64.3 m + 15.0 m = 79.3 m when dry and (b) to be 90.0 m + 15.0 m = 105 m when wet.

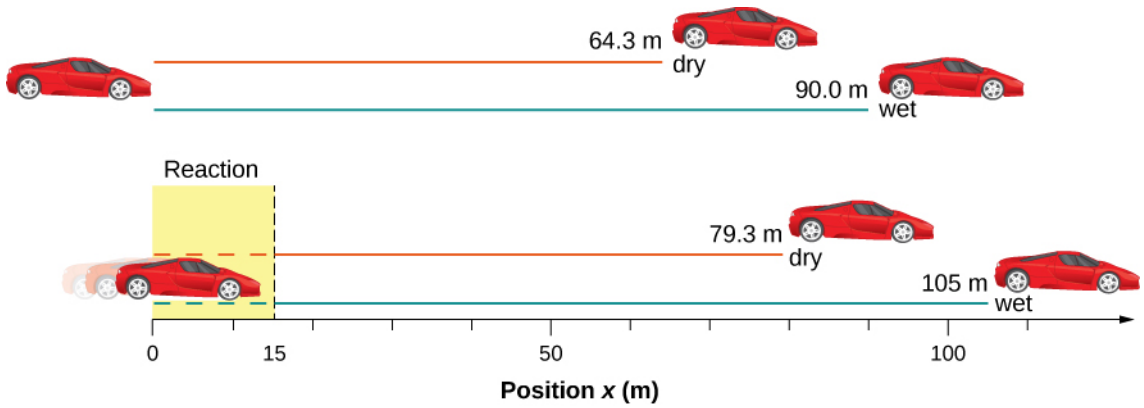


Figure 3.23 The distance necessary to stop a car varies greatly, depending on road conditions and driver reaction time. Shown here are the braking distances for dry and wet pavement, as calculated in this example, for a car traveling initially at 30.0 m/s. Also shown are the total distances traveled from the point when the driver first sees a light turn red, assuming a 0.500-s reaction time.

Significance

The displacements found in this example seem reasonable for stopping a fast-moving car. It should take longer to stop a car on wet pavement than dry. It is interesting that reaction time adds significantly to the displacements, but more important is the general approach to solving problems. We identify the knowns and the quantities to be determined, then find an appropriate equation. If there is more than one unknown, we need as many independent equations as there are unknowns to solve. There is often more than one way to solve a problem. The various parts of this example can, in fact, be solved by other methods, but the solutions presented here are the shortest.

EXAMPLE 3.11

Calculating Time

Suppose a car merges into freeway traffic on a 200-m-long ramp. If its initial velocity is 10.0 m/s and it accelerates at 2.00 m/s^2, how long does it take the car to travel the 200 m up the ramp? (Such information might be useful to a traffic engineer.)

Strategy

First, we draw a sketch Figure 3.24. We are asked to solve for time t. As before, we identify the known quantities to choose a convenient physical relationship (that is, an equation with one unknown, t.)

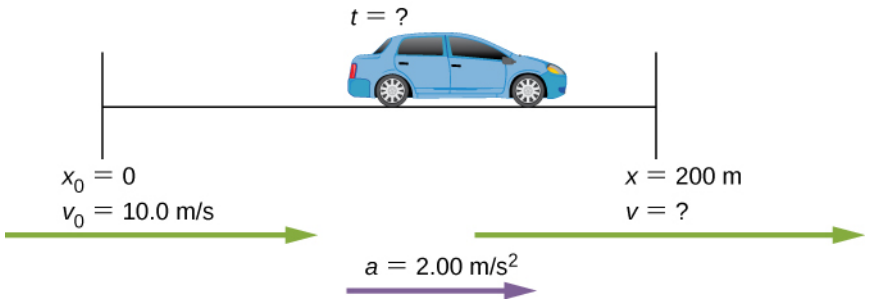


Figure 3.24 Sketch of a car accelerating on a freeway ramp.

Solution

Again, we identify the knowns and what we want to solve for. We know that $x_0 = 0$, $v_0 = 10$ m/s, $a = 2.00$ m/s^2, and $x = 200$ m.

We need to solve for t. The equation $x = x_0 + v_0 t + \frac{1}{2}at^2$ works best because the only unknown in the equation is the variable t, for which we need to solve. From this insight we see that when we input the knowns into the equation, we end up with a quadratic equation.

We need to rearrange the equation to solve for t, then substituting the knowns into the equation:

$$200 \text{ m} = 0 \text{ m} + (10.0 \text{ m/s})t + \frac{1}{2}\left(2.00 \text{ m/s}^2\right) t^2.$$

We then simplify the equation. The units of meters cancel because they are in each term. We can get the units of seconds to cancel by taking $t = t$ s, where t is the magnitude of time and s is the unit. Doing so leaves

$$200 = 10t + t^2.$$

We then use the quadratic formula to solve for t,

$$t^2 + 10t - 200 = 0$$

$$t = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a},$$

which yields two solutions: $t = 10.0$ and $t = -20.0$. A negative value for time is unreasonable, since it would mean the event happened 20 s before the motion began. We can discard that solution. Thus,

$$t = 10.0 \text{ s}.$$

Significance

Whenever an equation contains an unknown squared, there are two solutions. In some problems both solutions are meaningful; in others, only one solution is reasonable. The 10.0-s answer seems reasonable for a typical freeway on-ramp.

CHECK YOUR UNDERSTANDING 3.5

A rocket accelerates at a rate of 20 m/s^2 during launch. How long does it take the rocket to reach a velocity of 400 m/s?

EXAMPLE 3.12

Acceleration of a Spaceship

A spaceship has left Earth's orbit and is on its way to the Moon. It accelerates at 20 m/s^2 for 2 min and covers a distance of 1000 km. What are the initial and final velocities of the spaceship?

Strategy

We are asked to find the initial and final velocities of the spaceship. Looking at the kinematic equations, we see that one equation will not give the answer. We must use one kinematic equation to solve for one of the velocities and substitute it into another kinematic equation to get the second velocity. Thus, we solve two of the kinematic equations simultaneously.

Solution

First we solve for v_0 using $x = x_0 + v_0 t + \frac{1}{2}at^2$:

$$x - x_0 = v_0 t + \frac{1}{2}at^2$$

$$1.0 \times 10^6 \text{ m} = v_0(120.0 \text{ s}) + \frac{1}{2}(20.0 \text{ m/s}^2)(120.0 \text{ s})^2$$

$$v_0 = 7133.3 \text{ m/s}.$$

Then we substitute v_0 into $v = v_0 + at$ to solve for the final velocity:

$$v = v_0 + at = 7133.3 \text{ m/s} + (20.0 \text{ m/s}^2)(120.0 \text{ s}) = 9533.3 \text{ m/s}.$$

Significance

There are six variables in displacement, time, velocity, and acceleration that describe motion in one dimension. The initial conditions of a given problem can be many combinations of these variables. Because of this diversity, solutions may not be as easy as simple substitutions into one of the equations. This example illustrates that solutions to kinematics may require solving two simultaneous kinematic equations.

With the basics of kinematics established, we can go on to many other interesting examples and applications. In the process of developing kinematics, we have also glimpsed a general approach to problem solving that produces both correct answers and insights into physical relationships. The next level of complexity in our kinematics problems involves the motion of two interrelated bodies, called *two-body pursuit problems*.

Two-Body Pursuit Problems

Up until this point we have looked at examples of motion involving a single body. Even for the problem with two cars and the stopping distances on wet and dry roads, we divided this problem into two separate problems to find the answers. In a **two-body pursuit problem**, the motions of the objects are coupled—meaning, the unknown we seek depends on the motion of both objects. To solve these problems we write the equations of motion for each object and then solve them simultaneously to find the unknown. This is illustrated in Figure 3.25.

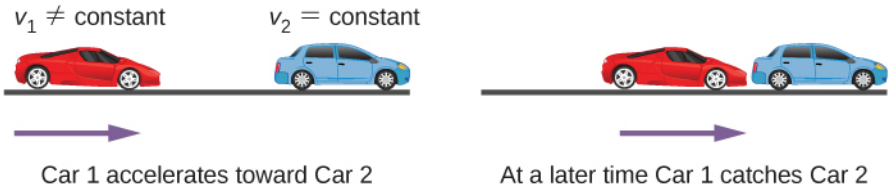


Figure 3.25 A two-body pursuit scenario where car 2 has a constant velocity and car 1 is behind with a constant acceleration. Car 1 catches up with car 2 at a later time.

The time and distance required for car 1 to catch car 2 depends on the initial distance car 1 is from car 2 as well as the velocities of both cars and the acceleration of car 1. The kinematic equations describing the motion of both cars must be solved to find these unknowns.

Consider the following example.

EXAMPLE 3.13

Cheetah Catching a Gazelle

A cheetah waits in hiding behind a bush. The cheetah spots a gazelle running past at 10 m/s. At the instant the gazelle passes the cheetah, the cheetah accelerates from rest at 4 m/s^2 to catch the gazelle. (a) How long does it take the cheetah to catch the gazelle? (b) What is the displacement of the gazelle and cheetah?

Strategy

We use the set of equations for constant acceleration to solve this problem. Since there are two objects in motion, we have separate equations of motion describing each animal. But what links the equations is a

common parameter that has the same value for each animal. If we look at the problem closely, it is clear the common parameter to each animal is their position x at a later time t. Since they both start at $x_0 = 0$, their displacements are the same at a later time t, when the cheetah catches up with the gazelle. If we pick the equation of motion that solves for the displacement for each animal, we can then set the equations equal to each other and solve for the unknown, which is time.

Solution

a. Equation for the gazelle: The gazelle has a constant velocity, which is its average velocity, since it is not accelerating. Therefore, we use Equation 3.10 with $x_0 = 0$:

$$x = x_0 + \bar{v}t = \bar{v}t.$$

Equation for the cheetah: The cheetah is accelerating from rest, so we use Equation 3.13 with $x_0 = 0$ and $v_0 = 0$:

$$x = x_0 + v_0 t + \frac{1}{2}at^2 = \frac{1}{2}at^2.$$

Now we have an equation of motion for each animal with a common parameter, which can be eliminated to find the solution. In this case, we solve for t:

$$x = \bar{v}t = \tfrac{1}{2}at^2$$
$$t = \tfrac{2\bar{v}}{a}.$$

The gazelle has a constant velocity of 10 m/s, which is its average velocity. The acceleration of the cheetah is 4 m/s^2. Evaluating t, the time for the cheetah to reach the gazelle, we have

$$t = \frac{2\bar{v}}{a} = \frac{2(10\text{ m/s})}{4\text{m/s}^2} = 5\text{ s}.$$

b. To get the displacement, we use either the equation of motion for the cheetah or the gazelle, since they should both give the same answer.
Displacement of the cheetah:

$$x = \frac{1}{2}at^2 = \frac{1}{2}(4\text{m/s}^2)(5)^2 = 50\text{ m}.$$

Displacement of the gazelle:

$$x = \bar{v}t = 10\text{ m/s}(5) = 50\text{ m}.$$

We see that both displacements are equal, as expected.

Significance

It is important to analyze the motion of each object and to use the appropriate kinematic equations to describe the individual motion. It is also important to have a good visual perspective of the two-body pursuit problem to see the common parameter that links the motion of both objects.

CHECK YOUR UNDERSTANDING 3.6

A bicycle has a constant velocity of 10 m/s. A person starts from rest and begins to run to catch up to the bicycle in 30 s when the bicycle is at the same position as the person. What is the acceleration of the person?

3.5 Free Fall

Learning Objectives

By the end of this section, you will be able to:

- Use the kinematic equations with the variables y and g to analyze free-fall motion.
- Describe how the values of the position, velocity, and acceleration change during a free fall.
- Solve for the position, velocity, and acceleration as functions of time when an object is in a free fall.

An interesting application of Equation 3.4 through Equation 3.14 is called *free fall*, which describes the motion of an object falling in a gravitational field, such as near the surface of Earth or other celestial objects of planetary size. Let's assume the body is falling in a straight line perpendicular to the surface, so its motion is one-dimensional. For example, we can estimate the depth of a vertical mine shaft by dropping a rock into it and listening for the rock to hit the bottom. But "falling," in the context of free fall, does not necessarily imply the body is moving from a greater height to a lesser height. If a ball is thrown upward, the equations of free fall apply equally to its ascent as well as its descent.

Gravity

The most remarkable and unexpected fact about falling objects is that if air resistance and friction are negligible, then in a given location all objects fall toward the center of Earth with the *same constant acceleration, independent of their mass*. This experimentally determined fact is unexpected because we are so accustomed to the effects of air resistance and friction that we expect light objects to fall slower than heavy ones. Until Galileo Galilei (1564–1642) proved otherwise, people believed that a heavier object has a greater acceleration in a free fall. We now know this is not the case. In the absence of air resistance, heavy objects arrive at the ground at the same time as lighter objects when dropped from the same height Figure 3.26.

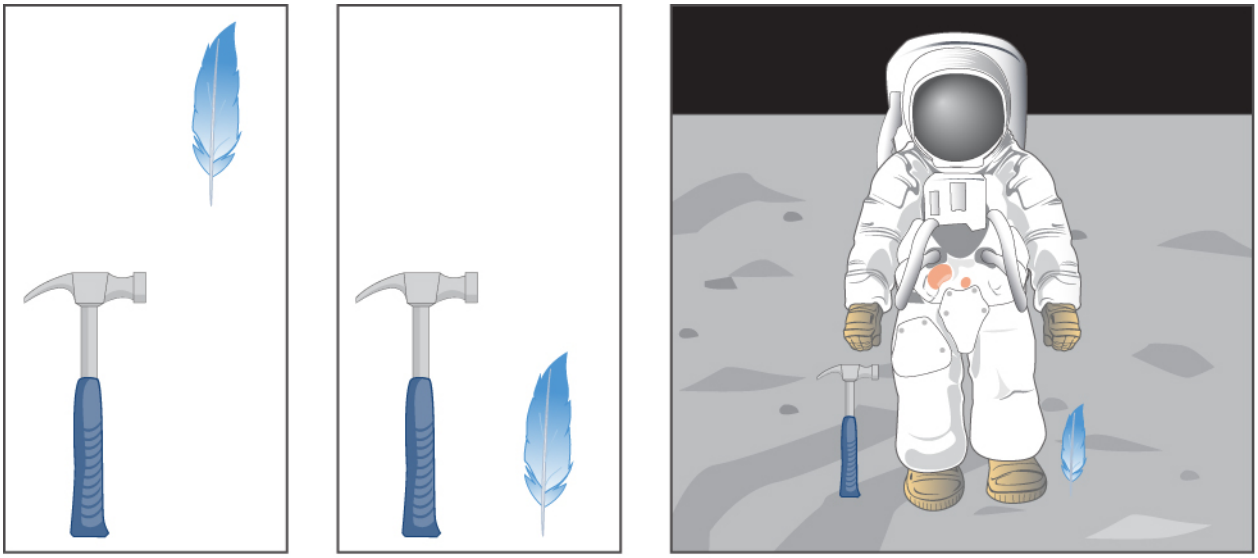


Figure 3.26 A hammer and a feather fall with the same constant acceleration if air resistance is negligible. This is a general characteristic of gravity not unique to Earth, as astronaut David R. Scott demonstrated in 1971 on the Moon, where the acceleration from gravity is only 1.67 m/s^2 and there is no atmosphere.

In the real world, air resistance can cause a lighter object to fall slower than a heavier object of the same size. A tennis ball reaches the ground after a baseball dropped at the same time. (It might be difficult to observe the difference if the height is not large.) Air resistance opposes the motion of an object through the air, and friction between objects—such as between clothes and a laundry chute or between a stone and a pool into which it is dropped—also opposes motion between them.

For the ideal situations of these first few chapters, an object *falling without air resistance or friction* is defined to be in **free fall**. The force of gravity causes objects to fall toward the center of Earth. The acceleration of free-

falling objects is therefore called **acceleration due to gravity**. Acceleration due to gravity is constant, which means we can apply the kinematic equations to any falling object where air resistance and friction are negligible. This opens to us a broad class of interesting situations.

Acceleration due to gravity is so important that its magnitude is given its own symbol, g. It is constant at any given location on Earth and has the average value

$$g = 9.81 \text{ m/s}^2 \quad (\text{or } 32.2 \text{ ft/s}^2).$$

Although g varies from 9.78 m/s^2 to 9.83 m/s^2, depending on latitude, altitude, underlying geological formations, and local topography, let's use an average value of 9.8 m/s^2 rounded to two significant figures in this text unless specified otherwise. Neglecting these effects on the value of g as a result of position on Earth's surface, as well as effects resulting from Earth's rotation, we take the direction of acceleration due to gravity to be downward (toward the center of Earth). In fact, its direction *defines* what we call vertical. Note that whether acceleration a in the kinematic equations has the value $+g$ or $-g$ depends on how we define our coordinate system. If we define the upward direction as positive, then $a = -g = -9.8 \text{ m/s}^2$, and if we define the downward direction as positive, then $a = g = 9.8 \text{ m/s}^2$.

One-Dimensional Motion Involving Gravity

The best way to see the basic features of motion involving gravity is to start with the simplest situations and then progress toward more complex ones. So, we start by considering straight up-and-down motion with no air resistance or friction. These assumptions mean the velocity (if there is any) is vertical. If an object is dropped, we know the initial velocity is zero when in free fall. When the object has left contact with whatever held or threw it, the object is in free fall. When the object is thrown, it has the same initial speed in free fall as it did before it was released. When the object comes in contact with the ground or any other object, it is no longer in free fall and its acceleration of g is no longer valid. Under these circumstances, the motion is one-dimensional and has constant acceleration of magnitude g. We represent vertical displacement with the symbol y.

Kinematic Equations for Objects in Free Fall

We assume here that acceleration equals $-g$ (with the positive direction upward).

$$v = v_0 - gt \tag{3.15}$$

$$y = y_0 + v_0 t - \frac{1}{2} g t^2 \tag{3.16}$$

$$v^2 = v_0^2 - 2g(y - y_0) \tag{3.17}$$

PROBLEM-SOLVING STRATEGY

Free Fall

1. Decide on the sign of the acceleration of gravity. In Equation 3.15 through Equation 3.17, acceleration g is negative, which says the positive direction is upward and the negative direction is downward. In some problems, it may be useful to have acceleration g as positive, indicating the positive direction is downward.
2. Draw a sketch of the problem. This helps visualize the physics involved.
3. Record the knowns and unknowns from the problem description. This helps devise a strategy for selecting the appropriate equations to solve the problem.
4. Decide which of Equation 3.15 through Equation 3.17 are to be used to solve for the unknowns.

EXAMPLE 3.14

Free Fall of a Ball

Figure 3.27 shows the positions of a ball, at 1-s intervals, with an initial velocity of 4.9 m/s downward, that is thrown from the top of a 98-m-high building. (a) How much time elapses before the ball reaches the ground? (b) What is the velocity when it arrives at the ground?

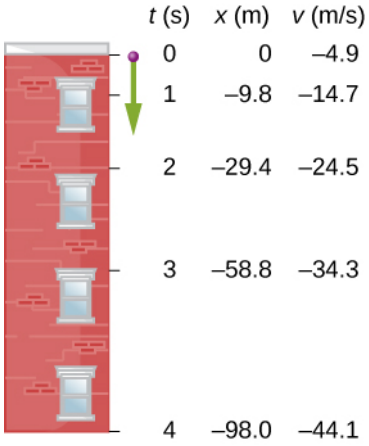


Figure 3.27 The positions and velocities at 1-s intervals of a ball thrown downward from a tall building at 4.9 m/s.

Strategy

Choose the origin at the top of the building with the positive direction upward and the negative direction downward. To find the time when the position is −98 m, we use Equation 3.16, with $y_0 = 0, v_0 = -4.9$ m/s, and $g = 9.8$ m/s^2.

Solution

a. Substitute the given values into the equation:

$$y = y_0 + v_0 t - \tfrac{1}{2} g t^2$$
$$-98.0\text{ m} = 0 - (4.9\text{ m/s})t - \tfrac{1}{2}(9.8\text{ m/s}^2)t^2.$$

This simplifies to

$$t^2 + t - 20 = 0.$$

This is a quadratic equation with roots $t = -5.0$ s and $t = 4.0$ s. The positive root is the one we are interested in, since time $t = 0$ is the time when the ball is released at the top of the building. (The time $t = -5.0$ s represents the fact that a ball thrown upward from the ground would have been in the air for 5.0 s when it passed by the top of the building moving downward at 4.9 m/s.)

b. Using Equation 3.15, we have

$$v = v_0 - gt = -4.9\text{ m/s} - (9.8\text{ m/s}^2)(4.0\text{ s}) = -44.1\text{ m/s}.$$

Significance

For situations when two roots are obtained from a quadratic equation in the time variable, we must look at the physical significance of both roots to determine which is correct. Since $t = 0$ corresponds to the time when the ball was released, the negative root would correspond to a time before the ball was released, which is not physically meaningful. When the ball hits the ground, its velocity is not immediately zero, but as soon as the ball interacts with the ground, its acceleration is not g and it accelerates with a different value over a short time to zero velocity. This problem shows how important it is to establish the correct coordinate system and to keep the signs of g in the kinematic equations consistent.

EXAMPLE 3.15

Vertical Motion of a Baseball

A batter hits a baseball straight upward at home plate and the ball is caught 5.0 s after it is struck Figure 3.28. (a) What is the initial velocity of the ball? (b) What is the maximum height the ball reaches? (c) How long does it take to reach the maximum height? (d) What is the acceleration at the top of its path? (e) What is the velocity of the ball when it is caught? Assume the ball is hit and caught at the same location.

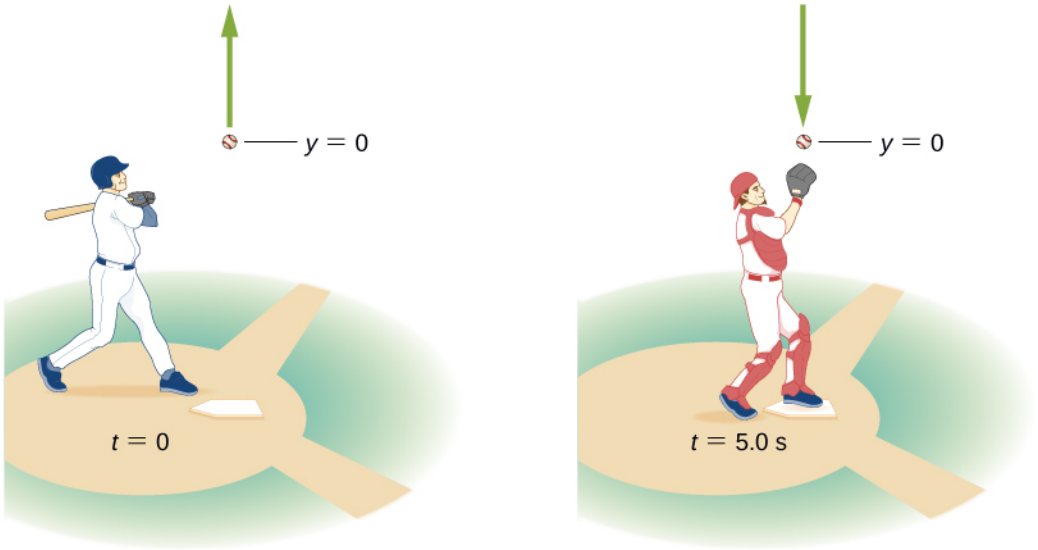


Figure 3.28 A baseball hit straight up is caught by the catcher 5.0 s later.

Strategy

Choose a coordinate system with a positive y-axis that is straight up and with an origin that is at the spot where the ball is hit and caught.

Solution

a. Equation 3.16 gives

$$y = y_0 + v_0 t - \frac{1}{2} g t^2$$

$$0 = 0 + v_0(5.0\text{ s}) - \frac{1}{2}\left(9.8\text{ m/s}^2\right)(5.0\text{ s})^2,$$

which gives $v_0 = 24.5$ m/s.

b. At the maximum height, $v = 0$. With $v_0 = 24.5$ m/s, Equation 3.17 gives

$$v^2 = v_0^2 - 2\,g(y - y_0)$$

$$0 = (24.5\text{ m/s})^2 - 2(9.8\text{ m/s}^2)(y - 0)$$

or

$$y = 30.6\text{ m}.$$

c. To find the time when $v = 0$, we use Equation 3.15:

$$v = v_0 - gt$$

$$0 = 24.5\text{ m/s} - (9.8\text{ m/s}^2)t.$$

This gives $t = 2.5$ s. Since the ball rises for 2.5 s, the time to fall is 2.5 s.

d. The acceleration is 9.8 m/s^2 everywhere, even when the velocity is zero at the top of the path. Although the velocity is zero at the top, it is changing at the rate of 9.8 m/s^2 downward.

e. The velocity at $t = 5.0$s can be determined with Equation 3.15:

$$\begin{aligned} v &= v_0 - gt \\ &= 24.5 \text{ m/s} - 9.8 \text{ m/s}^2(5.0 \text{ s}) \\ &= -24.5 \text{ m/s}. \end{aligned}$$

Significance

The ball returns with the speed it had when it left. This is a general property of free fall for any initial velocity. We used a single equation to go from throw to catch, and did not have to break the motion into two segments, upward and downward. We are used to thinking that the effect of gravity is to create free fall downward toward Earth. It is important to understand, as illustrated in this example, that objects moving upward away from Earth are also in a state of free fall.

CHECK YOUR UNDERSTANDING 3.7

A chunk of ice breaks off a glacier and falls 30.0 m before it hits the water. Assuming it falls freely (there is no air resistance), how long does it take to hit the water? Which quantity increases faster, the speed of the ice chunk or its distance traveled?

EXAMPLE 3.16

Rocket Booster

A small rocket with a booster blasts off and heads straight upward. When at a height of 5.0 km and velocity of 200.0 m/s, it releases its booster. (a) What is the maximum height the booster attains? (b) What is the velocity of the booster at a height of 6.0 km? Neglect air resistance.

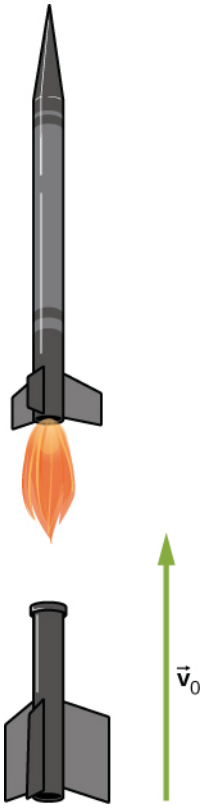


Figure 3.29 A rocket releases its booster at a given height and velocity. How high and how fast does the booster go?

Strategy

We need to select the coordinate system for the acceleration of gravity, which we take as negative downward. We are given the initial velocity of the booster and its height. We consider the point of release as the origin. We know the velocity is zero at the maximum position within the acceleration interval; thus, the velocity of the booster is zero at its maximum height, so we can use this information as well. From these observations, we use Equation 3.17, which gives us the maximum height of the booster. We also use Equation 3.17 to give the velocity at 6.0 km. The initial velocity of the booster is 200.0 m/s.

Solution

a. From Equation 3.17, $v^2 = v_0^2 - 2g(y - y_0)$. With $v = 0$ and $y_0 = 0$, we can solve for y:

$$y = \frac{v_0^2}{2g} = \frac{(2.0 \times 10^2 \text{ m/s})^2}{2(9.8 \text{ m/s}^2)} = 2040.8 \text{ m}.$$

This solution gives the maximum height of the booster in our coordinate system, which has its origin at the point of release, so the maximum height of the booster is roughly 7.0 km.

b. An altitude of 6.0 km corresponds to $y = 1.0 \times 10^3$ m in the coordinate system we are using. The other initial conditions are $y_0 = 0$, and $v_0 = 200.0$ m/s.
We have, from Equation 3.17,

$$v^2 = (200.0 \text{ m/s})^2 - 2(9.8 \text{ m/s}^2)(1.0 \times 10^3 \text{ m}) \Rightarrow v = \pm 142.8 \text{ m/s}.$$

Significance

We have both a positive and negative solution in (b). Since our coordinate system has the positive direction upward, the +142.8 m/s corresponds to a positive upward velocity at 6000 m during the upward leg of the trajectory of the booster. The value $v = -142.8$ m/s corresponds to the velocity at 6000 m on the downward leg. This example is also important in that an object is given an initial velocity at the origin of our coordinate system, but the origin is at an altitude above the surface of Earth, which must be taken into account when forming the solution.

INTERACTIVE

Visit this site (https://openstax.org/l/21equatgraph) to learn about graphing polynomials. The shape of the curve changes as the constants are adjusted. View the curves for the individual terms (for example, $y = bx$) to see how they add to generate the polynomial curve.

3.6 Finding Velocity and Displacement from Acceleration

Learning Objectives

By the end of this section, you will be able to:

- Derive the kinematic equations for constant acceleration using integral calculus.
- Use the integral formulation of the kinematic equations in analyzing motion.
- Find the functional form of velocity versus time given the acceleration function.
- Find the functional form of position versus time given the velocity function.

This section assumes you have enough background in calculus to be familiar with integration. In Instantaneous Velocity and Speed and Average and Instantaneous Acceleration we introduced the kinematic functions of velocity and acceleration using the derivative. By taking the derivative of the position function we found the velocity function, and likewise by taking the derivative of the velocity function we found the acceleration function. Using integral calculus, we can work backward and calculate the velocity function from the acceleration function, and the position function from the velocity function.

Kinematic Equations from Integral Calculus

Let's begin with a particle with an acceleration $a(t)$ which is a known function of time. Since the time derivative of the velocity function is acceleration,

$$\frac{d}{dt}v(t) = a(t),$$

we can take the indefinite integral of both sides, finding

$$\int \frac{d}{dt}v(t)dt = \int a(t)dt + C_1,$$

where C_1 is a constant of integration. Since $\int \frac{d}{dt}v(t)dt = v(t)$, the velocity is given by

$$v(t) = \int a(t)dt + C_1. \quad \textbf{3.18}$$

Similarly, the time derivative of the position function is the velocity function,

$$\frac{d}{dt}x(t) = v(t).$$

Thus, we can use the same mathematical manipulations we just used and find

$$x(t) = \int v(t)dt + C_2, \quad \textbf{3.19}$$

where C_2 is a second constant of integration.

We can derive the kinematic equations for a constant acceleration using these integrals. With $a(t) = a$ a constant, and doing the integration in Equation 3.18, we find

$$v(t) = \int adt + C_1 = at + C_1.$$

If the initial velocity is $v(0) = v_0$, then

$$v_0 = 0 + C_1.$$

Then, $C_1 = v_0$ and

$$v(t) = v_0 + at,$$

which is Equation 3.12. Substituting this expression into Equation 3.19 gives

$$x(t) = \int (v_0 + at)dt + C_2.$$

Doing the integration, we find

$$x(t) = v_0 t + \frac{1}{2}at^2 + C_2.$$

If $x(0) = x_0$, we have

$$x_0 = 0 + 0 + C_2;$$

so, $C_2 = x_0$. Substituting back into the equation for $x(t)$, we finally have

$$x(t) = x_0 + v_0 t + \frac{1}{2}at^2,$$

which is Equation 3.13.

EXAMPLE 3.17

Motion of a Motorboat

A motorboat is traveling at a constant velocity of 5.0 m/s when it starts to accelerate opposite to the motion to arrive at the dock. Its acceleration is $a(t) = -\frac{1}{4}t$ m/s^3. (a) What is the velocity function of the motorboat? (b) At what time does the velocity reach zero? (c) What is the position function of the motorboat? (d) What is the displacement of the motorboat from the time it begins to accelerate opposite to the motion to when the velocity is zero? (e) Graph the velocity and position functions.

Strategy

(a) To get the velocity function we must integrate and use initial conditions to find the constant of integration. (b) We set the velocity function equal to zero and solve for t. (c) Similarly, we must integrate to find the position function and use initial conditions to find the constant of integration. (d) Since the initial position is taken to be zero, we only have to evaluate the position function at the time when the velocity is zero.

Solution

We take $t = 0$ to be the time when the boat starts to accelerate opposite to the motion.

a. From the functional form of the acceleration we can solve Equation 3.18 to get $v(t)$:

$$v(t) = \int a(t)dt + C_1 = \int -\frac{1}{4}tdt + C_1 = -\frac{1}{8}t^2 + C_1.$$

At $t = 0$ we have $v(0) = 5.0$ m/s $= 0 + C_1$, so $C_1 = 5.0$ m/s or $v(t) = 5.0 \text{ m/s} - \frac{1}{8}t^2$.

b. $v(t) = 0 = 5.0 \text{ m/s} - \frac{1}{8}t^2 \text{m/s}^3 \Rightarrow t = 6.3 \text{ s}$

c. Solve Equation 3.19:

$$x(t) = \int v(t)dt + C_2 = \int (5.0 - \frac{1}{8}t^2)\, dt + C_2 = 5.0t \text{ m/s} - \frac{1}{24}t^3 \text{m/s}^3 + C_2.$$

At $t = 0$, we set $x(0) = 0 = x_0$, since we are only interested in the displacement from when the boat starts to accelerate opposite to the motion. We have

$$x(0) = 0 = C_2.$$

Therefore, the equation for the position is

$$x(t) = 5.0t - \frac{1}{24}t^3.$$

d. Since the initial position is taken to be zero, we only have to evaluate the position function at the time when the velocity is zero. This occurs at $t = 6.3$ s. Therefore, the displacement is

$$x(6.3) = 5.0(6.3 \text{ s}) - \frac{1}{24}(6.3 \text{ s})^3 = 21.1 \text{ m}.$$

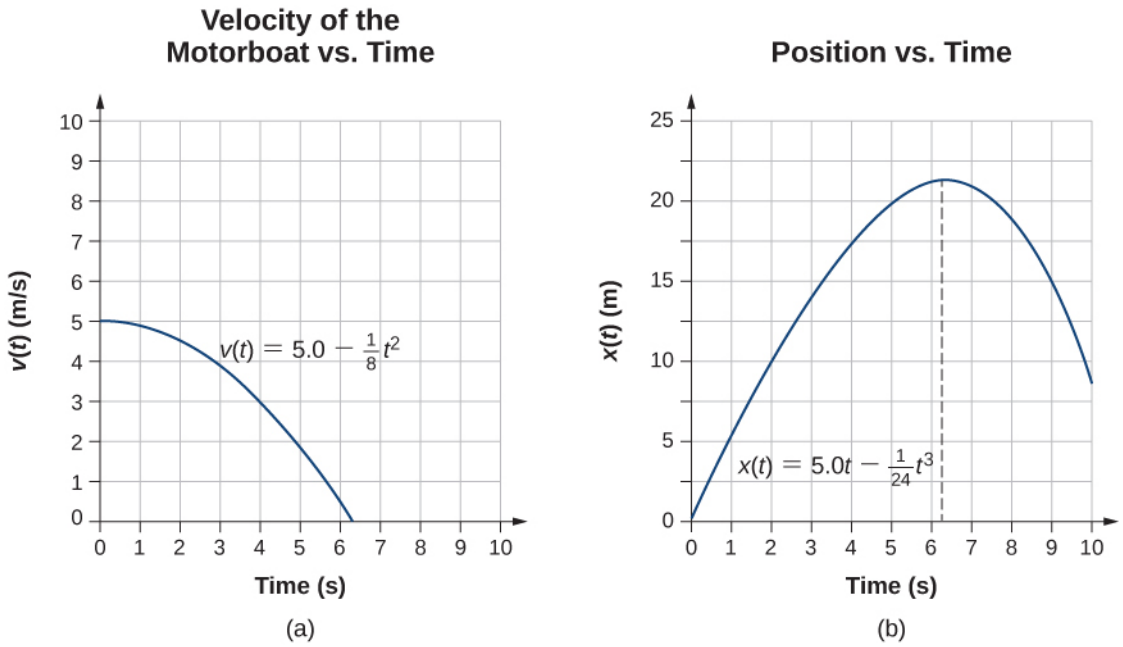


Figure 3.30 (a) Velocity of the motorboat as a function of time. The motorboat decreases its velocity to zero in 6.3 s. At times greater than this, velocity becomes negative—meaning, the boat is reversing direction. (b) Position of the motorboat as a function of time. At $t = 6.3$ s, the velocity is zero and the boat has stopped. At times greater than this, the velocity becomes negative—meaning, if the boat continues to move with the same acceleration, it reverses direction and heads back toward where it originated.

Significance

The acceleration function is linear in time so the integration involves simple polynomials. In Figure 3.30, we see that if we extend the solution beyond the point when the velocity is zero, the velocity becomes negative and the boat reverses direction. This tells us that solutions can give us information outside our immediate interest and we should be careful when interpreting them.

CHECK YOUR UNDERSTANDING 3.8

A particle starts from rest and has an acceleration function $a(t) = \left(5 - \left(10\frac{1}{s}\right)t\right)\frac{m}{s^2}$. (a) What is the velocity function? (b) What is the position function? (c) When is the velocity zero?

CHAPTER REVIEW

Key Terms

acceleration due to gravity acceleration of an object as a result of gravity
average acceleration the rate of change in velocity; the change in velocity over time
average speed the total distance traveled divided by elapsed time
average velocity the displacement divided by the time over which displacement occurs under constant acceleration
displacement the change in position of an object
distance traveled the total length of the path traveled between two positions
elapsed time the difference between the ending time and the beginning time
free fall the state of movement that results from gravitational force only
instantaneous acceleration acceleration at a specific point in time
instantaneous speed the absolute value of the instantaneous velocity
instantaneous velocity the velocity at a specific instant or time point
kinematics the description of motion through properties such as position, time, velocity, and acceleration
position the location of an object at a particular time
total displacement the sum of individual displacements over a given time period
two-body pursuit problem a kinematics problem in which the unknowns are calculated by solving the kinematic equations simultaneously for two moving objects

Key Equations

Displacement	$\Delta x = x_{\mathrm{f}} - x_{\mathrm{i}}$
Total displacement	$\Delta x_{\mathrm{Total}} = \sum \Delta x_{\mathrm{i}}$
Average velocity (for constant acceleration)	$\overline{v} = \frac{\Delta x}{\Delta t} = \frac{x_2 - x_1}{t_2 - t_1}$
Instantaneous velocity	$v(t) = \frac{dx(t)}{dt}$
Average speed	$\text{Average speed} = \overline{s} = \frac{\text{Total distance}}{\text{Elapsed time}}$
Instantaneous speed	$\text{Instantaneous speed} = \lvert v(t) \rvert$
Average acceleration	$\overline{a} = \frac{\Delta v}{\Delta t} = \frac{v_f - v_0}{t_f - t_0}$
Instantaneous acceleration	$a(t) = \frac{dv(t)}{dt}$
Position from average velocity	$x = x_0 + \overline{v}t$
Average velocity	$\overline{v} = \frac{v_0 + v}{2}$
Velocity from acceleration	$v = v_0 + at \ \ (\text{constant } a)$
Position from velocity and acceleration	$x = x_0 + v_0 t + \frac{1}{2}at^2 \ \ (\text{constant } a)$
Velocity from distance	$v^2 = v_0^2 + 2a(x - x_0) \ \ (\text{constant } a)$

Velocity of free fall	$v = v_0 - gt$ (positive upward)
Height of free fall	$y = y_0 + v_0 t - \frac{1}{2}gt^2$
Velocity of free fall from height	$v^2 = v_0^2 - 2g(y - y_0)$
Velocity from acceleration	$v(t) = \int a(t)dt + C_1$
Position from velocity	$x(t) = \int v(t)dt + C_2$

Summary

3.1 Position, Displacement, and Average Velocity

- Kinematics is the description of motion without considering its causes. In this chapter, it is limited to motion along a straight line, called one-dimensional motion.
- Displacement is the change in position of an object. The SI unit for displacement is the meter. Displacement has direction as well as magnitude.
- Distance traveled is the total length of the path traveled between two positions.
- Time is measured in terms of change. The time between two position points x_1 and x_2 is $\Delta t = t_2 - t_1$. Elapsed time for an event is $\Delta t = t_f - t_0$, where t_f is the final time and t_0 is the initial time. The initial time is often taken to be zero.
- Average velocity $\bar{v}$ is defined as displacement divided by elapsed time. If x_1, t_1 and x_2, t_2 are two position time points, the average velocity between these points is

$$\bar{v} = \frac{\Delta x}{\Delta t} = \frac{x_2 - x_1}{t_2 - t_1}.$$

3.2 Instantaneous Velocity and Speed

- Instantaneous velocity is a continuous function of time and gives the velocity at any point in time during a particle's motion. We can calculate the instantaneous velocity at a specific time by taking the derivative of the position function, which gives us the functional form of instantaneous velocity $v(t)$.
- Instantaneous velocity is a vector and can be negative.
- Instantaneous speed is found by taking the absolute value of instantaneous velocity, and it is always positive.
- Average speed is total distance traveled divided by elapsed time.
- The slope of a position-versus-time graph at a specific time gives instantaneous velocity at that time.

3.3 Average and Instantaneous Acceleration

- Acceleration is the rate at which velocity changes. Acceleration is a vector; it has both a magnitude and direction. The SI unit for acceleration is meters per second squared.
- Acceleration can be caused by a change in the magnitude or the direction of the velocity, or both.
- Instantaneous acceleration $a(t)$ is a continuous function of time and gives the acceleration at any specific time during the motion. It is calculated from the derivative of the velocity function. Instantaneous acceleration is the slope of the velocity-versus-time graph.
- Negative acceleration (sometimes called deceleration) is acceleration in the negative direction in the chosen coordinate system.

3.4 Motion with Constant Acceleration

- When analyzing one-dimensional motion with constant acceleration, identify the known quantities and choose the appropriate equations to solve for the unknowns. Either one or two of the kinematic equations are needed to solve for the unknowns, depending on the known and unknown quantities.
- Two-body pursuit problems always require two equations to be solved simultaneously for the unknowns.

3.5 Free Fall

- An object in free fall experiences constant acceleration if air resistance is negligible.
- On Earth, all free-falling objects have an acceleration g due to gravity, which averages $g = 9.81\ \text{m/s}^2$.
- For objects in free fall, the upward direction is normally taken as positive for displacement, velocity, and acceleration.

3.6 Finding Velocity and Displacement from Acceleration

- Integral calculus gives us a more complete formulation of kinematics.
- If acceleration $a(t)$ is known, we can use integral calculus to derive expressions for velocity $v(t)$ and position $x(t)$.
- If acceleration is constant, the integral equations reduce to Equation 3.12 and Equation 3.13 for motion with constant acceleration.

Conceptual Questions

3.1 Position, Displacement, and Average Velocity

1. Give an example in which there are clear distinctions among distance traveled, displacement, and magnitude of displacement. Identify each quantity in your example specifically.

2. Under what circumstances does distance traveled equal magnitude of displacement? What is the only case in which magnitude of displacement and distance are exactly the same?

3. Bacteria move back and forth using their flagella (structures that look like little tails). Speeds of up to 50 μm/s (50×10^{-6} m/s) have been observed. The total distance traveled by a bacterium is large for its size, whereas its displacement is small. Why is this?

4. Give an example of a device used to measure time and identify what change in that device indicates a change in time.

5. Does a car's odometer measure distance traveled or displacement?

6. During a given time interval the average velocity of an object is zero. What can you conclude about its displacement over the time interval?

3.2 Instantaneous Velocity and Speed

7. There is a distinction between average speed and the magnitude of average velocity. Give an example that illustrates the difference between these two quantities.

8. Does the speedometer of a car measure speed or velocity?

9. If you divide the total distance traveled on a car trip (as determined by the odometer) by the elapsed time of the trip, are you calculating average speed or magnitude of average velocity? Under what circumstances are these two quantities the same?

10. How are instantaneous velocity and instantaneous speed related to one another? How do they differ?

3.3 Average and Instantaneous Acceleration

11. Is it possible for speed to be constant while acceleration is not zero?

12. Is it possible for velocity to be constant while acceleration is not zero? Explain.

13. Give an example in which velocity is zero yet acceleration is not.

14. If a subway train is moving to the left (has a negative velocity) and then comes to a stop, what is the direction of its acceleration? Is the acceleration positive or negative?

15. Plus and minus signs are used in one-dimensional motion to indicate direction. What is the sign of an acceleration that reduces the magnitude of a negative velocity? Of a positive velocity?

3.4 Motion with Constant Acceleration

16. When analyzing the motion of a single object, what is the required number of known physical variables that are needed to solve for the unknown quantities using the kinematic equations?

17. State two scenarios of the kinematics of single object where three known quantities require two kinematic equations to solve for the unknowns.

3.5 Free Fall

18. What is the acceleration of a rock thrown straight upward on the way up? At the top of its flight? On the way down? Assume there is no air resistance.

19. An object that is thrown straight up falls back to Earth. This is one-dimensional motion. (a) When is its velocity zero? (b) Does its velocity change direction? (c) Does the acceleration have the same sign on the way up as on the way down?

20. Suppose you throw a rock nearly straight up at a coconut in a palm tree and the rock just misses the coconut on the way up but hits the coconut on the way down. Neglecting air resistance and the slight horizontal variation in motion to account for the hit and miss of the coconut, how does the speed of the rock when it hits the coconut on the way down compare with what it would have been if it had hit the coconut on the way up? Is it more likely to dislodge the coconut on the way up or down? Explain.

21. The severity of a fall depends on your speed when you strike the ground. All factors but the acceleration from gravity being the same, how many times higher could a safe fall occur on the Moon than on Earth (gravitational acceleration on the Moon is about one-sixth that of the Earth)?

22. How many times higher could an astronaut jump on the Moon than on Earth if her takeoff speed is the same in both locations (gravitational acceleration on the Moon is about on-sixth of that on Earth)?

3.6 Finding Velocity and Displacement from Acceleration

23. When given the acceleration function, what additional information is needed to find the velocity function and position function?

Problems

3.1 Position, Displacement, and Average Velocity

24. Consider a coordinate system in which the positive x axis is directed upward vertically. What are the positions of a particle (a) 5.0 m directly above the origin and (b) 2.0 m below the origin?

25. A car is 2.0 km west of a traffic light at $t = 0$ and 5.0 km east of the light at $t = 6.0$ min. Assume the origin of the coordinate system is the light and the positive x direction is eastward. (a) What are the car's position vectors at these two times? (b) What is the car's displacement between 0 min and 6.0 min?

26. The Shanghai maglev train connects Longyang Road to Pudong International Airport, a distance of 30 km. The journey takes 8 minutes on average. What is the maglev train's average velocity?

27. The position of a particle moving along the x-axis is given by $x(t) = 4.0 - 2.0t$ m. (a) At what time does the particle cross the origin? (b) What is the displacement of the particle between $t = 3.0$ s and $t = 6.0$ s?


28. A cyclist rides 8.0 km east for 20 minutes, then he turns and heads west for 8 minutes and 3.2 km. Finally, he rides east for 16 km, which takes 40 minutes. (a) What is the final displacement of the cyclist? (b) What is his average velocity?

29. On February 15, 2013, a superbolide meteor (brighter than the Sun) entered Earth's atmosphere over Chelyabinsk, Russia, and exploded at an altitude of 23.5 km. Eyewitnesses could feel the intense heat from the fireball, and the blast wave from the explosion blew out windows in buildings. The blast wave took approximately 2 minutes 30 seconds to reach ground level. The blast wave traveled at 10° above the horizon. (a) What was the average velocity of the blast wave? b) Compare this with the speed of sound, which is 343 m/s at sea level.


3.2 Instantaneous Velocity and Speed

30. A woodchuck runs 20 m to the right in 5 s, then turns and runs 10 m to the left in 3 s. (a) What is the average velocity of the woodchuck? (b) What is its average speed?


31. Sketch the velocity-versus-time graph from the following position-versus-time graph.

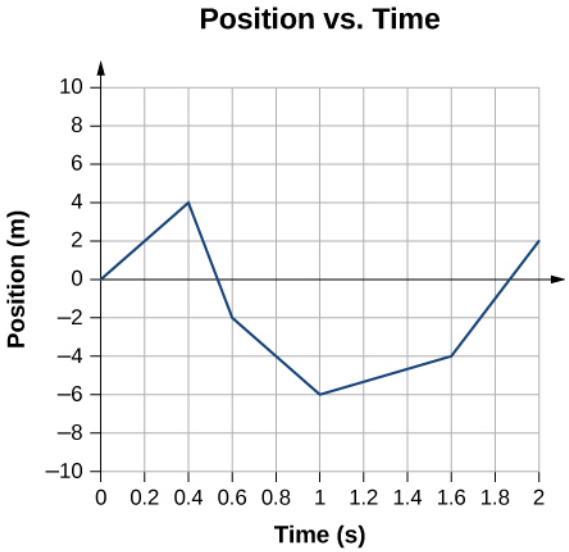

32. Sketch the velocity-versus-time graph from the following position-versus-time graph.

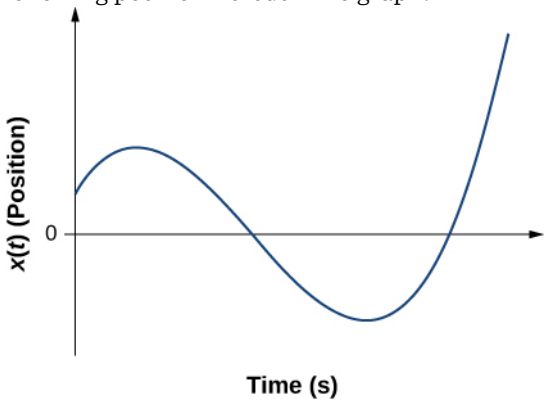

33. Given the following velocity-versus-time graph, sketch the position-versus-time graph.

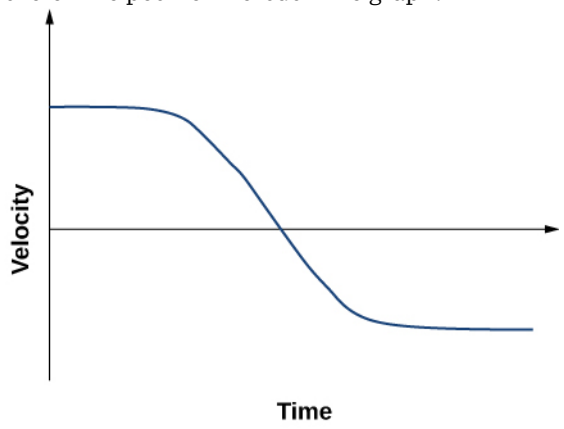

34. An object has a position function $x(t) = 5t$ m. (a) What is the velocity as a function of time? (b) Graph the position function and the velocity function.

35. A particle moves along the x-axis according to $x(t) = 10t - 2t^2$ m. (a) What is the instantaneous velocity at $t = 2$ s and $t = 3$ s? (b) What is the instantaneous speed at these times? (c) What is the average velocity between $t = 2$ s and $t = 3$ s?


36. **Unreasonable results.** A particle moves along the x-axis according to $x(t) = 3t^3 + 5t$. At what time is the velocity of the particle equal to zero? Is this reasonable?

3.3 Average and Instantaneous Acceleration

37. A cheetah can accelerate from rest to a speed of 30.0 m/s in 7.00 s. What is its acceleration?

38. Dr. John Paul Stapp was a U.S. Air Force officer who studied the effects of extreme acceleration on the human body. On December 10, 1954, Stapp rode a rocket sled, accelerating from rest to a top speed of 282 m/s (1015 km/h) in 5.00 s and was brought jarringly back to rest in only 1.40 s. Calculate his (a) acceleration in his direction of motion and (b) acceleration opposite to his direction of motion. Express each in multiples of g (9.80 m/s^2) by taking its ratio to the acceleration of gravity.

39. Sketch the acceleration-versus-time graph from the following velocity-versus-time graph.

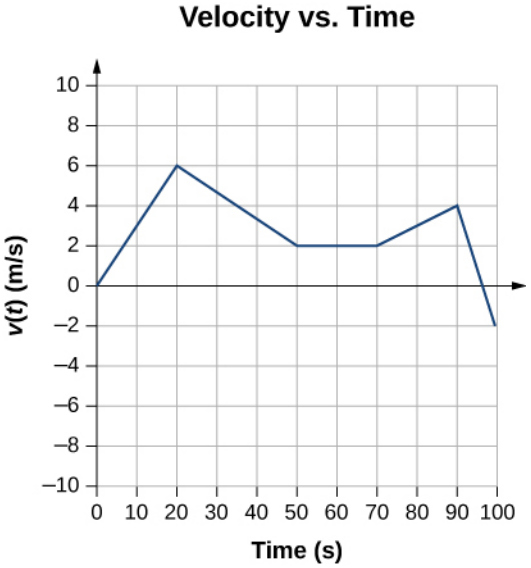

40. A commuter backs her car out of her garage with an acceleration of 1.40 m/s^2. (a) How long does it take her to reach a speed of 2.00 m/s? (b) If she then brakes to a stop in 0.800 s, what is her acceleration?

41. Assume an intercontinental ballistic missile goes from rest to a suborbital speed of 6.50 km/s in 60.0 s (the actual speed and time are classified). What is its average acceleration in meters per second squared and in multiples of g (9.80 m/s^2)?

42. An airplane, starting from rest, moves down the runway at constant acceleration for 18 s and then takes off at a speed of 60 m/s. What is the average acceleration of the plane?


3.4 Motion with Constant Acceleration

43. A particle moves in a straight line at a constant velocity of 30 m/s. What is its displacement between t = 0 and t = 5.0 s?


44. A particle moves in a straight line with an initial velocity of 0 m/s and a constant acceleration of 30 m/s^2. If $x = 0$ at $t = 0$, what is the particle's position at t = 5 s?

45. A particle moves in a straight line with an initial velocity of 30 m/s and constant acceleration 30 m/s^2. (a) What is its displacement at t = 5 s? (b) What is its velocity at this same time?

46. (a) Sketch a graph of velocity versus time corresponding to the graph of displacement versus time given in the following figure. (b) Identify the time or times (t_a, t_b, t_c, etc.) at which the instantaneous velocity has the greatest positive value. (c) At which times is it zero? (d) At which times is it negative?

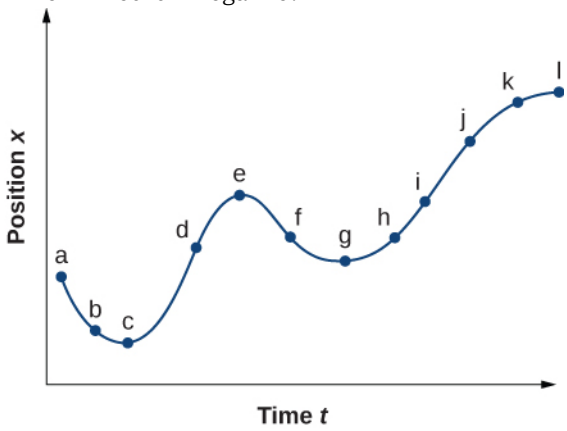

47. (a) Sketch a graph of acceleration versus time corresponding to the graph of velocity versus time given in the following figure. (b) Identify the time or times (t_a, t_b, t_c, etc.) at which the acceleration has the greatest positive value. (c) At which times is it zero? (d) At which times is it negative?

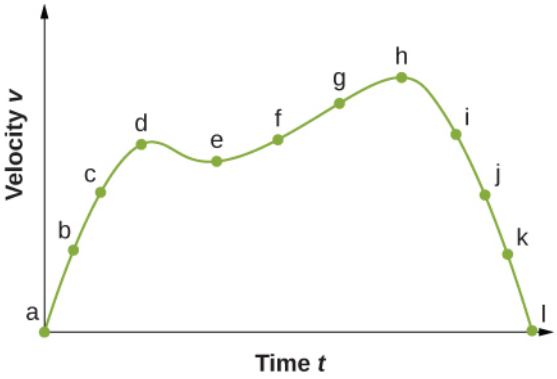

48. A particle has a constant acceleration of 6.0 m/s^2. (a) If its initial velocity is 2.0 m/s, at what time is its displacement 5.0 m? (b) What is its velocity at that time?

49. At t = 10 s, a particle is moving from left to right with a speed of 5.0 m/s. At t = 20 s, the particle is moving right to left with a speed of 8.0 m/s. Assuming the particle's acceleration is constant, determine (a) its acceleration, (b) its initial velocity, and (c) the instant when its velocity is zero.

50. A well-thrown ball is caught in a well-padded mitt. If the acceleration of the ball is2.10×10^4 m/s^2, and 1.85 ms ($1 \text{ ms} = 10^{-3}$ s) elapses from the time the ball first touches the mitt until it stops, what is the initial velocity of the ball?

51. A bullet in a gun is accelerated from the firing chamber to the end of the barrel at an average rate of 6.20×10^5 m/s^2 for 8.10×10^{-4} s. What is its muzzle velocity (that is, its final velocity)?

52. (a) A light-rail commuter train accelerates at a rate of 1.35 m/s^2. How long does it take to reach its top speed of 80.0 km/h, starting from rest? (b) The same train ordinarily accelerates opposite to the motion at a rate of 1.65 m/s^2. How long does it take to come to a stop from its top speed? (c) In emergencies, the train can accelerate opposite to the motion more rapidly, coming to rest from 80.0 km/h in 8.30 s. What is its emergency acceleration in meters per second squared?

53. While entering a freeway, a car accelerates from rest at a rate of 2.40 m/s^2 for 12.0 s. (a) Draw a sketch of the situation. (b) List the knowns in this problem. (c) How far does the car travel in those 12.0 s? To solve this part, first identify the unknown, then indicate how you chose the appropriate equation to solve for it. After choosing the equation, show your steps in solving for the unknown, check your units, and

discuss whether the answer is reasonable. (d) What is the car's final velocity? Solve for this unknown in the same manner as in (c), showing all steps explicitly.

54. **Unreasonable results** At the end of a race, a runner accelerates opposite to the motion from a velocity of 9.00 m/s at a rate of 2.00 m/s^2. (a) How far does she travel in the next 5.00 s? (b) What is her final velocity? (c) Evaluate the result. Does it make sense?

55. Blood is accelerated from rest to 30.0 cm/s in a distance of 1.80 cm by the left ventricle of the heart. (a) Make a sketch of the situation. (b) List the knowns in this problem. (c) How long does the acceleration take? To solve this part, first identify the unknown, then discuss how you chose the appropriate equation to solve for it. After choosing the equation, show your steps in solving for the unknown, checking your units. (d) Is the answer reasonable when compared with the time for a heartbeat?

56. During a slap shot, a hockey player accelerates the puck from a velocity of 8.00 m/s to 40.0 m/s in the same direction. If this shot takes 3.33×10^{-2} s, what is the distance over which the puck accelerates?

57. A powerful motorcycle can accelerate from rest to 26.8 m/s (100 km/h) in only 3.90 s. (a) What is its average acceleration? (b) Assuming constant acceleration, how far does it travel in that time?

58. Freight trains can produce only relatively small accelerations. (a) What is the final velocity of a freight train that accelerates at a rate of $0.0500\ m/s^2$ for 8.00 min, starting with an initial velocity of 4.00 m/s? (b) If the train can slow down at a rate of $0.550\ m/s^2$, how long will it take to come to a stop from this velocity? (c) How far will it travel in each case?

59. A fireworks shell is accelerated from rest to a velocity of 65.0 m/s over a distance of 0.250 m. (a) Calculate the acceleration. (b) How long did the acceleration last?

60. A swan on a lake gets airborne by flapping its wings and running on top of the water. (a) If the swan must reach a velocity of 6.00 m/s to take off and it accelerates from rest at an average rate of $0.35\ m/s^2$, how far will it travel before becoming airborne? (b) How long does this take?

61. A woodpecker's brain is specially protected from large accelerations by tendon-like attachments inside the skull. While pecking on a tree, the woodpecker's head comes to a stop from an initial velocity of 0.600 m/s in a distance of only 2.00 mm. (a) Find the acceleration in meters per second squared and in multiples of g, where $g = 9.80\ m/s^2$. (b) Calculate the stopping time. (c) The tendons cradling the brain stretch, making its stopping distance 4.50 mm (greater than the head and, hence, less acceleration of the brain). What is the brain's acceleration, expressed in multiples of g?

62. An unwary football player collides with a padded goalpost while running at a velocity of 7.50 m/s and comes to a full stop after compressing the padding and his body 0.350 m. (a) What is his acceleration? (b) How long does the collision last?

63. A care package is dropped out of a cargo plane and lands in the forest. If we assume the care package speed on impact is 54 m/s (123 mph), then what is its acceleration? Assume the trees and snow stops it over a distance of 3.0 m.

64. An express train passes through a station. It enters with an initial velocity of 22.0 m/s and accelerates opposite to the motion at a rate of $0.150\ m/s^2$ as it goes through. The station is 210.0 m long. (a) How fast is it going when the nose leaves the station? (b) How long is the nose of the train in the station? (c) If the train is 130 m long, what is the velocity of the end of the train as it leaves? (d) When does the end of the train leave the station?

65. **Unreasonable results** Dragsters can actually reach a top speed of 145.0 m/s in only 4.45 s. (a) Calculate the average acceleration for such a dragster. (b) Find the final velocity of this dragster starting from rest and accelerating at the rate found in (a) for 402.0 m (a quarter mile) without using any information on time. (c) Why is the final velocity greater than that used to find the average acceleration? (*Hint*: Consider whether the assumption of constant acceleration is valid for a dragster. If not, discuss whether the acceleration would be greater at the beginning or end of the run and what effect that would have on the final velocity.)

3.5 Free Fall

66. Calculate the displacement and velocity at times of (a) 0.500 s, (b) 1.00 s, (c) 1.50 s, and (d) 2.00 s for a ball thrown straight up with an initial velocity of 15.0 m/s. Take the point of release to be $y_0 = 0$.

67. Calculate the displacement and velocity at times of (a) 0.500 s, (b) 1.00 s, (c) 1.50 s, (d) 2.00 s, and (e) 2.50 s for a rock thrown straight down with an initial velocity of 14.0 m/s from the Verrazano Narrows Bridge in New York City. The roadway of this bridge is 70.0 m above the water.

68. A basketball referee tosses the ball straight up for the starting tip-off. At what velocity must a basketball player leave the ground to rise 1.25 m above the floor in an attempt to get the ball?

69. A rescue helicopter is hovering over a person whose boat has sunk. One of the rescuers throws a life preserver straight down to the victim with an initial velocity of 1.40 m/s and observes that it takes 1.8 s to reach the water. (a) List the knowns in this problem. (b) How high above the water was the preserver released? Note that the downdraft of the helicopter reduces the effects of air resistance on the falling life preserver, so that an acceleration equal to that of gravity is reasonable.

70. **Unreasonable results** A dolphin in an aquatic show jumps straight up out of the water at a velocity of 15.0 m/s. (a) List the knowns in this problem. (b) How high does his body rise above the water? To solve this part, first note that the final velocity is now a known, and identify its value. Then, identify the unknown and discuss how you chose the appropriate equation to solve for it. After choosing the equation, show your steps in solving for the unknown, checking units, and discuss whether the answer is reasonable. (c) How long a time is the dolphin in the air? Neglect any effects resulting from his size or orientation.

71. A diver bounces straight up from a diving board, avoiding the diving board on the way down, and falls feet first into a pool. She starts with a velocity of 4.00 m/s and her takeoff point is 1.80 m above the pool. (a) What is her highest point above the board? (b) How long a time are her feet in the air? (c) What is her velocity when her feet hit the water?

72. (a) Calculate the height of a cliff if it takes 2.35 s for a rock to hit the ground when it is thrown straight up from the cliff with an initial velocity of 8.00 m/s. (b) How long a time would it take to reach the ground if it is thrown straight down with the same speed?

73. A very strong, but inept, shot putter puts the shot straight up vertically with an initial velocity of 11.0 m/s. How long a time does he have to get out of the way if the shot was released at a height of 2.20 m and he is 1.80 m tall?

74. You throw a ball straight up with an initial velocity of 15.0 m/s. It passes a tree branch on the way up at a height of 7.0 m. How much additional time elapses before the ball passes the tree branch on the way back down?

75. A kangaroo can jump over an object 2.50 m high. (a) Considering just its vertical motion, calculate its vertical speed when it leaves the ground. (b) How long a time is it in the air?

76. Standing at the base of one of the cliffs of Mt. Arapiles in Victoria, Australia, a hiker hears a rock break loose from a height of 105.0 m. He can't see the rock right away, but then does, 1.50 s later. (a) How far above the hiker is the rock when he can hear it? (b) How much time does he have to move before the rock hits his head?

77. There is a 250-m-high cliff at Half Dome in Yosemite National Park in California. Suppose a boulder breaks loose from the top of this cliff. (a) How fast will it be going when it strikes the ground? (b) Assuming a reaction time of 0.300 s, how long a time will a tourist at the bottom have to get out of the way after hearing the sound of the rock breaking loose (neglecting the height of the tourist, which would become negligible anyway if hit)? The speed of sound is 335.0 m/s on this day.

3.6 Finding Velocity and Displacement from Acceleration

78. The acceleration of a particle varies with time according to the equation $a(t) = pt^2 - qt^3$. Initially, the velocity and position are zero. (a) What is the velocity as a function of time? (b) What is the position as a function of time?

79. Between $t = 0$ and $t = t_0$, a rocket moves straight upward with an acceleration given by $a(t) = A - Bt^{1/2}$, where A and B are constants. (a) If x is in meters and t is in seconds, what are the units of A and B? (b) If the rocket starts from rest, how does the velocity vary between $t = 0$ and $t = t_0$? (c) If its initial position is zero, what is the rocket's position as a function of time during this same time interval?

80. The velocity of a particle moving along the x-axis varies with time according to $v(t) = A + Bt^{-1}$, where $A = 2$ m/s, $B = 0.25$ m, and $1.0\text{ s} \leq t \leq 8.0\text{ s}$. Determine the acceleration and position of the particle at $t = 2.0$ s and $t = 5.0$ s. Assume that $x(t = 1\text{ s}) = 0$.

81. A particle at rest leaves the origin with its velocity increasing with time according to $v(t) = 3.2t$ m/s. At 5.0 s, the particle's velocity starts decreasing according to $[16.0 - 1.5(t - 5.0)]$ m/s. This decrease continues until $t = 11.0$ s, after which the particle's velocity remains constant at 7.0 m/s. (a) What is the acceleration of the particle as a function of time? (b) What is the position of the particle at $t = 2.0$ s, $t = 7.0$ s, and $t = 12.0$ s?

Additional Problems

82. Professional baseball player Nolan Ryan could pitch a baseball at approximately 160.0 km/h. At that average velocity, how long did it take a ball thrown by Ryan to reach home plate, which is 18.4 m from the pitcher's mound? Compare this with the average reaction time of a human to a visual stimulus, which is 0.25 s.

83. An airplane leaves Chicago and makes the 3000-km trip to Los Angeles in 5.0 h. A second plane leaves Chicago one-half hour later and arrives in Los Angeles at the same time. Compare the average velocities of the two planes. Ignore the curvature of Earth and the difference in altitude between the two cities.


84. **Unreasonable Results** A cyclist rides 16.0 km east, then 8.0 km west, then 8.0 km east, then 32.0 km west, and finally 11.2 km east. If his average velocity is 24 km/h, how long did it take him to complete the trip? Is this a reasonable time?

85. An object has an acceleration of $+1.2$ cm/s^2. At $t = 4.0$ s, its velocity is -3.4 cm/s. Determine the object's velocities at $t = 1.0$ s and $t = 6.0$ s.

86. A particle moves along the x-axis according to the equation $x(t) = 2.0 - 4.0t^2$ m. What are the velocity and acceleration at $t = 2.0$ s and $t = 5.0$ s?

87. A particle moving at constant acceleration has velocities of 2.0 m/s at $t = 2.0$ s and -7.6 m/s at $t = 5.2$ s. What is the acceleration of the particle?

88. A train is moving up a steep grade at constant velocity (see following figure) when its caboose breaks loose and starts rolling freely along the track. After 5.0 s, the caboose is 30 m behind the train. What is the acceleration of the caboose?

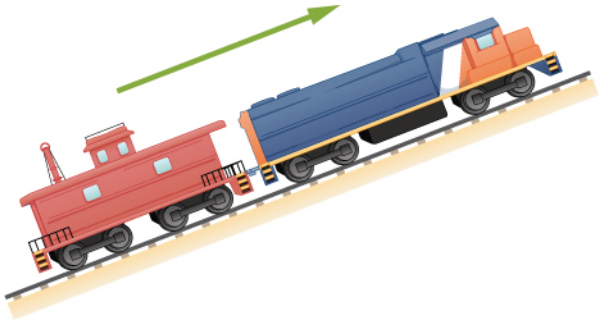

89. An electron is moving in a straight line with a velocity of 4.0×10^5 m/s. It enters a region 5.0 cm long where it undergoes an acceleration of 6.0×10^{12} m/s^2 along the same straight line. (a) What is the electron's velocity when it emerges from this region? b) How long does the electron take to cross the region?


90. An ambulance driver is rushing a patient to the hospital. While traveling at 72 km/h, she notices the traffic light at the upcoming intersections has turned amber. To reach the intersection before the light turns red, she must travel 50 m in 2.0 s. (a) What minimum acceleration must the ambulance have to reach the intersection before the light turns red? (b) What is the speed of the ambulance when it reaches the intersection?

91. A motorcycle that is slowing down uniformly covers 2.0 successive km in 80 s and 120 s, respectively. Calculate (a) the acceleration of the motorcycle and (b) its velocity at the beginning and end of the 2-km trip.

92. A cyclist travels from point A to point B in 10 min. During the first 2.0 min of her trip, she maintains a uniform acceleration of 0.090 m/s^2. She then travels at constant velocity for the next 5.0 min. Next, she accelerates opposite to the motion at a constant rate so that she comes to a rest at point B 3.0 min later. (a) Sketch the velocity-versus-time graph for the trip. (b) What is the acceleration during the last 3 min? (c) How far does the cyclist travel?

93. Two trains are moving at 30 m/s in opposite directions on the same track. The engineers see simultaneously that they are on a collision course and apply the brakes when they are 1000 m apart. Assuming both trains have the same acceleration, what must this acceleration be if the trains are to stop just short of colliding?

94. A 10.0-m-long truck moving with a constant velocity of 97.0 km/h passes a 3.0-m-long car moving with a constant velocity of 80.0 km/h. How much time elapses between the moment the front of the truck is even with the back of the car and the moment the back of the truck is even with the front of the car?

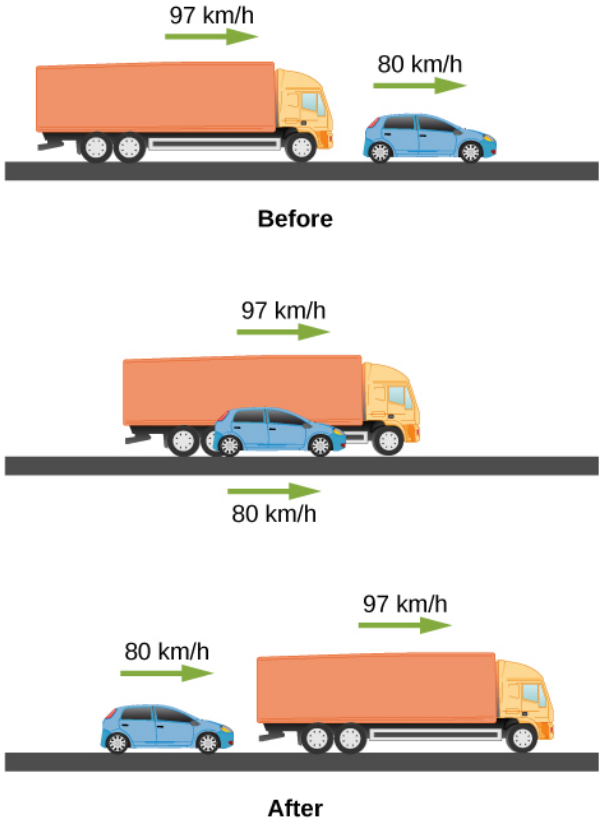

95. A police car waits in hiding slightly off the highway. A speeding car is spotted by the police car doing 40 m/s. At the instant the speeding car passes the police car, the police car accelerates from rest at 4 m/s^2 to catch the speeding car. How long does it take the police car to catch the speeding car?

96. Pablo is running in a half marathon at a velocity of 3 m/s. Another runner, Jacob, is 50 meters behind Pablo with the same velocity. Jacob begins to accelerate at 0.05 m/s^2. (a) How long does it take Jacob to catch Pablo? (b) What is the distance covered by Jacob? (c) What is the final velocity of Jacob?

97. **Unreasonable results** A runner approaches the finish line and is 75 m away; her speed at this position is 8 m/s. She accelerates opposite to the motion at this point at 0.5 m/s^2. How long does it take her to cross the finish line from 75 m away? Is this reasonable?

98. An airplane accelerates at 5.0 m/s^2 for 30.0 s. During this time, it covers a distance of 10.0 km. What are the initial and final velocities of the airplane?

99. Compare the distance traveled of an object that undergoes a change in velocity that is twice its initial velocity with an object that changes its velocity by four times its initial velocity over the same time period. The accelerations of both objects are constant.

100. An object is moving east with a constant velocity and is at position x_0 at time $t_0 = 0$. (a) With what acceleration must the object have for its total displacement to be zero at a later time t? (b) What is the physical interpretation of the solution in the case for $t \to \infty$?

101. A ball is thrown straight up. It passes a 2.00-m-high window 7.50 m off the ground on its path up and takes 1.30 s to go past the window. What was the ball's initial velocity?

102. A coin is dropped from a hot-air balloon that is 300 m above the ground and rising at 10.0 m/s upward. For the coin, find (a) the maximum height reached, (b) its position and velocity 4.00 s after being released, and (c) the time before it hits the ground.

103. A soft tennis ball is dropped onto a hard floor from a height of 1.50 m and rebounds to a height of 1.10 m. (a) Calculate its velocity just before it strikes the floor. (b) Calculate its velocity just after it leaves the floor on its way back up. (c) Calculate its acceleration during contact with the floor if that contact lasts 3.50 ms (3.50×10^{-3} s) (d) How much did the ball compress during its collision with the floor, assuming the floor is absolutely rigid?

104. **Unreasonable results**. A raindrop falls from a cloud 100 m above the ground. Neglect air resistance. What is the speed of the raindrop when it hits the ground? Is this a reasonable number?

105. Compare the time in the air of a basketball player who jumps 1.0 m vertically off the floor with that of a player who jumps 0.3 m vertically.

106. Suppose that a person takes 0.5 s to react and move his hand to catch an object he has dropped. (a) How far does the object fall on Earth, where $g = 9.8$ m/s^2? (b) How far does the object fall on the Moon, where the acceleration due to gravity is 1/6 of that on Earth?

107. A hot-air balloon rises from ground level at a constant velocity of 3.0 m/s. One minute after liftoff, a sandbag is dropped accidentally from the balloon. Calculate (a) the time it takes for the sandbag to reach the ground and (b) the velocity of the sandbag when it hits the ground.

108. (a) A world record was set for the men's 100-m dash in the 2008 Olympic Games in Beijing by Usain Bolt of Jamaica. Bolt "coasted" across the finish line with a time of 9.69 s. If we assume that Bolt accelerated for 3.00 s to reach his maximum speed, and maintained that speed for the rest of the race, calculate his maximum speed and his acceleration. (b) During the same Olympics, Bolt also set the world record in the 200-m dash with a time of 19.30 s. Using the same assumptions as for the 100-m dash, what was his maximum speed for this race?

109. An object is dropped from a height of 75.0 m above ground level. (a) Determine the distance traveled during the first second. (b) Determine the final velocity at which the object hits the ground. (c) Determine the distance traveled during the last second of motion before hitting the ground.

110. A steel ball is dropped onto a hard floor from a height of 1.50 m and rebounds to a height of 1.45 m. (a) Calculate its velocity just before it strikes the floor. (b) Calculate its velocity just after it leaves the floor on its way back up. (c) Calculate its acceleration during contact with the floor if that contact lasts 0.0800 ms $(8.00 \times 10^{-5}$ s) (d) How much did the ball compress during its collision with the floor, assuming the floor is absolutely rigid?

111. An object is dropped from a roof of a building of height h. During the last second of its descent, it drops a distance $h/3$. Calculate the height of the building.

Challenge Problems

112. In a 100-m race, the winner is timed at 11.2 s. The second-place finisher's time is 11.6 s. How far is the second-place finisher behind the winner when she crosses the finish line? Assume the velocity of each runner is constant throughout the race.

113. The position of a particle moving along the x-axis varies with time according to $x(t) = 5.0t^2 - 4.0t^3$ m. Find (a) the velocity and acceleration of the particle as functions of time, (b) the velocity and acceleration at $t = 2.0$ s, (c) the time at which the position is a maximum, (d) the time at which the velocity is zero, and (e) the maximum position.

114. A cyclist sprints at the end of a race to clinch a victory. She has an initial velocity of 11.5 m/s and accelerates at a rate of 0.500 m/s^2 for 7.00 s. (a) What is her final velocity? (b) The cyclist continues at this velocity to the finish line. If she is 300 m from the finish line when she starts to accelerate, how much time did she save? (c) The second-place winner was 5.00 m ahead when the winner started to accelerate, but he was unable to accelerate, and traveled at 11.8 m/s until the finish line. What was the difference in finish time in seconds between the winner and runner-up? How far back was the runner-up when the winner crossed the finish line?

115. In 1967, New Zealander Burt Munro set the world record for an Indian motorcycle, on the Bonneville Salt Flats in Utah, of 295.38 km/h. The one-way course was 8.00 km long. Acceleration rates are often described by the time it takes to reach 96.0 km/h from rest. If this time was 4.00 s and Burt accelerated at this rate until he reached his maximum speed, how long did it take Burt to complete the course?

CHAPTER 4
Motion in Two and Three Dimensions



Figure 4.1 The Red Arrows is the aerobatics display team of Britain's Royal Air Force. Based in Lincolnshire, England, they perform precision flying shows at high speeds, which requires accurate measurement of position, velocity, and acceleration in three dimensions. (credit: modification of work by Phil Long)

Chapter Outline

4.1 Displacement and Velocity Vectors

4.2 Acceleration Vector

4.3 Projectile Motion

4.4 Uniform Circular Motion

4.5 Relative Motion in One and Two Dimensions

INTRODUCTION To give a complete description of kinematics, we must explore motion in two and three dimensions. After all, most objects in our universe do not move in straight lines; rather, they follow curved paths. From kicked footballs to the flight paths of birds to the orbital motions of celestial bodies and down to the flow of blood plasma in your veins, most motion follows curved trajectories.

Fortunately, the treatment of motion in one dimension in the previous chapter has given us a foundation on which to build, as the concepts of position, displacement, velocity, and acceleration defined in one dimension can be expanded to two and three dimensions. Consider the Red Arrows, also known as the Royal Air Force

Aerobatic team of the United Kingdom. Each jet follows a unique curved trajectory in three-dimensional airspace, as well as has a unique velocity and acceleration. Thus, to describe the motion of any of the jets accurately, we must assign to each jet a unique position vector in three dimensions as well as a unique velocity and acceleration vector. We can apply the same basic equations for displacement, velocity, and acceleration we derived in Motion Along a Straight Line to describe the motion of the jets in two and three dimensions, but with some modifications—in particular, the inclusion of vectors.

In this chapter we also explore two special types of motion in two dimensions: projectile motion and circular motion. Last, we conclude with a discussion of relative motion. In the chapter-opening picture, each jet has a relative motion with respect to any other jet in the group or to the people observing the air show on the ground.

4.1 Displacement and Velocity Vectors

Learning Objectives

By the end of this section, you will be able to:

- Calculate position vectors in a multidimensional displacement problem.
- Solve for the displacement in two or three dimensions.
- Calculate the velocity vector given the position vector as a function of time.
- Calculate the average velocity in multiple dimensions.

Displacement and velocity in two or three dimensions are straightforward extensions of the one-dimensional definitions. However, now they are vector quantities, so calculations with them have to follow the rules of vector algebra, not scalar algebra.

Displacement Vector

To describe motion in two and three dimensions, we must first establish a coordinate system and a convention for the axes. We generally use the coordinates x, y, and z to locate a particle at point $P(x, y, z)$ in three dimensions. If the particle is moving, the variables x, y, and z are functions of time (t):

$$x = x(t) \quad y = y(t) \quad z = z(t). \tag{4.1}$$

The **position vector** from the origin of the coordinate system to point P is $\vec{\mathbf{r}}(t)$. In unit vector notation, introduced in Coordinate Systems and Components of a Vector, $\vec{\mathbf{r}}(t)$ is

$$\vec{\mathbf{r}}(t) = x(t)\hat{\mathbf{i}} + y(t)\hat{\mathbf{j}} + z(t)\hat{\mathbf{k}}. \tag{4.2}$$

Figure 4.2 shows the coordinate system and the vector to point P, where a particle could be located at a particular time t. Note the orientation of the x, y, and z axes. This orientation is called a right-handed coordinate system (Coordinate Systems and Components of a Vector) and it is used throughout the chapter.

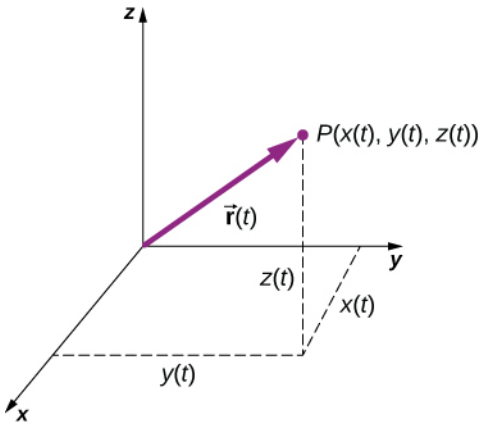


Figure 4.2 A three-dimensional coordinate system with a particle at position $P(x(t), y(t), z(t))$.

With our definition of the position of a particle in three-dimensional space, we can formulate the three-dimensional displacement. Figure 4.3 shows a particle at time t_1 located at P_1 with position vector $\vec{\mathbf{r}}(t_1)$. At a

later time t_2, the particle is located at P_2 with position vector $\vec{\mathbf{r}}(t_2)$. The **displacement vector** $\Delta\vec{\mathbf{r}}$ is found by subtracting $\vec{\mathbf{r}}(t_1)$ from $\vec{\mathbf{r}}(t_2)$:

$$\Delta\vec{\mathbf{r}} = \vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1). \tag{4.3}$$

Vector addition is discussed in Vectors. Note that this is the same operation we did in one dimension, but now the vectors are in three-dimensional space.

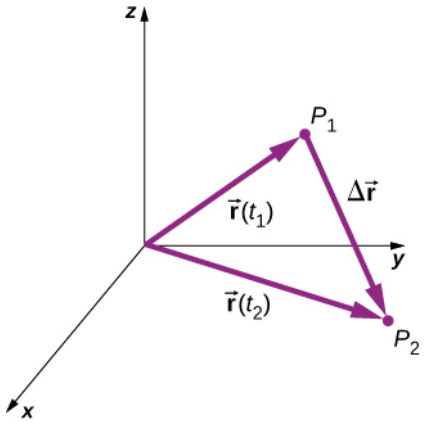


Figure 4.3 The displacement $\Delta\vec{\mathbf{r}} = \vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1)$ is the vector from P_1 to P_2.

The following examples illustrate the concept of displacement in multiple dimensions.

EXAMPLE 4.1

Polar Orbiting Satellite

A satellite is in a circular polar orbit around Earth at an altitude of 400 km—meaning, it passes directly overhead at the North and South Poles. What is the magnitude and direction of the displacement vector from when it is directly over the North Pole to when it is at $-45°$ latitude?

Strategy

We make a picture of the problem to visualize the solution graphically. This will aid in our understanding of the displacement. We then use unit vectors to solve for the displacement.

Solution

Figure 4.4 shows the surface of Earth and a circle that represents the orbit of the satellite. Although satellites are moving in three-dimensional space, they follow trajectories of ellipses, which can be graphed in two dimensions. The position vectors are drawn from the center of Earth, which we take to be the origin of the coordinate system, with the y-axis as north and the x-axis as east. The vector between them is the displacement of the satellite. We take the radius of Earth as 6370 km, so the length of each position vector is 6770 km.

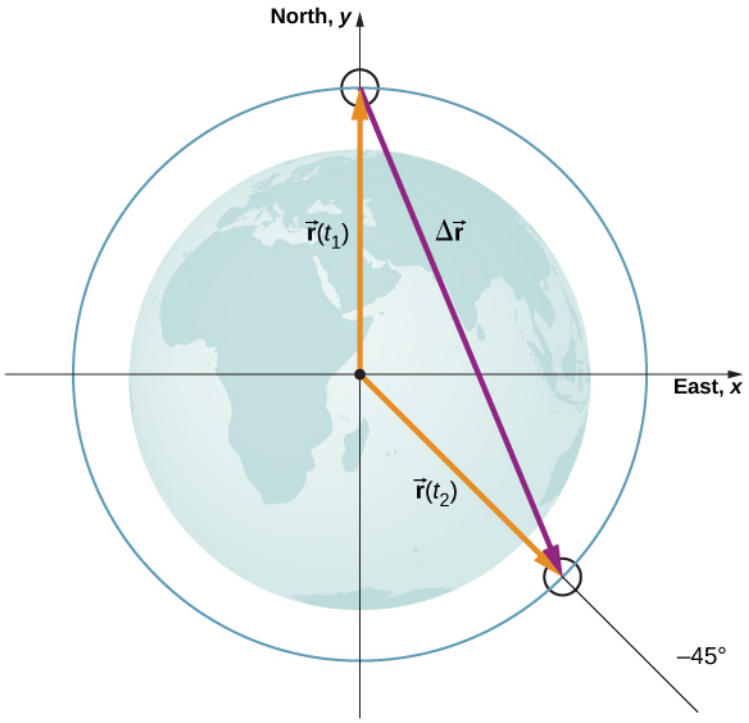


Figure 4.4 Two position vectors are drawn from the center of Earth, which is the origin of the coordinate system, with the *y*-axis as north and the *x*-axis as east. The vector between them is the displacement of the satellite.

In unit vector notation, the position vectors are

$$\vec{\mathbf{r}}(t_1) = 6770.\ \text{km}\hat{\mathbf{j}}$$
$$\vec{\mathbf{r}}(t_2) = 6770.\ \text{km}\ (\cos(-45°))\hat{\mathbf{i}} + 6770.\ \text{km}\ (\sin(-45°))\hat{\mathbf{j}}.$$

Evaluating the sine and cosine, we have

$$\begin{aligned}\vec{\mathbf{r}}(t_1) &= 6770.\hat{\mathbf{j}}\\ \vec{\mathbf{r}}(t_2) &= 4787\hat{\mathbf{i}} - 4787\hat{\mathbf{j}}.\end{aligned}$$

Now we can find $\Delta\vec{\mathbf{r}}$, the displacement of the satellite:

$$\Delta\vec{\mathbf{r}} = \vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1) = 4787\hat{\mathbf{i}} - 11{,}557\hat{\mathbf{j}}.$$

The magnitude of the displacement is $\left|\Delta\vec{\mathbf{r}}\right| = \sqrt{(4787)^2 + (-11{,}557)^2} = 12{,}509$ km. The angle the displacement makes with the *x*-axis is $\theta = \tan^{-1}\left(\frac{-11{,}557}{4787}\right) = -67.5°$.

Significance

Plotting the displacement gives information and meaning to the unit vector solution to the problem. When plotting the displacement, we need to include its components as well as its magnitude and the angle it makes with a chosen axis—in this case, the *x*-axis (Figure 4.5).

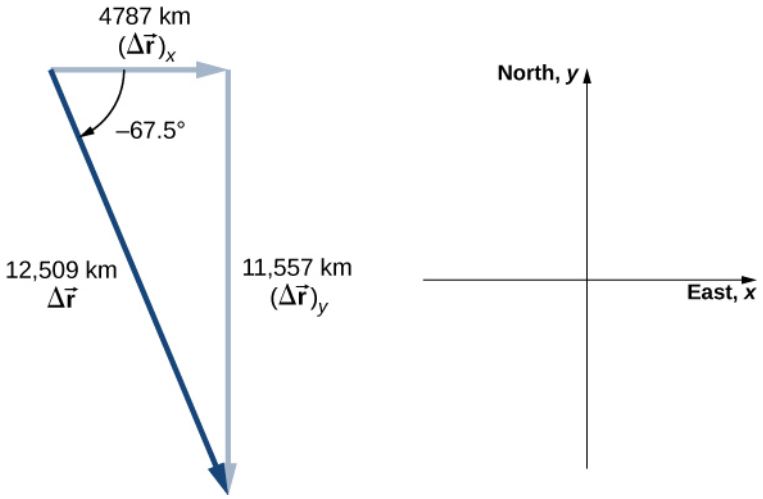


Figure 4.5 Displacement vector with components, angle, and magnitude.

Note that the satellite took a curved path along its circular orbit to get from its initial position to its final position in this example. It also could have traveled 4787 km east, then 11,557 km south to arrive at the same location. Both of these paths are longer than the length of the displacement vector. In fact, the displacement vector gives the shortest path between two points in one, two, or three dimensions.

Many applications in physics can have a series of displacements, as discussed in the previous chapter. The total displacement is the sum of the individual displacements, only this time, we need to be careful, because we are adding vectors. We illustrate this concept with an example of Brownian motion.

EXAMPLE 4.2

Brownian Motion

Brownian motion is a chaotic random motion of particles suspended in a fluid, resulting from collisions with the molecules of the fluid. This motion is three-dimensional. The displacements in numerical order of a particle undergoing Brownian motion could look like the following, in micrometers (Figure 4.6):

$$\begin{aligned}\Delta\vec{\mathbf{r}}_1 &= 2.0\hat{\mathbf{i}} + \hat{\mathbf{j}} + 3.0\hat{\mathbf{k}}\\ \Delta\vec{\mathbf{r}}_2 &= -\hat{\mathbf{i}} + 3.0\hat{\mathbf{k}}\\ \Delta\vec{\mathbf{r}}_3 &= 4.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}} + \hat{\mathbf{k}}\\ \Delta\vec{\mathbf{r}}_4 &= -3.0\hat{\mathbf{i}} + \hat{\mathbf{j}} + 2.0\hat{\mathbf{k}}.\end{aligned}$$

What is the total displacement of the particle from the origin?

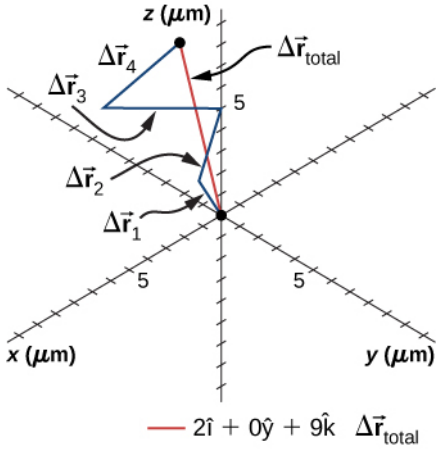


Figure 4.6 Trajectory of a particle undergoing random displacements of Brownian motion. The total displacement is shown in red.

Solution

We form the sum of the displacements and add them as vectors:

$$\begin{aligned}\Delta\vec{\mathbf{r}}_{\text{Total}} &= \sum \Delta\vec{\mathbf{r}}_i = \Delta\vec{\mathbf{r}}_1 + \Delta\vec{\mathbf{r}}_2 + \Delta\vec{\mathbf{r}}_3 + \Delta\vec{\mathbf{r}}_4 \\ &= (2.0 - 1.0 + 4.0 - 3.0)\hat{\mathbf{i}} + (1.0 + 0 - 2.0 + 1.0)\hat{\mathbf{j}} + (3.0 + 3.0 + 1.0 + 2.0)\hat{\mathbf{k}} \\ &= 2.0\hat{\mathbf{i}} + 0\hat{\mathbf{j}} + 9.0\hat{\mathbf{k}}\,\mu\text{m}.\end{aligned}$$

To complete the solution, we express the displacement as a magnitude and direction,

$$\left|\Delta\vec{\mathbf{r}}_{\text{Total}}\right| = \sqrt{2.0^2 + 0^2 + 9.0^2} = 9.2\ \mu\text{m}, \quad \theta = \tan^{-1}\left(\frac{9}{2}\right) = 77°,$$

with respect to the x-axis in the xz-plane.

Significance

From the figure we can see the magnitude of the total displacement is less than the sum of the magnitudes of the individual displacements.

Velocity Vector

In the previous chapter we found the instantaneous velocity by calculating the derivative of the position function with respect to time. We can do the same operation in two and three dimensions, but we use vectors. The instantaneous **velocity vector** is now

$$\vec{\mathbf{v}}(t) = \lim_{\Delta t \to 0} \frac{\vec{\mathbf{r}}(t + \Delta t) - \vec{\mathbf{r}}(t)}{\Delta t} = \frac{d\vec{\mathbf{r}}}{dt}. \tag{4.4}$$

Let's look at the relative orientation of the position vector and velocity vector graphically. In Figure 4.7 we show the vectors $\vec{\mathbf{r}}(t)$ and $\vec{\mathbf{r}}(t + \Delta t)$, which give the position of a particle moving along a path represented by the gray line. As Δt goes to zero, the velocity vector, given by Equation 4.4, becomes tangent to the path of the particle at time t.

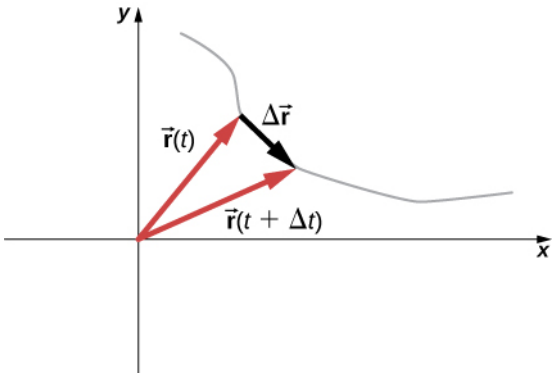


Figure 4.7 A particle moves along a path given by the gray line. In the limit as Δt approaches zero, the velocity vector becomes tangent to the path of the particle.

Equation 4.4 can also be written in terms of the components of $\vec{\mathbf{v}}(t)$. Since

$$\vec{\mathbf{r}}(t) = x(t)\hat{\mathbf{i}} + y(t)\hat{\mathbf{j}} + z(t)\hat{\mathbf{k}},$$

we can write

$$\vec{\mathbf{v}}(t) = v_x(t)\hat{\mathbf{i}} + v_y(t)\hat{\mathbf{j}} + v_z(t)\hat{\mathbf{k}} \qquad 4.5$$

where

$$v_x(t) = \frac{dx(t)}{dt}, \quad v_y(t) = \frac{dy(t)}{dt}, \quad v_z(t) = \frac{dz(t)}{dt}. \qquad 4.6$$

If only the average velocity is of concern, we have the vector equivalent of the one-dimensional average velocity for two and three dimensions:

$$\vec{\mathbf{v}}_{\text{avg}} = \frac{\vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1)}{t_2 - t_1}. \qquad 4.7$$

EXAMPLE 4.3

Calculating the Velocity Vector

The position function of a particle is $\vec{\mathbf{r}}(t) = 2.0t^2\hat{\mathbf{i}} + (2.0 + 3.0t)\hat{\mathbf{j}} + 5.0t\hat{\mathbf{k}}$m. (a) What is the instantaneous velocity and speed at t = 2.0 s? (b) What is the average velocity between 1.0 s and 3.0 s?

Solution

Using Equation 4.5 and Equation 4.6, and taking the derivative of the position function with respect to time, we find

(a) $v(t) = \frac{d\mathbf{r}(t)}{dt} = 4.0t\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 5.0\hat{\mathbf{k}}$m/s

$\vec{\mathbf{v}}(2.0s) = 8.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 5.0\hat{\mathbf{k}}$m/s

Speed $\left|\vec{\mathbf{v}}(2.0\text{ s})\right| = \sqrt{8^2 + 3^2 + 5^2} = 9.9$ m/s.

(b) From Equation 4.7,

$$\vec{\mathbf{v}}_{\text{avg}} = \frac{\vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1)}{t_2 - t_1} = \frac{\vec{\mathbf{r}}(3.0\text{ s}) - \vec{\mathbf{r}}(1.0\text{ s})}{3.0\text{ s} - 1.0\text{ s}} = \frac{(18\hat{\mathbf{i}} + 11\hat{\mathbf{j}} + 15\hat{\mathbf{k}})\text{ m} - (2\hat{\mathbf{i}} + 5\hat{\mathbf{j}} + 5\hat{\mathbf{k}})\text{ m}}{2.0\text{ s}}$$

$$= \frac{(16\hat{\mathbf{i}} + 6\hat{\mathbf{j}} + 10\hat{\mathbf{k}})\text{ m}}{2.0\text{ s}} = 8.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 5.0\hat{\mathbf{k}}\text{m/s}.$$

Significance

We see the average velocity is the same as the instantaneous velocity at $t = 2.0$ s, as a result of the velocity function being linear. This need not be the case in general. In fact, most of the time, instantaneous and average velocities are not the same.

CHECK YOUR UNDERSTANDING 4.1

The position function of a particle is $\vec{\mathbf{r}}(t) = 3.0t^3\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}$. (a) What is the instantaneous velocity at $t = 3$ s? (b) Is the average velocity between 2 s and 4 s equal to the instantaneous velocity at $t = 3$ s?

The Independence of Perpendicular Motions

When we look at the three-dimensional equations for position and velocity written in unit vector notation, Equation 4.2 and Equation 4.5, we see the components of these equations are separate and unique functions of time that do not depend on one another. Motion along the x direction has no part of its motion along the y and z directions, and similarly for the other two coordinate axes. Thus, the motion of an object in two or three dimensions can be divided into separate, independent motions along the perpendicular axes of the coordinate system in which the motion takes place.

To illustrate this concept with respect to displacement, consider a woman walking from point A to point B in a city with square blocks. The woman taking the path from A to B may walk east for so many blocks and then north (two perpendicular directions) for another set of blocks to arrive at B. How far she walks east is affected only by her motion eastward. Similarly, how far she walks north is affected only by her motion northward.

Independence of Motion

In the kinematic description of motion, we are able to treat the horizontal and vertical components of motion separately. In many cases, motion in the horizontal direction does not affect motion in the vertical direction, and vice versa.

An example illustrating the independence of vertical and horizontal motions is given by two baseballs. One baseball is dropped from rest. At the same instant, another is thrown horizontally from the same height and it follows a curved path. A stroboscope captures the positions of the balls at fixed time intervals as they fall (Figure 4.8).

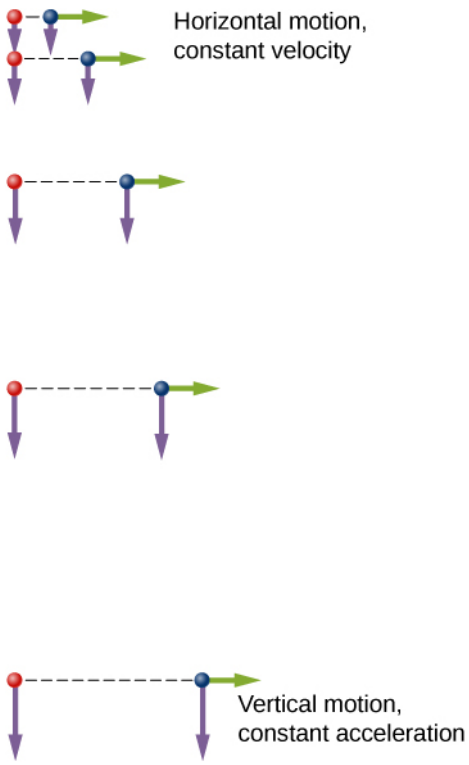


Figure 4.8 A diagram of the motions of two identical balls: one falls from rest and the other has an initial horizontal velocity. Each subsequent position is an equal time interval. Arrows represent the horizontal and vertical velocities at each position. The ball on the right has an initial horizontal velocity whereas the ball on the left has no horizontal velocity. Despite the difference in horizontal velocities, the vertical velocities and positions are identical for both balls, which shows the vertical and horizontal motions are independent.

It is remarkable that for each flash of the strobe, the vertical positions of the two balls are the same. This similarity implies vertical motion is independent of whether the ball is moving horizontally. (Assuming no air resistance, the vertical motion of a falling object is influenced by gravity only, not by any horizontal forces.) Careful examination of the ball thrown horizontally shows it travels the same horizontal distance between flashes. This is because there are no additional forces on the ball in the horizontal direction after it is thrown. This result means horizontal velocity is constant and is affected neither by vertical motion nor by gravity (which is vertical). Note this case is true for ideal conditions only. In the real world, air resistance affects the speed of the balls in both directions.

The two-dimensional curved path of the horizontally thrown ball is composed of two independent one-dimensional motions (horizontal and vertical). The key to analyzing such motion, called *projectile motion*, is to resolve it into motions along perpendicular directions. Resolving two-dimensional motion into perpendicular components is possible because the components are independent.

4.2 Acceleration Vector

Learning Objectives

By the end of this section, you will be able to:

- Calculate the acceleration vector given the velocity function in unit vector notation.
- Describe the motion of a particle with a constant acceleration in three dimensions.
- Use the one-dimensional motion equations along perpendicular axes to solve a problem in two or three dimensions with a constant acceleration.
- Express the acceleration in unit vector notation.

Instantaneous Acceleration

In addition to obtaining the displacement and velocity vectors of an object in motion, we often want to know its **acceleration vector** at any point in time along its trajectory. This acceleration vector is the instantaneous

acceleration and it can be obtained from the derivative with respect to time of the velocity function, as we have seen in a previous chapter. The only difference in two or three dimensions is that these are now vector quantities. Taking the derivative with respect to time $\vec{\mathbf{v}}(t)$, we find

$$\vec{\mathbf{a}}(t) = \lim_{t \to 0} \frac{\vec{\mathbf{v}}(t + \Delta t) - \vec{\mathbf{v}}(t)}{\Delta t} = \frac{d\vec{\mathbf{v}}(t)}{dt}. \quad 4.8$$

The acceleration in terms of components is

$$\vec{\mathbf{a}}(t) = \frac{dv_x(t)}{dt}\hat{\mathbf{i}} + \frac{dv_y(t)}{dt}\hat{\mathbf{j}} + \frac{dv_z(t)}{dt}\hat{\mathbf{k}}. \quad 4.9$$

Also, since the velocity is the derivative of the position function, we can write the acceleration in terms of the second derivative of the position function:

$$\vec{\mathbf{a}}(t) = \frac{d^2x(t)}{dt^2}\hat{\mathbf{i}} + \frac{d^2y(t)}{dt^2}\hat{\mathbf{j}} + \frac{d^2z(t)}{dt^2}\hat{\mathbf{k}}. \quad 4.10$$

EXAMPLE 4.4

Finding an Acceleration Vector

A particle has a velocity of $\vec{\mathbf{v}}(t) = 5.0t\hat{\mathbf{i}} + t^2\hat{\mathbf{j}} - 2.0t^3\hat{\mathbf{k}}$m/s. (a) What is the acceleration function? (b) What is the acceleration vector at $t = 2.0$ s? Find its magnitude and direction.

Solution

(a) We take the first derivative with respect to time of the velocity function to find the acceleration. The derivative is taken component by component:

$$\vec{\mathbf{a}}(t) = 5.0\hat{\mathbf{i}} + 2.0t\hat{\mathbf{j}} - 6.0t^2\hat{\mathbf{k}}\text{m/s}^2.$$

(b) Evaluating $\vec{\mathbf{a}}(2.0\text{ s}) = 5.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} - 24.0\hat{\mathbf{k}}\text{m/s}^2$ gives us the direction in unit vector notation. The magnitude of the acceleration is $|\vec{\mathbf{a}}(2.0\text{ s})| = \sqrt{5.0^2 + 4.0^2 + (-24.0)^2} = 24.8\text{ m/s}^2$.

Significance

In this example we find that acceleration has a time dependence and is changing throughout the motion. Let's consider a different velocity function for the particle.

EXAMPLE 4.5

Finding a Particle Acceleration

A particle has a position function $\vec{\mathbf{r}}(t) = (10t - t^2)\hat{\mathbf{i}} + 5t\hat{\mathbf{j}} + 5t\ \ \hat{\mathbf{k}}$m. (a) What is the velocity? (b) What is the acceleration? (c) Describe the motion from $t = 0$ s.

Strategy

We can gain some insight into the problem by looking at the position function. It is linear in y and z, so we know the acceleration in these directions is zero when we take the second derivative. Also, note that the position in the x direction is zero for $t = 0$ s and $t = 10$ s.

Solution

(a) Taking the derivative with respect to time of the position function, we find

$$\vec{\mathbf{v}}(t) = (10 - 2t)\hat{\mathbf{i}} + 5\hat{\mathbf{j}} + 5\hat{\mathbf{k}}\text{ m/s}.$$

The velocity function is linear in time in the x direction and is constant in the y and z directions.

(b) Taking the derivative of the velocity function, we find

$$\vec{\mathbf{a}}(t) = -2\hat{\mathbf{i}}\ \text{m/s}^2.$$

The acceleration vector is a constant in the negative x-direction.

(c) The trajectory of the particle can be seen in Figure 4.9. Let's look in the y and z directions first. The particle's position increases steadily as a function of time with a constant velocity in these directions. In the x direction, however, the particle follows a path in positive x until $t = 5$ s, when it reverses direction. We know this from looking at the velocity function, which becomes zero at this time and negative thereafter. We also know this because the acceleration is negative and constant—meaning, the particle is accelerating in the opposite direction. The particle's position reaches 25 m, where it then reverses direction and begins to accelerate in the negative x direction. The position reaches zero at $t = 10$ s.

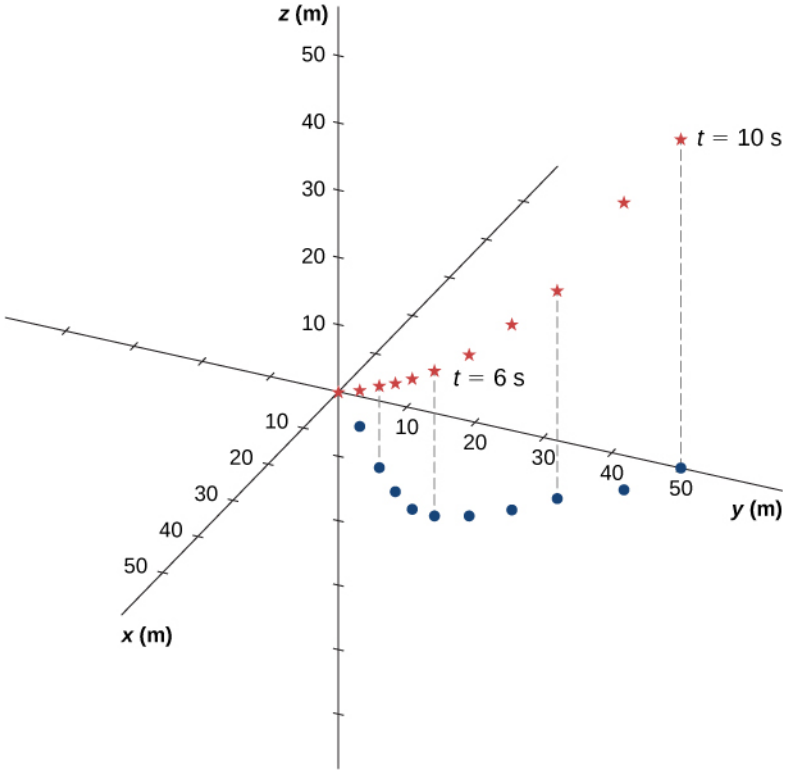


Figure 4.9 The particle starts at point $(x, y, z) = (0, 0, 0)$ with position vector $\vec{\mathbf{r}} = 0$ as shown with blue dots. The projection of the trajectory onto the xy-plane is shown with red stars. The values of y and z increase linearly as a function of time, whereas x has a turning point at $t = 5$ s and 25 m, when it reverses direction. At this point, the x component of the velocity becomes negative. At $t = 10$ s, the particle is back to 0 m in the x direction.

Significance

By graphing the trajectory of the particle, we can better understand its motion, given by the numerical results of the kinematic equations.

CHECK YOUR UNDERSTANDING 4.2

Suppose the acceleration function has the form $\vec{\mathbf{a}}(t) = a\hat{\mathbf{i}} + b\hat{\mathbf{j}} + c\hat{\mathbf{k}}\text{m/s}^2$, where a, b, and c are constants. What can be said about the functional form of the velocity function?

Constant Acceleration

Multidimensional motion with constant acceleration can be treated the same way as shown in the previous chapter for one-dimensional motion. Earlier we showed that three-dimensional motion is equivalent to three one-dimensional motions, each along an axis perpendicular to the others. To develop the relevant equations in each direction, let's consider the two-dimensional problem of a particle moving in the *xy* plane with constant acceleration, ignoring the *z*-component for the moment. The acceleration vector is

$$\vec{\mathbf{a}} = a_{0x}\hat{\mathbf{i}} + a_{0y}\hat{\mathbf{j}}.$$

Each component of the motion has a separate set of equations similar to Equation 3.10–Equation 3.14 of the previous chapter on one-dimensional motion. We show only the equations for position and velocity in the *x*- and *y*-directions. A similar set of kinematic equations could be written for motion in the *z*-direction:

$$x(t) = x_0 + (v_x)_{\text{avg}}t \quad \textbf{4.11}$$

$$v_x(t) = v_{0x} + a_x t \quad \textbf{4.12}$$

$$x(t) = x_0 + v_{0x}t + \frac{1}{2}a_x t^2 \quad \textbf{4.13}$$

$$v_x^2(t) = v_{0x}^2 + 2a_x(x - x_0) \quad \textbf{4.14}$$

$$y(t) = y_0 + (v_y)_{\text{avg}}t \quad \textbf{4.15}$$

$$v_y(t) = v_{0y} + a_y t \quad \textbf{4.16}$$

$$y(t) = y_0 + v_{0y}t + \frac{1}{2}a_y t^2 \quad \textbf{4.17}$$

$$v_y^2(t) = v_{0y}^2 + 2a_y(y - y_0). \quad \textbf{4.18}$$

Here the subscript 0 denotes the initial position or velocity. Equation 4.11 to Equation 4.18 can be substituted into Equation 4.2 and Equation 4.5 without the *z*-component to obtain the position vector and velocity vector as a function of time in two dimensions:

$$\vec{\mathbf{r}}(t) = x(t)\hat{\mathbf{i}} + y(t)\hat{\mathbf{j}} \text{ and } \vec{\mathbf{v}}(t) = v_x(t)\hat{\mathbf{i}} + v_y(t)\hat{\mathbf{j}}.$$

The following example illustrates a practical use of the kinematic equations in two dimensions.

EXAMPLE 4.6

A Skier

Figure 4.10 shows a skier moving with an acceleration of $2.1\ \text{m/s}^2$ down a slope of 15° at $t = 0$. With the origin of the coordinate system at the front of the lodge, her initial position and velocity are

$$\vec{\mathbf{r}}(0) = (75.0\hat{\mathbf{i}} - 50.0\hat{\mathbf{j}})\ \text{m}$$

and

$$\vec{\mathbf{v}}(0) = (4.1\hat{\mathbf{i}} - 1.1\hat{\mathbf{j}})\ \text{m/s}.$$

(a) What are the *x*- and *y*-components of the skier's position and velocity as functions of time? (b) What are her position and velocity at $t = 10.0$ s?

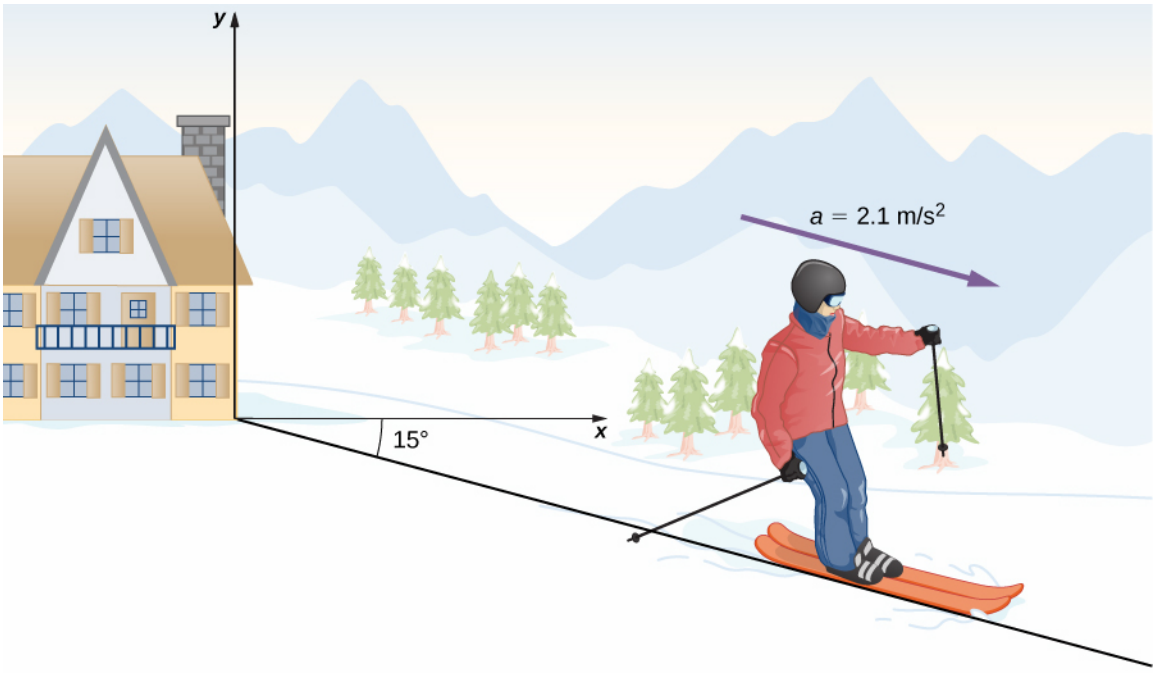


Figure 4.10 A skier has an acceleration of 2.1 m/s^2 down a slope of 15°. The origin of the coordinate system is at the ski lodge.

Strategy

Since we are evaluating the components of the motion equations in the *x* and *y* directions, we need to find the components of the acceleration and put them into the kinematic equations. The components of the acceleration are found by referring to the coordinate system in Figure 4.10. Then, by inserting the components of the initial position and velocity into the motion equations, we can solve for her position and velocity at a later time *t*.

Solution

(a) The origin of the coordinate system is at the top of the hill with *y*-axis vertically upward and the *x*-axis horizontal. By looking at the trajectory of the skier, the *x*-component of the acceleration is positive and the *y*-component is negative. Since the angle is 15° down the slope, we find

$$a_x = (2.1\ \text{m/s}^2)\cos(15°) = 2.0\ \text{m/s}^2$$
$$a_y = (-2.1\ \text{m/s}^2)\sin 15° = -0.54\ \text{m/s}^2.$$

Inserting the initial position and velocity into Equation 4.12 and Equation 4.13 for *x*, we have

$$x(t) = 75.0\ \text{m} + (4.1\ \text{m/s})t + \frac{1}{2}(2.0\ \text{m/s}^2)t^2$$
$$v_x(t) = 4.1\ \text{m/s} + (2.0\ \text{m/s}^2)t.$$

For *y*, we have

$$y(t) = -50.0\ \text{m} + (-1.1\ \text{m/s})t + \frac{1}{2}(-0.54\ \text{m/s}^2)t^2$$
$$v_y(t) = -1.1\ \text{m/s} + (-0.54\ \text{m/s}^2)t.$$

(b) Now that we have the equations of motion for *x* and *y* as functions of time, we can evaluate them at $t = 10.0$ s:

$$x(10.0\ \text{s}) = 75.0\ \text{m} + (4.1\ \text{m/s}^2)(10.0\ \text{s}) + \frac{1}{2}(2.0\ \text{m/s}^2)(10.0\ \text{s})^2 = 216.0\ \text{m}$$
$$v_x(10.0\ \text{s}) = 4.1\ \text{m/s} + (2.0\ \text{m/s}^2)(10.0\ \text{s}) = 24.1\text{m/s}$$

$$y(10.0\text{ s}) = -50.0\text{ m} + (-1.1\text{ m/s})(10.0\text{ s}) + \frac{1}{2}(-0.54\text{ m/s}^2)(10.0\text{ s})^2 = -88.0\text{ m}$$

$$v_y(10.0\text{ s}) = -1.1\text{ m/s} + (-0.54\text{ m/s}^2)(10.0\text{ s}) = -6.5\text{ m/s}.$$

The position and velocity at $t = 10.0$ s are, finally,

$$\vec{\mathbf{r}}(10.0\text{ s}) = (216.0\hat{\mathbf{i}} - 88.0\hat{\mathbf{j}})\text{ m}$$

$$\vec{\mathbf{v}}(10.0\text{ s}) = (24.1\hat{\mathbf{i}} - 6.5\hat{\mathbf{j}})\text{m/s}.$$

The magnitude of the velocity of the skier at 10.0 s is 25 m/s, which is 60 mi/h.

Significance

It is useful to know that, given the initial conditions of position, velocity, and acceleration of an object, we can find the position, velocity, and acceleration at any later time.

With Equation 4.8 through Equation 4.10 we have completed the set of expressions for the position, velocity, and acceleration of an object moving in two or three dimensions. If the trajectories of the objects look something like the "Red Arrows" in the opening picture for the chapter, then the expressions for the position, velocity, and acceleration can be quite complicated. In the sections to follow we examine two special cases of motion in two and three dimensions by looking at projectile motion and circular motion.

INTERACTIVE

At this University of Colorado Boulder website (https://openstax.org/l/21phetmotladyb) , you can explore the position velocity and acceleration of a ladybug with an interactive simulation that allows you to change these parameters.

4.3 Projectile Motion

Learning Objectives

By the end of this section, you will be able to:

- Use one-dimensional motion in perpendicular directions to analyze projectile motion.
- Calculate the range, time of flight, and maximum height of a projectile that is launched and impacts a flat, horizontal surface.
- Find the time of flight and impact velocity of a projectile that lands at a different height from that of launch.
- Calculate the trajectory of a projectile.

Projectile motion is the motion of an object thrown or projected into the air, subject only to acceleration as a result of gravity. The applications of projectile motion in physics and engineering are numerous. Some examples include meteors as they enter Earth's atmosphere, fireworks, and the motion of any ball in sports. Such objects are called *projectiles* and their path is called a **trajectory**. The motion of falling objects as discussed in Motion Along a Straight Line is a simple one-dimensional type of projectile motion in which there is no horizontal movement. In this section, we consider two-dimensional projectile motion, and our treatment neglects the effects of air resistance.

The most important fact to remember here is that *motions along perpendicular axes are independent* and thus can be analyzed separately. We discussed this fact in Displacement and Velocity Vectors, where we saw that vertical and horizontal motions are independent. The key to analyzing two-dimensional projectile motion is to break it into two motions: one along the horizontal axis and the other along the vertical. (This choice of axes is the most sensible because acceleration resulting from gravity is vertical; thus, there is no acceleration along the horizontal axis when air resistance is negligible.) As is customary, we call the horizontal axis the x-axis and the vertical axis the y-axis. It is not required that we use this choice of axes; it is simply convenient in the case of gravitational acceleration. In other cases we may choose a different set of axes. Figure 4.11 illustrates the notation for displacement, where we define $\vec{\mathbf{s}}$ to be the total displacement, and $\vec{\mathbf{x}}$ and $\vec{\mathbf{y}}$ are its component vectors along the horizontal and vertical axes, respectively. The magnitudes of these vectors are s, x, and y.

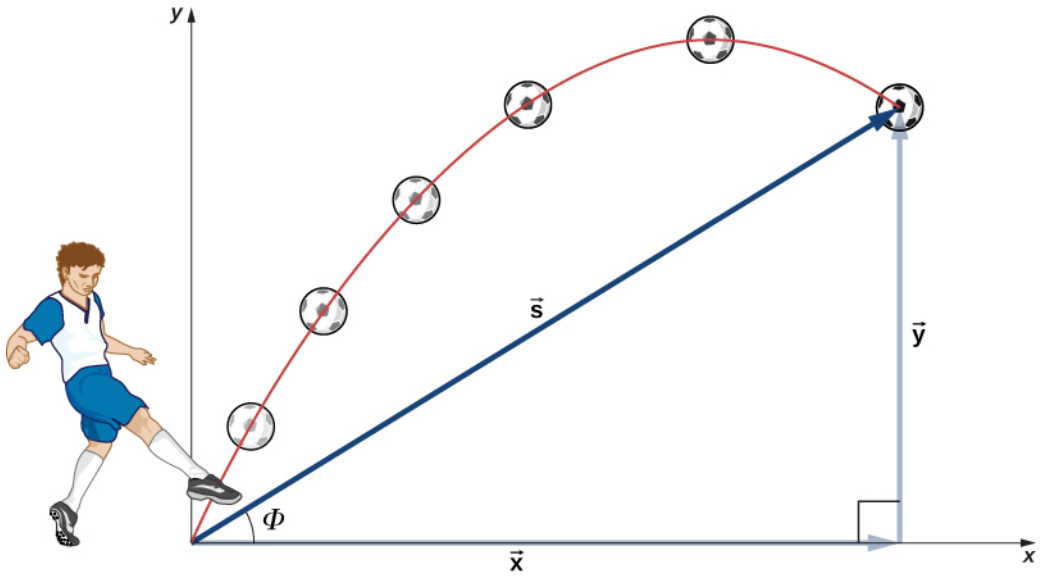


Figure 4.11 The total displacement s of a soccer ball at a point along its path. The vector $\vec{\mathbf{s}}$ has components $\vec{\mathbf{x}}$ and $\vec{\mathbf{y}}$ along the horizontal and vertical axes. Its magnitude is s and it makes an angle Φ with the horizontal.

To describe projectile motion completely, we must include velocity and acceleration, as well as displacement. We must find their components along the x- and y-axes. Let's assume all forces except gravity (such as air resistance and friction, for example) are negligible. Defining the positive direction to be upward, the components of acceleration are then very simple:

$$a_y = -g = -9.8 \text{ m/s}^2 \quad (-32 \text{ ft/s}^2).$$

Because gravity is vertical, $a_x = 0$. If $a_x = 0$, this means the initial velocity in the x direction is equal to the final velocity in the x direction, or $v_x = v_{0x}$. With these conditions on acceleration and velocity, we can write the kinematic Equation 4.11 through Equation 4.18 for motion in a uniform gravitational field, including the rest of the kinematic equations for a constant acceleration from Motion with Constant Acceleration. The kinematic equations for motion in a uniform gravitational field become kinematic equations with $a_y = -g, \ \ a_x = 0$:

Horizontal Motion

$$v_{0x} = v_x, \ x = x_0 + v_x t \tag{4.19}$$

Vertical Motion

$$y = y_0 + \frac{1}{2}(v_{0y} + v_y)t \tag{4.20}$$

$$v_y = v_{0y} - gt \tag{4.21}$$

$$y = y_0 + v_{0y}t - \frac{1}{2}gt^2 \tag{4.22}$$

$$v_y^2 = v_{0y}^2 - 2g(y - y_0) \tag{4.23}$$

Using this set of equations, we can analyze projectile motion, keeping in mind some important points.

PROBLEM-SOLVING STRATEGY

Projectile Motion

1. Resolve the motion into horizontal and vertical components along the x- and y-axes. The magnitudes of the components of displacement $\vec{\mathbf{s}}$ along these axes are x and y. The magnitudes of the components of velocity $\vec{\mathbf{v}}$ are $v_x = v\cos\theta$ and $v_y = v\sin\theta$, where v is the magnitude of the velocity and θ is its direction

relative to the horizontal, as shown in Figure 4.12.

2. Treat the motion as two independent one-dimensional motions: one horizontal and the other vertical. Use the kinematic equations for horizontal and vertical motion presented earlier.
3. Solve for the unknowns in the two separate motions: one horizontal and one vertical. Note that the only common variable between the motions is time t. The problem-solving procedures here are the same as those for one-dimensional kinematics and are illustrated in the following solved examples.
4. Recombine quantities in the horizontal and vertical directions to find the total displacement $\vec{\mathbf{s}}$ and velocity $\vec{\mathbf{v}}$. Solve for the magnitude and direction of the displacement and velocity using

$$s = \sqrt{x^2 + y^2}, \quad \Phi = \tan^{-1}(y/x), \quad v = \sqrt{v_x^2 + v_y^2},$$

where Φ is the direction of the displacement $\vec{\mathbf{s}}$.

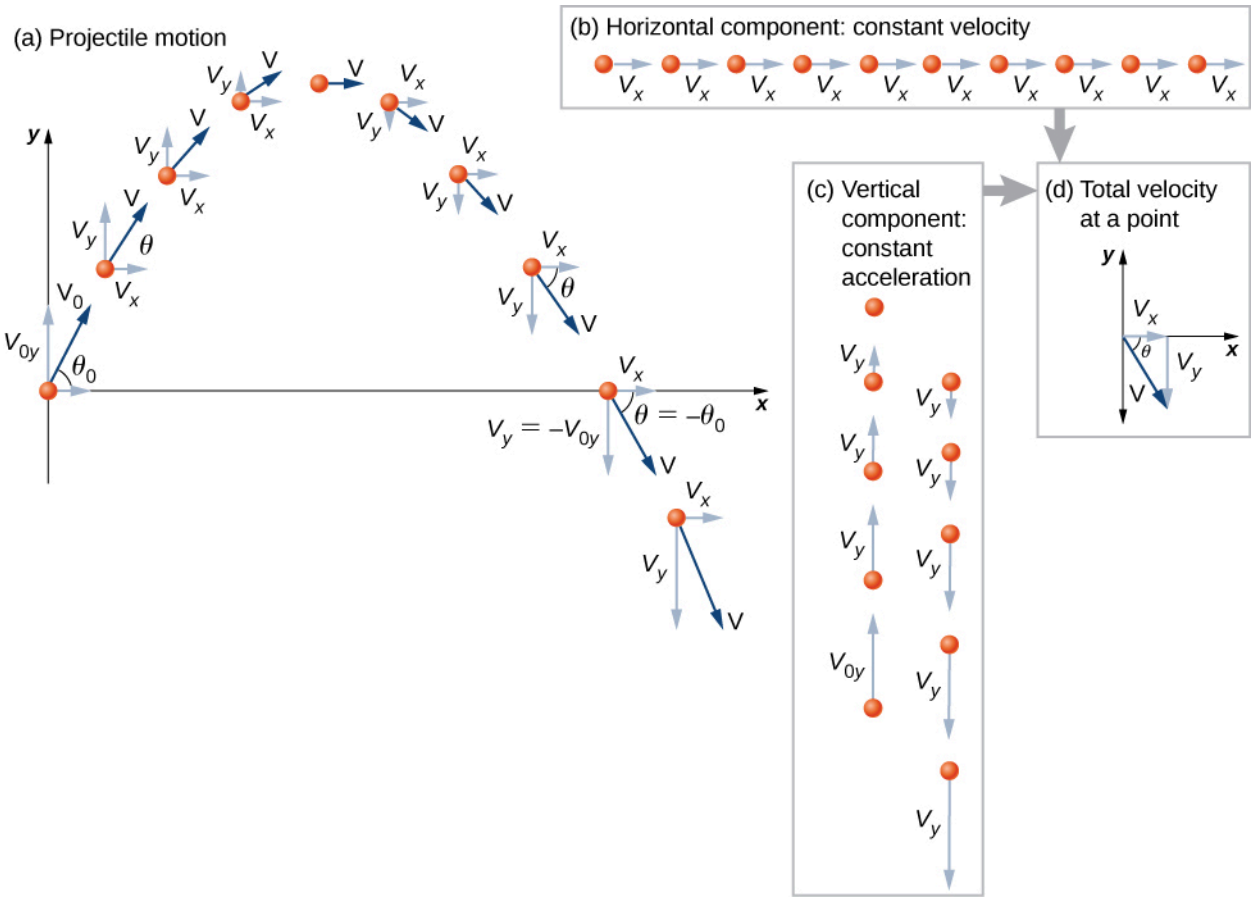


Figure 4.12 (a) We analyze two-dimensional projectile motion by breaking it into two independent one-dimensional motions along the vertical and horizontal axes. (b) The horizontal motion is simple, because $a_x = 0$ and v_x is a constant. (c) The velocity in the vertical direction begins to decrease as the object rises. At its highest point, the vertical velocity is zero. As the object falls toward Earth again, the vertical velocity increases again in magnitude but points in the opposite direction to the initial vertical velocity. (d) The x and y motions are recombined to give the total velocity at any given point on the trajectory.

EXAMPLE 4.7

A Fireworks Projectile Explodes High and Away

During a fireworks display, a shell is shot into the air with an initial speed of 70.0 m/s at an angle of 75.0° above the horizontal, as illustrated in Figure 4.13. The fuse is timed to ignite the shell just as it reaches its highest

point above the ground. (a) Calculate the height at which the shell explodes. (b) How much time passes between the launch of the shell and the explosion? (c) What is the horizontal displacement of the shell when it explodes? (d) What is the total displacement from the point of launch to the highest point?

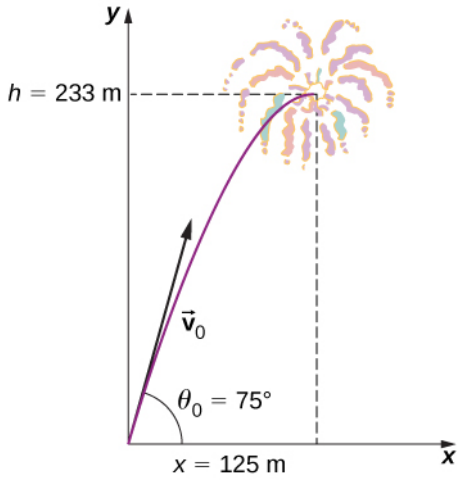


Figure 4.13 The trajectory of a fireworks shell. The fuse is set to explode the shell at the highest point in its trajectory, which is found to be at a height of 233 m and 125 m away horizontally.

Strategy

The motion can be broken into horizontal and vertical motions in which $a_x = 0$ and $a_y = -g$. We can then define x_0 and y_0 to be zero and solve for the desired quantities.

Solution

(a) By "height" we mean the altitude or vertical position y above the starting point. The highest point in any trajectory, called the *apex*, is reached when $v_y = 0$. Since we know the initial and final velocities, as well as the initial position, we use the following equation to find y:

$$v_y^2 = v_{0y}^2 - 2g(y - y_0).$$

Because y_0 and v_y are both zero, the equation simplifies to

$$0 = v_{0y}^2 - 2gy.$$

Solving for y gives

$$y = \frac{v_{0y}^2}{2g}.$$

Now we must find v_{0y}, the component of the initial velocity in the y direction. It is given by $v_{0y} = v_0 \sin\theta_0$, where v_0 is the initial velocity of 70.0 m/s and $\theta_0 = 75°$ is the initial angle. Thus,

$$v_{0y} = v_0 \sin\theta = (70.0 \text{ m/s})\sin 75° = 67.6 \text{ m/s}$$

and y is

$$y = \frac{(67.6 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)}.$$

Thus, we have

$$y = 233 \text{ m}.$$

Note that because up is positive, the initial vertical velocity is positive, as is the maximum height, but the acceleration resulting from gravity is negative. Note also that the maximum height depends only on the vertical component of the initial velocity, so that any projectile with a 67.6-m/s initial vertical component of

velocity reaches a maximum height of 233 m (neglecting air resistance). The numbers in this example are reasonable for large fireworks displays, the shells of which do reach such heights before exploding. In practice, air resistance is not completely negligible, so the initial velocity would have to be somewhat larger than that given to reach the same height.

(b) As in many physics problems, there is more than one way to solve for the time the projectile reaches its highest point. In this case, the easiest method is to use $v_y = v_{0y} - gt$. Because $v_y = 0$ at the apex, this equation reduces to simply

$$0 = v_{0y} - gt$$

or

$$t = \frac{v_{0y}}{g} = \frac{67.6 \text{ m/s}}{9.80 \text{ m/s}^2} = 6.90\text{s}.$$

This time is also reasonable for large fireworks. If you are able to see the launch of fireworks, notice that several seconds pass before the shell explodes. Another way of finding the time is by using$y = y_0 + \frac{1}{2}(v_{0y} + v_y)t$. This is left for you as an exercise to complete.

(c) Because air resistance is negligible, $a_x = 0$ and the horizontal velocity is constant, as discussed earlier. The horizontal displacement is the horizontal velocity multiplied by time as given by $x = x_0 + v_x t$, where x_0 is equal to zero. Thus,

$$x = v_x t,$$

where v_x is the x-component of the velocity, which is given by

$$v_x = v_0 \cos\theta = (70.0 \text{ m/s})\cos 75^\circ = 18.1 \text{ m/s}.$$

Time t for both motions is the same, so x is

$$x = (18.1 \text{ m/s})6.90 \text{ s} = 125 \text{ m}.$$

Horizontal motion is a constant velocity in the absence of air resistance. The horizontal displacement found here could be useful in keeping the fireworks fragments from falling on spectators. When the shell explodes, air resistance has a major effect, and many fragments land directly below.

(d) The horizontal and vertical components of the displacement were just calculated, so all that is needed here is to find the magnitude and direction of the displacement at the highest point:

$$\vec{\mathbf{s}} = 125\hat{\mathbf{i}} + 233\hat{\mathbf{j}}$$

$$|\vec{\mathbf{s}}| = \sqrt{125^2 + 233^2} = 264 \text{ m}$$

$$\Phi = \tan^{-1}\left(\frac{233}{125}\right) = 61.8^\circ.$$

Note that the angle for the displacement vector is less than the initial angle of launch. To see why this is, review Figure 4.11, which shows the curvature of the trajectory toward the ground level.

When solving Example 4.7(a), the expression we found for y is valid for any projectile motion when air resistance is negligible. Call the maximum height $y = h$. Then,

$$h = \frac{v_{0y}^2}{2g}.$$

This equation defines the *maximum height of a projectile above its launch position* and it depends only on the vertical component of the initial velocity.

CHECK YOUR UNDERSTANDING 4.3

A rock is thrown horizontally off a cliff 100.0 m high with a velocity of 15.0 m/s. (a) Define the origin of the coordinate system. (b) Which equation describes the horizontal motion? (c) Which equations describe the vertical motion? (d) What is the rock's velocity at the point of impact?

EXAMPLE 4.8

Calculating Projectile Motion: Tennis Player

A tennis player wins a match at Arthur Ashe stadium and hits a ball into the stands at 30 m/s and at an angle 45° above the horizontal (Figure 4.14). On its way down, the ball is caught by a spectator 10 m above the point where the ball was hit. (a) Calculate the time it takes the tennis ball to reach the spectator. (b) What are the magnitude and direction of the ball's velocity at impact?

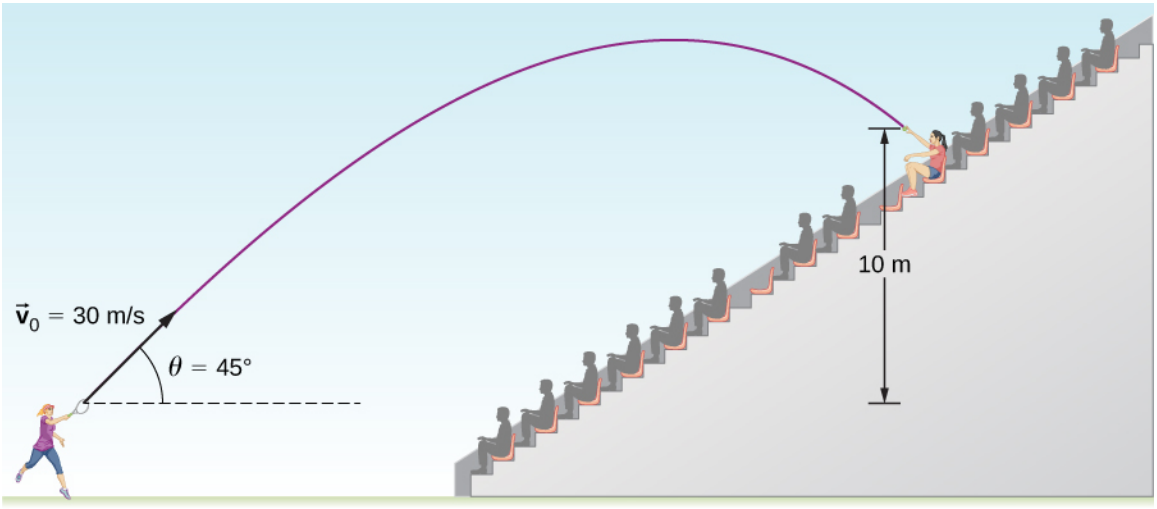


Figure 4.14 The trajectory of a tennis ball hit into the stands.

Strategy

Again, resolving this two-dimensional motion into two independent one-dimensional motions allows us to solve for the desired quantities. The time a projectile is in the air is governed by its vertical motion alone. Thus, we solve for t first. While the ball is rising and falling vertically, the horizontal motion continues at a constant velocity. This example asks for the final velocity. Thus, we recombine the vertical and horizontal results to obtain $\vec{v}$ at final time t, determined in the first part of the example.

Solution

(a) While the ball is in the air, it rises and then falls to a final position 10.0 m higher than its starting altitude. We can find the time for this by using Equation 4.22:

$$y = y_0 + v_{0y}t - \frac{1}{2}gt^2.$$

If we take the initial position y_0 to be zero, then the final position is $y = 10$ m. The initial vertical velocity is the vertical component of the initial velocity:

$$v_{0y} = v_0 \sin\theta_0 = (30.0 \text{ m/s})\sin 45° = 21.2 \text{ m/s}.$$

Substituting into Equation 4.22 for y gives us

$$10.0 \text{ m} = (21.2 \text{ m/s})t - (4.90 \text{ m/s}^2)t^2.$$

Rearranging terms gives a quadratic equation in t:

$$(4.90 \text{ m/s}^2)t^2 - (21.2 \text{ m/s})t + 10.0 \text{ m} = 0.$$

Use of the quadratic formula yields $t = 3.79$ s and $t = 0.54$ s. Since the ball is at a height of 10 m at two times during its trajectory—once on the way up and once on the way down—we take the longer solution for the time it takes the ball to reach the spectator:

$$t = 3.79 \text{ s}.$$

The time for projectile motion is determined completely by the vertical motion. Thus, any projectile that has an initial vertical velocity of 21.2 m/s and lands 10.0 m below its starting altitude spends 3.79 s in the air.

(b) We can find the final horizontal and vertical velocities v_x and v_y with the use of the result from (a). Then, we can combine them to find the magnitude of the total velocity vector $\vec{\mathbf{v}}$ and the angle θ it makes with the horizontal. Since v_x is constant, we can solve for it at any horizontal location. We choose the starting point because we know both the initial velocity and the initial angle. Therefore,

$$v_x = v_0 \cos\theta_0 = (30 \text{ m/s})\cos 45^\circ = 21.2 \text{ m/s}.$$

The final vertical velocity is given by Equation 4.21:

$$v_y = v_{0y} - gt.$$

Since v_{0y} was found in part (a) to be 21.2 m/s, we have

$$v_y = 21.2 \text{ m/s} - 9.8 \text{ m/s}^2(3.79 \text{ s}) = -15.9 \text{ m/s}.$$

The magnitude of the final velocity $\vec{\mathbf{v}}$ is

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(21.2 \text{ m/s})^2 + (-15.9 \text{ m/s})^2} = 26.5 \text{ m/s}.$$

The direction θ_v is found using the inverse tangent:

$$\theta_v = \tan^{-1}\left(\frac{v_y}{v_x}\right) = \tan^{-1}\left(\frac{-15.9}{21.2}\right) = 36.9^\circ \text{ below the horizon}.$$

Significance

(a) As mentioned earlier, the time for projectile motion is determined completely by the vertical motion. Thus, any projectile that has an initial vertical velocity of 21.2 m/s and lands 10.0 m above its starting altitude spends 3.79 s in the air. (b) The negative angle means the velocity is 36.9° below the horizontal at the point of impact. This result is consistent with the fact that the ball is impacting at a point on the other side of the apex of the trajectory and therefore has a negative y component of the velocity. The magnitude of the velocity is less than the magnitude of the initial velocity we expect since it is impacting 10.0 m above the launch elevation.

Time of Flight, Trajectory, and Range

Of interest are the time of flight, trajectory, and range for a projectile launched on a flat horizontal surface and impacting on the same surface. In this case, kinematic equations give useful expressions for these quantities, which are derived in the following sections.

Time of flight

We can solve for the time of flight of a projectile that is both launched and impacts on a flat horizontal surface by performing some manipulations of the kinematic equations. We note the position and displacement in y must be zero at launch and at impact on an even surface. Thus, we set the displacement in y equal to zero and find

$$y - y_0 = v_{0y}t - \frac{1}{2}gt^2 = (v_0 \sin\theta_0)t - \frac{1}{2}gt^2 = 0.$$

Factoring, we have

$$t\left(v_0 \sin\theta_0 - \frac{gt}{2}\right) = 0.$$

Solving for t gives us

$$T_{\text{tof}} = \frac{2(v_0 \sin\theta_0)}{g}. \tag{4.24}$$

This is the **time of flight** for a projectile both launched and impacting on a flat horizontal surface. Equation 4.24 does not apply when the projectile lands at a different elevation than it was launched, as we saw in Example 4.8 of the tennis player hitting the ball into the stands. The other solution, $t = 0$, corresponds to the time at launch. The time of flight is linearly proportional to the initial velocity in the y direction and inversely proportional to g. Thus, on the Moon, where gravity is one-sixth that of Earth, a projectile launched with the same velocity as on Earth would be airborne six times as long.

Trajectory

The trajectory of a projectile can be found by eliminating the time variable t from the kinematic equations for arbitrary t and solving for $y(x)$. We take $x_0 = y_0 = 0$ so the projectile is launched from the origin. The kinematic equation for x gives

$$x = v_{0x}t \Rightarrow t = \frac{x}{v_{0x}} = \frac{x}{v_0 \cos\theta_0}.$$

Substituting the expression for t into the equation for the position $y = (v_0 \sin\theta_0)t - \frac{1}{2}gt^2$ gives

$$y = (v_0 \sin\theta_0)\left(\frac{x}{v_0 \cos\theta_0}\right) - \frac{1}{2}g\left(\frac{x}{v_0 \cos\theta_0}\right)^2.$$

Rearranging terms, we have

$$y = (\tan\theta_0)x - \left[\frac{g}{2(v_0 \cos\theta_0)^2}\right]x^2. \tag{4.25}$$

This trajectory equation is of the form $y = ax + bx^2$, which is an equation of a parabola with coefficients

$$a = \tan\theta_0, \quad b = -\frac{g}{2(v_0 \cos\theta_0)^2}.$$

Range

From the trajectory equation we can also find the **range**, or the horizontal distance traveled by the projectile. Factoring Equation 4.25, we have

$$y = x\left[\tan\theta_0 - \frac{g}{2(v_0 \cos\theta_0)^2}x\right].$$

The position y is zero for both the launch point and the impact point, since we are again considering only a flat horizontal surface. Setting $y = 0$ in this equation gives solutions $x = 0$, corresponding to the launch point, and

$$x = \frac{2v_0^2 \sin\theta_0 \cos\theta_0}{g},$$

corresponding to the impact point. Using the trigonometric identity $2\sin\theta\cos\theta = \sin 2\theta$ and setting $x = R$ for range, we find

$$R = \frac{v_0^2 \sin 2\theta_0}{g}. \tag{4.26}$$

Note particularly that Equation 4.26 is valid only for launch and impact on a horizontal surface. We see the range is directly proportional to the square of the initial speed v_0 and $\sin 2\theta_0$, and it is inversely proportional to the acceleration of gravity. Thus, on the Moon, the range would be six times greater than on Earth for the same initial velocity. Furthermore, we see from the factor $\sin 2\theta_0$ that the range is maximum at 45°. These results are shown in Figure 4.15. In (a) we see that the greater the initial velocity, the greater the range. In (b), we see that

the range is maximum at 45°. This is true only for conditions neglecting air resistance. If air resistance is considered, the maximum angle is somewhat smaller. It is interesting that the same range is found for two initial launch angles that sum to 90°. The projectile launched with the smaller angle has a lower apex than the higher angle, but they both have the same range.

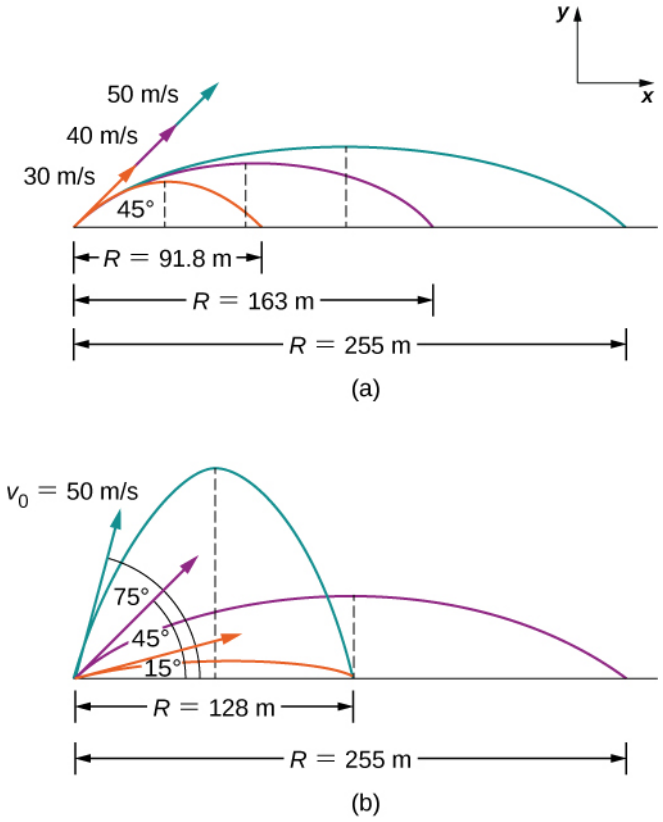


Figure 4.15 Trajectories of projectiles on level ground. (a) The greater the initial speed v_0, the greater the range for a given initial angle. (b) The effect of initial angle θ_0 on the range of a projectile with a given initial speed. Note that the range is the same for initial angles of 15° and 75°, although the maximum heights of those paths are different.

EXAMPLE 4.9

Comparing Golf Shots

A golfer finds himself in two different situations on different holes. On the second hole he is 120 m from the green and wants to hit the ball 90 m and let it run onto the green. He angles the shot low to the ground at 30° to the horizontal to let the ball roll after impact. On the fourth hole he is 90 m from the green and wants to let the ball drop with a minimum amount of rolling after impact. Here, he angles the shot at 70° to the horizontal to minimize rolling after impact. Both shots are hit and impacted on a level surface.

(a) What is the initial speed of the ball at the second hole?

(b) What is the initial speed of the ball at the fourth hole?

(c) Write the trajectory equation for both cases.

(d) Graph the trajectories.

Strategy

We see that the range equation has the initial speed and angle, so we can solve for the initial speed for both (a) and (b). When we have the initial speed, we can use this value to write the trajectory equation.

Solution

(a) $R = \frac{v_0^2 \sin 2\theta_0}{g} \Rightarrow v_0 = \sqrt{\frac{Rg}{\sin 2\theta_0}} = \sqrt{\frac{90.0 \text{ m}(9.8 \text{ m/s}^2)}{\sin(2(30°))}} = 31.9 \text{ m/s}$

(b) $R = \frac{v_0^2 \sin 2\theta_0}{g} \Rightarrow v_0 = \sqrt{\frac{Rg}{\sin 2\theta_0}} = \sqrt{\frac{90.0 \text{ m}(9.8 \text{ m/s}^2)}{\sin(2(70°))}} = 37.0 \text{ m/s}$

(c)

$$y = x\left[\tan\theta_0 - \frac{g}{2(v_0 \cos\theta_0)^2}x\right]$$

$$\text{Second hole: } y = x\left[\tan 30° - \frac{9.8 \text{ m/s}^2}{2[(31.9 \text{ m/s})(\cos 30°)]^2}x\right] = 0.58x - 0.0064x^2$$

$$\text{Fourth hole: } y = x\left[\tan 70° - \frac{9.8 \text{ m/s}^2}{2[(37.0 \text{ m/s})(\cos 70°)]^2}x\right] = 2.75x - 0.0306x^2$$

(d) Using a graphing utility, we can compare the two trajectories, which are shown in Figure 4.16.

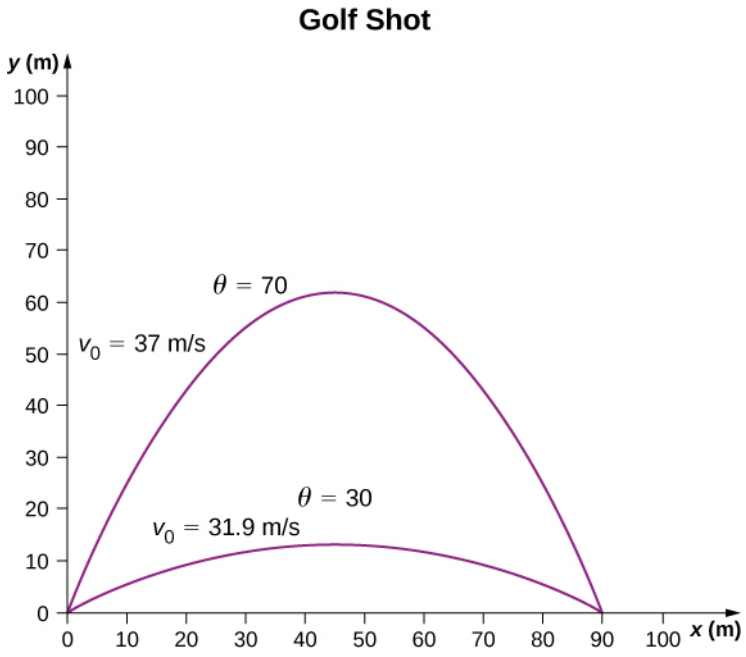


Figure 4.16 Two trajectories of a golf ball with a range of 90 m. The impact points of both are at the same level as the launch point.

Significance

The initial speed for the shot at 70° is greater than the initial speed of the shot at 30°. Note from Figure 4.16 that two projectiles launched at the same speed but at different angles have the same range if the launch angles add to 90°. The launch angles in this example add to give a number greater than 90°. Thus, the shot at 70° has to have a greater launch speed to reach 90 m, otherwise it would land at a shorter distance.

CHECK YOUR UNDERSTANDING 4.4

If the two golf shots in Example 4.9 were launched at the same speed, which shot would have the greatest range?

When we speak of the range of a projectile on level ground, we assume R is very small compared with the circumference of Earth. If, however, the range is large, Earth curves away below the projectile and the acceleration resulting from gravity changes direction along the path. The range is larger than predicted by the range equation given earlier because the projectile has farther to fall than it would on level ground, as shown in Figure 4.17, which is based on a drawing in Newton's *Principia.* If the initial speed is great enough, the projectile goes into orbit. Earth's surface drops 5 m every 8000 m. In 1 s an object falls 5 m without air resistance. Thus, if an object is given a horizontal velocity of 8000 m/s (or 18,000 mi/hr) near Earth's surface, it will go into orbit around the planet because the surface continuously falls away from the object. This is roughly the speed of the Space Shuttle in a low Earth orbit when it was operational, or any satellite in a low Earth orbit. These and other aspects of orbital motion, such as Earth's rotation, are covered in greater depth in Gravitation.

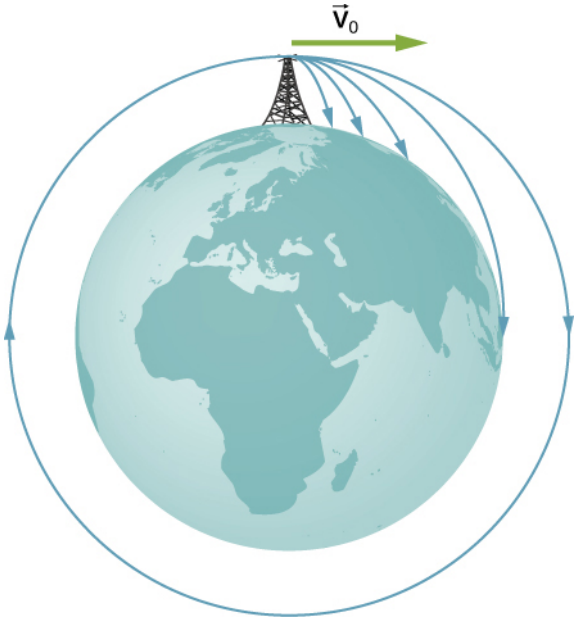


Figure 4.17 Projectile to satellite. In each case shown here, a projectile is launched from a very high tower to avoid air resistance. With increasing initial speed, the range increases and becomes longer than it would be on level ground because Earth curves away beneath its path. With a speed of 8000 m/s, orbit is achieved.

INTERACTIVE

At PhET Explorations: Projectile Motion (https://openstax.org/l/21phetpromot) , learn about projectile motion in terms of the launch angle and initial velocity.

4.4 Uniform Circular Motion

Learning Objectives

By the end of this section, you will be able to:

- Solve for the centripetal acceleration of an object moving on a circular path.
- Use the equations of circular motion to find the position, velocity, and acceleration of a particle executing circular motion.
- Explain the differences between centripetal acceleration and tangential acceleration resulting from nonuniform circular motion.
- Evaluate centripetal and tangential acceleration in nonuniform circular motion, and find the total acceleration vector.

Uniform circular motion is a specific type of motion in which an object travels in a circle with a constant speed. For example, any point on a propeller spinning at a constant rate is executing uniform circular motion. Other examples are the second, minute, and hour hands of a watch. It is remarkable that points on these rotating objects are actually accelerating, although the rotation rate is a constant. To see this, we must analyze the

motion in terms of vectors.

Centripetal Acceleration

In one-dimensional kinematics, objects with a constant speed have zero acceleration. However, in two- and three-dimensional kinematics, even if the speed is a constant, a particle can have acceleration if it moves along a curved trajectory such as a circle. In this case the velocity vector is changing, or $d\vec{\mathbf{v}}/dt \neq 0$. This is shown in Figure 4.18. As the particle moves counterclockwise in time Δt on the circular path, its position vector moves from $\vec{\mathbf{r}}(t)$ to $\vec{\mathbf{r}}(t + \Delta t)$. The velocity vector has constant magnitude and is tangent to the path as it changes from $\vec{\mathbf{v}}(t)$ to $\vec{\mathbf{v}}(t + \Delta t)$, changing its direction only. Since the velocity vector $\vec{\mathbf{v}}(t)$ is perpendicular to the position vector $\vec{\mathbf{r}}(t)$, the triangles formed by the position vectors and $\Delta\vec{\mathbf{r}}$, and the velocity vectors and $\Delta\vec{\mathbf{v}}$ are similar. Furthermore, since $|\vec{\mathbf{r}}(t)| = |\vec{\mathbf{r}}(t + \Delta t)|$ and $|\vec{\mathbf{v}}(t)| = |\vec{\mathbf{v}}(t + \Delta t)|$, the two triangles are isosceles. From these facts we can make the assertion

$$\frac{\Delta v}{v} = \frac{\Delta r}{r} \text{ or } \Delta v = \frac{v}{r}\Delta r.$$

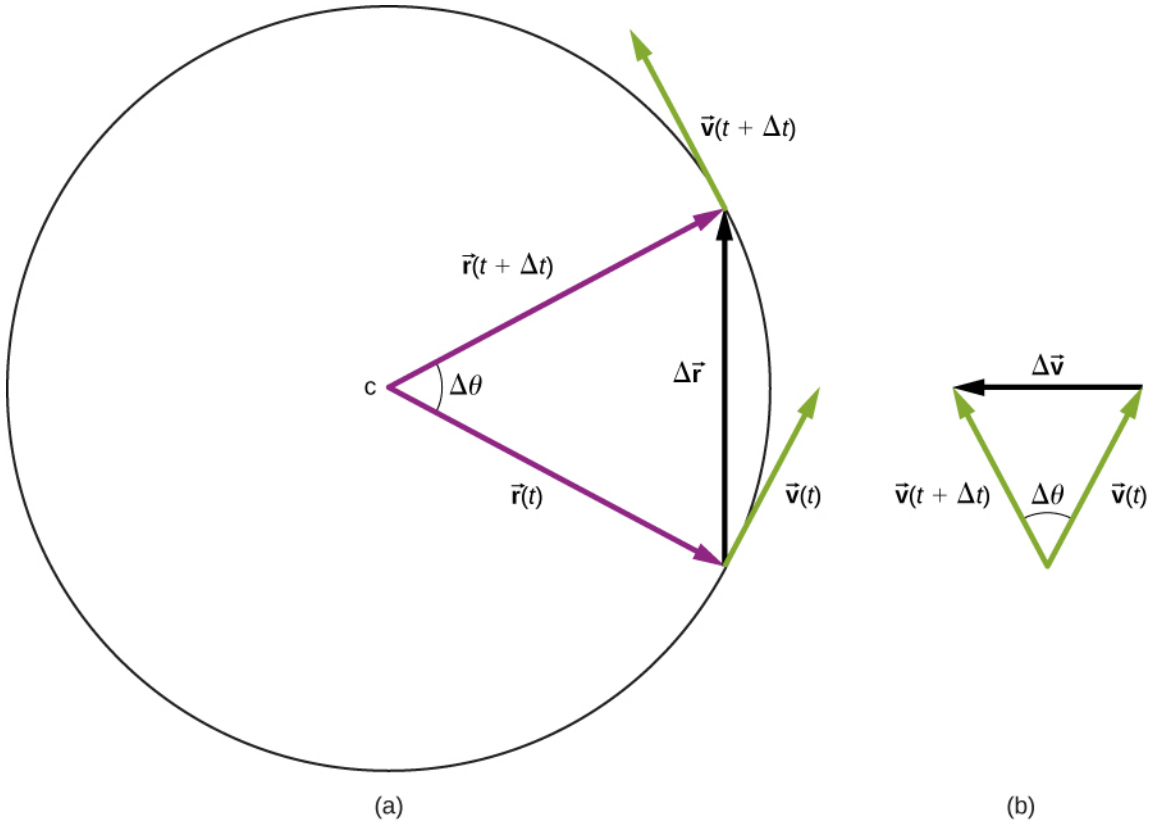


Figure 4.18 (a) A particle is moving in a circle at a constant speed, with position and velocity vectors at times t and $t + \Delta t$. (b) Velocity vectors forming a triangle. The two triangles in the figure are similar. The vector $\Delta\vec{\mathbf{v}}$ points toward the center of the circle in the limit $\Delta t \to 0$.

We can find the magnitude of the acceleration from

$$a = \lim_{\Delta t \to 0}\left(\frac{\Delta v}{\Delta t}\right) = \frac{v}{r}\left(\lim_{\Delta t \to 0}\frac{\Delta r}{\Delta t}\right) = \frac{v^2}{r}.$$

The direction of the acceleration can also be found by noting that as Δt and therefore $\Delta\theta$ approach zero, the vector $\Delta\vec{\mathbf{v}}$ approaches a direction perpendicular to $\vec{\mathbf{v}}$. In the limit $\Delta t \to 0, \Delta\vec{\mathbf{v}}$ is perpendicular to $\vec{\mathbf{v}}$. Since $\vec{\mathbf{v}}$ is tangent to the circle, the acceleration $d\vec{\mathbf{v}}/dt$ points toward the center of the circle. Summarizing, a particle moving in a circle at a constant speed has an acceleration with magnitude

$$a_c = \frac{v^2}{r}. \tag{4.27}$$

The direction of the acceleration vector is toward the center of the circle (Figure 4.19). This is a radial acceleration and is called the **centripetal acceleration**, which is why we give it the subscript c. The word *centripetal* comes from the Latin words *centrum* (meaning "center") and *petere* (meaning "to seek"), and thus takes the meaning "center seeking."

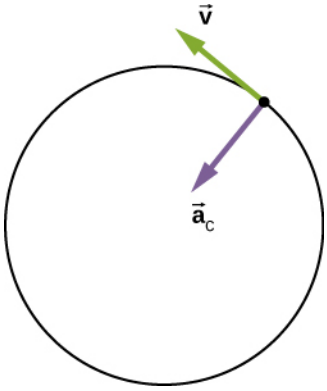


Figure 4.19 The centripetal acceleration vector points toward the center of the circular path of motion and is an acceleration in the radial direction. The velocity vector is also shown and is tangent to the circle.

Let's investigate some examples that illustrate the relative magnitudes of the velocity, radius, and centripetal acceleration.

EXAMPLE 4.10

Creating an Acceleration of 1 *g*

A jet is flying at 134.1 m/s along a straight line and makes a turn along a circular path level with the ground. What does the radius of the circle have to be to produce a centripetal acceleration of 1 *g* on the pilot and jet toward the center of the circular trajectory?

Strategy

Given the speed of the jet, we can solve for the radius of the circle in the expression for the centripetal acceleration.

Solution

Set the centripetal acceleration equal to the acceleration of gravity: $9.8\ \text{m/s}^2 = v^2/r$.

Solving for the radius, we find

$$r = \frac{(134.1\ \text{m/s})^2}{9.8\ \text{m/s}^2} = 1835\ \text{m} = 1.835\ \text{km}.$$

Significance

To create a greater acceleration than *g* on the pilot, the jet would either have to decrease the radius of its circular trajectory or increase its speed on its existing trajectory or both.

CHECK YOUR UNDERSTANDING 4.5

A flywheel has a radius of 20.0 cm. What is the speed of a point on the edge of the flywheel if it experiences a centripetal acceleration of $900.0\ \text{cm/s}^2$?

Centripetal acceleration can have a wide range of values, depending on the speed and radius of curvature of the circular path. Typical centripetal accelerations are given in the following table.

Object	Centripetal Acceleration (m/s^2 or factors of g)
Earth around the Sun	5.93×10^{-3}
Moon around the Earth	2.73×10^{-3}
Satellite in geosynchronous orbit	0.233
Outer edge of a CD when playing	5.78
Jet in a barrel roll	(2–3 g)
Roller coaster	(5 g)
Electron orbiting a proton in a simple Bohr model of the atom	9.0×10^{22}

Table 4.1 Typical Centripetal Accelerations

Equations of Motion for Uniform Circular Motion

A particle executing circular motion can be described by its position vector $\vec{\mathbf{r}}(t)$. Figure 4.20 shows a particle executing circular motion in a counterclockwise direction. As the particle moves on the circle, its position vector sweeps out the angle θ with the x-axis. Vector $\vec{\mathbf{r}}(t)$ making an angle θ with the x-axis is shown with its components along the x- and y-axes. The magnitude of the position vector is $A = |\vec{\mathbf{r}}(t)|$ and is also the radius of the circle, so that in terms of its components,

$$\vec{\mathbf{r}}(t) = A\cos\omega t\hat{\mathbf{i}} + A\sin\omega t\hat{\mathbf{j}}. \quad 4.28$$

Here, ω is a constant called the **angular frequency** of the particle. The angular frequency has units of radians (rad) per second and is simply the number of radians of angular measure through which the particle passes per second. The angle θ that the position vector has at any particular time is ωt.

If T is the period of motion, or the time to complete one revolution (2π rad), then

$$\omega = \frac{2\pi}{T}.$$

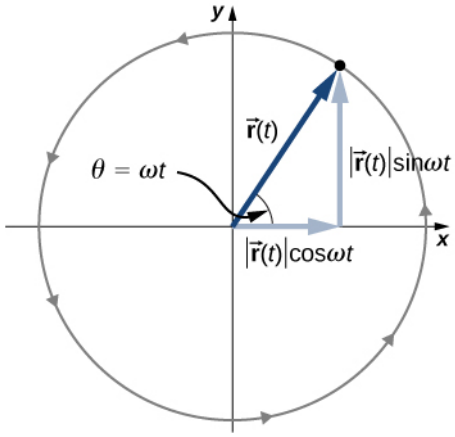


Figure 4.20 The position vector for a particle in circular motion with its components along the *x*- and *y*-axes. The particle moves counterclockwise. Angle θ is the angular frequency ω in radians per second multiplied by *t*.

Velocity and acceleration can be obtained from the position function by differentiation:

$$\vec{\mathbf{v}}(t) = \frac{d\vec{\mathbf{r}}(t)}{dt} = -A\omega \sin \omega t\hat{\mathbf{i}} + A\omega \cos \omega t\hat{\mathbf{j}}. \tag{4.29}$$

It can be shown from Figure 4.20 that the velocity vector is tangential to the circle at the location of the particle, with magnitude $A\omega$. Similarly, the acceleration vector is found by differentiating the velocity:

$$\vec{\mathbf{a}}(t) = \frac{d\vec{\mathbf{v}}(t)}{dt} = -A\omega^2 \cos \omega t\hat{\mathbf{i}} - A\omega^2 \sin \omega t\hat{\mathbf{j}}. \tag{4.30}$$

From this equation we see that the acceleration vector has magnitude $A\omega^2$ and is directed opposite the position vector, toward the origin, because $\vec{\mathbf{a}}(t) = -\omega^2\vec{\mathbf{r}}(t)$.

EXAMPLE 4.11

Circular Motion of a Proton

A proton has speed 5×10^6 m/s and is moving in a circle in the *xy* plane of radius $r = 0.175$ m. What is its position in the *xy* plane at time $t = 2.0 \times 10^{-7}$ s $= 200$ ns? At $t = 0$, the position of the proton is $0.175\ \text{m}\hat{\mathbf{i}}$ and it circles counterclockwise. Sketch the trajectory.

Solution

From the given data, the proton has period and angular frequency:

$$T = \frac{2\pi r}{v} = \frac{2\pi(0.175\ \text{m})}{5.0 \times 10^6\ \text{m/s}} = 2.20 \times 10^{-7}\ \text{s}$$

$$\omega = \frac{2\pi}{T} = \frac{2\pi}{2.20 \times 10^{-7}\ \text{s}} = 2.856 \times 10^7\ \text{rad/s}.$$

The position of the particle at $t = 2.0 \times 10^{-7}$ s with $A = 0.175$ m is

$$\begin{aligned}\vec{\mathbf{r}}(2.0 \times 10^{-7}\text{s}) &= A\cos\omega(2.0 \times 10^{-7}\ \text{s})\hat{\mathbf{i}} + A\sin\omega(2.0 \times 10^{-7}\ \text{s})\hat{\mathbf{j}}\ \text{m} \\ &= 0.175\cos[(2.856 \times 10^7\ \text{rad/s})(2.0 \times 10^{-7}\ \text{s})]\hat{\mathbf{i}} \\ &\quad + 0.175\sin[(2.856 \times 10^7\ \text{rad/s})(2.0 \times 10^{-7}\ \text{s})]\hat{\mathbf{j}}\ \text{m} \\ &= 0.175\cos(5.712\ \text{rad})\hat{\mathbf{i}} + 0.175\sin(5.712\ \text{rad})\hat{\mathbf{j}} = 0.147\hat{\mathbf{i}} - 0.095\hat{\mathbf{j}}\ \text{m}.\end{aligned}$$

From this result we see that the proton is located slightly below the *x*-axis. This is shown in Figure 4.21.

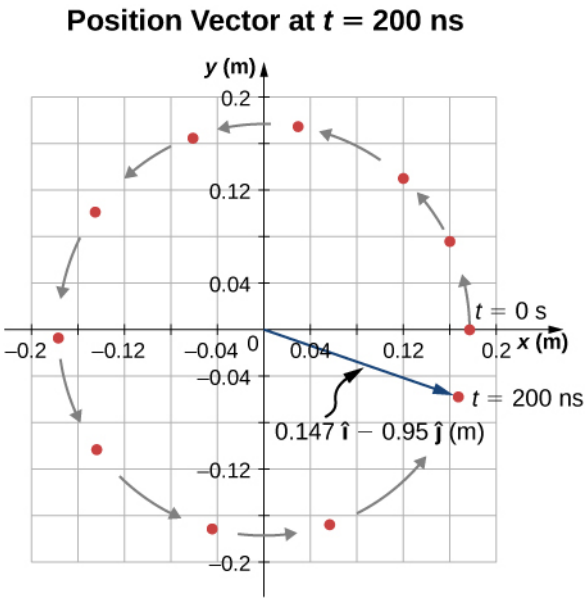


Figure 4.21 Position vector of the proton at $t = 2.0 \times 10^{-7}\,\text{s} = 200\,\text{ns}$. The trajectory of the proton is shown. The angle through which the proton travels along the circle is 5.712 rad, which a little less than one complete revolution.

Significance

We picked the initial position of the particle to be on the x-axis. This was completely arbitrary. If a different starting position were given, we would have a different final position at $t = 200$ ns.

Nonuniform Circular Motion

Circular motion does not have to be at a constant speed. A particle can travel in a circle and speed up or slow down, showing an acceleration in the direction of the motion.

In uniform circular motion, the particle executing circular motion has a constant speed and the circle is at a fixed radius. If the speed of the particle is changing as well, then we introduce an additional acceleration in the direction tangential to the circle. Such accelerations occur at a point on a top that is changing its spin rate, or any accelerating rotor. In Displacement and Velocity Vectors we showed that centripetal acceleration is the time rate of change of the direction of the velocity vector. If the speed of the particle is changing, then it has a **tangential acceleration** that is the time rate of change of the magnitude of the velocity:

$$a_\text{T} = \frac{d\,|\vec{\mathbf{v}}|}{dt}. \tag{4.31}$$

The direction of tangential acceleration is tangent to the circle whereas the direction of centripetal acceleration is radially inward toward the center of the circle. Thus, a particle in circular motion with a tangential acceleration has a **total acceleration** that is the vector sum of the centripetal and tangential accelerations:

$$\vec{\mathbf{a}} = \vec{\mathbf{a}}_\text{c} + \vec{\mathbf{a}}_\text{T}. \tag{4.32}$$

The acceleration vectors are shown in Figure 4.22. Note that the two acceleration vectors $\vec{\mathbf{a}}_\text{c}$ and $\vec{\mathbf{a}}_\text{T}$ are perpendicular to each other, with $\vec{\mathbf{a}}_\text{c}$ in the radial direction and $\vec{\mathbf{a}}_\text{T}$ in the tangential direction. The total acceleration $\vec{\mathbf{a}}$ points at an angle between $\vec{\mathbf{a}}_\text{c}$ and $\vec{\mathbf{a}}_\text{T}$.

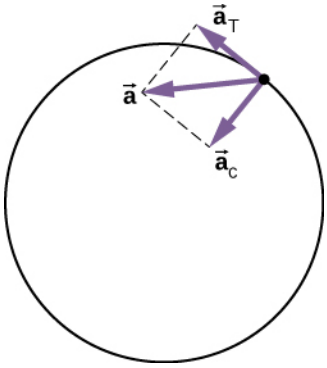


Figure 4.22 The centripetal acceleration points toward the center of the circle. The tangential acceleration is tangential to the circle at the particle's position. The total acceleration is the vector sum of the tangential and centripetal accelerations, which are perpendicular.

EXAMPLE 4.12

Total Acceleration during Circular Motion

A particle moves in a circle of radius $r = 2.0$ m. During the time interval from $t = 1.5$ s to $t = 4.0$ s its speed varies with time according to

$$v(t) = c_1 - \frac{c_2}{t^2}, \quad c_1 = 4.0 \text{ m/s}, \quad c_2 = 6.0 \text{ m} \cdot \text{s}.$$

What is the total acceleration of the particle at $t = 2.0$ s?

Strategy

We are given the speed of the particle and the radius of the circle, so we can calculate centripetal acceleration easily. The direction of the centripetal acceleration is toward the center of the circle. We find the magnitude of the tangential acceleration by taking the derivative with respect to time of $|v(t)|$ using Equation 4.31 and evaluating it at $t = 2.0$ s. We use this and the magnitude of the centripetal acceleration to find the total acceleration.

Solution

Centripetal acceleration is

$$v(2.0\text{s}) = \left(4.0 - \frac{6.0}{(2.0)^2}\right) \text{m/s} = 2.5 \text{ m/s}$$

$$a_c = \frac{v^2}{r} = \frac{(2.5 \text{ m/s})^2}{2.0 \text{ m}} = 3.1 \text{ m/s}^2$$

directed toward the center of the circle. Tangential acceleration is

$$a_T = \left|\frac{d\vec{v}}{dt}\right| = \frac{2c_2}{t^3} = \frac{12.0}{(2.0)^3} \text{m/s}^2 = 1.5 \text{ m/s}^2.$$

Total acceleration is

$$|\vec{a}| = \sqrt{3.1^2 + 1.5^2} \text{m/s}^2 = 3.44 \text{ m/s}^2$$

and $\theta = \tan^{-1} \frac{3.1}{1.5} = 64°$ from the tangent to the circle. See Figure 4.23.

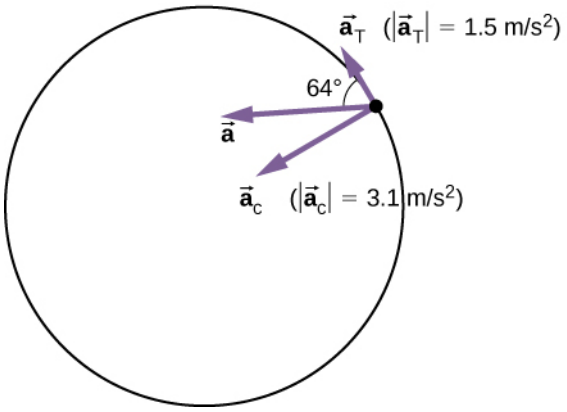


Figure 4.23 The tangential and centripetal acceleration vectors. The net acceleration $\vec{a}$ is the vector sum of the two accelerations.

Significance

The directions of centripetal and tangential accelerations can be described more conveniently in terms of a polar coordinate system, with unit vectors in the radial and tangential directions. This coordinate system, which is used for motion along curved paths, is discussed in detail later in the book.

4.5 Relative Motion in One and Two Dimensions

Learning Objectives

By the end of this section, you will be able to:

- Explain the concept of reference frames.
- Write the position and velocity vector equations for relative motion.
- Draw the position and velocity vectors for relative motion.
- Analyze one-dimensional and two-dimensional relative motion problems using the position and velocity vector equations.

Motion does not happen in isolation. If you're riding in a train moving at 10 m/s east, this velocity is measured relative to the ground on which you're traveling. However, if another train passes you at 15 m/s east, your velocity relative to this other train is different from your velocity relative to the ground. Your velocity relative to the other train is 5 m/s west. To explore this idea further, we first need to establish some terminology.

Reference Frames

To discuss relative motion in one or more dimensions, we first introduce the concept of **reference frames**. When we say an object has a certain velocity, we must state it has a velocity with respect to a given reference frame. In most examples we have examined so far, this reference frame has been Earth. If you say a person is sitting in a train moving at 10 m/s east, then you imply the person on the train is moving relative to the surface of Earth at this velocity, and Earth is the reference frame. We can expand our view of the motion of the person on the train and say Earth is spinning in its orbit around the Sun, in which case the motion becomes more complicated. In this case, the solar system is the reference frame. In summary, all discussion of relative motion must define the reference frames involved. We now develop a method to refer to reference frames in relative motion.

Relative Motion in One Dimension

We introduce relative motion in one dimension first, because the velocity vectors simplify to having only two possible directions. Take the example of the person sitting in a train moving east. If we choose east as the positive direction and Earth as the reference frame, then we can write the velocity of the train with respect to the Earth as $\vec{\mathbf{v}}_{\mathrm{TE}} = 10\ \mathrm{m/s}\ \hat{\mathbf{i}}$ east, where the subscripts TE refer to train and Earth. Let's now say the person gets up out of her seat and walks toward the back of the train at 2 m/s. This tells us she has a velocity relative to the reference frame of the train. Since the person is walking west, in the negative direction, we write her velocity with respect to the train as $\vec{\mathbf{v}}_{\mathrm{PT}} = -2\ \mathrm{m/s}\ \hat{\mathbf{i}}$. We can add the two velocity vectors to find the velocity of

the person with respect to Earth. This **relative velocity** is written as

$$\vec{\mathbf{v}}_{\mathrm{PE}} = \vec{\mathbf{v}}_{\mathrm{PT}} + \vec{\mathbf{v}}_{\mathrm{TE}}. \tag{4.33}$$

Note the ordering of the subscripts for the various reference frames in Equation 4.33. The subscripts for the coupling reference frame, which is the train, appear consecutively in the right-hand side of the equation. Figure 4.24 shows the correct order of subscripts when forming the vector equation.




Figure 4.24 When constructing the vector equation, the subscripts for the coupling reference frame appear consecutively on the inside. The subscripts on the left-hand side of the equation are the same as the two outside subscripts on the right-hand side of the equation.

Adding the vectors, we find $\vec{\mathbf{v}}_{\mathrm{PE}} = 8\ \mathrm{m/s}\ \hat{\mathbf{i}}$, so the person is moving 8 m/s east with respect to Earth. Graphically, this is shown in Figure 4.25.

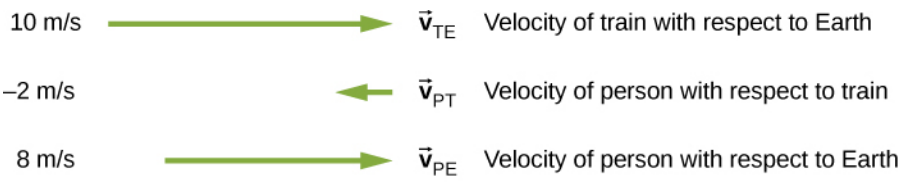


Figure 4.25 Velocity vectors of the train with respect to Earth, person with respect to the train, and person with respect to Earth.

Relative Velocity in Two Dimensions

We can now apply these concepts to describing motion in two dimensions. Consider a particle P and reference frames S and S', as shown in Figure 4.26. The position of the origin of S' as measured in S is $\vec{\mathbf{r}}_{S'S}$, the position of P as measured in S' is $\vec{\mathbf{r}}_{PS'}$, and the position of P as measured in S is $\vec{\mathbf{r}}_{PS}$.

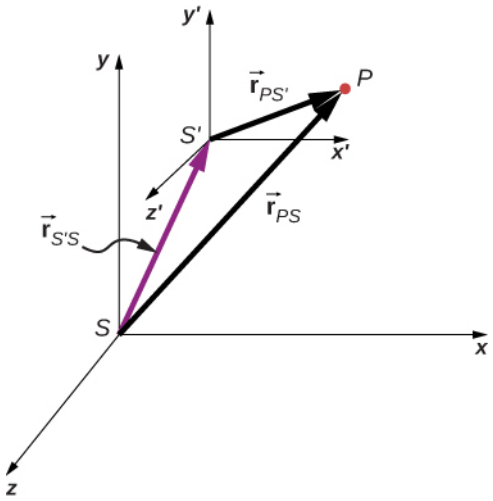


Figure 4.26 The positions of particle P relative to frames S and S' are $\vec{\mathbf{r}}_{PS}$ and $\vec{\mathbf{r}}_{PS'}$, respectively.

From Figure 4.26 we see that

$$\vec{\mathbf{r}}_{PS} = \vec{\mathbf{r}}_{PS'} + \vec{\mathbf{r}}_{S'S}. \tag{4.34}$$

The relative velocities are the time derivatives of the position vectors. Therefore,

$$\vec{\mathbf{v}}_{PS} = \vec{\mathbf{v}}_{PS'} + \vec{\mathbf{v}}_{S'S}. \tag{4.35}$$

The velocity of a particle relative to S is equal to its velocity relative to S' plus the velocity of S' relative to S.

We can extend Equation 4.35 to any number of reference frames. For particle P with velocities

$\vec{\mathbf{v}}_{PA}$, $\vec{\mathbf{v}}_{PB}$, and $\vec{\mathbf{v}}_{PC}$ in frames A, B, and C,

$$\vec{\mathbf{v}}_{PC} = \vec{\mathbf{v}}_{PA} + \vec{\mathbf{v}}_{AB} + \vec{\mathbf{v}}_{BC}. \tag{4.36}$$

We can also see how the accelerations are related as observed in two reference frames by differentiating Equation 4.35:

$$\vec{\mathbf{a}}_{PS} = \vec{\mathbf{a}}_{PS'} + \vec{\mathbf{a}}_{S'S}. \tag{4.37}$$

We see that if the velocity of S' relative to S is a constant, then $\vec{\mathbf{a}}_{S'S} = 0$ and

$$\vec{\mathbf{a}}_{PS} = \vec{\mathbf{a}}_{PS'}. \tag{4.38}$$

This says the acceleration of a particle is the same as measured by two observers moving at a constant velocity relative to each other.

EXAMPLE 4.13

Motion of a Car Relative to a Truck

A truck is traveling south at a speed of 70 km/h toward an intersection. A car is traveling east toward the intersection at a speed of 80 km/h (Figure 4.27). What is the velocity of the car relative to the truck?

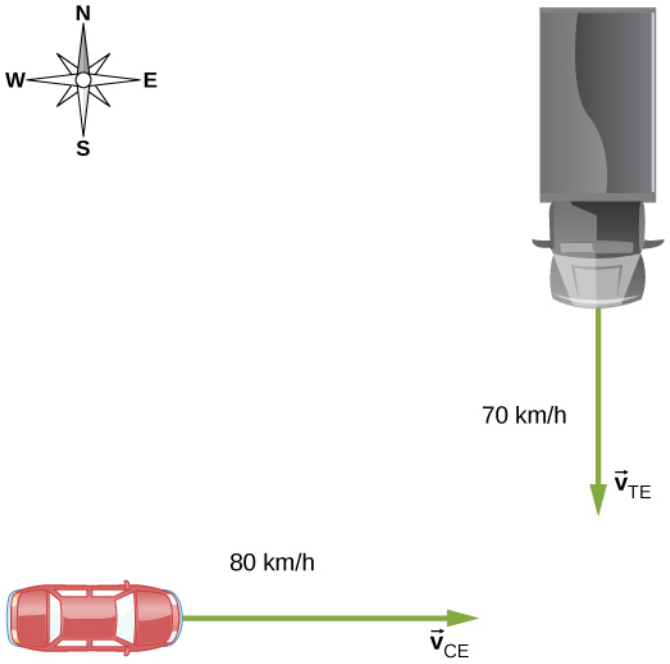


Figure 4.27 A car travels east toward an intersection while a truck travels south toward the same intersection.

Strategy

First, we must establish the reference frame common to both vehicles, which is Earth. Then, we write the velocities of each with respect to the reference frame of Earth, which enables us to form a vector equation that links the car, the truck, and Earth to solve for the velocity of the car with respect to the truck.

Solution

The velocity of the car with respect to Earth is $\vec{\mathbf{v}}_{\text{CE}} = 80 \text{ km/h } \hat{\mathbf{i}}$. The velocity of the truck with respect to Earth is $\vec{\mathbf{v}}_{\text{TE}} = -70 \text{ km/h } \hat{\mathbf{j}}$. Using the velocity addition rule, the relative motion equation we are seeking is

$$\vec{\mathbf{v}}_{\text{CT}} = \vec{\mathbf{v}}_{\text{CE}} + \vec{\mathbf{v}}_{\text{ET}}.$$

Here, $\vec{\mathbf{v}}_{CT}$ is the velocity of the car with respect to the truck, and Earth is the connecting reference frame. Since we have the velocity of the truck with respect to Earth, the negative of this vector is the velocity of Earth with respect to the truck: $\vec{\mathbf{v}}_{ET} = -\vec{\mathbf{v}}_{TE}$. The vector diagram of this equation is shown in Figure 4.28.

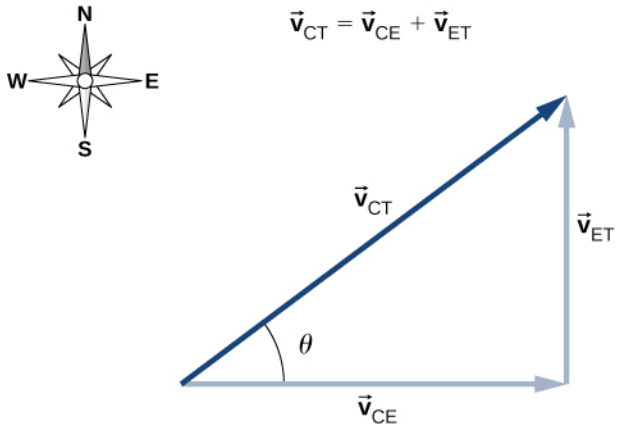


Figure 4.28 Vector diagram of the vector equation $\vec{\mathbf{v}}_{CT} = \vec{\mathbf{v}}_{CE} + \vec{\mathbf{v}}_{ET}$.

We can now solve for the velocity of the car with respect to the truck:

$$|\vec{\mathbf{v}}_{CT}| = \sqrt{(80.0\ \text{km/h})^2 + (70.0\ \text{km/h})^2} = 106.\ \text{km/h}$$

and

$$\theta = \tan^{-1}\left(\frac{70.0}{80.0}\right) = 41.2^\circ \text{ north of east.}$$

Significance

Drawing a vector diagram showing the velocity vectors can help in understanding the relative velocity of the two objects.

CHECK YOUR UNDERSTANDING 4.6

A boat heads north in still water at 4.5 m/s directly across a river that is running east at 3.0 m/s. What is the velocity of the boat with respect to Earth?

EXAMPLE 4.14

Flying a Plane in a Wind

A pilot must fly his plane due north to reach his destination. The plane can fly at 300 km/h in still air. A wind is blowing out of the northeast at 90 km/h. (a) What is the speed of the plane relative to the ground? (b) In what direction must the pilot head her plane to fly due north?

Strategy

The pilot must point her plane somewhat east of north to compensate for the wind velocity. We need to construct a vector equation that contains the velocity of the plane with respect to the ground, the velocity of the plane with respect to the air, and the velocity of the air with respect to the ground. Since these last two quantities are known, we can solve for the velocity of the plane with respect to the ground. We can graph the vectors and use this diagram to evaluate the magnitude of the plane's velocity with respect to the ground. The diagram will also tell us the angle the plane's velocity makes with north with respect to the air, which is the direction the pilot must head her plane.

Solution

The vector equation is $\vec{\mathbf{v}}_{\mathrm{PG}} = \vec{\mathbf{v}}_{\mathrm{PA}} + \vec{\mathbf{v}}_{\mathrm{AG}}$, where P = plane, A = air, and G = ground. From the geometry in Figure 4.29, we can solve easily for the magnitude of the velocity of the plane with respect to the ground and the angle of the plane's heading, θ.

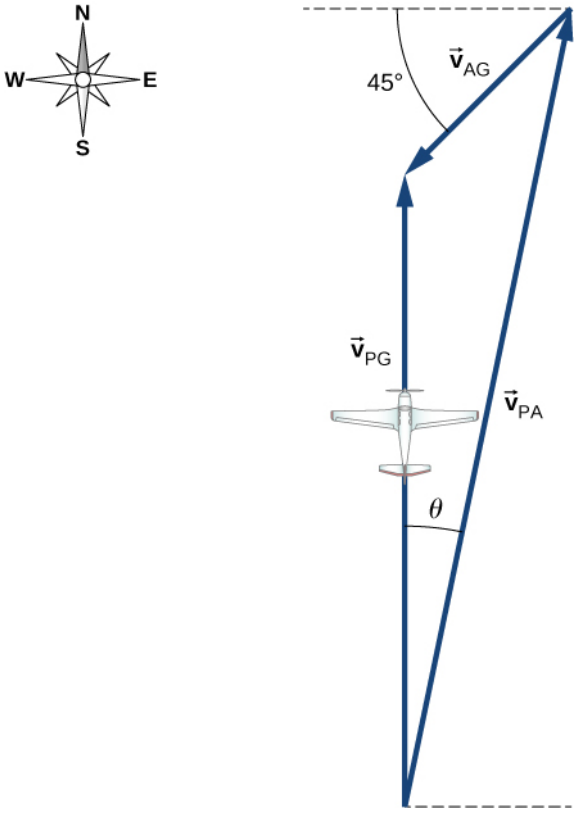


Figure 4.29 Vector diagram for Equation 4.34 showing the vectors $\vec{\mathbf{v}}_{\mathrm{PA}}$, $\vec{\mathbf{v}}_{\mathrm{AG}}$, and $\vec{\mathbf{v}}_{\mathrm{PG}}$.

(a) Known quantities:

$$\left|\vec{\mathbf{v}}_{\mathrm{PA}}\right| = 300 \text{ km/h}$$

$$\left|\vec{\mathbf{v}}_{\mathrm{AG}}\right| = 90 \text{ km/h}$$

Substituting into the equation of motion, we obtain $\left|\vec{\mathbf{v}}_{\mathrm{PG}}\right| = 230$ km/h.

(b) The angle $\theta = \tan^{-1}\frac{63.64}{300} = 12°$ east of north.

CHAPTER REVIEW

Key Terms

acceleration vector instantaneous acceleration found by taking the derivative of the velocity function with respect to time in unit vector notation

angular frequency ω, rate of change of an angle with which an object that is moving on a circular path

centripetal acceleration component of acceleration of an object moving in a circle that is directed radially inward toward the center of the circle

displacement vector vector from the initial position to a final position on a trajectory of a particle

position vector vector from the origin of a chosen coordinate system to the position of a particle in two- or three-dimensional space

projectile motion motion of an object subject only to the acceleration of gravity

range maximum horizontal distance a projectile travels

reference frame coordinate system in which the position, velocity, and acceleration of an object at rest or moving is measured

relative velocity velocity of an object as observed from a particular reference frame, or the velocity of one reference frame with respect to another reference frame

tangential acceleration magnitude of which is the time rate of change of speed. Its direction is tangent to the circle.

time of flight elapsed time a projectile is in the air

total acceleration vector sum of centripetal and tangential accelerations

trajectory path of a projectile through the air

velocity vector vector that gives the instantaneous speed and direction of a particle; tangent to the trajectory

Key Equations

Position vector	$\vec{\mathbf{r}}(t) = x(t)\hat{\mathbf{i}} + y(t)\hat{\mathbf{j}} + z(t)\hat{\mathbf{k}}$
Displacement vector	$\Delta\vec{\mathbf{r}} = \vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1)$
Velocity vector	$\vec{\mathbf{v}}(t) = \lim_{\Delta t \to 0} \frac{\vec{\mathbf{r}}(t+\Delta t) - \vec{\mathbf{r}}(t)}{\Delta t} = \frac{d\vec{\mathbf{r}}}{dt}$
Velocity in terms of components	$\vec{\mathbf{v}}(t) = v_x(t)\hat{\mathbf{i}} + v_y(t)\hat{\mathbf{j}} + v_z(t)\hat{\mathbf{k}}$
Velocity components	$v_x(t) = \frac{dx(t)}{dt} \quad v_y(t) = \frac{dy(t)}{dt} \quad v_z(t) = \frac{dz(t)}{dt}$
Average velocity	$\vec{\mathbf{v}}_{\text{avg}} = \frac{\vec{\mathbf{r}}(t_2) - \vec{\mathbf{r}}(t_1)}{t_2 - t_1}$
Instantaneous acceleration	$\vec{\mathbf{a}}(t) = \lim_{t \to 0} \frac{\vec{\mathbf{v}}(t+\Delta t) - \vec{\mathbf{v}}(t)}{\Delta t} = \frac{d\vec{\mathbf{v}}(t)}{dt}$
Instantaneous acceleration, component form	$\vec{\mathbf{a}}(t) = \frac{dv_x(t)}{dt}\hat{\mathbf{i}} + \frac{dv_y(t)}{dt}\hat{\mathbf{j}} + \frac{dv_z(t)}{dt}\hat{\mathbf{k}}$
Instantaneous acceleration as second derivatives of position	$\vec{\mathbf{a}}(t) = \frac{d^2x(t)}{dt^2}\hat{\mathbf{i}} + \frac{d^2y(t)}{dt^2}\hat{\mathbf{j}} + \frac{d^2z(t)}{dt^2}\hat{\mathbf{k}}$
Time of flight	$T_{\text{tof}} = \frac{2(v_0 \sin\theta_0)}{g}$

Trajectory	$y = (\tan\theta_0)x - \left[\frac{g}{2(v_0\cos\theta_0)^2}\right]x^2$
Range	$R = \frac{v_0^2 \sin 2\theta_0}{g}$
Centripetal acceleration	$a_C = \frac{v^2}{r}$
Position vector, uniform circular motion	$\vec{\mathbf{r}}(t) = A\cos\omega t\,\hat{\mathbf{i}} + A\sin\omega t\,\hat{\mathbf{j}}$
Velocity vector, uniform circular motion	$\vec{\mathbf{v}}(t) = \frac{d\vec{\mathbf{r}}(t)}{dt} = -A\omega\sin\omega t\hat{\mathbf{i}} + A\omega\cos\omega t\hat{\mathbf{j}}$
Acceleration vector, uniform circular motion	$\vec{\mathbf{a}}(t) = \frac{d\vec{\mathbf{v}}(t)}{dt} = -A\omega^2\cos\omega t\hat{\mathbf{i}} - A\omega^2\sin\omega t\hat{\mathbf{j}}$
Tangential acceleration	$a_T = \frac{d\lvert\vec{\mathbf{v}}\rvert}{dt}$
Total acceleration	$\vec{\mathbf{a}} = \vec{\mathbf{a}}_C + \vec{\mathbf{a}}_T$
Position vector in frame S is the position vector in frame S' plus the vector from the origin of S to the origin of S'	$\vec{\mathbf{r}}_{PS} = \vec{\mathbf{r}}_{PS'} + \vec{\mathbf{r}}_{S'S}$
Relative velocity equation connecting two reference frames	$\vec{\mathbf{v}}_{PS} = \vec{\mathbf{v}}_{PS'} + \vec{\mathbf{v}}_{S'S}$
Relative velocity equation connecting more than two reference frames	$\vec{\mathbf{v}}_{PC} = \vec{\mathbf{v}}_{PA} + \vec{\mathbf{v}}_{AB} + \vec{\mathbf{v}}_{BC}$
Relative acceleration equation	$\vec{\mathbf{a}}_{PS} = \vec{\mathbf{a}}_{PS'} + \vec{\mathbf{a}}_{S'S}$

Summary

4.1 Displacement and Velocity Vectors

- The position function $\vec{\mathbf{r}}(t)$ gives the position as a function of time of a particle moving in two or three dimensions. Graphically, it is a vector from the origin of a chosen coordinate system to the point where the particle is located at a specific time.
- The displacement vector $\Delta\vec{\mathbf{r}}$ gives the shortest distance between any two points on the trajectory of a particle in two or three dimensions.
- Instantaneous velocity gives the speed and direction of a particle at a specific time on its trajectory in two or three dimensions, and is a vector in two and three dimensions.
- The velocity vector is tangent to the trajectory of the particle.
- Displacement $\vec{\mathbf{r}}(t)$ can be written as a vector sum of the one-dimensional displacements $\vec{x}(t)$, $\vec{y}(t)$, $\vec{z}(t)$ along the x, y, and z directions.
- Velocity $\vec{\mathbf{v}}(t)$ can be written as a vector sum of the one-dimensional velocities $v_x(t)$, $v_y(t)$, $v_z(t)$ along the x, y, and z directions.
- Motion in any given direction is independent of motion in a perpendicular direction.

4.2 Acceleration Vector

- In two and three dimensions, the acceleration vector can have an arbitrary direction and does not necessarily point along a given component of the velocity.
- The instantaneous acceleration is produced by a

change in velocity taken over a very short (infinitesimal) time period. Instantaneous acceleration is a vector in two or three dimensions. It is found by taking the derivative of the velocity function with respect to time.

- In three dimensions, acceleration $\vec{\mathbf{a}}(t)$ can be written as a vector sum of the one-dimensional accelerations $a_x(t)$, $a_y(t)$, and $a_z(t)$ along the x-, y-, and z-axes.
- The kinematic equations for constant acceleration can be written as the vector sum of the constant acceleration equations in the x, y, and z directions.

4.3 Projectile Motion

- Projectile motion is the motion of an object subject only to the acceleration of gravity, where the acceleration is constant, as near the surface of Earth.
- To solve projectile motion problems, we analyze the motion of the projectile in the horizontal and vertical directions using the one-dimensional kinematic equations for x and y.
- The time of flight of a projectile launched with initial vertical velocity v_{0y} on an even surface is given by

$$T_{tof} = \frac{2(v_0 \sin\theta)}{g}.$$

This equation is valid only when the projectile lands at the same elevation from which it was launched.

- The maximum horizontal distance traveled by a projectile is called the range. Again, the equation for range is valid only when the projectile lands at the same elevation from which it was launched.

4.4 Uniform Circular Motion

- Uniform circular motion is motion in a circle at constant speed.
- Centripetal acceleration $\vec{\mathbf{a}}_C$ is the acceleration a particle must have to follow a circular path. Centripetal acceleration always points toward the center of rotation and has magnitude $a_C = v^2/r$.
- Nonuniform circular motion occurs when there is tangential acceleration of an object executing circular motion such that the speed of the object is changing. This acceleration is called tangential acceleration $\vec{\mathbf{a}}_T$. The magnitude of tangential acceleration is the time rate of change of the magnitude of the velocity. The tangential acceleration vector is tangential to the circle, whereas the centripetal acceleration vector points radially inward toward the center of the circle. The total acceleration is the vector sum of tangential and centripetal accelerations.
- An object executing uniform circular motion can be described with equations of motion. The position vector of the object is $\vec{\mathbf{r}}(t) = A\cos\omega t\hat{\mathbf{i}} + A\sin\omega t\hat{\mathbf{j}}$, where A is the magnitude $|\vec{\mathbf{r}}(t)|$, which is also the radius of the circle, and ω is the angular frequency.

4.5 Relative Motion in One and Two Dimensions

- When analyzing motion of an object, the reference frame in terms of position, velocity, and acceleration needs to be specified.
- Relative velocity is the velocity of an object as observed from a particular reference frame, and it varies with the choice of reference frame.
- If S and S' are two reference frames moving relative to each other at a constant velocity, then the velocity of an object relative to S is equal to its velocity relative to S' plus the velocity of S' relative to S.
- If two reference frames are moving relative to each other at a constant velocity, then the accelerations of an object as observed in both reference frames are equal.

Conceptual Questions

4.1 Displacement and Velocity Vectors

1. What form does the trajectory of a particle have if the distance from any point A to point B is equal to the magnitude of the displacement from A to B?

2. Give an example of a trajectory in two or three dimensions caused by independent perpendicular motions.

3. If the instantaneous velocity is zero, what can be said about the slope of the position function?

4.2 Acceleration Vector

4. If the position function of a particle is a linear function of time, what can be said about its acceleration?

5. If an object has a constant x-component of the

velocity and suddenly experiences an acceleration in the *y* direction, does the *x*-component of its velocity change?

6. If an object has a constant *x*-component of velocity and suddenly experiences an acceleration at an angle of $70°$ in the *x* direction, does the *x*-component of velocity change?

4.3 Projectile Motion

7. Answer the following questions for projectile motion on level ground assuming negligible air resistance, with the initial angle being neither $0°$ nor $90°$: (a) Is the velocity ever zero? (b) When is the velocity a minimum? A maximum? (c) Can the velocity ever be the same as the initial velocity at a time other than at $t = 0$? (d) Can the speed ever be the same as the initial speed at a time other than at $t = 0$?

8. Answer the following questions for projectile motion on level ground assuming negligible air resistance, with the initial angle being neither $0°$ nor $90°$: (a) Is the acceleration ever zero? (b) Is the vector $\vec{\mathbf{v}}$ ever parallel or antiparallel to the vector $\vec{\mathbf{a}}$? (c) Is the vector v ever perpendicular to the vector a? If so, where is this located?

9. A dime is placed at the edge of a table so it hangs over slightly. A quarter is slid horizontally on the table surface perpendicular to the edge and hits the dime head on. Which coin hits the ground first?

4.4 Uniform Circular Motion

10. Can centripetal acceleration change the speed of a particle undergoing circular motion?

11. Can tangential acceleration change the speed of a particle undergoing circular motion?

4.5 Relative Motion in One and Two Dimensions

12. What frame or frames of reference do you use instinctively when driving a car? When flying in a commercial jet?

13. A basketball player dribbling down the court usually keeps his eyes fixed on the players around him. He is moving fast. Why doesn't he need to keep his eyes on the ball?

14. If someone is riding in the back of a pickup truck and throws a softball straight backward, is it possible for the ball to fall straight down as viewed by a person standing at the side of the road? Under what condition would this occur? How would the motion of the ball appear to the person who threw it?

15. The hat of a jogger running at constant velocity falls off the back of his head. Draw a sketch showing the path of the hat in the jogger's frame of reference. Draw its path as viewed by a stationary observer. Neglect air resistance.

16. A clod of dirt falls from the bed of a moving truck. It strikes the ground directly below the end of the truck. (a) What is the direction of its velocity relative to the truck just before it hits? (b) Is this the same as the direction of its velocity relative to ground just before it hits? Explain your answers.

Problems

4.1 Displacement and Velocity Vectors

17. The coordinates of a particle in a rectangular coordinate system are (1.0, –4.0, 6.0). What is the position vector of the particle?

18. The position of a particle changes from $\vec{\mathbf{r}}_1 = (2.0\ \ \hat{\mathbf{i}} + 3.0\hat{\mathbf{j}})\text{cm}$ to $\vec{\mathbf{r}}_2 = (-4.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}})$ cm. What is the particle's displacement?


19. The 18th hole at Pebble Beach Golf Course is a dogleg to the left of length 496.0 m. The fairway off the tee is taken to be the *x* direction. A golfer hits his tee shot a distance of 300.0 m, corresponding to a displacement $\Delta\vec{\mathbf{r}}_1 = 300.0\ \text{m}\hat{\mathbf{i}}$, and hits his second shot 189.0 m with a displacement $\Delta\vec{\mathbf{r}}_2 = 172.0\ \text{m}\hat{\mathbf{i}} + 80.3\ \text{m}\hat{\mathbf{j}}$. What is the final displacement of the golf ball from where it started?

20. A bird flies straight northeast a distance of 95.0 km for 3.0 h. With the *x*-axis due east and the *y*-axis due north, what is the displacement in unit vector notation for the bird? What is the average velocity for the trip?

21. A cyclist rides 5.0 km due east, then 10.0 km $20°$ west of north. From this point she rides 8.0 km due west. What is the final displacement from where the cyclist started?

22. New York Rangers defenseman Daniel Girardi stands at the goal and passes a hockey puck 20 m and $45°$ from straight down the ice to left wing Chris Kreider waiting at the blue line.

Kreider waits for Girardi to reach the blue line and passes the puck directly across the ice to him 10 m away. What is the final displacement of the puck? See the following figure.

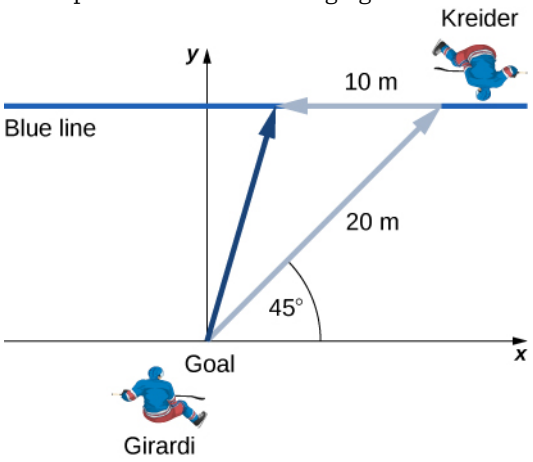

23. The position of a particle is $\vec{\mathbf{r}}(t) = 4.0t^2\hat{\mathbf{i}} - 3.0\hat{\mathbf{j}} + 2.0t^3\hat{\mathbf{k}}$m. (a) What is the velocity of the particle at 0 s and at 1.0 s? (b) What is the average velocity between 0 s and 1.0 s?

24. Clay Matthews, a linebacker for the Green Bay Packers, can reach a speed of 10.0 m/s. At the start of a play, Matthews runs downfield at 45° with respect to the 50-yard line and covers 8.0 m in 1 s. He then runs straight down the field at 90° with respect to the 50-yard line for 12 m, with an elapsed time of 1.2 s. (a) What is Matthews' final displacement from the start of the play? (b) What is his average velocity?

25. The F-35B Lighting II is a short-takeoff and vertical landing fighter jet. If it does a vertical takeoff to 20.00-m height above the ground and then follows a flight path angled at 30° with respect to the ground for 20.00 km, what is the final displacement?

4.2 Acceleration Vector

26. The position of a particle is $\vec{\mathbf{r}}(t) = (3.0t^2\hat{\mathbf{i}} + 5.0\hat{\mathbf{j}} - 6.0t\hat{\mathbf{k}})$ m. (a) Determine its velocity and acceleration as functions of time. (b) What are its velocity and acceleration at time $t = 0$?

27. A particle's acceleration is $(4.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}})$m/s^2. At $t = 0$, its position and velocity are zero. (a) What are the particle's position and velocity as functions of time? (b) Find the equation of the path of the particle. Draw the x- and y-axes and sketch the trajectory of the particle.

28. A boat leaves the dock at $t = 0$ and heads out into a lake with an acceleration of $2.0\ \text{m/s}^2\hat{\mathbf{i}}$. A strong wind is pushing the boat, giving it an additional velocity of $2.0\ \text{m/s}\hat{\mathbf{i}} + 1.0\ \text{m/s}\hat{\mathbf{j}}$. (a) What is the velocity of the boat at $t = 10$ s? (b) What is the position of the boat at $t = 10$s? Draw a sketch of the boat's trajectory and position at $t = 10$ s, showing the x- and y-axes.

29. The position of a particle for $t > 0$ is given by $\vec{\mathbf{r}}(t) = (3.0t^2\hat{\mathbf{i}} - 7.0t^3\hat{\mathbf{j}} - 5.0t^{-2}\hat{\mathbf{k}})$ m. (a) What is the velocity as a function of time? (b) What is the acceleration as a function of time? (c) What is the particle's velocity at $t = 2.0$ s? (d) What is its speed at $t = 1.0$ s and $t = 3.0$ s? (e) What is the average velocity between $t = 1.0$ s and $t = 2.0$ s?

30. The acceleration of a particle is a constant. At $t = 0$ the velocity of the particle is $(10\hat{\mathbf{i}} + 20\hat{\mathbf{j}})$m/s. At $t = 4$ s the velocity is $10\hat{\mathbf{j}}$ m/s. (a) What is the particle's acceleration? (b) How do the position and velocity vary with time? Assume the particle is initially at the origin.

31. A particle has a position function $\vec{\mathbf{r}}(t) = \cos(1.0t)\hat{\mathbf{i}} + \sin(1.0t)\hat{\mathbf{j}} + t\hat{\mathbf{k}}$, where the arguments of the cosine and sine functions are in radians. (a) What is the velocity vector? (b) What is the acceleration vector?

32. A Lockheed Martin F-35 II Lighting jet takes off from an aircraft carrier with a runway length of 90 m and a takeoff speed 70 m/s at the end of the runway. Jets are catapulted into airspace from the deck of an aircraft carrier with two sources of propulsion: the jet propulsion and the catapult. At the point of leaving the deck of the aircraft carrier, the F-35's acceleration decreases to a constant acceleration of $5.0\ \text{m/s}^2$ at 30° with respect to the horizontal. (a) What is the initial acceleration of the F-35 on the deck of the aircraft carrier to make it airborne? (b) Write the position and velocity of the F-35 in unit vector notation from the point it leaves the deck of the aircraft carrier. (c) At what altitude is the fighter 5.0 s after it leaves the deck of the aircraft carrier? (d) What is its velocity and speed at this time? (e) How far has it traveled horizontally?


4.3 Projectile Motion

33. A bullet is shot horizontally from shoulder height (1.5 m) with an initial speed 200 m/s. (a) How much time elapses before the bullet hits the ground? (b) How far does the bullet travel horizontally?


34. A marble rolls off a tabletop 1.0 m high and hits the floor at a point 3.0 m away from the table's

edge in the horizontal direction. (a) How long is the marble in the air? (b) What is the speed of the marble when it leaves the table's edge? (c) What is its speed when it hits the floor?

35. A dart is thrown horizontally at a speed of 10 m/s at the bull's-eye of a dartboard 2.4 m away, as in the following figure. (a) How far below the intended target does the dart hit? (b) What does your answer tell you about how proficient dart players throw their darts?

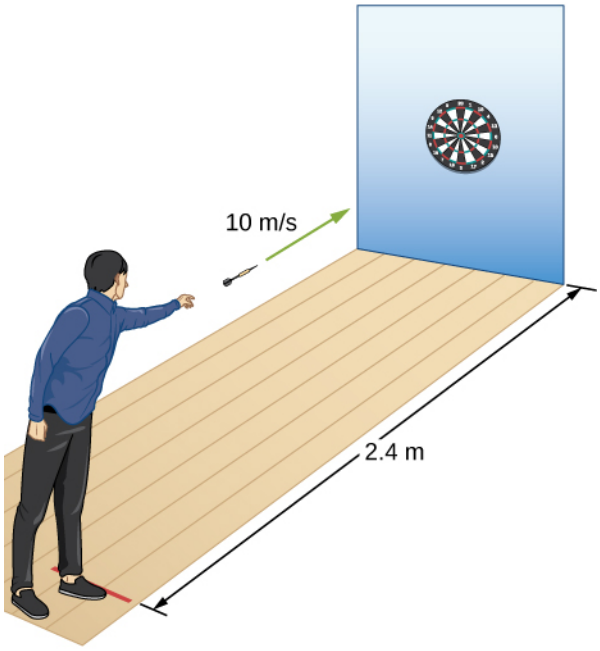

36. An airplane flying horizontally with a speed of 500 km/h at a height of 800 m drops a crate of supplies (see the following figure). If the parachute fails to open, how far in front of the release point does the crate hit the ground?

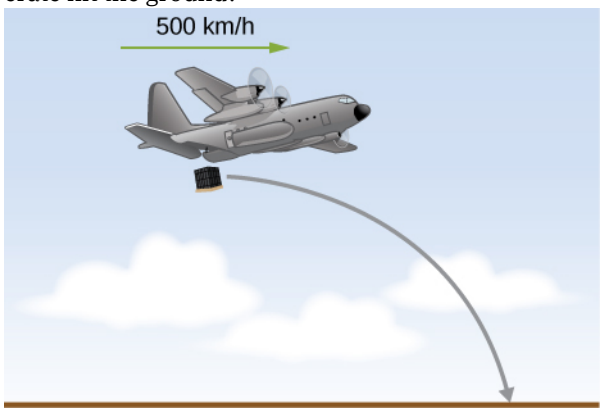

37. Suppose the airplane in the preceding problem fires a projectile horizontally in its direction of motion at a speed of 300 m/s relative to the plane. (a) How far in front of the release point does the projectile hit the ground? (b) What is its speed when it hits the ground?

38. A fastball pitcher can throw a baseball at a speed of 40 m/s (90 mi/h). (a) Assuming the pitcher can release the ball 16.7 m from home plate so the ball is moving horizontally, how long does it take the ball to reach home plate? (b) How far does the ball drop between the pitcher's hand and home plate?

39. A projectile is launched at an angle of 30° and lands 20 s later at the same height as it was launched. (a) What is the initial speed of the projectile? (b) What is the maximum altitude? (c) What is the range? (d) Calculate the displacement from the point of launch to the position on its trajectory at 15 s.

40. A basketball player shoots toward a basket 6.1 m away and 3.0 m above the floor. If the ball is released 1.8 m above the floor at an angle of 60° above the horizontal, what must the initial speed be if it were to go through the basket?

41. At a particular instant, a hot air balloon is 100 m in the air and descending at a constant speed of 2.0 m/s. At this exact instant, a girl throws a ball horizontally, relative to herself, with an initial speed of 20 m/s. When she lands, where will she find the ball? Ignore air resistance.


42. A man on a motorcycle traveling at a uniform speed of 10 m/s throws an empty can straight upward relative to himself with an initial speed of 3.0 m/s. Find the equation of the trajectory as seen by a police officer on the side of the road. Assume the initial position of the can is the point where it is thrown. Ignore air resistance.

43. An athlete can jump a distance of 8.0 m in the broad jump. What is the maximum distance the athlete can jump on the Moon, where the gravitational acceleration is one-sixth that of Earth?

44. The maximum horizontal distance a boy can throw a ball is 50 m. Assume he can throw with the same initial speed at all angles. How high does he throw the ball when he throws it straight upward?


45. A rock is thrown off a cliff at an angle of 53° with respect to the horizontal. The cliff is 100 m high. The initial speed of the rock is 30 m/s. (a) How high above the edge of the cliff does the rock rise? (b) How far has it moved horizontally when it is at maximum altitude? (c) How long after the release does it hit the ground? (d) What is the range of the rock? (e) What are the horizontal and vertical positions of the rock relative to the edge of the cliff at $t = 2.0$ s, $t = 4.0$ s, and $t = 6.0$ s?

46. Trying to escape his pursuers, a secret agent skis off a slope inclined at 30° below the horizontal at 60 km/h. To survive and land on the snow 100 m below, he must clear a gorge 60 m wide. Does he make it? Ignore air resistance.

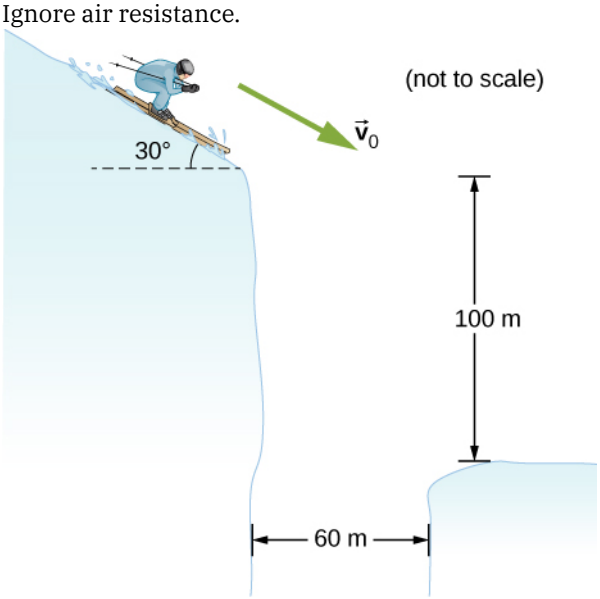

47. A golfer on a fairway is 70 m away from the green, which sits below the level of the fairway by 20 m. If the golfer hits the ball at an angle of 40° with an initial speed of 20 m/s, how close to the green does she come?

48. A projectile is shot at a hill, the base of which is 300 m away. The projectile is shot at 60° above the horizontal with an initial speed of 75 m/s. The hill can be approximated by a plane sloped at 20° to the horizontal. Relative to the coordinate system shown in the following figure, the equation of this straight line is $y = (\tan 20°)x - 109$. Where on the hill does the projectile land?

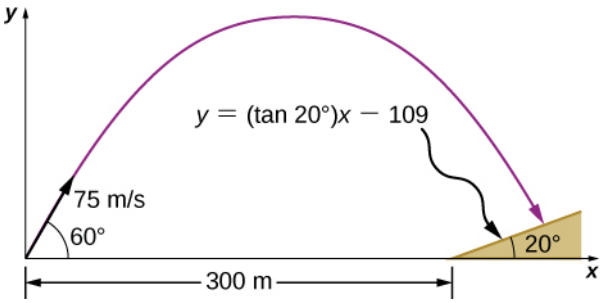

49. An astronaut on Mars kicks a soccer ball at an angle of 45° with an initial velocity of 15 m/s. If the acceleration of gravity on Mars is 3.7m/s^2, (a) what is the range of the soccer kick on a flat surface? (b) What would be the range of the same kick on the Moon, where gravity is one-sixth that of Earth?

50. Mike Powell holds the record for the long jump of 8.95 m, established in 1991. If he left the ground at an angle of 15°, what was his initial speed?

51. MIT's robot cheetah can jump over obstacles 46 cm high and has speed of 12.0 km/h. (a) If the robot launches itself at an angle of 60° at this speed, what is its maximum height? (b) What would the launch angle have to be to reach a height of 46 cm?

52. Mt. Asama, Japan, is an active volcano. In 2009, an eruption threw solid volcanic rocks that landed 1 km horizontally from the crater. If the volcanic rocks were launched at an angle of 40° with respect to the horizontal and landed 900 m below the crater, (a) what would be their initial velocity and (b) what is their time of flight?

53. Drew Brees of the New Orleans Saints can throw a football 23.0 m/s (50 mph). If he angles the throw at 10° from the horizontal, what distance does it go if it is to be caught at the same elevation as it was thrown?

54. The Lunar Roving Vehicle used in NASA's late *Apollo* missions reached an unofficial lunar land speed of 5.0 m/s by astronaut Eugene Cernan. If the rover was moving at this speed on a flat lunar surface and hit a small bump that projected it off the surface at an angle of 20°, how long would it be "airborne" on the Moon?

55. A soccer goal is 2.44 m high. A player kicks the ball at a distance 10 m from the goal at an angle of 25°. The ball hits the crossbar at the top of the goal. What is the initial speed of the soccer ball?

56. Olympus Mons on Mars is the largest volcano in the solar system, at a height of 25 km and with a radius of 312 km. If you are standing on the summit, with what initial velocity would you have to fire a projectile from a cannon horizontally to clear the volcano and land on the surface of Mars? Note that Mars has an acceleration of gravity of 3.7 m/s^2.

57. In 1999, Robbie Knievel was the first to jump the Grand Canyon on a motorcycle. At a narrow part of the canyon (69.0 m wide) and traveling 35.8 m/s off the takeoff ramp, he reached the other side. What was his launch angle?

58. You throw a baseball at an initial speed of 15.0 m/s at an angle of 30° with respect to the horizontal. What would the ball's initial speed have to be at 30° on a planet that has twice the acceleration of gravity as Earth to achieve the same range? Consider launch and impact on a horizontal surface.

59. Aaron Rodgers throws a football at 20.0 m/s to his wide receiver, who is running straight down

the field at 9.4 m/s. If Aaron throws the football when the wide receiver is 10.0 m in front of him, (a) at what angle does Aaron have to launch the ball so the ball will be at the same height as the receiver when the receiver makes it to 20.0 m in front of Aaron? (b) Will the receiver be able to catch the ball?

4.4 Uniform Circular Motion

60. A flywheel is rotating at 30 rev/s. What is the total angle, in radians, through which a point on the flywheel rotates in 40 s?

61. A particle travels in a circle of radius 10 m at a constant speed of 20 m/s. What is the magnitude of the acceleration?

62. Cam Newton of the Carolina Panthers throws a perfect football spiral at 8.0 rev/s. The radius of a pro football is 8.5 cm at the middle of the short side. What is the centripetal acceleration of the laces on the football?

63. A fairground ride spins its occupants inside a flying saucer-shaped container. If the horizontal circular path the riders follow has an 8.00-m radius, at how many revolutions per minute are the riders subjected to a centripetal acceleration equal to that of gravity?

64. A runner taking part in the 200-m dash must run around the end of a track that has a circular arc with a radius of curvature of 30.0 m. The runner starts the race at a constant speed. If she completes the 200-m dash in 23.2 s and runs at constant speed throughout the race, what is her centripetal acceleration as she runs the curved portion of the track?

65. What is the acceleration of Venus toward the Sun, assuming a circular orbit?

66. An experimental jet rocket travels around Earth along its equator just above its surface. At what speed must the jet travel if the magnitude of its acceleration is g?

67. A fan is rotating at a constant 360.0 rev/min. What is the magnitude of the acceleration of a point on one of its blades 10.0 cm from the axis of rotation?

68. A point located on the second hand of a large clock has a radial acceleration of 0.1cm/s^2. How far is the point from the axis of rotation of the second hand?

4.5 Relative Motion in One and Two Dimensions

69. The coordinate axes of the reference frame S' remain parallel to those of S, as S' moves away from S at a constant velocity $\vec{\mathbf{v}}_{S'}^{S} = (4.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}} + 5.0\hat{\mathbf{k}})$ m/s. (a) If at time t = 0 the origins coincide, what is the position of the origin O' in the S frame as a function of time? (b) How is particle position for $\vec{\mathbf{r}}(t)$ and $\vec{\mathbf{r}}'(t)$, as measured in S and S', respectively, related? (c) What is the relationship between particle velocities $\vec{\mathbf{v}}(t)$ and $\vec{\mathbf{v}}'(t)$? (d) How are accelerations $\vec{\mathbf{a}}(t)$ and $\vec{\mathbf{a}}'(t)$ related?

70. The coordinate axes of the reference frame S' remain parallel to those of S, as S' moves away from S at a constant velocity $\vec{\mathbf{v}}_{S'S} = (1.0\hat{\mathbf{i}} + 2.0\hat{\mathbf{j}} + 3.0\hat{\mathbf{k}})t$ m/s. (a) If at time t = 0 the origins coincide, what is the position of origin O' in the S frame as a function of time? (b) How is particle position for $\vec{\mathbf{r}}(t)$ and $\vec{\mathbf{r}}'(t)$, as measured in S and S', respectively, related? (c) What is the relationship between particle velocities $\vec{\mathbf{v}}(t)$ and $\vec{\mathbf{v}}'(t)$? (d) How are accelerations $\vec{\mathbf{a}}(t)$ and $\vec{\mathbf{a}}'(t)$ related?

71. The velocity of a particle in reference frame A is $(2.0\hat{\mathbf{i}} + 3.0\hat{\mathbf{j}})$ m/s. The velocity of reference frame A with respect to reference frame B is $4.0\hat{\mathbf{k}}$m/s, and the velocity of reference frame B with respect to C is $2.0\hat{\mathbf{j}}$m/s. What is the velocity of the particle in reference frame C?

72. Raindrops fall vertically at 4.5 m/s relative to the earth. What does an observer in a car moving at 22.0 m/s in a straight line measure as the velocity of the raindrops?

73. A seagull can fly at a velocity of 9.00 m/s in still air. (a) If it takes the bird 20.0 min to travel 6.00 km straight into an oncoming wind, what is the velocity of the wind? (b) If the bird turns around and flies with the wind, how long will it take the bird to return 6.00 km?

74. A ship sets sail from Rotterdam, heading due north at 7.00 m/s relative to the water. The local ocean current is 1.50 m/s in a direction 40.0° north of east. What is the velocity of the ship relative to Earth?

75. A boat can be rowed at 8.0 km/h in still water. (a) How much time is required to row 1.5 km downstream in a river moving 3.0 km/h relative to the shore? (b) How much time is required for the return trip? (c) In what direction must the boat be aimed to row straight across the river? (d) Suppose the river is 0.8 km wide. What is the velocity of the boat with respect to Earth and how much time is required to get to the opposite shore? (e) Suppose, instead, the boat is

aimed straight across the river. How much time is required to get across and how far downstream is the boat when it reaches the opposite shore?

76. A small plane flies at 200 km/h in still air. If the wind blows directly out of the west at 50 km/h, (a) in what direction must the pilot head her plane to move directly north across land and (b) how long does it take her to reach a point 300 km directly north of her starting point?

77. A cyclist traveling southeast along a road at 15 km/h feels a wind blowing from the southwest at 25 km/h. To a stationary observer, what are the speed and direction of the wind?

78. A river is moving east at 4 m/s. A boat starts from the dock heading 30° north of west at 7 m/s. If the river is 1800 m wide, (a) what is the velocity of the boat with respect to Earth and (b) how long does it take the boat to cross the river?

Additional Problems


79. A Formula One race car is traveling at 89.0 m/s along a straight track enters a turn on the race track with radius of curvature of 200.0 m. What centripetal acceleration must the car have to stay on the track?

80. A particle travels in a circular orbit of radius 10 m. Its speed is changing at a rate of $15.0\ \text{m/s}^2$ at an instant when its speed is 40.0 m/s. What is the magnitude of the acceleration of the particle?

81. The driver of a car moving at 90.0 km/h presses down on the brake as the car enters a circular curve of radius 150.0 m. If the speed of the car is decreasing at a rate of 9.0 km/h each second, what is the magnitude of the acceleration of the car at the instant its speed is 60.0 km/h?

82. A race car entering the curved part of the track at the Daytona 500 drops its speed from 85.0 m/s to 80.0 m/s in 2.0 s. If the radius of the curved part of the track is 316.0 m, calculate the total acceleration of the race car at the beginning and ending of reduction of speed.

83. An elephant is located on Earth's surface at a latitude λ. Calculate the centripetal acceleration of the elephant resulting from the rotation of Earth around its polar axis. Express your answer in terms of λ, the radius R_E of Earth, and time T for one rotation of Earth. Compare your answer with g for $\lambda = 40°$.

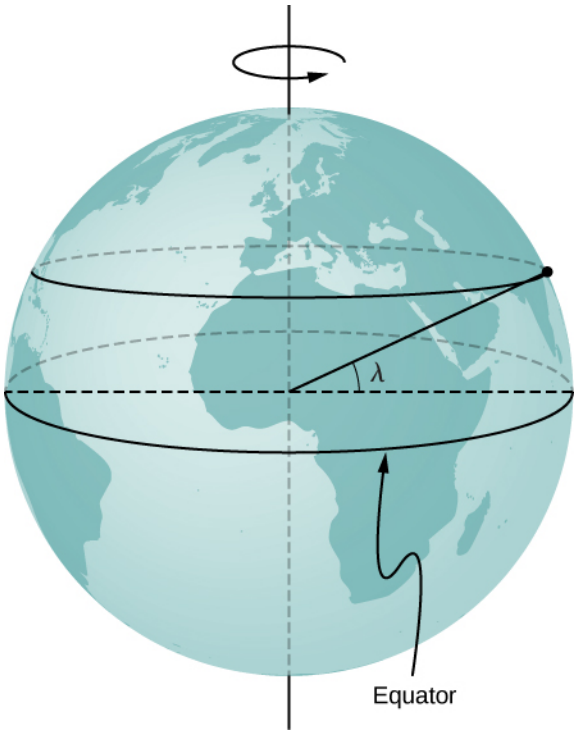

84. A proton in a synchrotron is moving in a circle of radius 1 km and increasing its speed by $v(t) = c_1 + c_2 t^2$, where $c_1 = 2.0 \times 10^5\ \text{m/s}$, $c_2 = 10^5\ \text{m/s}^3$. (a) What is the proton's total acceleration at $t = 5.0$ s? (b) At what time does the expression for the velocity become unphysical?

85. A propeller blade at rest starts to rotate from t = 0 s to t = 5.0 s with a tangential acceleration of the tip of the blade at $3.00\ \text{m/s}^2$. The tip of the blade is 1.5 m from the axis of rotation. At t = 5.0 s, what is the total acceleration of the tip of the blade?

86. A particle is executing circular motion with a constant angular frequency of $\omega = 4.00$ rad/s. If time t = 0 corresponds to the position of the particle being located at y = 0 m and x = 5 m, (a) what is the position of the particle at t = 10 s? (b) What is its velocity at this time? (c) What is its acceleration?

87. A particle's centripetal acceleration is $a_C = 4.0\ \text{m/s}^2$ at t = 0 s where it is on the x-axis and moving counterclockwise in the xy plane. It is executing uniform circular motion about an axis at a distance of 5.0 m. What is its velocity at t = 10 s?

88. A rod 3.0 m in length is rotating at 2.0 rev/s about an axis at one end. Compare the centripetal accelerations at radii of (a) 1.0 m, (b) 2.0 m, and (c) 3.0 m.

89. A particle located initially at $(1.5\hat{\mathbf{j}} + 4.0\hat{\mathbf{k}})$m undergoes a displacement of $(2.5\hat{\mathbf{i}} + 3.2\hat{\mathbf{j}} - 1.2\hat{\mathbf{k}})$ m. What is the final position of the particle?

90. The position of a particle is given by $\vec{\mathbf{r}}(t) = (50\ \text{m/s})t\hat{\mathbf{i}} - (4.9\ \text{m/s}^2)t^2\hat{\mathbf{j}}$. (a) What are the particle's velocity and acceleration as functions of time? (b) What are the initial conditions to produce the motion?

91. A spaceship is traveling at a constant velocity of $\vec{\mathbf{v}}(t) = 250.0\hat{\mathbf{i}}$m/s when its rockets fire, giving it an acceleration of $\vec{\mathbf{a}}(t) = (3.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{k}})\text{m/s}^2$. What is its velocity 5 s after the rockets fire?

Challenge Problems

99. World's Longest Par 3. The tee of the world's longest par 3 sits atop South Africa's Hanglip Mountain at 400.0 m above the green and can only be reached by helicopter. The horizontal distance to the green is 359.0 m. Neglect air resistance and answer the following questions. (a) If a golfer launches a shot that is $40°$ with respect to the horizontal, what initial velocity must she give the ball? (b) What is the time to reach the green?

92. A crossbow is aimed horizontally at a target 40 m away. The arrow hits 30 cm below the spot at which it was aimed. What is the initial velocity of the arrow?

93. A long jumper can jump a distance of 8.0 m when he takes off at an angle of $45°$ with respect to the horizontal. Assuming he can jump with the same initial speed at all angles, how much distance does he lose by taking off at $30°$?

94. On planet Arcon, the maximum horizontal range of a projectile launched at 10 m/s is 20 m. What is the acceleration of gravity on this planet?


95. A mountain biker encounters a jump on a race course that sends him into the air at $60°$ to the horizontal. If he lands at a horizontal distance of 45.0 m and 20 m below his launch point, what is his initial speed?

96. Which has the greater centripetal acceleration, a car with a speed of 15.0 m/s along a circular track of radius 100.0 m or a car with a speed of 12.0 m/s along a circular track of radius 75.0 m?

97. A geosynchronous satellite orbits Earth at a distance of 42,250.0 km and has a period of 1 day. What is the centripetal acceleration of the satellite?

98. Two speedboats are traveling at the same speed relative to the water in opposite directions in a moving river. An observer on the riverbank sees the boats moving at 4.0 m/s and 5.0 m/s. (a) What is the speed of the boats relative to the river? (b) How fast is the river moving relative to the shore?

100. When a field goal kicker kicks a football as hard as he can at 45° to the horizontal, the ball just clears the 3-m-high crossbar of the goalposts 45.7 m away. (a) What is the maximum speed the kicker can impart to the football? (b) In addition to clearing the crossbar, the football must be high enough in the air early during its flight to clear the reach of the onrushing defensive lineman. If the lineman is 4.6 m away and has a vertical reach of 2.5 m, can he block the 45.7-m field goal attempt? (c) What if the lineman is 1.0 m away?

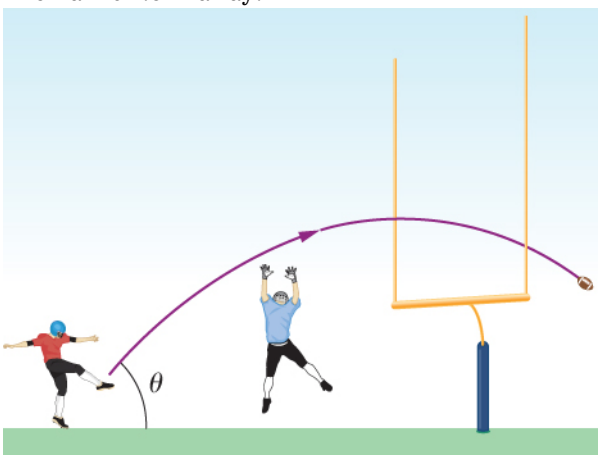

101. A truck is traveling east at 80 km/h. At an intersection 32 km ahead, a car is traveling north at 50 km/h. (a) How long after this moment will the vehicles be closest to each other? (b) How far apart will they be at that point?

CHAPTER 5
Newton's Laws of Motion



Figure 5.1 The Golden Gate Bridge, one of the greatest works of modern engineering, was the longest suspension bridge in the world in the year it opened, 1937. It is still among the 10 longest suspension bridges as of this writing. In designing and building a bridge, what physics must we consider? What forces act on the bridge? What forces keep the bridge from falling? How do the towers, cables, and ground interact to maintain stability?

Chapter Outline

5.1 Forces

5.2 Newton's First Law

5.3 Newton's Second Law

5.4 Mass and Weight

5.5 Newton's Third Law

5.6 Common Forces

5.7 Drawing Free-Body Diagrams

INTRODUCTION When you drive across a bridge, you expect it to remain stable. You also expect to speed up or slow your car in response to traffic changes. In both cases, you deal with forces. The forces on the bridge are in equilibrium, so it stays in place. In contrast, the force produced by your car engine causes a change in motion. Isaac Newton discovered the laws of motion that describe these situations.

Forces affect every moment of your life. Your body is held to Earth by force and held together by the forces of

charged particles. When you open a door, walk down a street, lift your fork, or touch a baby's face, you are applying forces. Zooming in deeper, your body's atoms are held together by electrical forces, and the core of the atom, called the nucleus, is held together by the strongest force we know—strong nuclear force.

5.1 Forces

Learning Objectives

By the end of this section, you will be able to:

- Distinguish between kinematics and dynamics
- Understand the definition of force
- Identify simple free-body diagrams
- Define the SI unit of force, the newton
- Describe force as a vector

The study of motion is called *kinematics*, but kinematics only describes the way objects move—their velocity and their acceleration. **Dynamics** is the study of how forces affect the motion of objects and systems. It considers the causes of motion of objects and systems of interest, where a system is anything being analyzed. The foundation of dynamics are the laws of motion stated by Isaac Newton (1642–1727). These laws provide an example of the breadth and simplicity of principles under which nature functions. They are also universal laws in that they apply to situations on Earth and in space.

Newton's laws of motion were just one part of the monumental work that has made him legendary (Figure 5.2). The development of Newton's laws marks the transition from the Renaissance to the modern era. Not until the advent of modern physics was it discovered that Newton's laws produce a good description of motion only when the objects are moving at speeds much less than the speed of light and when those objects are larger than the size of most molecules (about 10^{-9} m in diameter). These constraints define the realm of Newtonian mechanics. At the beginning of the twentieth century, Albert Einstein (1879–1955) developed the theory of relativity and, along with many other scientists, quantum mechanics. Quantum mechanics does not have the constraints present in Newtonian physics. All of the situations we consider in this chapter, and all those preceding the introduction of relativity in Relativity, are in the realm of Newtonian physics.

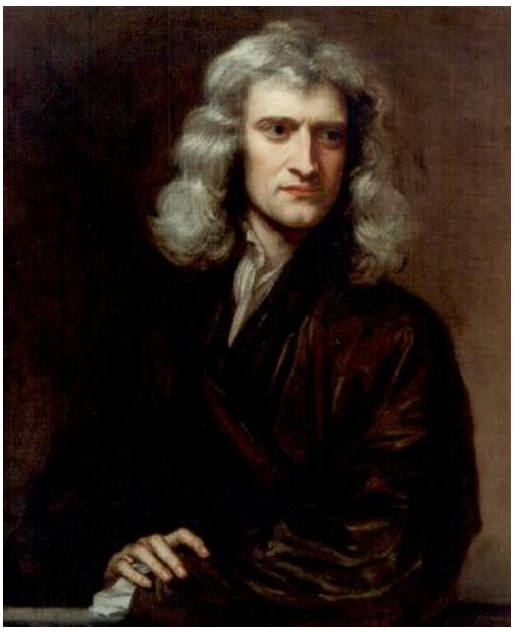


Figure 5.2 Isaac Newton (1642–1727) published his amazing work, *Philosophiae Naturalis Principia Mathematica*, in 1687. It proposed scientific laws that still apply today to describe the motion of objects (the laws of motion). Newton also discovered the law of gravity, invented calculus, and made great contributions to the theories of light and color.

Working Definition of Force

Dynamics is the study of the forces that cause objects and systems to move. To understand this, we need a working definition of force. An intuitive definition of **force**—that is, a push or a pull—is a good place to start. We know that a push or a pull has both magnitude and direction (therefore, it is a vector quantity), so we can define force as the push or pull on an object with a specific magnitude and direction. Force can be represented by vectors or expressed as a multiple of a standard force.

The push or pull on an object can vary considerably in either magnitude or direction. For example, a cannon exerts a strong force on a cannonball that is launched into the air. In contrast, Earth exerts only a tiny downward pull on a flea. Our everyday experiences also give us a good idea of how multiple forces add. If two people push in different directions on a third person, as illustrated in Figure 5.3, we might expect the total force to be in the direction shown. Since force is a vector, it adds just like other vectors. Forces, like other vectors, are represented by arrows and can be added using the familiar head-to-tail method or trigonometric methods. These ideas were developed in Vectors.

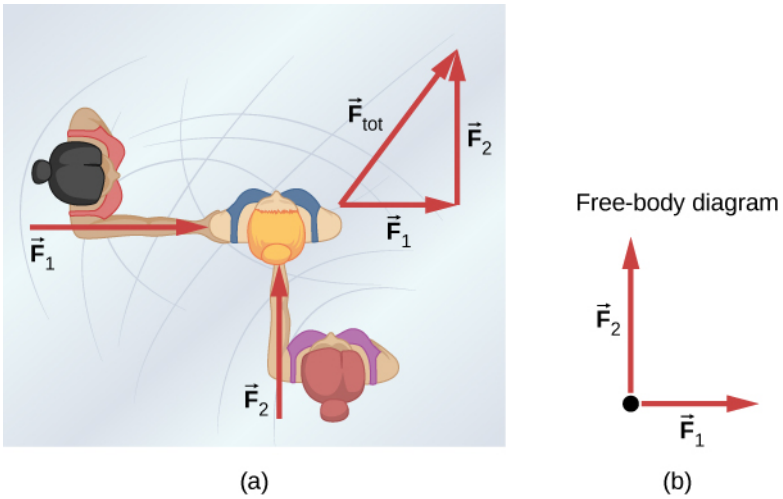


Figure 5.3 (a) An overhead view of two ice skaters pushing on a third skater. Forces are vectors and add like other vectors, so the total force on the third skater is in the direction shown. (b) A free-body diagram representing the forces acting on the third skater.

Figure 5.3(b) is our first example of a **free-body diagram**, which is a sketch showing all external forces acting on an object or system. The object or system is represented by a single isolated point (or free body), and only those forces acting *on* it that originate outside of the object or system—that is, **external forces**—are shown. (These forces are the only ones shown because only external forces acting on the free body affect its motion. We can ignore any internal forces within the body.) The forces are represented by vectors extending outward from the free body.

Free-body diagrams are useful in analyzing forces acting on an object or system, and are employed extensively in the study and application of Newton's laws of motion. You will see them throughout this text and in all your studies of physics. The following steps briefly explain how a free-body diagram is created; we examine this strategy in more detail in Drawing Free-Body Diagrams.

PROBLEM-SOLVING STRATEGY

Drawing Free-Body Diagrams

1. Draw the object under consideration. If you are treating the object as a particle, represent the object as a point. Place this point at the origin of an *xy*-coordinate system.
2. Include all forces that act on the object, representing these forces as vectors. However, do not include the net force on the object or the forces that the object exerts on its environment.
3. Resolve all force vectors into *x*- and *y*-components.
4. Draw a separate free-body diagram for each object in the problem.

We illustrate this strategy with two examples of free-body diagrams (Figure 5.4). The terms used in this figure are explained in more detail later in the chapter.

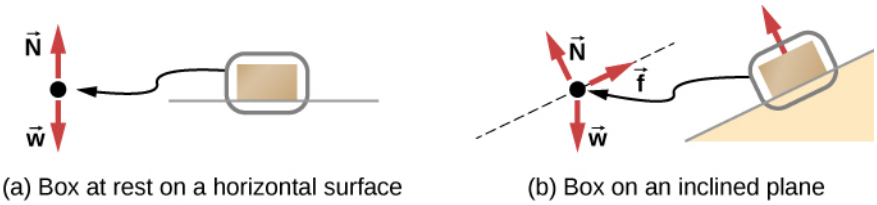


Figure 5.4 In these free-body diagrams, $\vec{\mathbf{N}}$ is the normal force, $\vec{\mathbf{w}}$ is the weight of the object, and $\vec{\mathbf{f}}$ is the friction.

The steps given here are sufficient to guide you in this important problem-solving strategy. The final section of this chapter explains in more detail how to draw free-body diagrams when working with the ideas presented in this chapter.

Development of the Force Concept

A quantitative definition of force can be based on some standard force, just as distance is measured in units relative to a standard length. One possibility is to stretch a spring a certain fixed distance (Figure 5.5) and use the force it exerts to pull itself back to its relaxed shape—called a *restoring force*—as a standard. The magnitude of all other forces can be considered as multiples of this standard unit of force. Many other possibilities exist for standard forces. Some alternative definitions of force will be given later in this chapter.

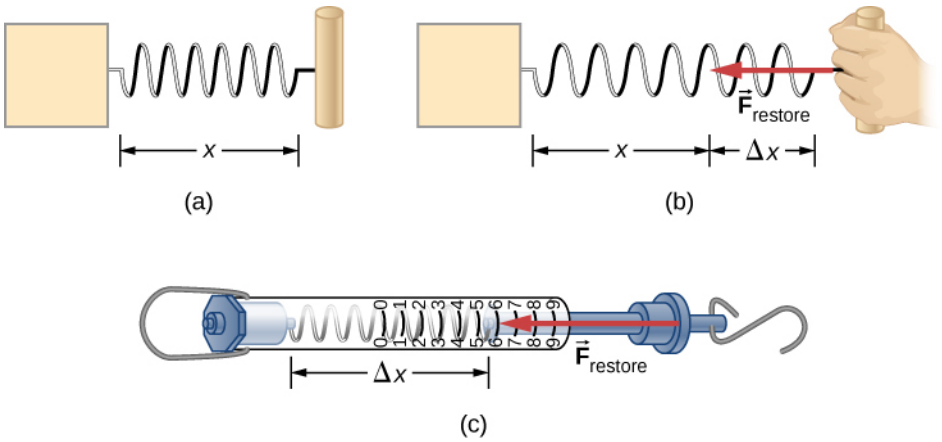


Figure 5.5 The force exerted by a stretched spring can be used as a standard unit of force. (a) This spring has a length x when undistorted. (b) When stretched a distance Δx, the spring exerts a restoring force $\vec{\mathbf{F}}_{\text{restore}}$, which is reproducible. (c) A spring scale is one device that uses a spring to measure force. The force $\vec{\mathbf{F}}_{\text{restore}}$ is exerted on whatever is attached to the hook. Here, this force has a magnitude of six units of the force standard being employed.

Let's analyze force more deeply. Suppose a physics student sits at a table, working diligently on his homework (Figure 5.6). What external forces act on him? Can we determine the origin of these forces?

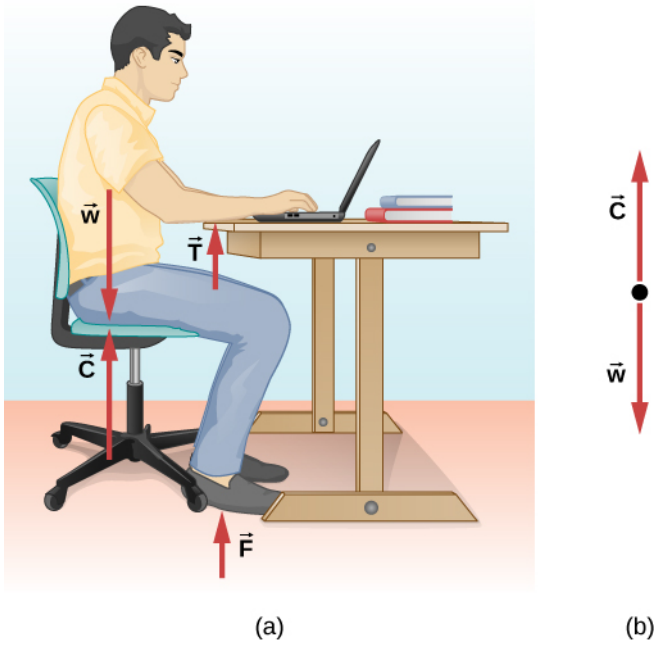


Figure 5.6 (a) The forces acting on the student are due to the chair, the table, the floor, and Earth's gravitational attraction. (b) In solving a problem involving the student, we may want to consider only the forces acting along the line running through his torso. A free-body diagram for this situation is shown.

In most situations, forces are grouped into two categories: *contact forces* and *field forces*. As you might guess, contact forces are due to direct physical contact between objects. For example, the student in Figure 5.6 experiences the contact forces $\vec{\mathbf{C}}$, $\vec{\mathbf{F}}$, and $\vec{\mathbf{T}}$, which are exerted by the chair on his posterior, the floor on his feet, and the table on his forearms, respectively. Field forces, however, act without the necessity of physical contact between objects. They depend on the presence of a "field" in the region of space surrounding the body under consideration. Since the student is in Earth's gravitational field, he feels a gravitational force $\vec{\mathbf{w}}$; in other words, he has weight.

You can think of a field as a property of space that is detectable by the forces it exerts. Scientists think there are only four fundamental force fields in nature. These are the gravitational, electromagnetic, strong nuclear, and weak fields (we consider these four forces in nature later in this text). As noted for $\vec{\mathbf{w}}$ in Figure 5.6, the gravitational field is responsible for the weight of a body. The forces of the electromagnetic field include those of static electricity and magnetism; they are also responsible for the attraction among atoms in bulk matter. Both the strong nuclear and the weak force fields are effective only over distances roughly equal to a length of scale no larger than an atomic nucleus (10^{-15} m). Their range is so small that neither field has influence in the macroscopic world of Newtonian mechanics.

Contact forces are fundamentally electromagnetic. While the elbow of the student in Figure 5.6 is in contact with the tabletop, the atomic charges in his skin interact electromagnetically with the charges in the surface of the table. The net (total) result is the force $\vec{\mathbf{T}}$. Similarly, when adhesive tape sticks to a piece of paper, the atoms of the tape are intermingled with those of the paper to cause a net electromagnetic force between the two objects. However, in the context of Newtonian mechanics, the electromagnetic origin of contact forces is not an important concern.

Vector Notation for Force

As previously discussed, force is a vector; it has both magnitude and direction. The SI unit of force is called the **newton** (abbreviated N), and 1 N is the force needed to accelerate an object with a mass of 1 kg at a rate of $1\ \text{m/s}^2$: $1\ \text{N} = 1\ \text{kg} \cdot \text{m/s}^2$. An easy way to remember the size of a newton is to imagine holding a small apple; it has a weight of about 1 N.

We can thus describe a two-dimensional force in the form $\vec{\mathbf{F}} = a\hat{\mathbf{i}} + b\hat{\mathbf{j}}$ (the unit vectors $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ indicate the

direction of these forces along the *x*-axis and the *y*-axis, respectively) and a three-dimensional force in the form $\vec{\mathbf{F}} = a\hat{\mathbf{i}} + b\hat{\mathbf{j}} + c\hat{\mathbf{k}}$. In Figure 5.3, let's suppose that ice skater 1, on the left side of the figure, pushes horizontally with a force of 30.0 N to the right; we represent this as $\vec{\mathbf{F}}_1 = 30.0\hat{\mathbf{i}}$ N. Similarly, if ice skater 2 pushes with a force of 40.0 N in the positive vertical direction shown, we would write $\vec{\mathbf{F}}_2 = 40.0\hat{\mathbf{j}}$ N. The resultant of the two forces causes a mass to accelerate—in this case, the third ice skater. This resultant is called the **net external force** $\vec{\mathbf{F}}_{\text{net}}$ and is found by taking the vector sum of all external forces acting on an object or system (thus, we can also represent net external force as $\sum \vec{\mathbf{F}}$):

$$\vec{\mathbf{F}}_{\text{net}} = \sum \vec{\mathbf{F}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 + \cdots \quad 5.1$$

This equation can be extended to any number of forces.

In this example, we have $\vec{\mathbf{F}}_{\text{net}} = \sum \vec{\mathbf{F}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 = 30.0\hat{\mathbf{i}} + 40.0\hat{\mathbf{j}}$ N. The hypotenuse of the triangle shown in Figure 5.3 is the resultant force, or net force. It is a vector. To find its magnitude (the size of the vector, without regard to direction), we use the rule given in Vectors, taking the square root of the sum of the squares of the components:

$$F_{\text{net}} = \sqrt{(30.0\text{ N})^2 + (40.0\text{ N})^2} = 50.0\text{ N}.$$

The direction is given by

$$\theta = \tan^{-1}\left(\frac{F_2}{F_1}\right) = \tan^{-1}\left(\frac{40.0}{30.0}\right) = 53.1^\circ,$$

measured from the positive *x*-axis, as shown in the free-body diagram in Figure 5.3(b).

Let's suppose the ice skaters now push the third ice skater with $\vec{\mathbf{F}}_1 = 3.0\hat{\mathbf{i}} + 8.0\hat{\mathbf{j}}$ N and $\vec{\mathbf{F}}_2 = 5.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}$ N. What is the resultant of these two forces? We must recognize that force is a vector; therefore, we must add using the rules for vector addition:

$$\vec{\mathbf{F}}_{\text{net}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 = \left(3.0\hat{\mathbf{i}} + 8.0\hat{\mathbf{j}}\right) + \left(5.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}\right) = 8.0\hat{\mathbf{i}} + 12\hat{\mathbf{j}}\text{ N}$$

CHECK YOUR UNDERSTANDING 5.1

Find the magnitude and direction of the net force in the ice skater example just given.

INTERACTIVE

View this interactive simulation (https://openstax.org/l/21addvectors) to learn how to add vectors. Drag vectors onto a graph, change their length and angle, and sum them together. The magnitude, angle, and components of each vector can be displayed in several formats.

5.2 Newton's First Law

Learning Objectives

By the end of this section, you will be able to:

- Describe Newton's first law of motion
- Recognize friction as an external force
- Define inertia
- Identify inertial reference frames
- Calculate equilibrium for a system

Experience suggests that an object at rest remains at rest if left alone and that an object in motion tends to slow down and stop unless some effort is made to keep it moving. However, **Newton's first law** gives a deeper

explanation of this observation.

Newton's First Law of Motion

A body at rest remains at rest or, if in motion, remains in motion at constant velocity unless acted on by a net external force.

Note the repeated use of the verb "remains." We can think of this law as preserving the status quo of motion. Also note the expression "constant velocity;" this means that the object maintains a path along a straight line, since neither the magnitude nor the direction of the velocity vector changes. We can use Figure 5.7 to consider the two parts of Newton's first law.

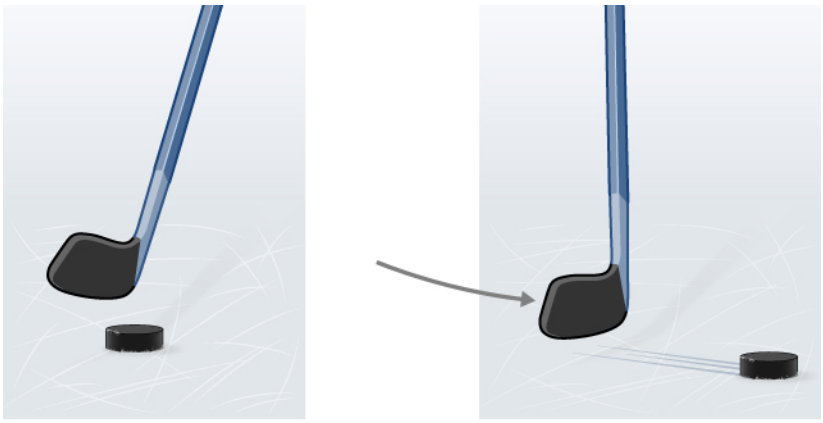


Figure 5.7 (a) A hockey puck is shown at rest; it remains at rest until an outside force such as a hockey stick changes its state of rest; (b) a hockey puck is shown in motion; it continues in motion in a straight line until an outside force causes it to change its state of motion. Although it is slick, an ice surface provides some friction that slows the puck.

Rather than contradicting our experience, Newton's first law says that there must be a cause for any change in velocity (a change in either magnitude or direction) to occur. This cause is a net external force, which we defined earlier in the chapter. An object sliding across a table or floor slows down due to the net force of friction acting on the object. If friction disappears, will the object still slow down?

The idea of cause and effect is crucial in accurately describing what happens in various situations. For example, consider what happens to an object sliding along a rough horizontal surface. The object quickly grinds to a halt. If we spray the surface with talcum powder to make the surface smoother, the object slides farther. If we make the surface even smoother by rubbing lubricating oil on it, the object slides farther yet. Extrapolating to a frictionless surface and ignoring air resistance, we can imagine the object sliding in a straight line indefinitely. Friction is thus the cause of slowing (consistent with Newton's first law). The object would not slow down if friction were eliminated.

Consider an air hockey table (Figure 5.8). When the air is turned off, the puck slides only a short distance before friction slows it to a stop. However, when the air is turned on, it creates a nearly frictionless surface, and the puck glides long distances without slowing down. Additionally, if we know enough about the friction, we can accurately predict how quickly the object slows down.

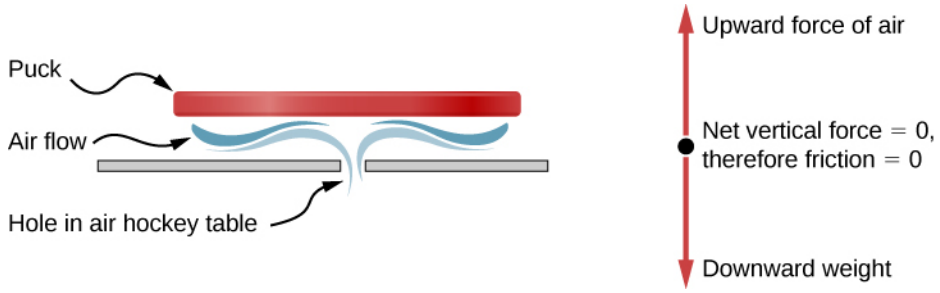


Figure 5.8 An air hockey table is useful in illustrating Newton's laws. When the air is off, friction quickly slows the puck; but when the air is on, it minimizes contact between the puck and the hockey table, and the puck glides far down the table.

Newton's first law is general and can be applied to anything from an object sliding on a table to a satellite in orbit to blood pumped from the heart. Experiments have verified that any change in velocity (speed or direction) must be caused by an external force. The idea of *generally applicable or universal laws* is important—it is a basic feature of all laws of physics. Identifying these laws is like recognizing patterns in nature from which further patterns can be discovered. The genius of Galileo, who first developed the idea for the first law of motion, and Newton, who clarified it, was to ask the fundamental question: "What is the cause?" Thinking in terms of cause and effect is fundamentally different from the typical ancient Greek approach, when questions such as "Why does a tiger have stripes?" would have been answered in Aristotelian fashion, such as "That is the nature of the beast." The ability to think in terms of cause and effect is the ability to make a connection between an observed behavior and the surrounding world.

Gravitation and Inertia

Regardless of the scale of an object, whether a molecule or a subatomic particle, two properties remain valid and thus of interest to physics: gravitation and inertia. Both are connected to mass. Roughly speaking, *mass* is a measure of the amount of matter in something. *Gravitation* is the attraction of one mass to another, such as the attraction between yourself and Earth that holds your feet to the floor. The magnitude of this attraction is your weight, and it is a force.

Mass is also related to **inertia**, the ability of an object to resist changes in its motion—in other words, to resist acceleration. Newton's first law is often called the **law of inertia**. As we know from experience, some objects have more inertia than others. It is more difficult to change the motion of a large boulder than that of a basketball, for example, because the boulder has more mass than the basketball. In other words, the inertia of an object is measured by its mass. The relationship between mass and weight is explored later in this chapter.

Inertial Reference Frames

Earlier, we stated Newton's first law as "A body at rest remains at rest or, if in motion, remains in motion at constant velocity unless acted on by a net external force." It can also be stated as "Every body remains in its state of uniform motion in a straight line unless it is compelled to change that state by forces acting on it." To Newton, "uniform motion in a straight line" meant constant velocity, which includes the case of zero velocity, or rest. Therefore, the first law says that the velocity of an object remains constant if the net force on it is zero.

Newton's first law is usually considered to be a statement about reference frames. It provides a method for identifying a special type of reference frame: the **inertial reference frame**. In principle, we can make the net force on a body zero. If its velocity relative to a given frame is constant, then that frame is said to be inertial. So by definition, an inertial reference frame is a reference frame in which Newton's first law is valid. Newton's first law applies to objects with constant velocity. From this fact, we can infer the following statement.

Inertial Reference Frame

A reference frame moving at constant velocity relative to an inertial frame is also inertial. A reference frame accelerating relative to an inertial frame is not inertial.

Are inertial frames common in nature? It turns out that well within experimental error, a reference frame at rest relative to the most distant, or "fixed," stars is inertial. All frames moving uniformly with respect to this fixed-star frame are also inertial. For example, a nonrotating reference frame attached to the Sun is, for all practical purposes, inertial, because its velocity relative to the fixed stars does not vary by more than one part in 10^{10}. Earth accelerates relative to the fixed stars because it rotates on its axis and revolves around the Sun; hence, a reference frame attached to its surface is not inertial. For most problems, however, such a frame serves as a sufficiently accurate approximation to an inertial frame, because the acceleration of a point on Earth's surface relative to the fixed stars is rather small ($< 3.4 \times 10^{-2}$ m/s^2). Thus, unless indicated otherwise, we consider reference frames fixed on Earth to be inertial.

Finally, no particular inertial frame is more special than any other. As far as the laws of nature are concerned, all inertial frames are equivalent. In analyzing a problem, we choose one inertial frame over another simply on the basis of convenience.

Newton's First Law and Equilibrium

Newton's first law tells us about the equilibrium of a system, which is the state in which the forces on the system are balanced. Returning to Forces and the ice skaters in Figure 5.3, we know that the forces $\vec{\mathbf{F}}_1$ and $\vec{\mathbf{F}}_2$ combine to form a resultant force, or the net external force: $\vec{\mathbf{F}}_\text{R} = \vec{\mathbf{F}}_\text{net} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2$. To create equilibrium, we require a balancing force that will produce a net force of zero. This force must be equal in magnitude but opposite in direction to $\vec{\mathbf{F}}_\text{R}$, which means the vector must be $-\vec{\mathbf{F}}_\text{R}$. Referring to the ice skaters, for which we found $\vec{\mathbf{F}}_\text{R}$ to be $30.0\hat{\mathbf{i}} + 40.0\hat{\mathbf{j}}$ N, we can determine the balancing force by simply finding $-\vec{\mathbf{F}}_\text{R} = -30.0\hat{\mathbf{i}} - 40.0\hat{\mathbf{j}}$ N. See the free-body diagram in Figure 5.3(b).

We can give Newton's first law in vector form:

$$\vec{\mathbf{v}} = \text{constant when } \vec{\mathbf{F}}_\text{net} = \vec{\mathbf{0}} \text{ N}. \qquad 5.2$$

This equation says that a net force of zero implies that the velocity $\vec{\mathbf{v}}$ of the object is constant. (The word "constant" can indicate zero velocity.)

Newton's first law is deceptively simple. If a car is at rest, the only forces acting on the car are weight and the contact force of the pavement pushing up on the car (Figure 5.9). It is easy to understand that a nonzero net force is required to change the state of motion of the car. As a car moves with constant velocity, the friction force propels the car forward and opposes the drag force against it.

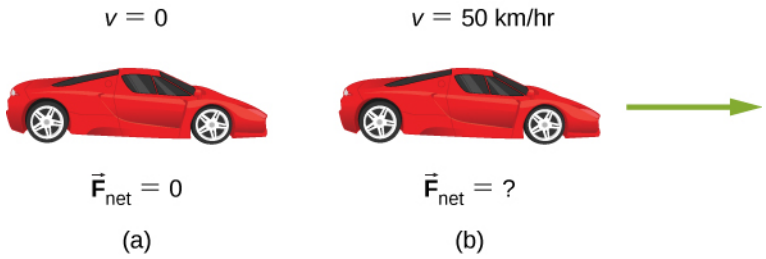


Figure 5.9 A car is shown (a) parked and (b) moving at constant velocity. How do Newton's laws apply to the parked car? What does the knowledge that the car is moving at constant velocity tell us about the net horizontal force on the car?

EXAMPLE 5.1

When Does Newton's First Law Apply to Your Car?

Newton's laws can be applied to all physical processes involving force and motion, including something as mundane as driving a car.

(a) Your car is parked outside your house. Does Newton's first law apply in this situation? Why or why not?

(b) Your car moves at constant velocity down the street. Does Newton's first law apply in this situation? Why or why not?

Strategy

In (a), we are considering the first part of Newton's first law, dealing with a body at rest; in (b), we look at the second part of Newton's first law for a body in motion.

Solution

a. When your car is parked, all forces on the car must be balanced; the vector sum is 0 N. Thus, the net force is zero, and Newton's first law applies. The acceleration of the car is zero, and in this case, the velocity is also zero.
b. When your car is moving at constant velocity down the street, the net force must also be zero according to Newton's first law. The car's frictional force between the road and tires opposes the drag force on the car with the same magnitude, producing a net force of zero. The body continues in its state of constant velocity until the net force becomes nonzero. Realize that *a net force of zero means that an object is either at rest or moving with constant velocity, that is, it is not accelerating.* What do you suppose happens when the car accelerates? We explore this idea in the next section.

Significance

As this example shows, there are two kinds of equilibrium. In (a), the car is at rest; we say it is in *static equilibrium*. In (b), the forces on the car are balanced, but the car is moving; we say that it is in *dynamic equilibrium*. (We examine this idea in more detail in Static Equilibrium and Elasticity.) Again, it is possible for two (or more) forces to act on an object yet for the object to move. In addition, a net force of zero cannot produce acceleration.

CHECK YOUR UNDERSTANDING 5.2

A skydiver opens his parachute, and shortly thereafter, he is moving at constant velocity. (a) What forces are acting on him? (b) Which force is bigger?

INTERACTIVE

Engage this simulation (https://openstax.org/l/21forcemotion) to predict, qualitatively, how an external force will affect the speed and direction of an object's motion. Explain the effects with the help of a free-body diagram. Use free-body diagrams to draw position, velocity, acceleration, and force graphs, and vice versa. Explain how the graphs relate to one another. Given a scenario or a graph, sketch all four graphs.

5.3 Newton's Second Law

Learning Objectives

By the end of this section, you will be able to:

- Distinguish between external and internal forces
- Describe Newton's second law of motion
- Explain the dependence of acceleration on net force and mass

Newton's second law is closely related to his first law. It mathematically gives the cause-and-effect relationship between force and changes in motion. Newton's second law is quantitative and is used extensively to calculate what happens in situations involving a force. Before we can write down Newton's second law as a simple equation that gives the exact relationship of force, mass, and acceleration, we need to sharpen some ideas we mentioned earlier.

Force and Acceleration

First, what do we mean by a change in motion? The answer is that a change in motion is equivalent to a change

in velocity. A change in velocity means, by definition, that there is acceleration. Newton's first law says that a net external force causes a change in motion; thus, we see that a *net external force causes nonzero acceleration*.

We defined external force in Forces as force acting on an object or system that originates outside of the object or system. Let's consider this concept further. An intuitive notion of *external* is correct—it is outside the system of interest. For example, in Figure 5.10(a), the system of interest is the car plus the person within it. The two forces exerted by the two students are external forces. In contrast, an internal force acts between elements of the system. Thus, the force the person in the car exerts to hang on to the steering wheel is an internal force between elements of the system of interest. Only external forces affect the motion of a system, according to Newton's first law. (The internal forces cancel each other out, as explained in the next section.) Therefore, we must define the boundaries of the system before we can determine which forces are external. Sometimes, the system is obvious, whereas at other times, identifying the boundaries of a system is more subtle. The concept of a system is fundamental to many areas of physics, as is the correct application of Newton's laws. This concept is revisited many times in the study of physics.

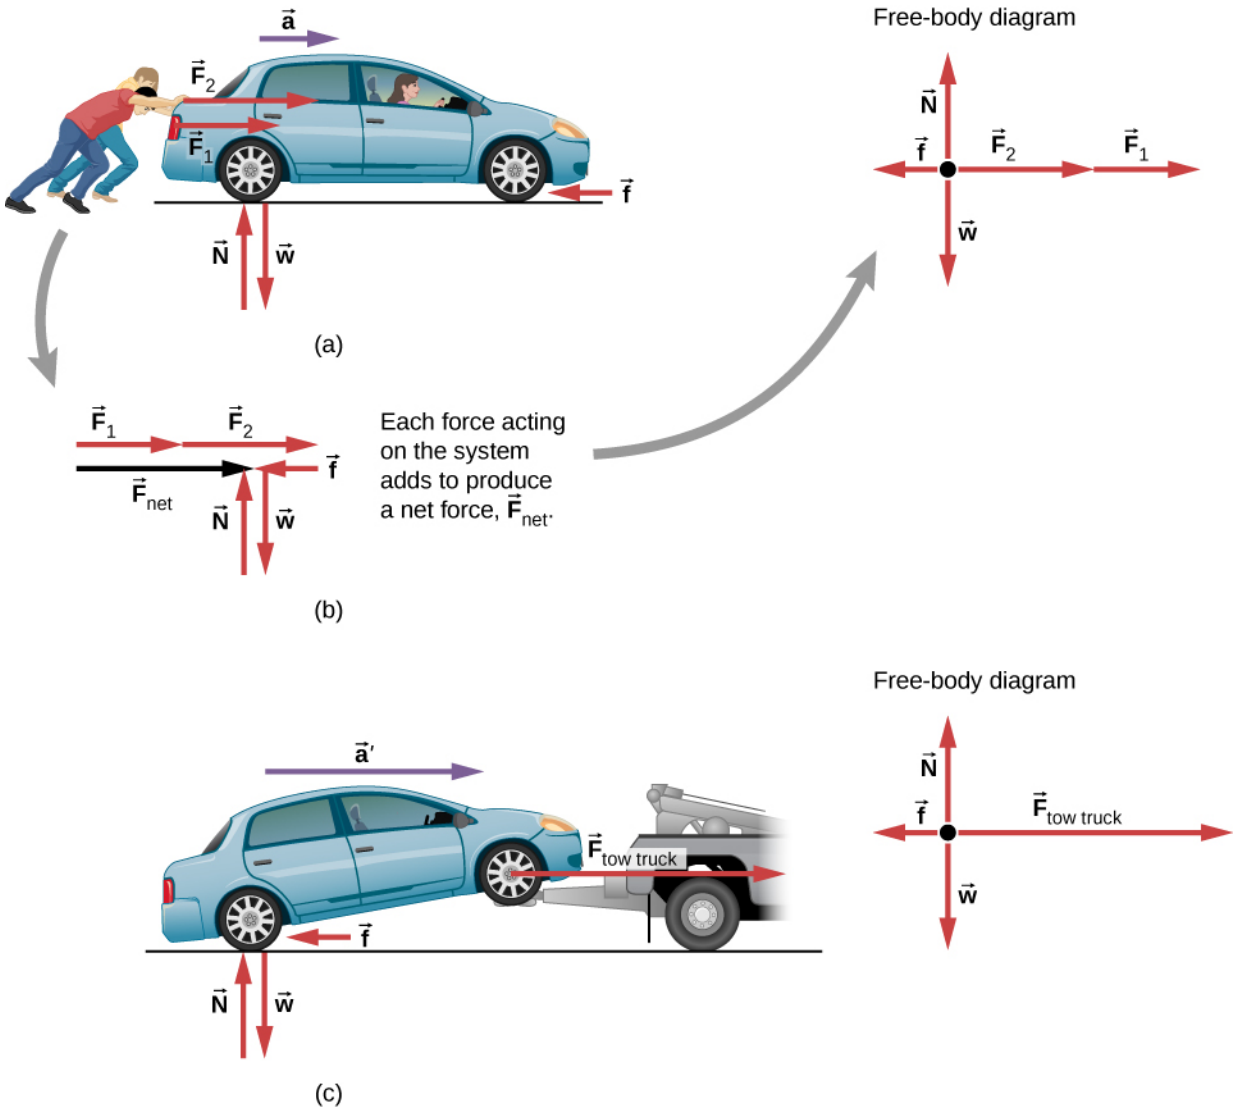


Figure 5.10 Different forces exerted on the same mass produce different accelerations. (a) Two students push a stalled car. All external forces acting on the car are shown. (b) The forces acting on the car are transferred to a coordinate plane (free-body diagram) for simpler analysis. (c) The tow truck can produce greater external force on the same mass, and thus greater acceleration.

From this example, you can see that different forces exerted on the same mass produce different accelerations.

In Figure 5.10(a), the two students push a car with a driver in it. Arrows representing all external forces are shown. The system of interest is the car and its driver. The weight $\vec{\mathbf{w}}$ of the system and the support of the ground $\vec{\mathbf{N}}$ are also shown for completeness and are assumed to cancel (because there was no vertical motion and no imbalance of forces in the vertical direction to create a change in motion). The vector $\vec{\mathbf{f}}$ represents the friction acting on the car, and it acts to the left, opposing the motion of the car. (We discuss friction in more detail in the next chapter.) In Figure 5.10(b), all external forces acting on the system add together to produce the net force $\vec{\mathbf{F}}_{\text{net}}$. The free-body diagram shows all of the forces acting on the system of interest. The dot represents the center of mass of the system. Each force vector extends from this dot. Because there are two forces acting to the right, the vectors are shown collinearly. Finally, in Figure 5.10(c), a larger net external force produces a larger acceleration ($\vec{\mathbf{a}}' > \vec{\mathbf{a}}$) when the tow truck pulls the car.

It seems reasonable that acceleration would be directly proportional to and in the same direction as the net external force acting on a system. This assumption has been verified experimentally and is illustrated in Figure 5.10. To obtain an equation for Newton's second law, we first write the relationship of acceleration $\vec{\mathbf{a}}$ and net external force $\vec{\mathbf{F}}_{\text{net}}$ as the proportionality

$$\vec{\mathbf{a}} \propto \vec{\mathbf{F}}_{\text{net}}$$

where the symbol $\propto$ means "proportional to." (Recall from Forces that the net external force is the vector sum of all external forces and is sometimes indicated as $\sum \vec{\mathbf{F}}$.) This proportionality shows what we have said in words—acceleration is directly proportional to net external force. Once the system of interest is chosen, identify the external forces and ignore the internal ones. It is a tremendous simplification to disregard the numerous internal forces acting between objects within the system, such as muscular forces within the students' bodies, let alone the myriad forces between the atoms in the objects. Still, this simplification helps us solve some complex problems.

It also seems reasonable that acceleration should be inversely proportional to the mass of the system. In other words, the larger the mass (the inertia), the smaller the acceleration produced by a given force. As illustrated in Figure 5.11, the same net external force applied to a basketball produces a much smaller acceleration when it is applied to an SUV. The proportionality is written as

$$a \propto \frac{1}{m},$$

where m is the mass of the system and a is the magnitude of the acceleration. Experiments have shown that acceleration is exactly inversely proportional to mass, just as it is directly proportional to net external force.

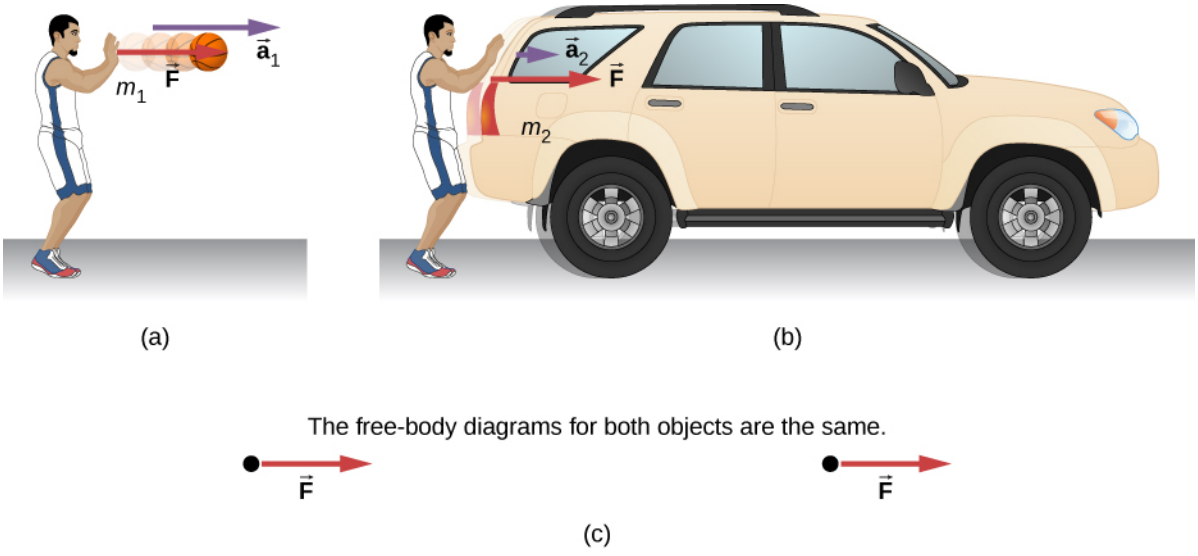


Figure 5.11 The same force exerted on systems of different masses produces different accelerations. (a) A basketball player pushes on a basketball to make a pass. (Ignore the effect of gravity on the ball.) (b) The same player exerts an identical force on a stalled SUV and

produces far less acceleration. (c) The free-body diagrams are identical, permitting direct comparison of the two situations. A series of patterns for free-body diagrams will emerge as you do more problems and learn how to draw them in Drawing Free-Body Diagrams.

It has been found that the acceleration of an object depends only on the net external force and the mass of the object. Combining the two proportionalities just given yields **Newton's second law**.

Newton's Second Law of Motion

The acceleration of a system is directly proportional to and in the same direction as the net external force acting on the system and is inversely proportion to its mass. In equation form, Newton's second law is

$$\vec{\mathbf{a}} = \frac{\vec{\mathbf{F}}_{\text{net}}}{m},$$

where $\vec{\mathbf{a}}$ is the acceleration, $\vec{\mathbf{F}}_{\text{net}}$ is the net force, and m is the mass. This is often written in the more familiar form

$$\vec{\mathbf{F}}_{\text{net}} = \sum \vec{\mathbf{F}} = m\vec{\mathbf{a}}, \tag{5.3}$$

but the first equation gives more insight into what Newton's second law means. When only the magnitude of force and acceleration are considered, this equation can be written in the simpler scalar form:

$$F_{\text{net}} = ma. \tag{5.4}$$

The law is a cause-and-effect relationship among three quantities that is not simply based on their definitions. The validity of the second law is based on experimental verification. The free-body diagram, which you will learn to draw in Drawing Free-Body Diagrams, is the basis for writing Newton's second law.

EXAMPLE 5.2

What Acceleration Can a Person Produce When Pushing a Lawn Mower?

Suppose that the net external force (push minus friction) exerted on a lawn mower is 51 N (about 11 lb.) parallel to the ground (Figure 5.12). The mass of the mower is 24 kg. What is its acceleration?

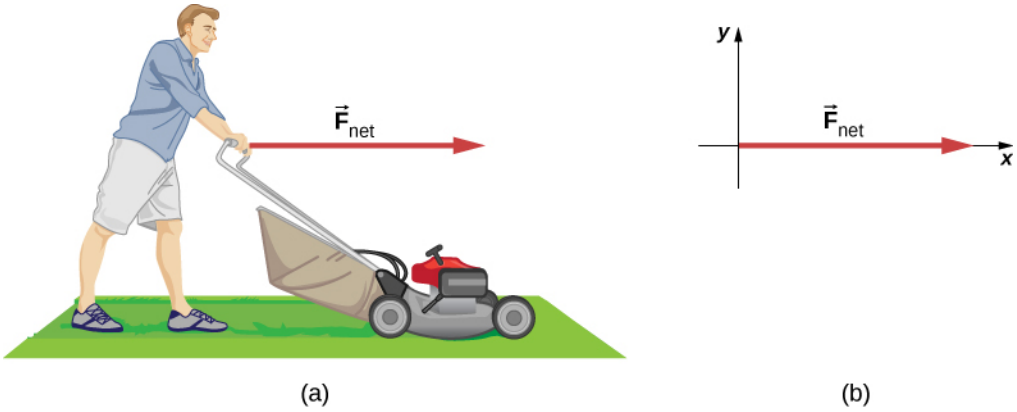


Figure 5.12 (a) The net force on a lawn mower is 51 N to the right. At what rate does the lawn mower accelerate to the right? (b) The free-body diagram for this problem is shown.

Strategy

This problem involves only motion in the horizontal direction; we are also given the net force, indicated by the single vector, but we can suppress the vector nature and concentrate on applying Newton's second law. Since F_{net} and m are given, the acceleration can be calculated directly from Newton's second law as $F_{\text{net}} = ma$.

Solution

The magnitude of the acceleration a is $a = F_{\text{net}}/m$. Entering known values gives

$$a = \frac{51\ \text{N}}{24\ \text{kg}}.$$

Substituting the unit of kilograms times meters per square second for newtons yields

$$a = \frac{51\ \text{kg} \cdot \text{m/s}^2}{24\ \text{kg}} = 2.1\ \text{m/s}^2.$$

Significance

The direction of the acceleration is the same direction as that of the net force, which is parallel to the ground. This is a result of the vector relationship expressed in Newton's second law, that is, the vector representing net force is the scalar multiple of the acceleration vector. There is no information given in this example about the individual external forces acting on the system, but we can say something about their relative magnitudes. For example, the force exerted by the person pushing the mower must be greater than the friction opposing the motion (since we know the mower moved forward), and the vertical forces must cancel because no acceleration occurs in the vertical direction (the mower is moving only horizontally). The acceleration found is small enough to be reasonable for a person pushing a mower. Such an effort would not last too long, because the person's top speed would soon be reached.

CHECK YOUR UNDERSTANDING 5.3

At the time of its launch, the HMS *Titanic* was the most massive mobile object ever built, with a mass of 6.0×10^7 kg. If a force of 6 MN (6×10^6 N) was applied to the ship, what acceleration would it experience?

In the preceding example, we dealt with net force only for simplicity. However, several forces act on the lawn mower. The weight $\vec{\mathbf{w}}$ (discussed in detail in Mass and Weight) pulls down on the mower, toward the center of Earth; this produces a contact force on the ground. The ground must exert an upward force on the lawn mower, known as the normal force $\vec{\mathbf{N}}$, which we define in Common Forces. These forces are balanced and therefore do not produce vertical acceleration. In the next example, we show both of these forces. As you continue to solve problems using Newton's second law, be sure to show multiple forces.

EXAMPLE 5.3

Which Force Is Bigger?

(a) The car shown in Figure 5.13 is moving at a constant speed. Which force is bigger, $\vec{\mathbf{F}}_{\text{friction}}$ or $\vec{\mathbf{F}}_{\text{drag}}$? Explain.

(b) The same car is now accelerating to the right. Which force is bigger, $\vec{\mathbf{F}}_{\text{friction}}$ or $\vec{\mathbf{F}}_{\text{drag}}$? Explain.

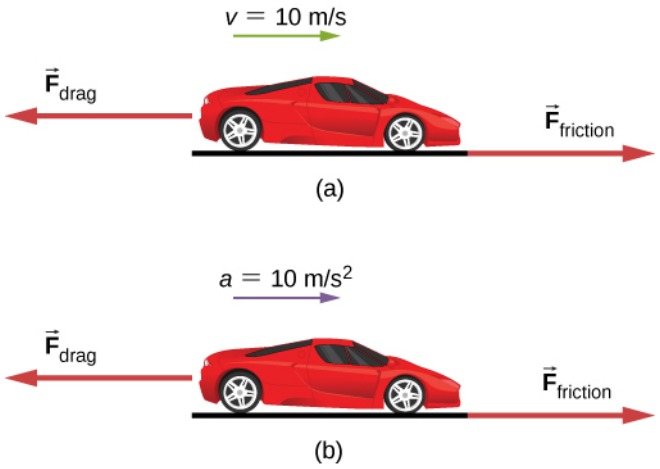


Figure 5.13 A car is shown (a) moving at constant speed and (b) accelerating. How do the forces acting on the car compare in each case? (a) What does the knowledge that the car is moving at constant velocity tell us about the net horizontal force on the car compared to the friction force? (b) What does the knowledge that the car is accelerating tell us about the horizontal force on the car compared to the friction force?

Strategy

We must consider Newton's first and second laws to analyze the situation. We need to decide which law applies; this, in turn, will tell us about the relationship between the forces.

Solution

a. The forces are equal. According to Newton's first law, if the net force is zero, the velocity is constant.
b. In this case, $\vec{\mathbf{F}}_{\text{friction}}$ must be larger than $\vec{\mathbf{F}}_{\text{drag}}$. According to Newton's second law, a net force is required to cause acceleration.

Significance

These questions may seem trivial, but they are commonly answered incorrectly. For a car or any other object to move, it must be accelerated from rest to the desired speed; this requires that the friction force be greater than the drag force. Once the car is moving at constant velocity, the net force must be zero; otherwise, the car will accelerate (gain speed). To solve problems involving Newton's laws, we must understand whether to apply Newton's first law (where $\sum \vec{\mathbf{F}} = \vec{\mathbf{0}}$) or Newton's second law (where $\sum \vec{\mathbf{F}}$ is not zero). This will be apparent as you see more examples and attempt to solve problems on your own.

EXAMPLE 5.4

What Rocket Thrust Accelerates This Sled?

Before space flights carrying astronauts, rocket sleds were used to test aircraft, missile equipment, and physiological effects on human subjects at high speeds. They consisted of a platform that was mounted on one or two rails and propelled by several rockets.

Calculate the magnitude of force exerted by each rocket, called its thrust T, for the four-rocket propulsion system shown in Figure 5.14. The sled's initial acceleration is 49 m/s^2, the mass of the system is 2100 kg, and the force of friction opposing the motion is 650 N.

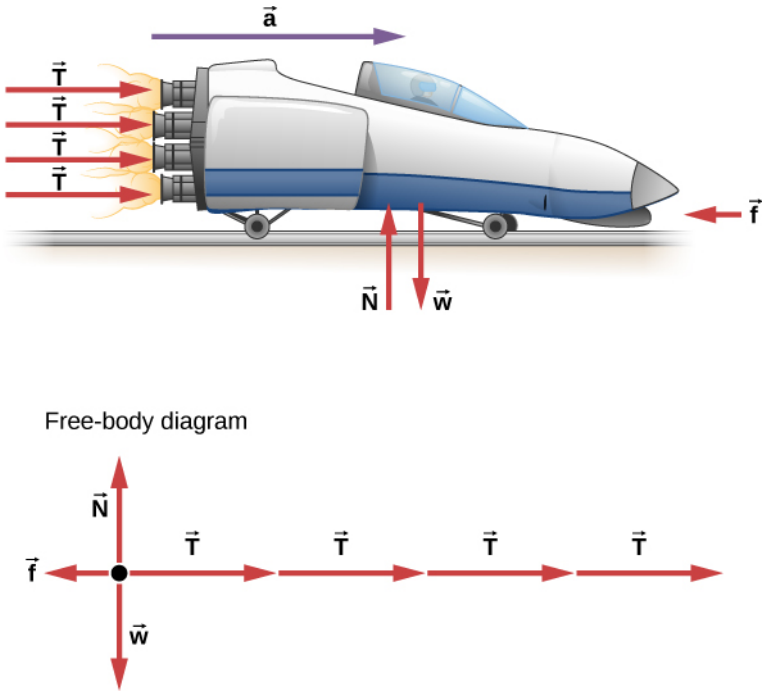


Figure 5.14 A sled experiences a rocket thrust that accelerates it to the right. Each rocket creates an identical thrust *T*. The system here is the sled, its rockets, and its rider, so none of the forces between these objects are considered. The arrow representing friction ($\vec{\mathbf{f}}$) is drawn larger than scale.

Strategy

Although forces are acting both vertically and horizontally, we assume the vertical forces cancel because there is no vertical acceleration. This leaves us with only horizontal forces and a simpler one-dimensional problem. Directions are indicated with plus or minus signs, with right taken as the positive direction. See the free-body diagram in Figure 5.14.

Solution

Since acceleration, mass, and the force of friction are given, we start with Newton's second law and look for ways to find the thrust of the engines. We have defined the direction of the force and acceleration as acting "to the right," so we need to consider only the magnitudes of these quantities in the calculations. Hence we begin with

$$F_{\text{net}} = ma$$

where F_{net} is the net force along the horizontal direction. We can see from the figure that the engine thrusts add, whereas friction opposes the thrust. In equation form, the net external force is

$$F_{\text{net}} = 4T - f.$$

Substituting this into Newton's second law gives us

$$F_{\text{net}} = ma = 4T - f.$$

Using a little algebra, we solve for the total thrust $4T$:

$$4T = ma + f.$$

Substituting known values yields

$$4T = ma + f = (2100\ \text{kg})\left(49\ \text{m/s}^2\right) + 650\ \text{N}.$$

Therefore, the total thrust is

$$4T = 1.0 \times 10^5\ \text{N},$$

and the individual thrusts are

$$T = \frac{1.0 \times 10^5 \text{ N}}{4} = 2.5 \times 10^4 \text{ N}.$$

Significance

The numbers are quite large, so the result might surprise you. Experiments such as this were performed in the early 1960s to test the limits of human endurance, and the setup was designed to protect human subjects in jet fighter emergency ejections. Speeds of 1000 km/h were obtained, with accelerations of 45 *g*'s. (Recall that *g*, acceleration due to gravity, is 9.80 m/s^2. When we say that acceleration is 45 *g*'s, it is $45 \times 9.8 \text{ m/s}^2$, which is approximately 440 m/s^2.) Although living subjects are not used anymore, land speeds of 10,000 km/h have been obtained with a rocket sled.

In this example, as in the preceding one, the system of interest is obvious. We see in later examples that choosing the system of interest is crucial—and the choice is not always obvious.

Newton's second law is more than a definition; it is a relationship among acceleration, force, and mass. It can help us make predictions. Each of those physical quantities can be defined independently, so the second law tells us something basic and universal about nature.

CHECK YOUR UNDERSTANDING 5.4

A 550-kg sports car collides with a 2200-kg truck, and during the collision, the net force on each vehicle is the force exerted by the other. If the magnitude of the truck's acceleration is 10 m/s^2, what is the magnitude of the sports car's acceleration?

Component Form of Newton's Second Law

We have developed Newton's second law and presented it as a vector equation in Equation 5.3. This vector equation can be written as three component equations:

$$\sum \vec{\mathbf{F}}_x = m\vec{\mathbf{a}}_x, \ \sum \vec{\mathbf{F}}_y = m\vec{\mathbf{a}}_y, \text{ and } \sum \vec{\mathbf{F}}_z = m\vec{\mathbf{a}}_z. \qquad 5.5$$

The second law is a description of how a body responds mechanically to its environment. The influence of the environment is the net force $\vec{\mathbf{F}}_{\text{net}}$, the body's response is the acceleration $\vec{\mathbf{a}}$, and the strength of the response is inversely proportional to the mass *m*. The larger the mass of an object, the smaller its response (its acceleration) to the influence of the environment (a given net force). Therefore, a body's mass is a measure of its inertia, as we explained in Newton's First Law.

EXAMPLE 5.5

Force on a Soccer Ball

A 0.400-kg soccer ball is kicked across the field by a player; it undergoes acceleration given by $\vec{\mathbf{a}} = 3.00\hat{\mathbf{i}} + 7.00\hat{\mathbf{j}} \text{ m/s}^2$. Find (a) the resultant force acting on the ball and (b) the magnitude and direction of the resultant force.

Strategy

The vectors in $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ format, which indicate force direction along the *x*-axis and the *y*-axis, respectively, are involved, so we apply Newton's second law in vector form.

Solution

a. We apply Newton's second law:

$$\vec{\mathbf{F}}_{\text{net}} = m\vec{\mathbf{a}} = (0.400 \text{ kg})\left(3.00\hat{\mathbf{i}} + 7.00\hat{\mathbf{j}} \text{ m/s}^2\right) = 1.20\hat{\mathbf{i}} + 2.80\hat{\mathbf{j}} \text{ N}.$$

b. Magnitude and direction are found using the components of $\vec{\mathbf{F}}_{\text{net}}$:

$$F_{\text{net}} = \sqrt{(1.20\,\text{N})^2 + (2.80\,\text{N})^2} = 3.05\,\text{N and } \theta = \tan^{-1}\left(\frac{2.80}{1.20}\right) = 66.8°.$$

Significance

We must remember that Newton's second law is a vector equation. In (a), we are multiplying a vector by a scalar to determine the net force in vector form. While the vector form gives a compact representation of the force vector, it does not tell us how "big" it is, or where it goes, in intuitive terms. In (b), we are determining the actual size (magnitude) of this force and the direction in which it travels.

EXAMPLE 5.6

Mass of a Car

Find the mass of a car if a net force of $-600.0\hat{\mathbf{j}}$ N produces an acceleration of $-0.2\hat{\mathbf{j}}$ m/s^2.

Strategy

Vector division is not defined, so $m = \vec{\mathbf{F}}_{\text{net}}/\vec{\mathbf{a}}$ cannot be performed. However, mass m is a scalar, so we can use the scalar form of Newton's second law, $m = F_{\text{net}}/a$.

Solution

We use $m = F_{\text{net}}/a$ and substitute the magnitudes of the two vectors: $F_{\text{net}} = 600.0$ N and $a = 0.2$ m/s^2. Therefore,

$$m = \frac{F_{\text{net}}}{a} = \frac{600.0\,\text{N}}{0.2\,\text{m/s}^2} = 3000\,\text{kg}.$$

Significance

Force and acceleration were given in the $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ format, but the answer, mass m, is a scalar and thus is not given in $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ form.

EXAMPLE 5.7

Several Forces on a Particle

A particle of mass $m = 4.0$ kg is acted upon by four forces of magnitudes. $F_1 = 10.0$ N, $F_2 = 40.0$ N, $F_3 = 5.0$ N, and $F_4 = 2.0$ N, with the directions as shown in the free-body diagram in Figure 5.15. What is the acceleration of the particle?

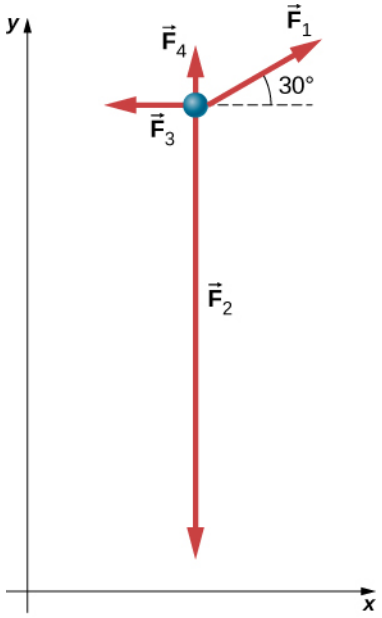


Figure 5.15 Four forces in the *xy*-plane are applied to a 4.0-kg particle.

Strategy

Because this is a two-dimensional problem, we must use a free-body diagram. First, $\vec{\mathbf{F}}_1$ must be resolved into *x*- and *y*-components. We can then apply the second law in each direction.

Solution

We draw a free-body diagram as shown in Figure 5.15. Now we apply Newton's second law. We consider all vectors resolved into *x*- and *y*-components:

$$\sum F_x = ma_x \qquad \sum F_y = ma_y$$
$$F_{1x} - F_{3x} = ma_x \qquad F_{1y} + F_{4y} - F_{2y} = ma_y$$
$$F_1 \cos 30° - F_{3x} = ma_x \qquad F_1 \sin 30° + F_{4y} - F_{2y} = ma_y$$
$$(10.0\ \text{N})(\cos 30°) - 5.0\ \text{N} = (4.0\ \text{kg})\, a_x \qquad (10.0\ \text{N})(\sin 30°) + 2.0\ \text{N} - 40.0\ \text{N} = (4.0\ \text{kg})\, a_y$$
$$a_x = 0.92\ \text{m/s}^2. \qquad a_y = -8.3\ \text{m/s}^2.$$

Thus, the net acceleration is

$$\vec{\mathbf{a}} = \left(0.92\hat{\mathbf{i}} - 8.3\hat{\mathbf{j}}\right)\ \text{m/s}^2,$$


which is a vector of magnitude $8.4\ \text{m/s}^2$ directed at $276°$ to the positive *x*-axis.

Significance

Numerous examples in everyday life can be found that involve three or more forces acting on a single object, such as cables running from the Golden Gate Bridge or a football player being tackled by three defenders. We can see that the solution of this example is just an extension of what we have already done.

CHECK YOUR UNDERSTANDING 5.5

A car has forces acting on it, as shown below. The mass of the car is 1000.0 kg. The road is slick, so friction can be ignored. (a) What is the net force on the car? (b) What is the acceleration of the car?

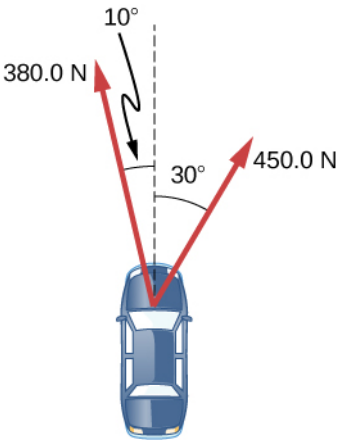

Newton's Second Law and Momentum

Newton actually stated his second law in terms of momentum: "The instantaneous rate at which a body's momentum changes is equal to the net force acting on the body." ("Instantaneous rate" implies that the derivative is involved.) This can be given by the vector equation

$$\vec{\mathbf{F}}_{\text{net}} = \frac{d\vec{\mathbf{p}}}{dt}. \tag{5.6}$$

This means that Newton's second law addresses the central question of motion: What causes a change in motion of an object? Momentum was described by Newton as "quantity of motion," a way of combining both the velocity of an object and its mass. We devote Linear Momentum and Collisions to the study of momentum.

For now, it is sufficient to define *momentum* $\vec{\mathbf{p}}$ as the product of the mass of the object m and its velocity $\vec{\mathbf{v}}$:

$$\vec{\mathbf{p}} = m\vec{\mathbf{v}}. \tag{5.7}$$

Since velocity is a vector, so is momentum.

It is easy to visualize momentum. A train moving at 10 m/s has more momentum than one that moves at 2 m/s. In everyday life, we speak of one sports team as "having momentum" when they score points against the opposing team.

If we substitute Equation 5.7 into Equation 5.6, we obtain

$$\vec{\mathbf{F}}_{\text{net}} = \frac{d\vec{\mathbf{p}}}{dt} = \frac{d\left(m\vec{\mathbf{v}}\right)}{dt}.$$

When m is constant, we have

$$\vec{\mathbf{F}}_{\text{net}} = m\frac{d\left(\vec{\mathbf{v}}\right)}{dt} = m\vec{\mathbf{a}}.$$

Thus, we see that the momentum form of Newton's second law reduces to the form given earlier in this section.

INTERACTIVE

Explore the forces at work (https://openstax.org/l/21forcesatwork) when pulling a cart (https://openstax.org/l/21pullacart) or pushing a refrigerator, crate, or person. Create an applied force (https://openstax.org/l/21forcemotion) and see how it makes objects move. Put an object on a ramp (https://openstax.org/l/21ramp) and see how it affects its motion.

5.4 Mass and Weight

Learning Objectives

By the end of this section, you will be able to:

- Explain the difference between mass and weight
- Explain why falling objects on Earth are never truly in free fall
- Describe the concept of weightlessness

Mass and weight are often used interchangeably in everyday conversation. For example, our medical records often show our weight in kilograms but never in the correct units of newtons. In physics, however, there is an important distinction. Weight is the pull of Earth on an object. It depends on the distance from the center of Earth. Unlike weight, mass does not vary with location. The mass of an object is the same on Earth, in orbit, or on the surface of the Moon.

Units of Force

The equation $F_{\text{net}} = ma$ is used to define net force in terms of mass, length, and time. As explained earlier, the SI unit of force is the newton. Since $F_{\text{net}} = ma$,

$$1\ \text{N} = 1\ \text{kg} \cdot \text{m/s}^2.$$

Although almost the entire world uses the newton for the unit of force, in the United States, the most familiar unit of force is the pound (lb), where 1 N = 0.225 lb. Thus, a 225-lb person weighs 1000 N.

Weight and Gravitational Force

When an object is dropped, it accelerates toward the center of Earth. Newton's second law says that a net force on an object is responsible for its acceleration. If air resistance is negligible, the net force on a falling object is the gravitational force, commonly called its **weight** $\vec{\mathbf{w}}$, or its force due to gravity acting on an object of mass m. Weight can be denoted as a vector because it has a direction; *down* is, by definition, the direction of gravity, and hence, weight is a downward force. The magnitude of weight is denoted as w. Galileo was instrumental in showing that, in the absence of air resistance, all objects fall with the same acceleration g. Using Galileo's result and Newton's second law, we can derive an equation for weight.

Consider an object with mass m falling toward Earth. It experiences only the downward force of gravity, which is the weight $\vec{\mathbf{w}}$. Newton's second law says that the magnitude of the net external force on an object is $\vec{\mathbf{F}}_{\text{net}} = m\vec{\mathbf{a}}$. We know that the acceleration of an object due to gravity is $\vec{\mathbf{g}}$, or $\vec{\mathbf{a}} = \vec{\mathbf{g}}$. Substituting these into Newton's second law gives us the following equations.

Weight

The gravitational force on a mass is its weight. We can write this in vector form, where $\vec{\mathbf{w}}$ is weight and m is mass, as

$$\vec{\mathbf{w}} = m\vec{\mathbf{g}}. \tag{5.8}$$

In scalar form, we can write

$$w = mg. \tag{5.9}$$

Since $g = 9.80\ \text{m/s}^2$ on Earth, the weight of a 1.00-kg object on Earth is 9.80 N:

$$w = mg = (1.00\ \text{kg})(9.80\ \text{m/s}^2) = 9.80\ \text{N}.$$

When the net external force on an object is its weight, we say that it is in **free fall**, that is, the only force acting on the object is gravity. However, when objects on Earth fall downward, they are never truly in free fall because there is always some upward resistance force from the air acting on the object.

Acceleration due to gravity g varies slightly over the surface of Earth, so the weight of an object depends on its

location and is not an intrinsic property of the object. Weight varies dramatically if we leave Earth's surface. On the Moon, for example, acceleration due to gravity is only $1.67\ \text{m/s}^2$. A 1.0-kg mass thus has a weight of 9.8 N on Earth and only about 1.7 N on the Moon.

The broadest definition of weight in this sense is that the weight of an object is the gravitational force on it from the nearest large body, such as Earth, the Moon, or the Sun. This is the most common and useful definition of weight in physics. It differs dramatically, however, from the definition of weight used by NASA and the popular media in relation to space travel and exploration. When they speak of "weightlessness" and "microgravity," they are referring to the phenomenon we call "free fall" in physics. We use the preceding definition of weight, force $\vec{\mathbf{w}}$ due to gravity acting on an object of mass m, and we make careful distinctions between free fall and actual weightlessness.

Be aware that weight and mass are different physical quantities, although they are closely related. Mass is an intrinsic property of an object: It is a quantity of matter. The quantity or amount of matter of an object is determined by the numbers of atoms and molecules of various types it contains. Because these numbers do not vary, in Newtonian physics, mass does not vary; therefore, its response to an applied force does not vary. In contrast, weight is the gravitational force acting on an object, so it does vary depending on gravity. For example, a person closer to the center of Earth, at a low elevation such as New Orleans, weighs slightly more than a person who is located in the higher elevation of Denver, even though they may have the same mass.

It is tempting to equate mass to weight, because most of our examples take place on Earth, where the weight of an object varies only a little with the location of the object. In addition, it is difficult to count and identify all of the atoms and molecules in an object, so mass is rarely determined in this manner. If we consider situations in which $\vec{\mathbf{g}}$ is a constant on Earth, we see that weight $\vec{\mathbf{w}}$ is directly proportional to mass m, since $\vec{\mathbf{w}} = m\vec{\mathbf{g}}$, that is, the more massive an object is, the more it weighs. Operationally, the masses of objects are determined by comparison with the standard kilogram, as we discussed in Units and Measurement. But by comparing an object on Earth with one on the Moon, we can easily see a variation in weight but not in mass. For instance, on Earth, a 5.0-kg object weighs 49 N; on the Moon, where g is $1.67\ \text{m/s}^2$, the object weighs 8.4 N. However, the mass of the object is still 5.0 kg on the Moon.

EXAMPLE 5.8

Clearing a Field


A farmer is lifting some moderately heavy rocks from a field to plant crops. He lifts a stone that weighs 40.0 lb. (about 180 N). What force does he apply if the stone accelerates at a rate of $1.5\ \text{m/s}^2$?

Strategy

We were given the weight of the stone, which we use in finding the net force on the stone. However, we also need to know its mass to apply Newton's second law, so we must apply the equation for weight, $w = mg$, to determine the mass.

Solution

No forces act in the horizontal direction, so we can concentrate on vertical forces, as shown in the following free-body diagram. We label the acceleration to the side; technically, it is not part of the free-body diagram, but it helps to remind us that the object accelerates upward (so the net force is upward).

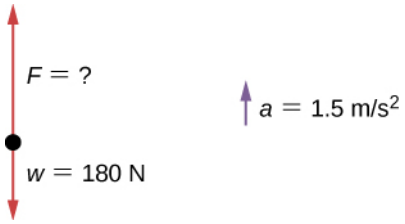

$$\begin{aligned} w &= mg \\ m &= \frac{w}{g} = \frac{180\ \text{N}}{9.8\ \text{m/s}^2} = 18\ \text{kg} \\ \sum F &= ma \\ F - w &= ma \\ F - 180\ \text{N} &= (18\ \text{kg})(1.5\ \text{m/s}^2) \\ F - 180\ \text{N} &= 27\ \text{N} \\ F &= 207\ \text{N} = 210\ \text{N to two significant figures} \end{aligned}$$

Significance

To apply Newton's second law as the primary equation in solving a problem, we sometimes have to rely on other equations, such as the one for weight or one of the kinematic equations, to complete the solution.

CHECK YOUR UNDERSTANDING 5.6

For Example 5.8, find the acceleration when the farmer's applied force is 230.0 N.

INTERACTIVE

Can you avoid the boulder field and land safely just before your fuel runs out, as Neil Armstrong did in 1969? This version of the classic video game (https://openstax.org/l/21lunarlander) accurately simulates the real motion of the lunar lander, with the correct mass, thrust, fuel consumption rate, and lunar gravity. The real lunar lander is hard to control.

5.5 Newton's Third Law

Learning Objectives

By the end of this section, you will be able to:

- State Newton's third law of motion
- Identify the action and reaction forces in different situations
- Apply Newton's third law to define systems and solve problems of motion

We have thus far considered force as a push or a pull; however, if you think about it, you realize that no push or pull ever occurs by itself. When you push on a wall, the wall pushes back on you. This brings us to **Newton's third law**.

Newton's Third Law of Motion

Whenever one body exerts a force on a second body, the first body experiences a force that is equal in magnitude and opposite in direction to the force that it exerts. Mathematically, if a body A exerts a force $\vec{\mathbf{F}}$ on body B, then B simultaneously exerts a force $-\vec{\mathbf{F}}$ on A, or in vector equation form,

$$\vec{\mathbf{F}}_{\text{AB}} = -\vec{\mathbf{F}}_{\text{BA}}. \qquad 5.10$$

Newton's third law represents a certain symmetry in nature: Forces always occur in pairs, and one body cannot exert a force on another without experiencing a force itself. We sometimes refer to this law loosely as "action-reaction," where the force exerted is the action and the force experienced as a consequence is the reaction. Newton's third law has practical uses in analyzing the origin of forces and understanding which forces are external to a system.

We can readily see Newton's third law at work by taking a look at how people move about. Consider a swimmer pushing off the side of a pool (Figure 5.16). She pushes against the wall of the pool with her feet and accelerates

in the direction opposite that of her push. The wall has exerted an equal and opposite force on the swimmer. You might think that two equal and opposite forces would cancel, but they do not *because they act on different systems*. In this case, there are two systems that we could investigate: the swimmer and the wall. If we select the swimmer to be the system of interest, as in the figure, then $F_{\text{wall on feet}}$ is an external force on this system and affects its motion. The swimmer moves in the direction of this force. In contrast, the force $F_{\text{feet on wall}}$ acts on the wall, not on our system of interest. Thus, $F_{\text{feet on wall}}$ does not directly affect the motion of the system and does not cancel $F_{\text{wall on feet}}$. The swimmer pushes in the direction opposite that in which she wishes to move. The reaction to her push is thus in the desired direction. In a free-body diagram, such as the one shown in Figure 5.16, we never include both forces of an action-reaction pair; in this case, we only use $F_{\text{wall on feet}}$, not $F_{\text{feet on wall}}$.

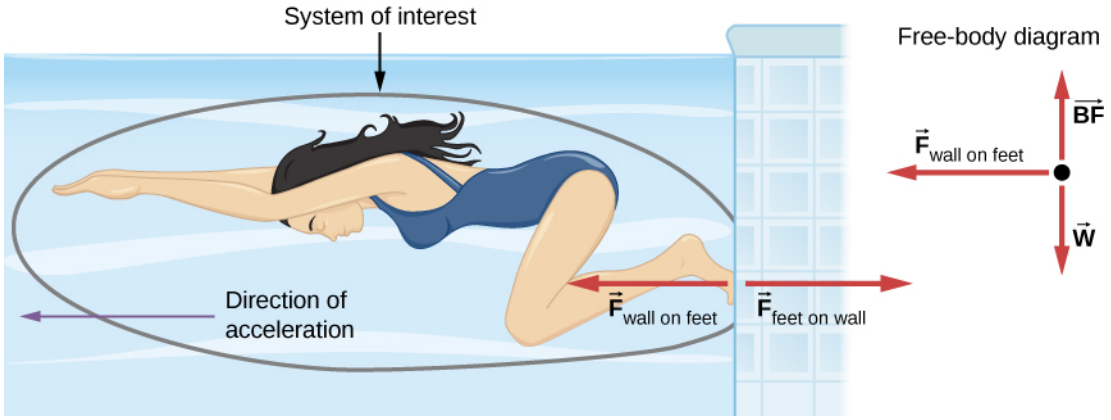


Figure 5.16 When the swimmer exerts a force on the wall, she accelerates in the opposite direction; in other words, the net external force on her is in the direction opposite of $F_{\text{feet on wall}}$. This opposition occurs because, in accordance with Newton's third law, the wall exerts a force $F_{\text{wall on feet}}$ on the swimmer that is equal in magnitude but in the direction opposite to the one she exerts on it. The line around the swimmer indicates the system of interest. Thus, the free-body diagram shows only $F_{\text{wall on feet}}$, *w* (the gravitational force), and *BF*, which is the buoyant force of the water supporting the swimmer's weight. The vertical forces *w* and *BF* cancel because there is no vertical acceleration.

Other examples of Newton's third law are easy to find:

- As a professor paces in front of a whiteboard, he exerts a force backward on the floor. The floor exerts a reaction force forward on the professor that causes him to accelerate forward.
- A car accelerates forward because the ground pushes forward on the drive wheels, in reaction to the drive wheels pushing backward on the ground. You can see evidence of the wheels pushing backward when tires spin on a gravel road and throw the rocks backward.
- Rockets move forward by expelling gas backward at high velocity. This means the rocket exerts a large backward force on the gas in the rocket combustion chamber; therefore, the gas exerts a large reaction force forward on the rocket. This reaction force, which pushes a body forward in response to a backward force, is called **thrust**. It is a common misconception that rockets propel themselves by pushing on the ground or on the air behind them. They actually work better in a vacuum, where they can more readily expel the exhaust gases.
- Helicopters create lift by pushing air down, thereby experiencing an upward reaction force.
- Birds and airplanes also fly by exerting force on the air in a direction opposite that of whatever force they need. For example, the wings of a bird force air downward and backward to get lift and move forward.
- An octopus propels itself in the water by ejecting water through a funnel from its body, similar to a jet ski.
- When a person pulls down on a vertical rope, the rope pulls up on the person (Figure 5.17).

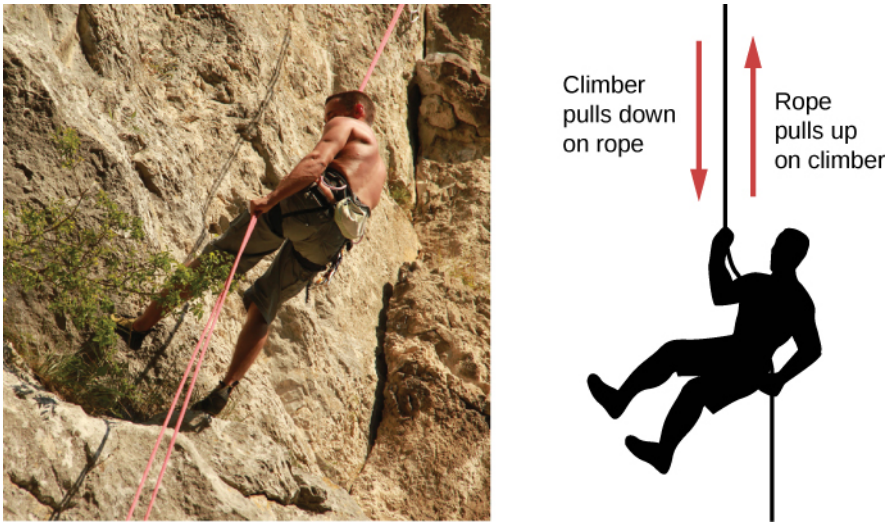


Figure 5.17 When the mountain climber pulls down on the rope, the rope pulls up on the mountain climber. (credit left: modification of work by Cristian Bortes)

There are two important features of Newton's third law. First, the forces exerted (the action and reaction) are always equal in magnitude but opposite in direction. Second, these forces are acting on different bodies or systems: *A*'s force acts on *B* and *B*'s force acts on *A*. In other words, the two forces are distinct forces that do not act on the same body. Thus, they do not cancel each other.

For the situation shown in Figure 5.6, the third law indicates that because the chair is pushing upward on the boy with force $\vec{\mathbf{C}}$, he is pushing downward on the chair with force $-\vec{\mathbf{C}}$. Similarly, he is pushing downward with forces $-\vec{\mathbf{F}}$ and $-\vec{\mathbf{T}}$ on the floor and table, respectively. Finally, since Earth pulls downward on the boy with force $\vec{\mathbf{w}}$, he pulls upward on Earth with force $-\vec{\mathbf{w}}$. If that student were to angrily pound the table in frustration, he would quickly learn the painful lesson (avoidable by studying Newton's laws) that the table hits back just as hard.

A person who is walking or running applies Newton's third law instinctively. For example, the runner in Figure 5.18 pushes backward on the ground so that it pushes him forward.

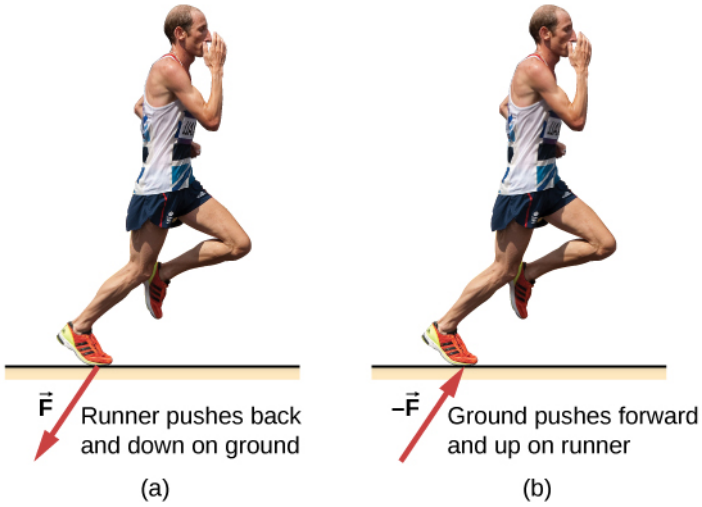


Figure 5.18 The runner experiences Newton's third law. (a) A force is exerted by the runner on the ground. (b) The reaction force of the ground on the runner pushes him forward. (credit "runner": modification of work by "Greenwich Photography"/Flickr)

EXAMPLE 5.9

Forces on a Stationary Object

The package in Figure 5.19 is sitting on a scale. The forces on the package are $\vec{\mathbf{S}}$, which is due to the scale, and $-\vec{\mathbf{w}}$, which is due to Earth's gravitational field. The reaction forces that the package exerts are $-\vec{\mathbf{S}}$ on the scale and $\vec{\mathbf{w}}$ on Earth. Because the package is not accelerating, application of the second law yields

$$\vec{\mathbf{S}} - \vec{\mathbf{w}} = m\vec{\mathbf{a}} = \vec{\mathbf{0}},$$

so

$$\vec{\mathbf{S}} = \vec{\mathbf{w}}.$$

Thus, the scale reading gives the magnitude of the package's weight. However, the scale does not measure the weight of the package; it measures the force $-\vec{\mathbf{S}}$ on its surface. If the system is accelerating, $\vec{\mathbf{S}}$ and $-\vec{\mathbf{w}}$ would not be equal, as explained in Applications of Newton's Laws.

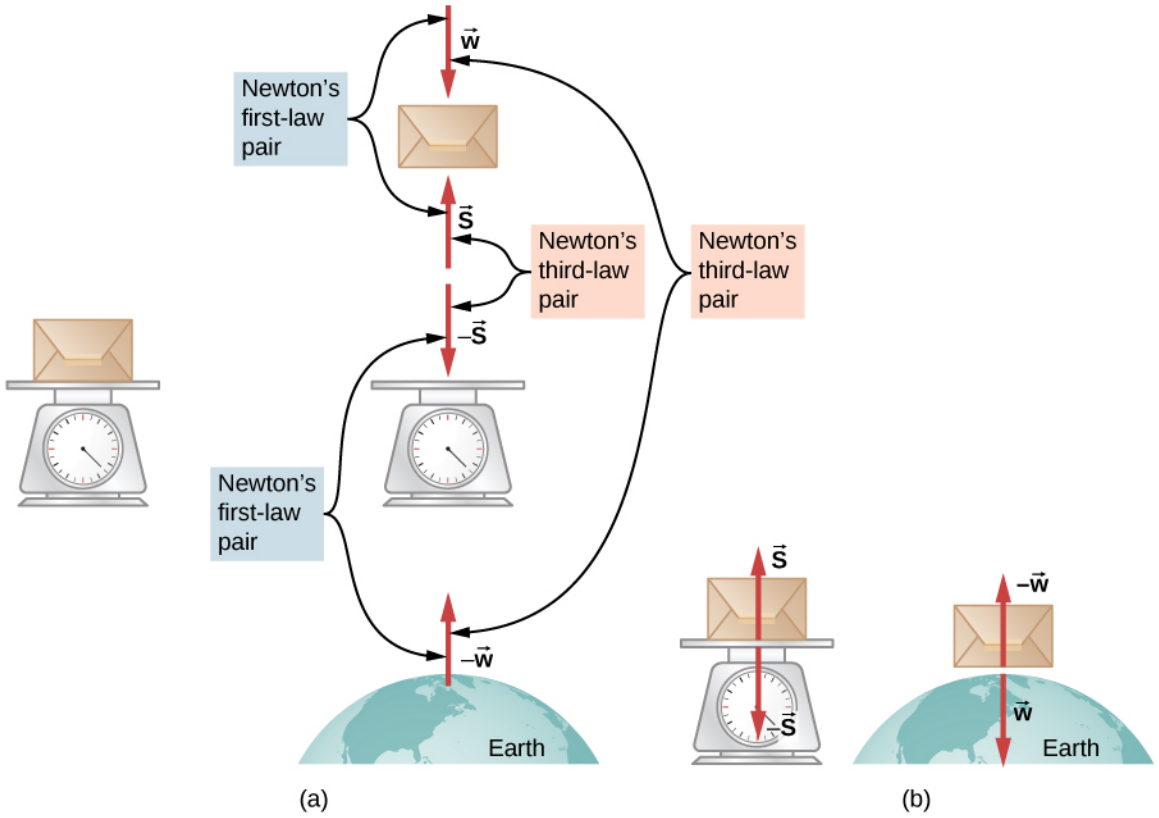


Figure 5.19 (a) The forces on a package sitting on a scale, along with their reaction forces. The force $\vec{\mathbf{w}}$ is the weight of the package (the force due to Earth's gravity) and $\vec{\mathbf{S}}$ is the force of the scale on the package. (b) Isolation of the package-scale system and the package-Earth system makes the action and reaction pairs clear.

EXAMPLE 5.10

Getting Up to Speed: Choosing the Correct System

A physics professor pushes a cart of demonstration equipment to a lecture hall (Figure 5.20). Her mass is 65.0 kg, the cart's mass is 12.0 kg, and the equipment's mass is 7.0 kg. Calculate the acceleration produced when the professor exerts a backward force of 150 N on the floor. All forces opposing the motion, such as friction on

the cart's wheels and air resistance, total 24.0 N.

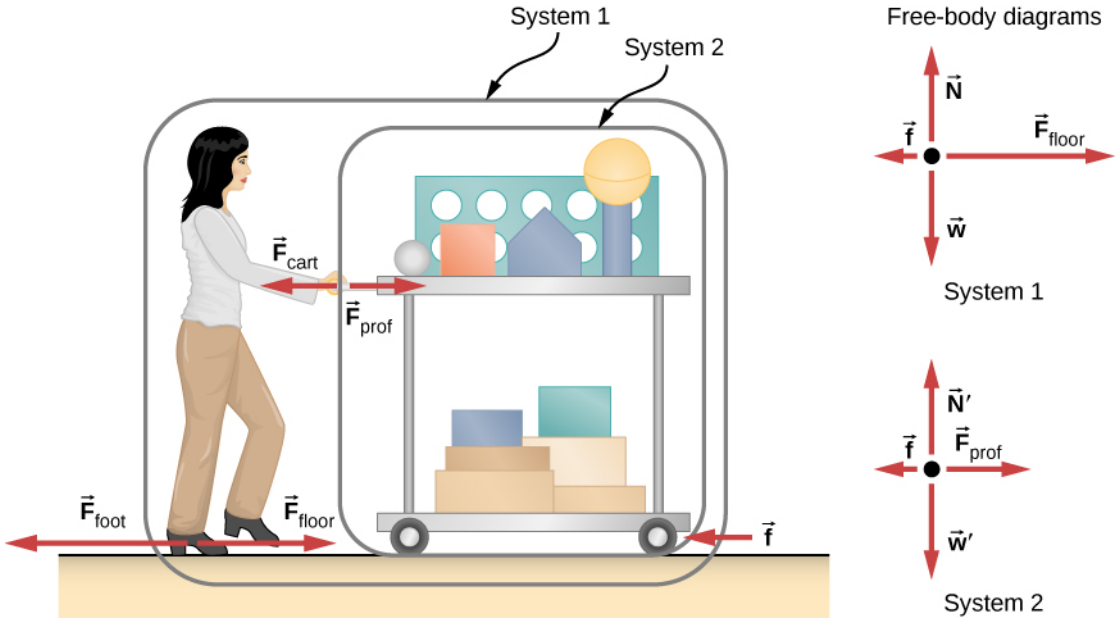


Figure 5.20 A professor pushes the cart with her demonstration equipment. The lengths of the arrows are proportional to the magnitudes of the forces (except for $\vec{\mathbf{f}}$, because it is too small to drawn to scale). System 1 is appropriate for this example, because it asks for the acceleration of the entire group of objects. Only $\vec{\mathbf{F}}_{\text{floor}}$ and $\vec{\mathbf{f}}$ are external forces acting on System 1 along the line of motion. All other forces either cancel or act on the outside world. System 2 is chosen for the next example so that $\vec{\mathbf{F}}_{\text{prof}}$ is an external force and enters into Newton's second law. The free-body diagrams, which serve as the basis for Newton's second law, vary with the system chosen.

Strategy

Since they accelerate as a unit, we define the system to be the professor, cart, and equipment. This is System 1 in Figure 5.20. The professor pushes backward with a force F_{foot} of 150 N. According to Newton's third law, the floor exerts a forward reaction force F_{floor} of 150 N on System 1. Because all motion is horizontal, we can assume there is no net force in the vertical direction. Therefore, the problem is one-dimensional along the horizontal direction. As noted, friction f opposes the motion and is thus in the opposite direction of F_{floor}. We do not include the forces F_{prof} or F_{cart} because these are internal forces, and we do not include F_{foot} because it acts on the floor, not on the system. There are no other significant forces acting on System 1. If the net external force can be found from all this information, we can use Newton's second law to find the acceleration as requested. See the free-body diagram in the figure.

Solution

Newton's second law is given by

$$a = \frac{F_{\text{net}}}{m}.$$

The net external force on System 1 is deduced from Figure 5.20 and the preceding discussion to be

$$F_{\text{net}} = F_{\text{floor}} - f = 150\ \text{N} - 24.0\ \text{N} = 126\ \text{N}.$$

The mass of System 1 is

$$m = (65.0 + 12.0 + 7.0)\ \text{kg} = 84\ \text{kg}.$$

These values of F_{net} and m produce an acceleration of

$$a = \frac{F_{\text{net}}}{m} = \frac{126\ \text{N}}{84\ \text{kg}} = 1.5\ \text{m/s}^2.$$

Significance

None of the forces between components of System 1, such as between the professor's hands and the cart, contribute to the net external force because they are internal to System 1. Another way to look at this is that forces between components of a system cancel because they are equal in magnitude and opposite in direction. For example, the force exerted by the professor on the cart results in an equal and opposite force back on the professor. In this case, both forces act on the same system and therefore cancel. Thus, internal forces (between components of a system) cancel. Choosing System 1 was crucial to solving this problem.

EXAMPLE 5.11

Force on the Cart: Choosing a New System

Calculate the force the professor exerts on the cart in Figure 5.20, using data from the previous example if needed.

Strategy

If we define the system of interest as the cart plus the equipment (System 2 in Figure 5.20), then the net external force on System 2 is the force the professor exerts on the cart minus friction. The force she exerts on the cart, F_{prof}, is an external force acting on System 2. F_{prof} was internal to System 1, but it is external to System 2 and thus enters Newton's second law for this system.

Solution

Newton's second law can be used to find F_{prof}. We start with

$$a = \frac{F_{\text{net}}}{m}.$$

The magnitude of the net external force on System 2 is

$$F_{\text{net}} = F_{\text{prof}} - f.$$

We solve for F_{prof}, the desired quantity:

$$F_{\text{prof}} = F_{\text{net}} + f.$$

The value of f is given, so we must calculate net F_{net}. That can be done because both the acceleration and the mass of System 2 are known. Using Newton's second law, we see that

$$F_{\text{net}} = ma,$$

where the mass of System 2 is 19.0 kg ($m = 12.0\,\text{kg} + 7.0\,\text{kg}$) and its acceleration was found to be $a = 1.5\,\text{m/s}^2$ in the previous example. Thus,

$$F_{\text{net}} = ma = (19.0\,\text{kg})\left(1.5\,\text{m/s}^2\right) = 29\,\text{N}.$$

Now we can find the desired force:

$$F_{\text{prof}} = F_{\text{net}} + f = 29\,\text{N} + 24.0\,\text{N} = 53\,\text{N}.$$


Significance

This force is significantly less than the 150-N force the professor exerted backward on the floor. Not all of that 150-N force is transmitted to the cart; some of it accelerates the professor. The choice of a system is an important analytical step both in solving problems and in thoroughly understanding the physics of the situation (which are not necessarily the same things).

CHECK YOUR UNDERSTANDING 5.7

Two blocks are at rest and in contact on a frictionless surface as shown below, with $m_1 = 2.0\,\text{kg}$, $m_2 = 6.0\,\text{kg}$,

and applied force 24 N. (a) Find the acceleration of the system of blocks. (b) Suppose that the blocks are later separated. What force will give the second block, with the mass of 6.0 kg, the same acceleration as the system of blocks?

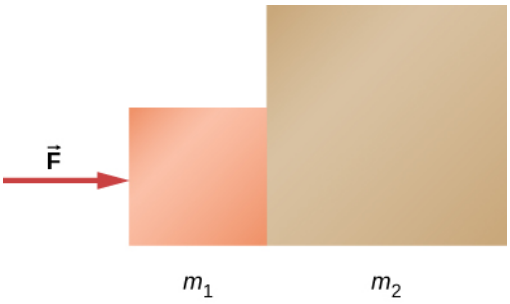

INTERACTIVE

View this video (https://openstax.org/l/21actionreact) to watch examples of action and reaction.

INTERACTIVE

View this video (https://openstax.org/l/21NewtonsLaws) to watch examples of Newton's laws and internal and external forces.

5.6 Common Forces

Learning Objectives

By the end of this section, you will be able to:

- Define normal and tension forces
- Distinguish between real and fictitious forces
- Apply Newton's laws of motion to solve problems involving a variety of forces

Forces are given many names, such as push, pull, thrust, and weight. Traditionally, forces have been grouped into several categories and given names relating to their source, how they are transmitted, or their effects. Several of these categories are discussed in this section, together with some interesting applications. Further examples of forces are discussed later in this text.

A Catalog of Forces: Normal, Tension, and Other Examples of Forces

A catalog of forces will be useful for reference as we solve various problems involving force and motion. These forces include normal force, tension, friction, and spring force.

Normal force

Weight (also called the force of gravity) is a pervasive force that acts at all times and must be counteracted to keep an object from falling. You must support the weight of a heavy object by pushing up on it when you hold it stationary, as illustrated in Figure 5.21(a). But how do inanimate objects like a table support the weight of a mass placed on them, such as shown in Figure 5.21(b)? When the bag of dog food is placed on the table, the table sags slightly under the load. This would be noticeable if the load were placed on a card table, but even a sturdy oak table deforms when a force is applied to it. Unless an object is deformed beyond its limit, it will exert a restoring force much like a deformed spring (or a trampoline or diving board). The greater the deformation, the greater the restoring force. Thus, when the load is placed on the table, the table sags until the restoring force becomes as large as the weight of the load. At this point, the net external force on the load is zero. That is the situation when the load is stationary on the table. The table sags quickly and the sag is slight, so we do not notice it. But it is similar to the sagging of a trampoline when you climb onto it.

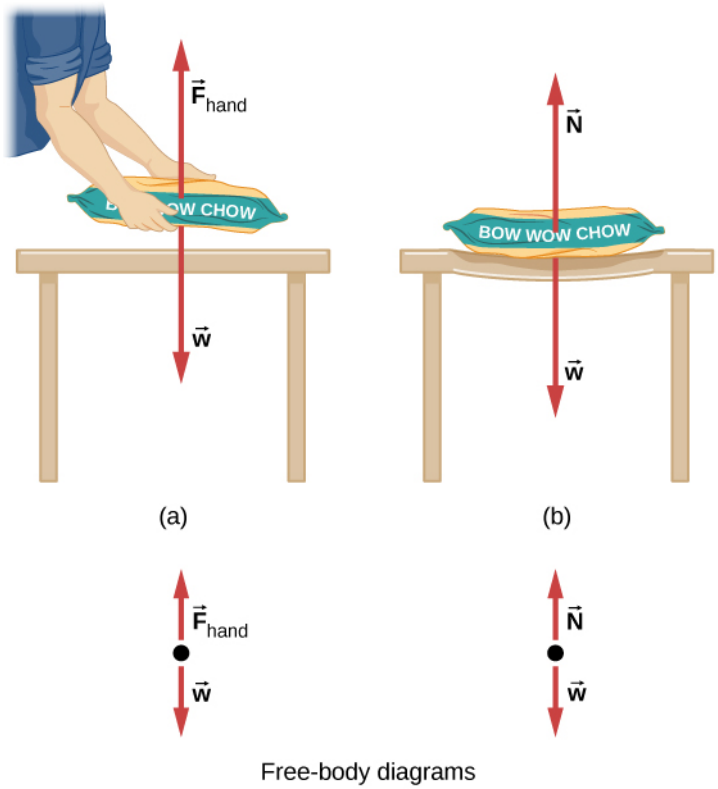


Figure 5.21 (a) The person holding the bag of dog food must supply an upward force $\vec{\mathbf{F}}_{\text{hand}}$ equal in magnitude and opposite in direction to the weight of the food $\vec{\mathbf{w}}$ so that it doesn't drop to the ground. (b) The card table sags when the dog food is placed on it, much like a stiff trampoline. Elastic restoring forces in the table grow as it sags until they supply a force $\vec{\mathbf{N}}$ equal in magnitude and opposite in direction to the weight of the load.

We must conclude that whatever supports a load, be it animate or not, must supply an upward force equal to the weight of the load, as we assumed in a few of the previous examples. If the force supporting the weight of an object, or a load, is perpendicular to the surface of contact between the load and its support, this force is defined as a **normal force** and here is given by the symbol $\vec{\mathbf{N}}$. (This is not the newton unit for force, or N.) The word *normal* means perpendicular to a surface. This means that the normal force experienced by an object resting on a horizontal surface can be expressed in vector form as follows:

$$\vec{\mathbf{N}} = -m\vec{\mathbf{g}}. \tag{5.11}$$

In scalar form, this becomes

$$N = mg. \tag{5.12}$$

The normal force can be less than the object's weight if the object is on an incline.

EXAMPLE 5.12

Weight on an Incline

Consider the skier on the slope in Figure 5.22. Her mass including equipment is 60.0 kg. (a) What is her acceleration if friction is negligible? (b) What is her acceleration if friction is 45.0 N?

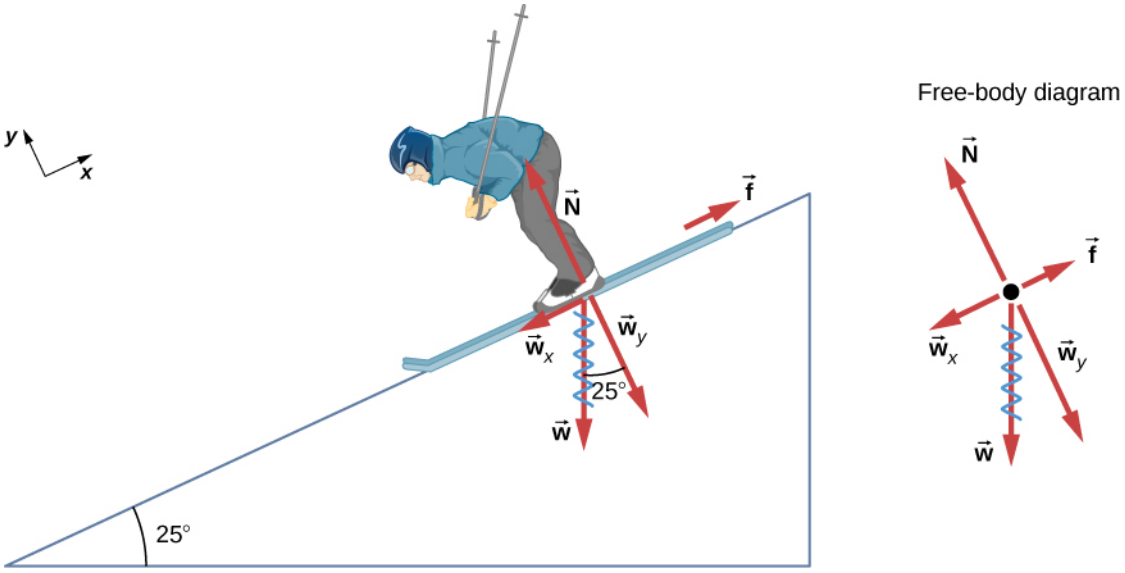


Figure 5.22 Since the acceleration is parallel to the slope and acting down the slope, it is most convenient to project all forces onto a coordinate system where one axis is parallel to the slope and the other is perpendicular to it (axes shown to the left of the skier). $\vec{\mathbf{N}}$ is perpendicular to the slope and $\vec{\mathbf{f}}$ is parallel to the slope, but $\vec{\mathbf{w}}$ has components along both axes, namely, w_y and w_x. Here, $\vec{\mathbf{w}}$ has a squiggly line to show that it has been replaced by these components. The force $\vec{\mathbf{N}}$ is equal in magnitude to w_y, so there is no acceleration perpendicular to the slope, but f is less than w_x, so there is a downslope acceleration (along the axis parallel to the slope).

Strategy

This is a two-dimensional problem, since not all forces on the skier (the system of interest) are parallel. The approach we have used in two-dimensional kinematics also works well here. Choose a convenient coordinate system and project the vectors onto its axes, creating two one-dimensional problems to solve. The most convenient coordinate system for motion on an incline is one that has one coordinate parallel to the slope and one perpendicular to the slope. (Motions along mutually perpendicular axes are independent.) We use x and y for the parallel and perpendicular directions, respectively. This choice of axes simplifies this type of problem, because there is no motion perpendicular to the slope and the acceleration is downslope. Regarding the forces, friction is drawn in opposition to motion (friction always opposes forward motion) and is always parallel to the slope, w_x is drawn parallel to the slope and downslope (it causes the motion of the skier down the slope), and w_y is drawn as the component of weight perpendicular to the slope. Then, we can consider the separate problems of forces parallel to the slope and forces perpendicular to the slope.

Solution

The magnitude of the component of weight parallel to the slope is

$$w_x = w \sin 25^\circ = mg \sin 25^\circ,$$

and the magnitude of the component of the weight perpendicular to the slope is

$$w_y = w \cos 25^\circ = mg \cos 25^\circ.$$

a. Neglect friction. Since the acceleration is parallel to the slope, we need only consider forces parallel to the slope. (Forces perpendicular to the slope add to zero, since there is no acceleration in that direction.) The forces parallel to the slope are the component of the skier's weight parallel to slope w_x and friction f. Using Newton's second law, with subscripts to denote quantities parallel to the slope,

$$a_x = \frac{F_{\text{net } x}}{m}$$

where $F_{\text{net } x} = w_x - mg \sin 25^\circ$, assuming no friction for this part. Therefore,

$$a_x = \frac{F_{\text{net } x}}{m} = \frac{mg \sin 25°}{m} = g \sin 25°$$
$$\left(9.80 \text{ m/s}^2\right)(0.4226) = 4.14 \text{ m/s}^2$$

is the acceleration.

b. Include friction. We have a given value for friction, and we know its direction is parallel to the slope and it opposes motion between surfaces in contact. So the net external force is

$$F_{\text{net } x} = w_x - f.$$

Substituting this into Newton's second law, $a_x = F_{\text{net } x}/m$, gives

$$a_x = \frac{F_{\text{net } x}}{m} = \frac{w_x - f}{m} = \frac{mg \sin 25° - f}{m}.$$

We substitute known values to obtain

$$a_x = \frac{(60.0 \text{ kg})\left(9.80 \text{ m/s}^2\right)(0.4226) - 45.0 \text{ N}}{60.0 \text{ kg}}.$$

This gives us


$$a_x = 3.39 \text{ m/s}^2,$$

which is the acceleration parallel to the incline when there is 45.0 N of opposing friction.

Significance

Since friction always opposes motion between surfaces, the acceleration is smaller when there is friction than when there is none. It is a general result that if friction on an incline is negligible, then the acceleration down the incline is $a = g \sin \theta$, regardless of mass. As discussed previously, all objects fall with the same acceleration in the absence of air resistance. Similarly, all objects, regardless of mass, slide down a frictionless incline with the same acceleration (if the angle is the same).

When an object rests on an incline that makes an angle θ with the horizontal, the force of gravity acting on the object is divided into two components: a force acting perpendicular to the plane, w_y, and a force acting parallel to the plane, w_x (Figure 5.23). The normal force $\vec{\mathbf{N}}$ is typically equal in magnitude and opposite in direction to the perpendicular component of the weight w_y. The force acting parallel to the plane, w_x, causes the object to accelerate down the incline.

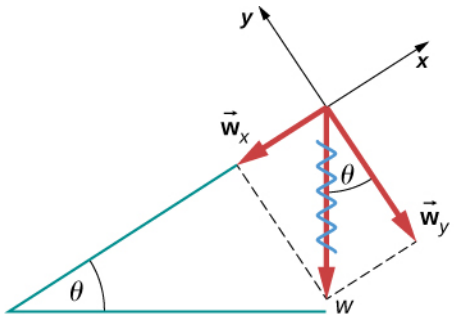

$w_x = w \sin(\theta) = mg \sin(\theta)$
$w_y = w \cos(\theta) = mg \cos(\theta)$

Figure 5.23 An object rests on an incline that makes an angle θ with the horizontal.

Be careful when resolving the weight of the object into components. If the incline is at an angle θ to the horizontal, then the magnitudes of the weight components are

$$w_x = w \sin \theta = mg \sin \theta$$

and

$$w_y = w\cos\theta = mg\cos\theta.$$

We use the second equation to write the normal force experienced by an object resting on an inclined plane:

$$N = mg\cos\theta. \quad \textbf{5.13}$$

Instead of memorizing these equations, it is helpful to be able to determine them from reason. To do this, we draw the right angle formed by the three weight vectors. The angle θ of the incline is the same as the angle formed between w and w_y. Knowing this property, we can use trigonometry to determine the magnitude of the weight components:

$$\cos\theta = \frac{w_y}{w}, \quad w_y = w\cos\theta = mg\cos\theta$$
$$\sin\theta = \frac{w_x}{w}, \quad w_x = w\sin\theta = mg\sin\theta.$$

CHECK YOUR UNDERSTANDING 5.8

A force of 1150 N acts parallel to a ramp to push a 250-kg gun safe into a moving van. The ramp is frictionless and inclined at 17°. (a) What is the acceleration of the safe up the ramp? (b) If we consider friction in this problem, with a friction force of 120 N, what is the acceleration of the safe?

Tension

A **tension** is a force along the length of a medium; in particular, it is a pulling force that acts along a stretched flexible connector, such as a rope or cable. The word "tension" comes from a Latin word meaning "to stretch." Not coincidentally, the flexible cords that carry muscle forces to other parts of the body are called *tendons*.

Any flexible connector, such as a string, rope, chain, wire, or cable, can only exert a pull parallel to its length; thus, a force carried by a flexible connector is a tension with a direction parallel to the connector. Tension is a pull in a connector. Consider the phrase: "You can't push a rope." Instead, tension force pulls outward along the two ends of a rope.

Consider a person holding a mass on a rope, as shown in Figure 5.24. If the 5.00-kg mass in the figure is stationary, then its acceleration is zero and the net force is zero. The only external forces acting on the mass are its weight and the tension supplied by the rope. Thus,

$$F_{\text{net}} = T - w = 0,$$

where T and w are the magnitudes of the tension and weight, respectively, and their signs indicate direction, with up being positive. As we proved using Newton's second law, the tension equals the weight of the supported mass:

$$T = w = mg. \quad \textbf{5.14}$$

Thus, for a 5.00-kg mass (neglecting the mass of the rope), we see that

$$T = mg = (5.00\,\text{kg})\left(9.80\,\text{m/s}^2\right) = 49.0\,\text{N}.$$

If we cut the rope and insert a spring, the spring would extend a length corresponding to a force of 49.0 N, providing a direct observation and measure of the tension force in the rope.

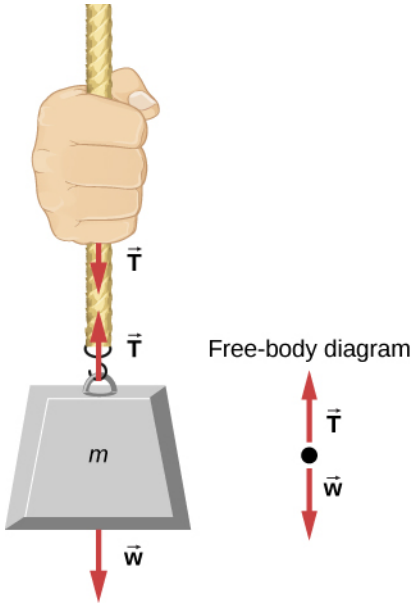


Figure 5.24 When a perfectly flexible connector (one requiring no force to bend it) such as this rope transmits a force $\vec{\mathbf{T}}$, that force must be parallel to the length of the rope, as shown. By Newton's third law, the rope pulls with equal force but in opposite directions on the hand and the supported mass (neglecting the weight of the rope). The rope is the medium that carries the equal and opposite forces between the two objects. The tension anywhere in the rope between the hand and the mass is equal. Once you have determined the tension in one location, you have determined the tension at all locations along the rope.

Flexible connectors are often used to transmit forces around corners, such as in a hospital traction system, a tendon, or a bicycle brake cable. If there is no friction, the tension transmission is undiminished; only its direction changes, and it is always parallel to the flexible connector, as shown in Figure 5.25.

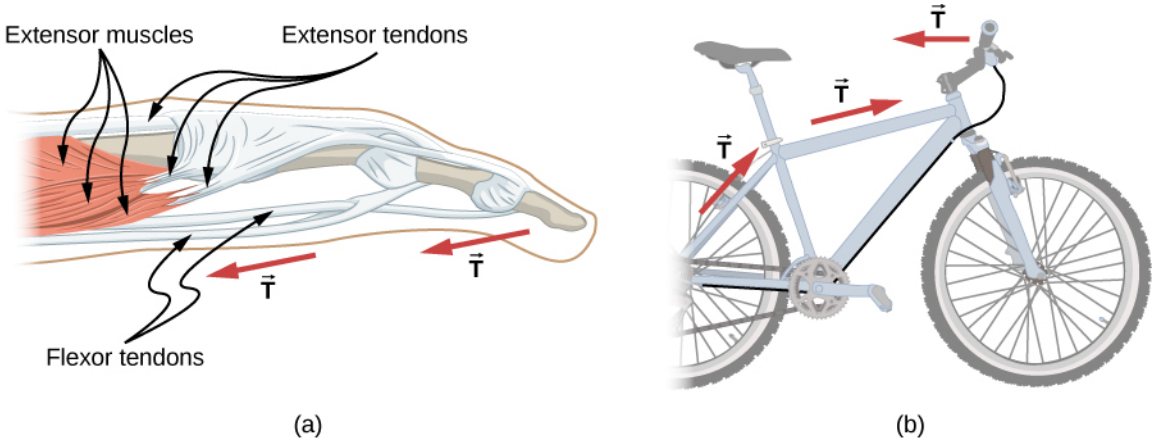


Figure 5.25 (a) Tendons in the finger carry force *T* from the muscles to other parts of the finger, usually changing the force's direction but not its magnitude (the tendons are relatively friction free). (b) The brake cable on a bicycle carries the tension *T* from the brake lever on the handlebars to the brake mechanism. Again, the direction but not the magnitude of *T* is changed.

EXAMPLE 5.13

What Is the Tension in a Tightrope?

Calculate the tension in the wire supporting the 70.0-kg tightrope walker shown in Figure 5.26.

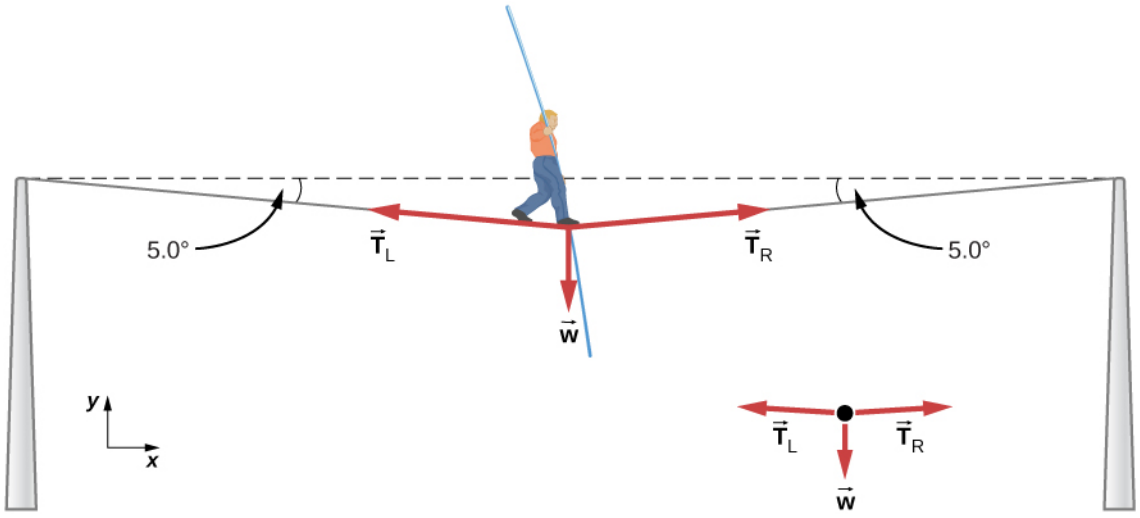


Figure 5.26 The weight of a tightrope walker causes a wire to sag by 5.0°. The system of interest is the point in the wire at which the tightrope walker is standing.

Strategy

As you can see in Figure 5.26, the wire is bent under the person's weight. Thus, the tension on either side of the person has an upward component that can support his weight. As usual, forces are vectors represented pictorially by arrows that have the same direction as the forces and lengths proportional to their magnitudes. The system is the tightrope walker, and the only external forces acting on him are his weight $\vec{\mathbf{w}}$ and the two tensions $\vec{\mathbf{T}}_{\mathrm{L}}$ (left tension) and $\vec{\mathbf{T}}_{\mathrm{R}}$ (right tension). It is reasonable to neglect the weight of the wire. The net external force is zero, because the system is static. We can use trigonometry to find the tensions. One conclusion is possible at the outset—we can see from Figure 5.26(b) that the magnitudes of the tensions T_{L} and T_{R} must be equal. We know this because there is no horizontal acceleration in the rope and the only forces acting to the left and right are T_{L} and T_{R}. Thus, the magnitude of those horizontal components of the forces must be equal so that they cancel each other out.

Whenever we have two-dimensional vector problems in which no two vectors are parallel, the easiest method of solution is to pick a convenient coordinate system and project the vectors onto its axes. In this case, the best coordinate system has one horizontal axis (x) and one vertical axis (y).

Solution

First, we need to resolve the tension vectors into their horizontal and vertical components. It helps to look at a new free-body diagram showing all horizontal and vertical components of each force acting on the system (Figure 5.27).

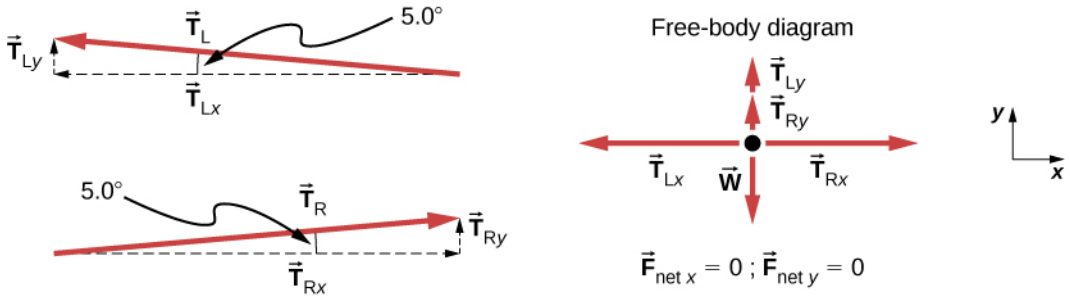


Figure 5.27 When the vectors are projected onto vertical and horizontal axes, their components along these axes must add to zero, since the tightrope walker is stationary. The small angle results in T being much greater than w.

Consider the horizontal components of the forces (denoted with a subscript x):

$$F_{\mathrm{net}\,x} = T_{\mathrm{R}x} - T_{\mathrm{L}x}.$$

The net external horizontal force $F_{\text{net }x} = 0$, since the person is stationary. Thus,

$$\begin{aligned} F_{\text{net }x} &= 0 = T_{\text{R}x} - T_{\text{L}x} \\ T_{\text{L}x} &= T_{\text{R}x}. \end{aligned}$$

Now observe Figure 5.27. You can use trigonometry to determine the magnitude of T_{L} and T_{R}:

$$\begin{aligned} \cos 5.0^\circ &= \frac{T_{\text{L}x}}{T_{\text{L}}}, \quad T_{\text{L}x} = T_{\text{L}} \cos 5.0^\circ \\ \cos 5.0^\circ &= \frac{T_{\text{R}x}}{T_{\text{R}}}, \quad T_{\text{R}x} = T_{\text{R}} \cos 5.0^\circ. \end{aligned}$$

Equating $T_{\text{L}x}$ and $T_{\text{R}x}$:

$$T_{\text{L}} \cos 5.0^\circ = T_{\text{R}} \cos 5.0^\circ.$$

Thus,

$$T_{\text{L}} = T_{\text{R}} = T,$$

as predicted. Now, considering the vertical components (denoted by a subscript *y*), we can solve for T. Again, since the person is stationary, Newton's second law implies that $F_{\text{net }y} = 0$. Thus, as illustrated in the free-body diagram,

$$F_{\text{net }y} = T_{\text{L}y} + T_{\text{R}y} - w = 0.$$

We can use trigonometry to determine the relationships among $T_{\text{L}y}$, $T_{\text{R}y}$, and T. As we determined from the analysis in the horizontal direction, $T_{\text{L}} = T_{\text{R}} = T$:

$$\begin{aligned} \sin 5.0^\circ &= \frac{T_{\text{L}y}}{T_{\text{L}}}, \quad T_{\text{L}y} = T_{\text{L}} \sin 5.0^\circ = T \sin 5.0^\circ \\ \sin 5.0^\circ &= \frac{T_{\text{R}y}}{T_{\text{R}}}, \quad T_{\text{R}y} = T_{\text{R}} \sin 5.0^\circ = T \sin 5.0^\circ. \end{aligned}$$

Now we can substitute the vales for $T_{\text{L}y}$ and $T_{\text{R}y}$, into the net force equation in the vertical direction:

$$\begin{aligned} F_{\text{net }y} &= T_{\text{L}y} + T_{\text{R}y} - w = 0 \\ F_{\text{net }y} &= T \sin 5.0^\circ + T \sin 5.0^\circ - w = 0 \\ 2T \sin 5.0^\circ - w &= 0 \\ 2T \sin 5.0^\circ &= w \end{aligned}$$

and

$$T = \frac{w}{2 \sin 5.0^\circ} = \frac{mg}{2 \sin 5.0^\circ},$$

so

$$T = \frac{(70.0\,\text{kg})\left(9.80\,\text{m/s}^2\right)}{2\,(0.0872)},$$

and the tension is

$$T = 3930\,\text{N}.$$

Significance

The vertical tension in the wire acts as a force that supports the weight of the tightrope walker. The tension is almost six times the 686-N weight of the tightrope walker. Since the wire is nearly horizontal, the vertical component of its tension is only a fraction of the tension in the wire. The large horizontal components are in opposite directions and cancel, so most of the tension in the wire is not used to support the weight of the

tightrope walker.

If we wish to create a large tension, all we have to do is exert a force perpendicular to a taut flexible connector, as illustrated in Figure 5.26. As we saw in Example 5.13, the weight of the tightrope walker acts as a force perpendicular to the rope. We saw that the tension in the rope is related to the weight of the tightrope walker in the following way:

$$T = \frac{w}{2 \sin \theta}.$$

We can extend this expression to describe the tension T created when a perpendicular force ($F_\perp$) is exerted at the middle of a flexible connector:

$$T = \frac{F_\perp}{2 \sin \theta}.$$

The angle between the horizontal and the bent connector is represented by θ. In this case, T becomes large as θ approaches zero. Even the relatively small weight of any flexible connector will cause it to sag, since an infinite tension would result if it were horizontal (i.e., $\theta = 0$ and $\sin \theta = 0$). For example, Figure 5.28 shows a situation where we wish to pull a car out of the mud when no tow truck is available. Each time the car moves forward, the chain is tightened to keep it as straight as possible. The tension in the chain is given by $T = \frac{F_\perp}{2 \sin \theta}$, and since θ is small, T is large. This situation is analogous to the tightrope walker, except that the tensions shown here are those transmitted to the car and the tree rather than those acting at the point where $F_\perp$ is applied.

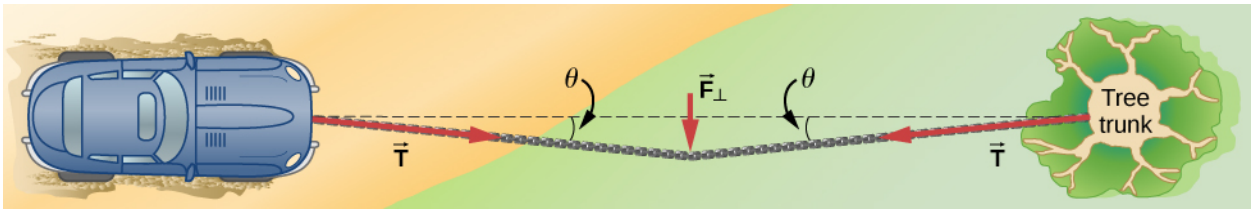


Figure 5.28 We can create a large tension in the chain—and potentially a big mess—by pushing on it perpendicular to its length, as shown.

CHECK YOUR UNDERSTANDING 5.9

One end of a 3.0-m rope is tied to a tree; the other end is tied to a car stuck in the mud. The motorist pulls sideways on the midpoint of the rope, displacing it a distance of 0.25 m. If he exerts a force of 200.0 N under these conditions, determine the force exerted on the car.

In Applications of Newton's Laws, we extend the discussion on tension in a cable to include cases in which the angles shown are not equal.

Friction

Friction is a resistive force opposing motion or its tendency. Imagine an object at rest on a horizontal surface. The net force acting on the object must be zero, leading to equality of the weight and the normal force, which act in opposite directions. If the surface is tilted, the normal force balances the component of the weight perpendicular to the surface. If the object does not slide downward, the component of the weight parallel to the inclined plane is balanced by friction. Friction is discussed in greater detail in the next chapter.

Spring force

A spring is a special medium with a specific atomic structure that has the ability to restore its shape, if deformed. To restore its shape, a spring exerts a restoring force that is proportional to and in the opposite direction in which it is stretched or compressed. This is the statement of a law known as Hooke's law, which has the mathematical form

$$\vec{\mathbf{F}} = -k\vec{\mathbf{x}}.$$

The constant of proportionality k is a measure of the spring's stiffness. The line of action of this force is parallel

to the spring axis, and the sense of the force is in the opposite direction of the displacement vector (Figure 5.29). The displacement must be measured from the relaxed position; $x = 0$ when the spring is relaxed.

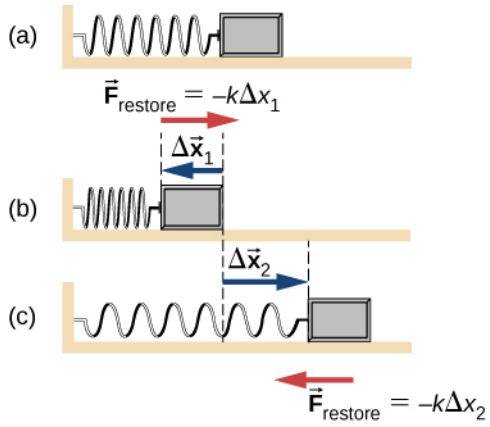


Figure 5.29 A spring exerts its force proportional to a displacement, whether it is compressed or stretched. (a) The spring is in a relaxed position and exerts no force on the block. (b) The spring is compressed by displacement $\Delta\vec{\mathbf{x}}_1$ of the object and exerts restoring force $-k\Delta\vec{\mathbf{x}}_1$. (c) The spring is stretched by displacement $\Delta\vec{\mathbf{x}}_2$ of the object and exerts restoring force $-k\Delta\vec{\mathbf{x}}_2$.

Real Forces and Inertial Frames

There is another distinction among forces: Some forces are real, whereas others are not. *Real forces* have some physical origin, such as a gravitational pull. In contrast, *fictitious forces* arise simply because an observer is in an accelerating or noninertial frame of reference, such as one that rotates (like a merry-go-round) or undergoes linear acceleration (like a car slowing down). For example, if a satellite is heading due north above Earth's Northern Hemisphere, then to an observer on Earth, it will appear to experience a force to the west that has no physical origin. Instead, Earth is rotating toward the east and moves east under the satellite. In Earth's frame, this looks like a westward force on the satellite, or it can be interpreted as a violation of Newton's first law (the law of inertia). We can identify a fictitious force by asking the question, "What is the reaction force?" If we cannot name the reaction force, then the force we are considering is fictitious. In the example of the satellite, the reaction force would have to be an eastward force on Earth. Recall that an inertial frame of reference is one in which all forces are real and, equivalently, one in which Newton's laws have the simple forms given in this chapter.

Earth's rotation is slow enough that Earth is nearly an inertial frame. You ordinarily must perform precise experiments to observe fictitious forces and the slight departures from Newton's laws, such as the effect just described. On a large scale, such as for the rotation of weather systems and ocean currents, the effects can be easily observed (Figure 5.30).



Figure 5.30 Hurricane Fran is shown heading toward the southeastern coast of the United States in September 1996. Notice the characteristic “eye” shape of the hurricane. This is a result of the Coriolis effect, which is the deflection of objects (in this case, air) when considered in a rotating frame of reference, like the spin of Earth. This hurricane shows a counter-clockwise rotation because it is a low pressure storm. (credit "runner": modification of work by "Greenwich Photography"/Flickr)

The crucial factor in determining whether a frame of reference is inertial is whether it accelerates or rotates relative to a known inertial frame. Unless stated otherwise, all phenomena discussed in this text are in inertial frames.

The forces discussed in this section are real forces, but they are not the only real forces. Lift and thrust, for example, are more specialized real forces. In the long list of forces, are some more basic than others? Are some different manifestations of the same underlying force? The answer to both questions is yes, as you will see in the treatment of modern physics later in the text.

INTERACTIVE

Explore forces and motion in this interactive simulation (https://openstax.org/l/21ramp) as you push household objects up and down a ramp. Lower and raise the ramp to see how the angle of inclination affects the parallel forces. Graphs show forces, energy, and work.

INTERACTIVE

Stretch and compress springs in this activity (https://openstax.org/l/21hookeslaw) to explore the relationships among force, spring constant, and displacement. Investigate what happens when two springs are connected in series and in parallel.

5.7 Drawing Free-Body Diagrams

Learning Objectives

By the end of this section, you will be able to:

- Explain the rules for drawing a free-body diagram
- Construct free-body diagrams for different situations

The first step in describing and analyzing most phenomena in physics involves the careful drawing of a free-body diagram. Free-body diagrams have been used in examples throughout this chapter. Remember that a free-body diagram must only include the external forces acting on the body of interest. Once we have drawn an accurate free-body diagram, we can apply Newton’s first law if the body is in equilibrium (balanced forces; that is, $F_{\text{net}} = 0$) or Newton’s second law if the body is accelerating (unbalanced force; that is, $F_{\text{net}} \neq 0$).

In Forces, we gave a brief problem-solving strategy to help you understand free-body diagrams. Here, we add

some details to the strategy that will help you in constructing these diagrams.

PROBLEM-SOLVING STRATEGY

Constructing Free-Body Diagrams

Observe the following rules when constructing a free-body diagram:

1. Draw the object under consideration; it does not have to be artistic. At first, you may want to draw a circle around the object of interest to be sure you focus on labeling the forces acting on the object. If you are treating the object as a particle (no size or shape and no rotation), represent the object as a point. We often place this point at the origin of an *xy*-coordinate system.
2. Include all forces that act on the object, representing these forces as vectors. Consider the types of forces described in Common Forces—normal force, friction, tension, and spring force—as well as weight and applied force. Do not include the net force on the object. With the exception of gravity, all of the forces we have discussed require direct contact with the object. However, forces that the object exerts on its environment must not be included. We never include both forces of an action-reaction pair.
3. Convert the free-body diagram into a more detailed diagram showing the *x*- and *y*-components of a given force (this is often helpful when solving a problem using Newton's first or second law). In this case, place a squiggly line through the original vector to show that it is no longer in play—it has been replaced by its *x*- and *y*-components.
4. If there are two or more objects, or bodies, in the problem, draw a separate free-body diagram for each object.

Note: If there is acceleration, we do not directly include it in the free-body diagram; however, it may help to indicate acceleration outside the free-body diagram. You can label it in a different color to indicate that it is separate from the free-body diagram.

Let's apply the problem-solving strategy in drawing a free-body diagram for a sled. In Figure 5.31(a), a sled is pulled by force **P** at an angle of 30°. In part (b), we show a free-body diagram for this situation, as described by steps 1 and 2 of the problem-solving strategy. In part (c), we show all forces in terms of their *x*- and *y*-components, in keeping with step 3.

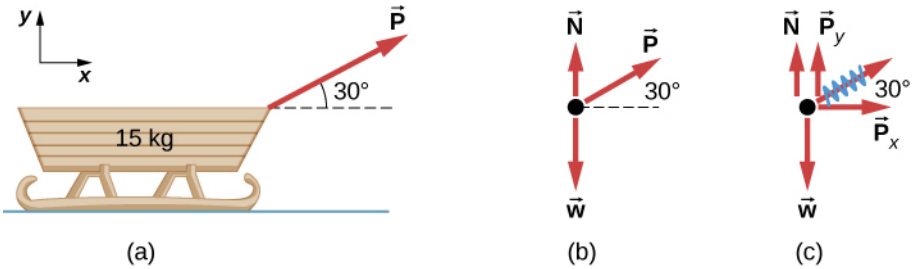


Figure 5.31 (a) A moving sled is shown as (b) a free-body diagram and (c) a free-body diagram with force components.

EXAMPLE 5.14

Two Blocks on an Inclined Plane

Construct the free-body diagram for object A and object B in Figure 5.32.

Strategy

We follow the four steps listed in the problem-solving strategy.

Solution

We start by creating a diagram for the first object of interest. In Figure 5.32(a), object A is isolated (circled) and represented by a dot.

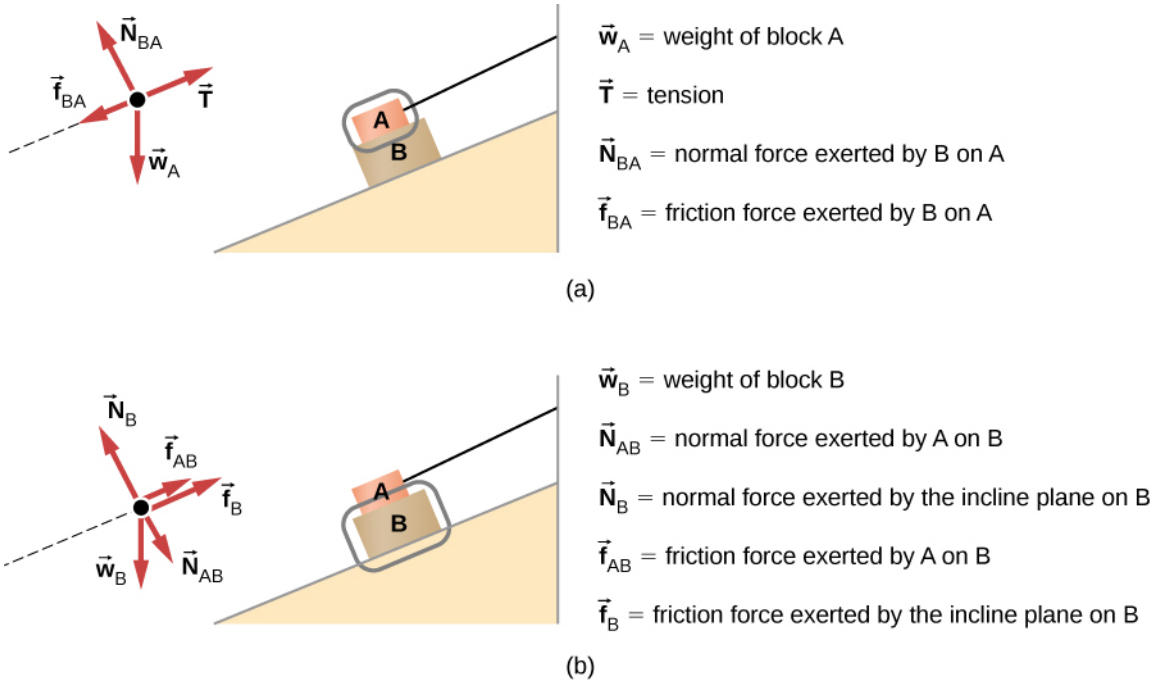


Figure 5.32 (a) The free-body diagram for isolated object A. (b) The free-body diagram for isolated object B. Comparing the two drawings, we see that friction acts in the opposite direction in the two figures. Because object A experiences a force that tends to pull it to the right, friction must act to the left. Because object B experiences a component of its weight that pulls it to the left, down the incline, the friction force must oppose it and act up the ramp. Friction always acts opposite the intended direction of motion.

We now include any force that acts on the body. Here, no applied force is present. The weight of the object acts as a force pointing vertically downward, and the presence of the cord indicates a force of tension pointing away from the object. Object A has one interface and hence experiences a normal force, directed away from the interface. The source of this force is object B, and this normal force is labeled accordingly. Since object B has a tendency to slide down, object A has a tendency to slide up with respect to the interface, so the friction f_{BA} is directed downward parallel to the inclined plane.

As noted in step 4 of the problem-solving strategy, we then construct the free-body diagram in Figure 5.32(b) using the same approach. Object B experiences two normal forces and two friction forces due to the presence of two contact surfaces. The interface with the inclined plane exerts external forces of N_{B} and f_{B}, and the interface with object B exerts the normal force N_{AB} and friction f_{AB}; N_{AB} is directed away from object B, and f_{AB} is opposing the tendency of the relative motion of object B with respect to object A.

Significance

The object under consideration in each part of this problem was circled in gray. When you are first learning how to draw free-body diagrams, you will find it helpful to circle the object before deciding what forces are acting on that particular object. This focuses your attention, preventing you from considering forces that are not acting on the body.


EXAMPLE 5.15

Two Blocks in Contact


A force is applied to two blocks in contact, as shown.

Strategy

Draw a free-body diagram for each block. Be sure to consider Newton's third law at the interface where the two blocks touch.

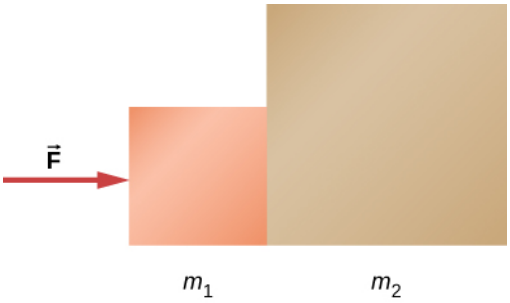

Solution

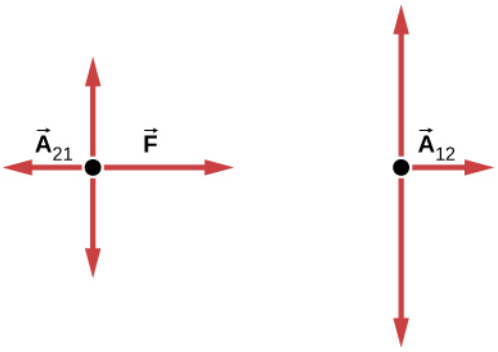

Significance

$\vec{A}_{21}$ is the action force of block 2 on block 1. $\vec{A}_{12}$ is the reaction force of block 1 on block 2. We use these free-body diagrams in Applications of Newton's Laws.


EXAMPLE 5.16

Block on the Table (Coupled Blocks)


A block rests on the table, as shown. A light rope is attached to it and runs over a pulley. The other end of the rope is attached to a second block. The two blocks are said to be coupled. Block m_2 exerts a force due to its weight, which causes the system (two blocks and a string) to accelerate.

Strategy

We assume that the string has no mass so that we do not have to consider it as a separate object. Draw a free-body diagram for each block.

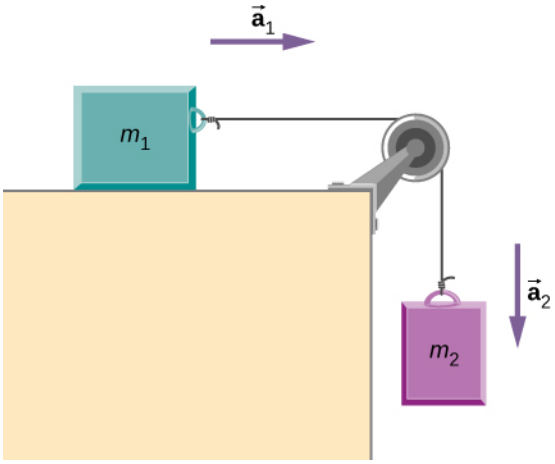

Solution

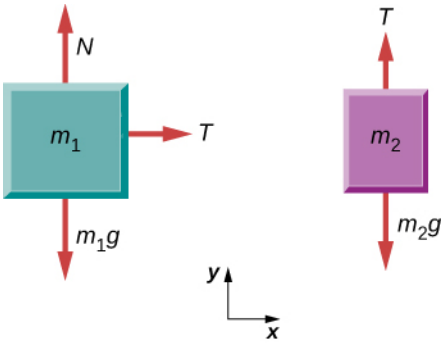


Significance

Each block accelerates (notice the labels shown for $\vec{\mathbf{a}}_1$ and $\vec{\mathbf{a}}_2$); however, assuming the string remains taut, the magnitudes of acceleration are equal. Thus, we have $|\vec{\mathbf{a}}_1| = |\vec{\mathbf{a}}_2|$. If we were to continue solving the problem, we could simply call the acceleration $\vec{\mathbf{a}}$. Also, we use two free-body diagrams because we are usually finding tension T, which may require us to use a system of two equations in this type of problem. The tension is the same on both m_1 and m_2.

CHECK YOUR UNDERSTANDING 5.10

(a) Draw the free-body diagram for the situation shown. (b) Redraw it showing components; use x-axes parallel to the two ramps.

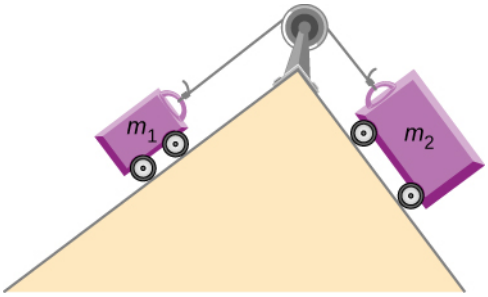

INTERACTIVE

View this simulation (https://openstax.org/l/21forcemotion) to predict, qualitatively, how an external force will affect the speed and direction of an object's motion. Explain the effects with the help of a free-body diagram. Use free-body diagrams to draw position, velocity, acceleration, and force graphs, and vice versa. Explain how the graphs relate to one another. Given a scenario or a graph, sketch all four graphs.

CHAPTER REVIEW

Key Terms

dynamics study of how forces affect the motion of objects and systems

external force force acting on an object or system that originates outside of the object or system

force push or pull on an object with a specific magnitude and direction; can be represented by vectors or expressed as a multiple of a standard force

free fall situation in which the only force acting on an object is gravity

free-body diagram sketch showing all external forces acting on an object or system; the system is represented by a single isolated point, and the forces are represented by vectors extending outward from that point

Hooke's law in a spring, a restoring force proportional to and in the opposite direction of the imposed displacement

inertia ability of an object to resist changes in its motion

inertial reference frame reference frame moving at constant velocity relative to an inertial frame is also inertial; a reference frame accelerating relative to an inertial frame is not inertial

law of inertia see Newton's first law of motion

net external force vector sum of all external forces acting on an object or system; causes a mass to accelerate

newton SI unit of force; 1 N is the force needed to accelerate an object with a mass of 1 kg at a rate of 1 m/s^2

Newton's first law of motion body at rest remains at rest or, if in motion, remains in motion at constant velocity unless acted on by a net external force; also known as the law of inertia

Newton's second law of motion acceleration of a system is directly proportional to and in the same direction as the net external force acting on the system and is inversely proportional to its mass

Newton's third law of motion whenever one body exerts a force on a second body, the first body experiences a force that is equal in magnitude and opposite in direction to the force that it exerts

normal force force supporting the weight of an object, or a load, that is perpendicular to the surface of contact between the load and its support; the surface applies this force to an object to support the weight of the object

tension pulling force that acts along a stretched flexible connector, such as a rope or cable

thrust reaction force that pushes a body forward in response to a backward force

weight force $\vec{\mathbf{w}}$ due to gravity acting on an object of mass m

Key Equations

Net external force	$\vec{\mathbf{F}}_{\text{net}} = \sum \vec{\mathbf{F}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2 + \cdots$
Newton's first law	$\vec{\mathbf{v}} = \text{ constant when } \vec{\mathbf{F}}_{\text{net}} = \vec{\mathbf{0}}\,\text{N}$
Newton's second law, vector form	$\vec{\mathbf{F}}_{\text{net}} = \sum \vec{\mathbf{F}} = m\vec{\mathbf{a}}$
Newton's second law, scalar form	$F_{\text{net}} = ma$
Newton's second law, component form	$\sum \vec{\mathbf{F}}_x = m\vec{\mathbf{a}}_x, \ \sum \vec{\mathbf{F}}_y = m\vec{\mathbf{a}}_y, \text{ and } \sum \vec{\mathbf{F}}_z = m\vec{\mathbf{a}}_z.$
Newton's second law, momentum form	$\vec{\mathbf{F}}_{\text{net}} = \frac{d\vec{\mathbf{p}}}{dt}$
Definition of weight, vector form	$\vec{\mathbf{w}} = m\vec{\mathbf{g}}$
Definition of weight, scalar form	$w = mg$
Newton's third law	$\vec{\mathbf{F}}_{\text{AB}} = -\vec{\mathbf{F}}_{\text{BA}}$

Normal force on an object resting on a horizontal surface, vector form	$\vec{\mathbf{N}} = -m\vec{\mathbf{g}}$
Normal force on an object resting on a horizontal surface, scalar form	$N = mg$
Normal force on an object resting on an inclined plane, scalar form	$N = mg\cos\theta$
Tension in a cable supporting an object of mass m at rest, scalar form	$T = w = mg$

Summary

5.1 Forces

- Dynamics is the study of how forces affect the motion of objects, whereas kinematics simply describes the way objects move.
- Force is a push or pull that can be defined in terms of various standards, and it is a vector that has both magnitude and direction.
- External forces are any outside forces that act on a body. A free-body diagram is a drawing of all external forces acting on a body.
- The SI unit of force is the newton (N).

5.2 Newton's First Law

- According to Newton's first law, there must be a cause for any change in velocity (a change in either magnitude or direction) to occur. This law is also known as the law of inertia.
- Friction is an external force that causes an object to slow down.
- Inertia is the tendency of an object to remain at rest or remain in motion. Inertia is related to an object's mass.
- If an object's velocity relative to a given frame is constant, then the frame is inertial. This means that for an inertial reference frame, Newton's first law is valid.
- Equilibrium is achieved when the forces on a system are balanced.
- A net force of zero means that an object is either at rest or moving with constant velocity; that is, it is not accelerating.

5.3 Newton's Second Law

- An external force acts on a system from outside the system, as opposed to internal forces, which act between components within the system.
- Newton's second law of motion says that the net external force on an object with a certain mass is directly proportional to and in the same direction as the acceleration of the object.
- Newton's second law can also describe net force as the instantaneous rate of change of momentum. Thus, a net external force causes nonzero acceleration.

5.4 Mass and Weight

- Mass is the quantity of matter in a substance.
- The weight of an object is the net force on a falling object, or its gravitational force. The object experiences acceleration due to gravity.
- Some upward resistance force from the air acts on all falling objects on Earth, so they can never truly be in free fall.
- Careful distinctions must be made between free fall and weightlessness using the definition of weight as force due to gravity acting on an object of a certain mass.

5.5 Newton's Third Law

- Newton's third law of motion represents a basic symmetry in nature, with an experienced force equal in magnitude and opposite in direction to an exerted force.
- Two equal and opposite forces do not cancel because they act on different systems.
- Action-reaction pairs include a swimmer pushing off a wall, helicopters creating lift by pushing air down, and an octopus propelling itself forward by ejecting water from its body. Rockets, airplanes, and cars are pushed forward by a thrust reaction force.
- Choosing a system is an important analytical step in understanding the physics of a problem and solving it.

5.6 Common Forces

- When an object rests on a surface, the surface applies a force to the object that supports the weight of the object. This supporting force acts perpendicular to and away from the surface. It is called a normal force.
- When an object rests on a nonaccelerating horizontal surface, the magnitude of the normal force is equal to the weight of the object.
- When an object rests on an inclined plane that makes an angle θ with the horizontal surface, the weight of the object can be resolved into components that act perpendicular and parallel to the surface of the plane.
- The pulling force that acts along a stretched flexible connector, such as a rope or cable, is called tension. When a rope supports the weight of an object at rest, the tension in the rope is equal to the weight of the object. If the object is accelerating, tension is greater than weight, and if it is accelerating opposite to the motion, tension is less than weight.
- The force of friction is a force experienced by a moving object (or an object that has a tendency to move) parallel to the interface opposing the motion (or its tendency).
- The force developed in a spring obeys Hooke's law, according to which its magnitude is proportional to the displacement and has a sense in the opposite direction of the displacement.
- Real forces have a physical origin, whereas fictitious forces occur because the observer is in an accelerating or noninertial frame of reference.

5.7 Drawing Free-Body Diagrams

- To draw a free-body diagram, we draw the object of interest, draw all forces acting on that object, and resolve all force vectors into x- and y-components. We must draw a separate free-body diagram for each object in the problem.
- A free-body diagram is a useful means of describing and analyzing all the forces that act on a body to determine equilibrium according to Newton's first law or acceleration according to Newton's second law.

Conceptual Questions

5.1 Forces

1. What properties do forces have that allow us to classify them as vectors?

5.2 Newton's First Law

2. Taking a frame attached to Earth as inertial, which of the following objects cannot have inertial frames attached to them, and which are inertial reference frames?
(a) A car moving at constant velocity
(b) A car that is accelerating
(c) An elevator in free fall
(d) A space capsule orbiting Earth
(e) An elevator descending uniformly

3. A woman was transporting an open box of cupcakes to a school party. The car in front of her stopped suddenly; she applied her brakes immediately. She was wearing her seat belt and suffered no physical harm (just a great deal of embarrassment), but the cupcakes flew into the dashboard and became "smushcakes." Explain what happened.

5.3 Newton's Second Law

4. Why can we neglect forces such as those holding a body together when we apply Newton's second law?

5. A rock is thrown straight up. At the top of the trajectory, the velocity is momentarily zero. Does this imply that the force acting on the object is zero? Explain your answer.

5.4 Mass and Weight

6. What is the relationship between weight and mass? Which is an intrinsic, unchanging property of a body?

7. How much does a 70-kg astronaut weight in space, far from any celestial body? What is her mass at this location?

8. Which of the following statements is accurate?
(a) Mass and weight are the same thing expressed in different units.
(b) If an object has no weight, it must have no mass.
(c) If the weight of an object varies, so must the mass.
(d) Mass and inertia are different concepts.
(e) Weight is always proportional to mass.

9. When you stand on Earth, your feet push against it with a force equal to your weight. Why doesn't Earth accelerate away from you?

10. How would you give the value of $\vec{\mathbf{g}}$ in vector form?

5.5 Newton's Third Law

11. Identify the action and reaction forces in the following situations: (a) Earth attracts the Moon, (b) a boy kicks a football, (c) a rocket accelerates upward, (d) a car accelerates forward, (e) a high jumper leaps, and (f) a bullet is shot from a gun.

12. Suppose that you are holding a cup of coffee in your hand. Identify all forces on the cup and the reaction to each force.


13. (a) Why does an ordinary rifle recoil (kick backward) when fired? (b) The barrel of a recoilless rifle is open at both ends. Describe how Newton's third law applies when one is fired. (c) Can you safely stand close behind one when it is fired?

Problems

5.1 Forces

19. Two ropes are attached to a tree, and forces of $\vec{\mathbf{F}}_1 = 2.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}$ N and $\vec{\mathbf{F}}_2 = 3.0\hat{\mathbf{i}} + 6.0\hat{\mathbf{j}}$ N are applied. The forces are coplanar (in the same plane). (a) What is the resultant (net force) of these two force vectors? (b) Find the magnitude and direction of this net force.

20. A telephone pole has three cables pulling as shown from above, with $\vec{\mathbf{F}}_1 = \left(300.0\hat{\mathbf{i}} + 500.0\hat{\mathbf{j}}\right)$, $\vec{\mathbf{F}}_2 = -200.0\hat{\mathbf{i}}$, and $\vec{\mathbf{F}}_3 = -800.0\hat{\mathbf{j}}$. (a) Find the net force on the telephone pole in component form. (b) Find the magnitude and direction of this net force.

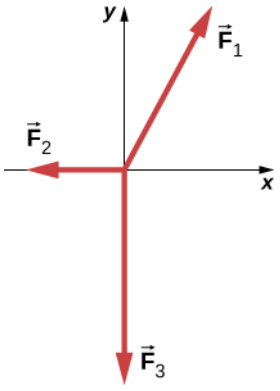

21. Two teenagers are pulling on ropes attached to a tree. The angle between the ropes is $30.0°$. David pulls with a force of 400.0 N and Stephanie pulls with a force of 300.0 N. (a) Find the component form of the net force. (b) Find the magnitude of the resultant (net) force on the tree and the angle it makes with David's rope.

5.2 Newton's First Law

22. Two forces of $\vec{\mathbf{F}}_1 = \frac{75.0}{\sqrt{2}}\left(\hat{\mathbf{i}} - \hat{\mathbf{j}}\right)$ N and $\vec{\mathbf{F}}_2 = \frac{150.0}{\sqrt{2}}\left(\hat{\mathbf{i}} - \hat{\mathbf{j}}\right)$ N act on an object. Find the third force $\vec{\mathbf{F}}_3$ that is needed to balance the first two forces.

23. While sliding a couch across a floor, Andrea and Jennifer exert forces $\vec{\mathbf{F}}_A$ and $\vec{\mathbf{F}}_J$ on the couch. Andrea's force is due north with a magnitude of 130.0 N and Jennifer's force is 32° east of north with a magnitude of 180.0 N. (a) Find the net force in component form. (b) Find the magnitude and direction of the net force. (c) If Andrea and Jennifer's housemates, David and Stephanie, disagree with the move and want to prevent its relocation, with what combined force $\vec{\mathbf{F}}_{DS}$ should they push so that the couch does not move?

5.3 Newton's Second Law

24. Andrea, a 63.0-kg sprinter, starts a race with an acceleration of $4.200\ \text{m/s}^2$. What is the net

5.6 Common Forces

14. A table is placed on a rug. Then a book is placed on the table. What does the floor exert a normal force on?

15. A particle is moving to the right. (a) Can the force on it be acting to the left? If yes, what would happen? (b) Can that force be acting downward? If yes, why?

5.7 Drawing Free-Body Diagrams

16. In completing the solution for a problem involving forces, what do we do after constructing the free-body diagram? That is, what do we apply?

17. If a book is located on a table, how many forces should be shown in a free-body diagram of the book? Describe them.

18. If the book in the previous question is in free fall, how many forces should be shown in a free-body diagram of the book? Describe them.

external force on her?


25. If the sprinter from the previous problem accelerates at that rate for 20.00 m and then maintains that velocity for the remainder of a 100.00-m dash, what will her time be for the race?

26. A cleaner pushes a 4.50-kg laundry cart in such a way that the net external force on it is 60.0 N. Calculate the magnitude of his cart's acceleration.

27. Astronauts in orbit are apparently weightless. This means that a clever method of measuring the mass of astronauts is needed to monitor their mass gains or losses, and adjust their diet. One way to do this is to exert a known force on an astronaut and measure the acceleration produced. Suppose a net external force of 50.0 N is exerted, and an astronaut's acceleration is measured to be $0.893\ \text{m/s}^2$. (a) Calculate her mass. (b) By exerting a force on the astronaut, the vehicle in which she orbits experiences an equal and opposite force. Use this knowledge to find an equation for the acceleration of the system (astronaut and spaceship) that would be measured by a nearby observer. (c) Discuss how this would affect the measurement of the astronaut's acceleration. Propose a method by which recoil of the vehicle is avoided.

28. In Figure 5.12, the net external force on the 24-kg mower is given as 51 N. If the force of friction opposing the motion is 24 N, what force F (in newtons) is the person exerting on the mower? Suppose the mower is moving at 1.5 m/s when the force F is removed. How far will the mower go before stopping?


29. The rocket sled shown below accelerates opposite to the motion at a rate of $196\ \text{m/s}^2$. What force is necessary to produce this acceleration opposite to the motion? Assume that the rockets are off. The mass of the system is 2.10×10^3 kg.

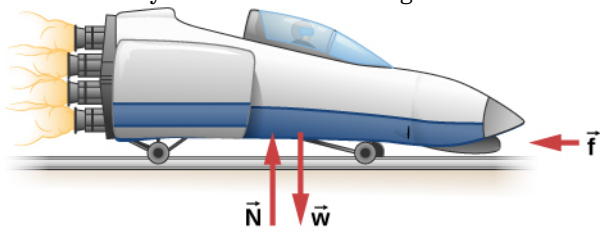

30. If the rocket sled shown in the previous problem starts with only one rocket burning, what is the magnitude of this acceleration? Assume that the mass of the system is 2.10×10^3 kg, the thrust T is 2.40×10^4 N, and the force of friction opposing the motion is 650.0 N. (b) Why is the acceleration not one-fourth of what it is with all rockets burning?

31. What is the acceleration opposite to the motion of the rocket sled if it comes to rest in 1.10 s from a speed of 1000.0 km/h? (Such acceleration opposite to the motion caused one test subject to black out and have temporary blindness.)

32. Suppose two children push horizontally, but in exactly opposite directions, on a third child in a wagon. The first child exerts a force of 75.0 N, the second exerts a force of 90.0 N, friction is 12.0 N, and the mass of the third child plus wagon is 23.0 kg. (a) What is the system of interest if the acceleration of the child in the wagon is to be calculated? (See the free-body diagram.) (b) Calculate the acceleration. (c) What would the acceleration be if friction were 15.0 N?



33. A powerful motorcycle can produce an acceleration of $3.50\ \text{m/s}^2$ while traveling at 90.0 km/h. At that speed, the forces resisting motion, including friction and air resistance, total 400.0 N. (Air resistance is analogous to air friction. It always opposes the motion of an object.) What is the magnitude of the force that motorcycle exerts backward on the ground to produce its acceleration if the mass of the motorcycle with rider is 245 kg?

34. A car with a mass of 1000.0 kg accelerates from 0 to 90.0 km/h in 10.0 s. (a) What is its acceleration? (b) What is the net force on the car?

35. The driver in the previous problem applies the brakes when the car is moving at 90.0 km/h, and the car comes to rest after traveling 40.0 m. What is the net force on the car during its acceleration opposite to the motion?


36. An 80.0-kg passenger in an SUV traveling at 1.00×10^2 km/h is wearing a seat belt. The driver slams on the brakes and the SUV stops in 45.0 m. Find the force of the seat belt on the passenger.

37. A particle of mass 2.0 kg is acted on by a single force $\vec{\mathbf{F}}_1 = 18\hat{\mathbf{i}}$ N. (a) What is the particle's


acceleration? (b) If the particle starts at rest, how far does it travel in the first 5.0 s?

38. Suppose that the particle of the previous problem also experiences forces $\vec{\mathbf{F}}_2 = -15\hat{\mathbf{i}}$ N and $\vec{\mathbf{F}}_3 = 6.0\hat{\mathbf{j}}$ N. What is its acceleration in this case?

39. Find the acceleration of the body of mass 5.0 kg shown below.

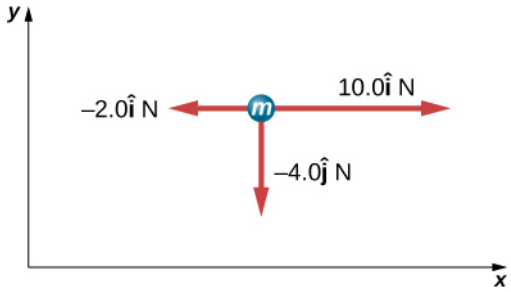

40. In the following figure, the horizontal surface on which this block slides is frictionless. If the two forces acting on it each have magnitude $F = 30.0$ N and $M = 10.0$ kg, what is the magnitude of the resulting acceleration of the block?

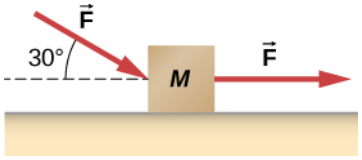

5.4 Mass and Weight

41. The weight of an astronaut plus his space suit on the Moon is only 250 N. (a) How much does the suited astronaut weigh on Earth? (b) What is the mass on the Moon? On Earth?

42. Suppose the mass of a fully loaded module in which astronauts take off from the Moon is 1.00×10^4 kg. The thrust of its engines is 3.00×10^4 N. (a) Calculate the module's magnitude of acceleration in a vertical takeoff from the Moon. (b) Could it lift off from Earth? If not, why not? If it could, calculate the magnitude of its acceleration.

43. A rocket sled accelerates at a rate of 49.0 m/s^2. Its passenger has a mass of 75.0 kg. (a) Calculate the horizontal component of the force the seat exerts against his body. Compare this with his weight using a ratio. (b) Calculate the direction and magnitude of the total force the seat exerts against his body.

44. Repeat the previous problem for a situation in which the rocket sled accelerates opposite to the motion at a rate of 201 m/s^2. In this problem, the forces are exerted by the seat and the seat belt.

45. A body of mass 2.00 kg is pushed straight upward by a 25.0 N vertical force. What is its acceleration?


46. A car weighing 12,500 N starts from rest and accelerates to 83.0 km/h in 5.00 s. The friction force is 1350 N. Find the applied force produced by the engine.

47. A body with a mass of 10.0 kg is assumed to be in Earth's gravitational field with $g = 9.80$ m/s^2. What is the net force on the body if there are no other external forces acting on the object?

48. A fireman has mass m; he hears the fire alarm and slides down the pole with acceleration a (which is less than g in magnitude). (a) Write an equation giving the vertical force he must apply to the pole. (b) If his mass is 90.0 kg and he accelerates at 5.00 m/s^2, what is the magnitude of his applied force?

49. A baseball catcher is performing a stunt for a television commercial. He will catch a baseball (mass 145 g) dropped from a height of 60.0 m above his glove. His glove stops the ball in 0.0100 s. What is the force exerted by his glove on the ball?

50. When the Moon is directly overhead at sunset, the force by Earth on the Moon, F_{EM}, is essentially at 90° to the force by the Sun on the Moon, F_{SM}, as shown below. Given that $F_{EM} = 1.98 \times 10^{20}$ N and $F_{SM} = 4.36 \times 10^{20}$ N, all other forces on the Moon are negligible, and the mass of the Moon is 7.35×10^{22} kg, determine the magnitude of the Moon's acceleration.




5.5 Newton's Third Law

51. (a) What net external force is exerted on a 1100.0-kg artillery shell fired from a battleship if the shell is accelerated at 2.40×10^4 m/s^2? (b) What is the magnitude of the force exerted on the ship by the artillery shell, and why?

52. A brave but inadequate rugby player is being pushed backward by an opposing player who is exerting a force of 800.0 N on him. The mass of the losing player plus equipment is 90.0 kg, and

he is accelerating backward at $1.20\ \text{m/s}^2$. (a) What is the force of friction between the losing player's feet and the grass? (b) What force does the winning player exert on the ground to move forward if his mass plus equipment is 110.0 kg?


53. A history book is lying on top of a physics book on a desk, as shown below; a free-body diagram is also shown. The history and physics books weigh 14 N and 18 N, respectively. Identify each force on each book with a double subscript notation (for instance, the contact force of the history book pressing against physics book can be described as $\vec{F}_{HP}$), and determine the value of each of these forces, explaining the process used.

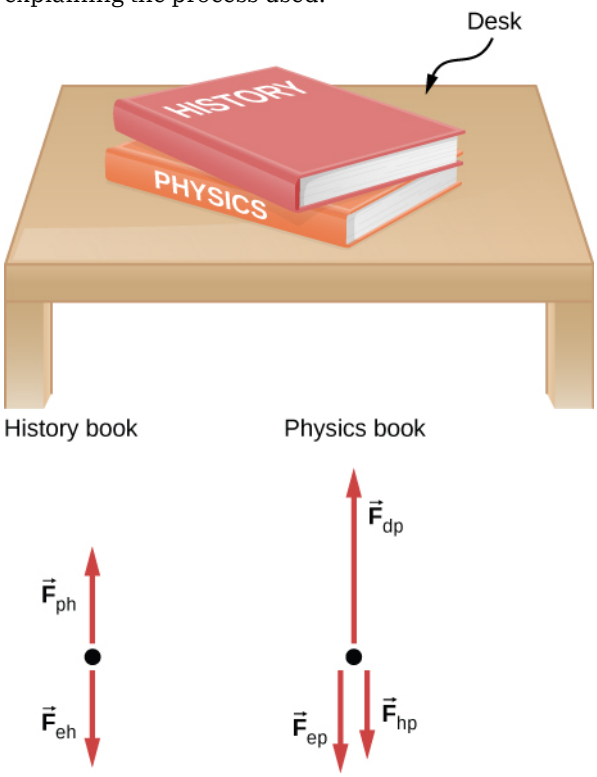

54. A truck collides with a car, and during the collision, the net force on each vehicle is essentially the force exerted by the other. Suppose the mass of the car is 550 kg, the mass of the truck is 2200 kg, and the magnitude of the truck's acceleration is $10\ \text{m/s}^2$. Find the magnitude of the car's acceleration.

5.6 Common Forces

55. A leg is suspended in a traction system, as shown below. (a) Which pulley in the figure is used to calculate the force exerted on the foot? (b) What is the tension in the rope? Here $\vec{T}$ is the tension, $\vec{w}_{leg}$ is the weight of the leg, and $\vec{w}$ is the weight of the load that provides the tension.

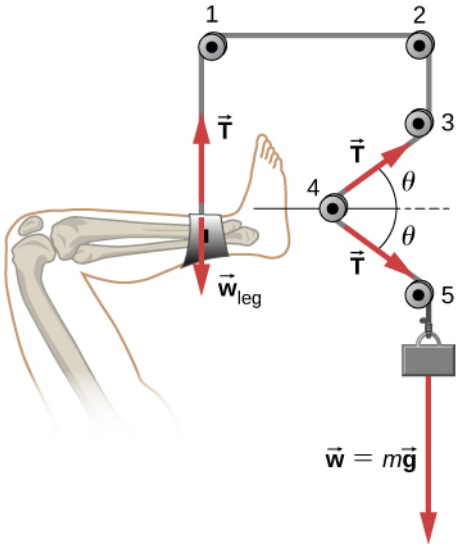

56. Suppose the shinbone in the preceding image was a femur in a traction setup for a broken bone, with pulleys and rope available. How might we be able to increase the force along the femur using the same weight?

57. Two teams of nine members each engage in a tug-of-war, pulling in opposite directions on a horizontal rope. Each of the first team's members has an average mass of 68 kg and exerts an average force of 1350 N horizontally on the ground as they pull on the rope. Each of the second team's members has an average mass of 73 kg and exerts an average force of 1365 N horizontally on the ground as they pull on the rope in the opposite direction. (a) What is the magnitude of the acceleration of the two teams, and which team wins? (b) What is the tension in the section of rope between the teams?

58. What force does a trampoline have to apply to Jennifer, a 45.0-kg gymnast, to accelerate her straight up at $7.50\ \text{m/s}^2$? The answer is independent of the velocity of the gymnast—she can be moving up or down or can be instantly stationary.

59. (a) Calculate the tension in a vertical strand of spider web if a spider of mass 2.00×10^{-5} kg hangs motionless on it. (b) Calculate the tension in a horizontal strand of spider web if the same spider sits motionless in the middle of it much like the tightrope walker in Figure 5.26. The strand sags at an angle of 12° below the horizontal. Compare this with the tension in the vertical strand (find their ratio).


60. Suppose Kevin, a 60.0-kg gymnast, climbs a rope. (a) What is the tension in the rope if he

climbs at a constant speed? (b) What is the tension in the rope if he accelerates upward at a rate of $1.50\ \text{m/s}^2$?

61. Show that, as explained in the text, a force $F_\perp$ exerted on a flexible medium at its center and perpendicular to its length (such as on the tightrope wire in Figure 5.26) gives rise to a tension of magnitude $T = F_\perp / 2 \sin(\theta)$.


62. Consider Figure 5.28. The driver attempts to get the car out of the mud by exerting a perpendicular force of 610.0 N, and the distance she pushes in the middle of the rope is 1.00 m while she stands 6.00 m away from the car on the left and 6.00 m away from the tree on the right. What is the tension T in the rope, and how do you find the answer?

63. A bird has a mass of 26 g and perches in the middle of a stretched telephone line. (a) Show that the tension in the line can be calculated using the equation $T = \frac{mg}{2 \sin \theta}$. Determine the tension when (b) $\theta = 5°$ and (c) $\theta = 0.5°$. Assume that each half of the line is straight.

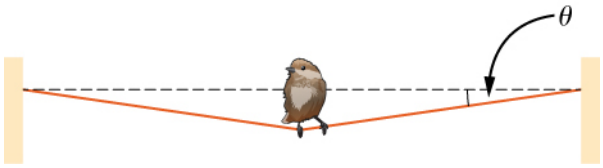


64. One end of a 30-m rope is tied to a tree; the other end is tied to a car stuck in the mud. The motorist pulls sideways on the midpoint of the rope, displacing it a distance of 2 m. If he exerts a force of 80 N under these conditions, determine the force exerted on the car.

65. Consider the baby being weighed in the following figure. (a) What is the mass of the infant and basket if a scale reading of 55 N is observed? (b) What is tension T_1 in the cord attaching the baby to the scale? (c) What is tension T_2 in the cord attaching the scale to the ceiling, if the scale has a mass of 0.500 kg? (d) Sketch the situation, indicating the system of interest used to solve each part. The masses of the cords are negligible.

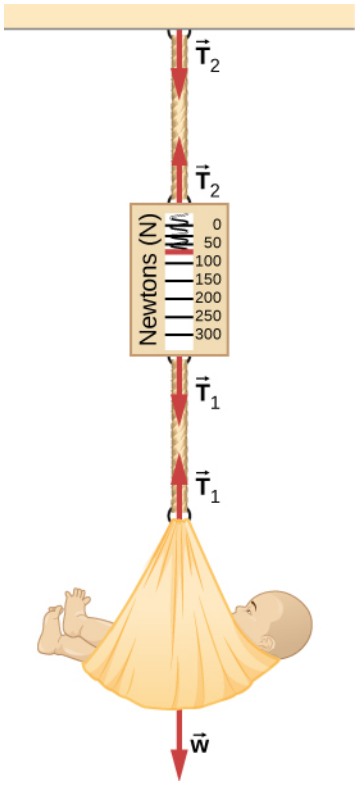

66. What force must be applied to a 100.0-kg crate on a frictionless plane inclined at 30° to cause an acceleration of $2.0\ \text{m/s}^2$ up the plane?

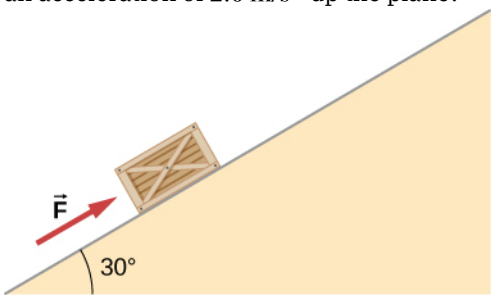

67. A 2.0-kg block is on a perfectly smooth ramp that makes an angle of 30° with the horizontal. (a) What is the block's acceleration down the ramp and the force of the ramp on the block? (b) What force applied upward along and parallel to the ramp would allow the block to move with constant velocity?

5.7 Drawing Free-Body Diagrams

68. A ball of mass m hangs at rest, suspended by a string. (a) Sketch all forces. (b) Draw the free-body diagram for the ball.


69. A car moves along a horizontal road. Draw a free-body diagram; be sure to include the friction of the road that opposes the forward motion of the car.

70. A runner pushes against the track, as shown. (a) Provide a free-body diagram showing all the

forces on the runner. (*Hint:* Place all forces at the center of his body, and include his weight.) (b) Give a revised diagram showing the *xy*-component form.
(credit: modification of work by "Greenwich Photography"/Flickr)



71. The traffic light hangs from the cables as shown. Draw a free-body diagram on a coordinate plane for this situation.

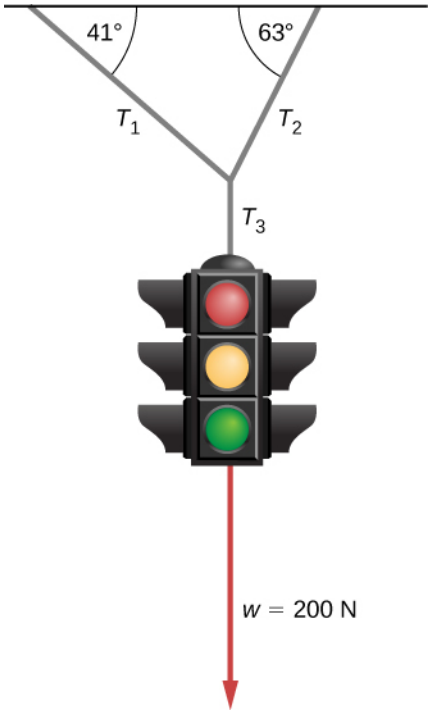

Additional Problems

72. Two small forces, $\vec{\mathbf{F}}_1 = -2.40\hat{\mathbf{i}} - 6.10\hat{\mathbf{j}}$ N and $\vec{\mathbf{F}}_2 = 8.50\hat{\mathbf{i}} - 9.70\hat{\mathbf{j}}$ N, are exerted on a rogue asteroid by a pair of space tractors. (a) Find the net force. (b) What are the magnitude and direction of the net force? (c) If the mass of the asteroid is 125 kg, what acceleration does it experience (in vector form)? (d) What are the magnitude and direction of the acceleration?

73. Two forces of 25 and 45 N act on an object. Their directions differ by $70°$. The resulting acceleration has magnitude of $10.0\ \text{m/s}^2$. What is the mass of the body?

74. A force of 1600 N acts parallel to a ramp to push a 300-kg piano into a moving van. The ramp is inclined at $20°$. (a) What is the acceleration of the piano up the ramp? (b) What is the velocity of the piano when it reaches the top if the ramp is 4.0 m long and the piano starts from rest?


75. Draw a free-body diagram of a diver who has entered the water, moved downward, and is acted on by an upward force due to the water which balances the weight (that is, the diver is suspended).

76. For a swimmer who has just jumped off a diving board, assume air resistance is negligible. The swimmer has a mass of 80.0 kg and jumps off a board 10.0 m above the water. Three seconds after entering the water, her downward motion is stopped. What average upward force did the water exert on her?


77. (a) Find an equation to determine the magnitude of the net force required to stop a car of mass m, given that the initial speed of the car is v_0 and the stopping distance is x. (b) Find the magnitude of the net force if the mass of the car is 1050 kg, the initial speed is 40.0 km/h, and the stopping distance is 25.0 m.

78. A sailboat has a mass of 1.50×10^3 kg and is acted on by a force of 2.00×10^3 N toward the east, while the wind acts behind the sails with a force of 3.00×10^3 N in a direction $45°$ north of east. Find the magnitude and direction of the resulting acceleration.


79. Find the acceleration of the body of mass 10.0 kg shown below.

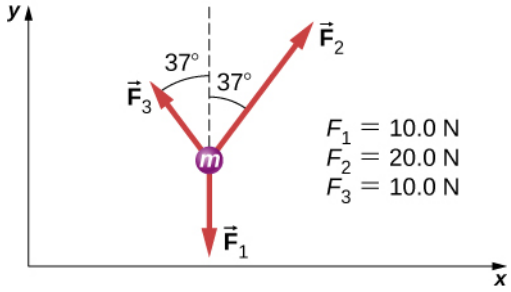


80. A body of mass 2.0 kg is moving along the x-axis with a speed of 3.0 m/s at the instant represented below. (a) What is the acceleration of the body? (b) What is the body's velocity 10.0 s later? (c) What is its displacement after 10.0 s?

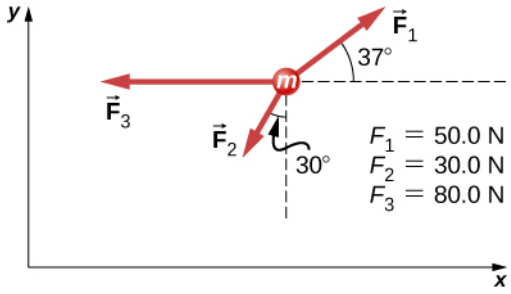

81. Force $\vec{\mathbf{F}}_\mathrm{B}$ has twice the magnitude of force $\vec{\mathbf{F}}_\mathrm{A}$. Find the direction in which the particle accelerates in this figure.

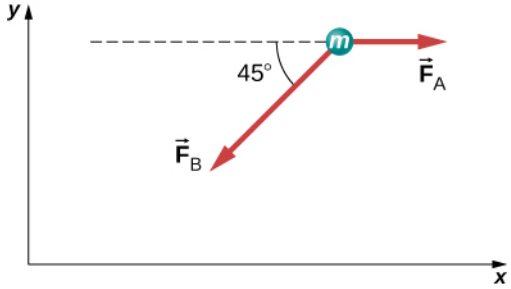

82. Shown below is a body of mass 1.0 kg under the influence of the forces $\vec{\mathbf{F}}_\mathbf{A}$, $\vec{\mathbf{F}}_\mathbf{B}$, and $m\vec{\mathbf{g}}$. If the body accelerates to the left at 20 m/s^2, what are $\vec{\mathbf{F}}_\mathbf{A}$ and $\vec{\mathbf{F}}_\mathbf{B}$?

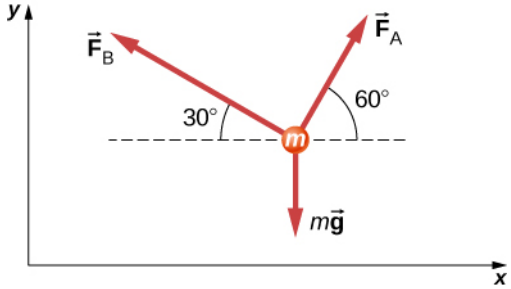


83. A force acts on a car of mass m so that the speed v of the car increases with position x as $v = kx^2$, where k is constant and all quantities are in SI units. Find the force acting on the car as a function of position.

84. A 7.0-N force parallel to an incline is applied to a 1.0-kg crate. The ramp is tilted at 20° and is frictionless. (a) What is the acceleration of the crate? (b) If all other conditions are the same but the ramp has a friction force of 1.9 N, what is the acceleration?


85. Two boxes, A and B, are at rest. Box A is on level ground, while box B rests on an inclined plane tilted at angle θ with the horizontal. (a) Write expressions for the normal force acting on each block. (b) Compare the two forces; that is, tell which one is larger or whether they are equal in magnitude. (c) If the angle of incline is 10°, which force is greater?

86. A mass of 250.0 g is suspended from a spring hanging vertically. The spring stretches 6.00 cm. How much will the spring stretch if the suspended mass is 530.0 g?

87. As shown below, two identical springs, each with the spring constant 20 N/m, support a 15.0-N weight. (a) What is the tension in spring A? (b) What is the amount of stretch of spring A from the rest position?

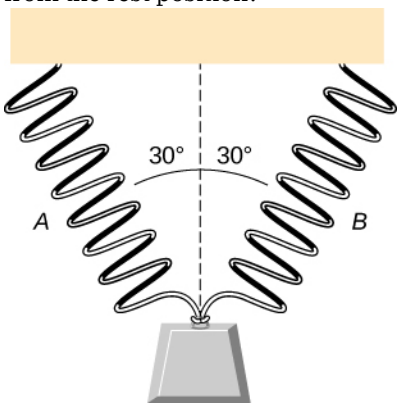


88. Shown below is a 30.0-kg block resting on a frictionless ramp inclined at 60° to the horizontal. The block is held by a spring that is stretched 5.0 cm. What is the force constant of the spring?

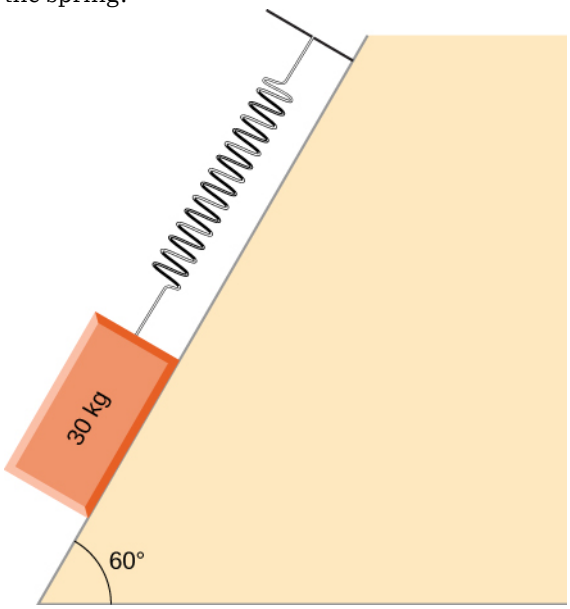


89. In building a house, carpenters use nails from a large box. The box is suspended from a spring twice during the day to measure the usage of nails. At the beginning of the day, the spring stretches 50 cm. At the end of the day, the spring stretches 30 cm. What fraction or percentage of the nails have been used?

90. A force is applied to a block to move it up a 30° incline. The incline is frictionless. If $F = 65.0\ \text{N}$ and $M = 5.00\ \text{kg}$, what is the magnitude of the acceleration of the block?

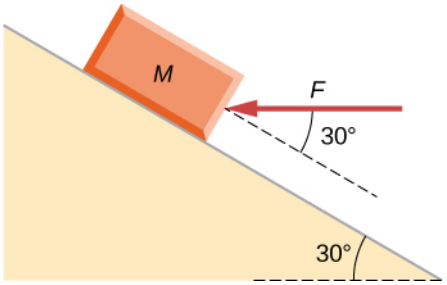


91. Two forces are applied to a 5.0-kg object, and it accelerates at a rate of $2.0\ \text{m/s}^2$ in the positive y-direction. If one of the forces acts in the positive x-direction with magnitude 12.0 N, find the magnitude of the other force.

92. The block on the right shown below has more mass than the block on the left ($m_2 > m_1$). Draw free-body diagrams for each block.

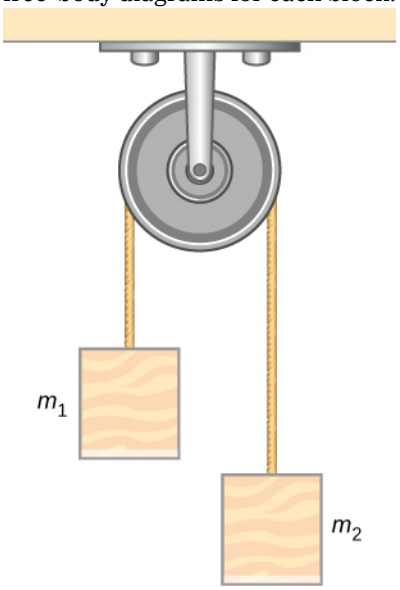

Challenge Problems

93. If two tugboats pull on a disabled vessel, as shown here in an overhead view, the disabled vessel will be pulled along the direction indicated by the result of the exerted forces. (a) Draw a free-body diagram for the vessel. Assume no friction or drag forces affect the vessel. (b) Did you include all forces in the overhead view in your free-body diagram? Why or why not?

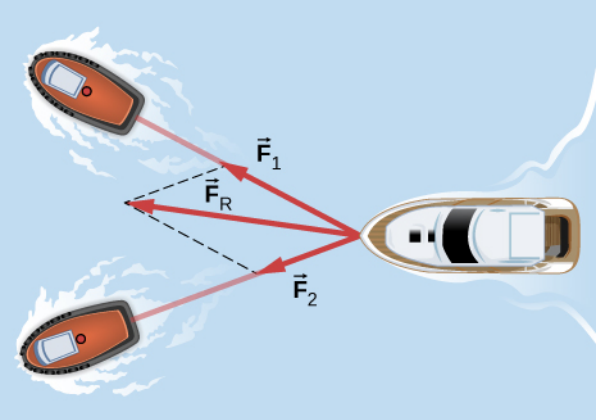

94. A 10.0-kg object is initially moving east at 15.0 m/s. Then a force acts on it for 2.00 s, after which it moves northwest, also at 15.0 m/s. What are the magnitude and direction of the average force that acted on the object over the 2.00-s interval?

95. On June 25, 1983, shot-putter Udo Beyer of East Germany threw the 7.26-kg shot 22.22 m, which at that time was a world record. (a) If the shot was released at a height of 2.20 m with a projection angle of $45.0°$, what was its initial velocity? (b) If while in Beyer's hand the shot was accelerated uniformly over a distance of 1.20 m, what was the net force on it?

96. A body of mass m moves in a horizontal direction such that at time t its position is given by $x(t) = at^4 + bt^3 + ct$, where a, b, and c are constants. (a) What is the acceleration of the body? (b) What is the time-dependent force acting on the body?

97. A body of mass m has initial velocity v_0 in the positive x-direction. It is acted on by a constant force F for time t until the velocity becomes zero; the force continues to act on the body until its velocity becomes $-v_0$ in the same amount of time. Write an expression for the total distance the body travels in terms of the variables indicated.

98. The velocities of a 3.0-kg object at $t = 6.0$ s and $t = 8.0$ s are $(3.0\hat{\mathbf{i}} - 6.0\hat{\mathbf{j}} + 4.0\hat{\mathbf{k}})$ m/s and $(-2.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{k}})$ m/s, respectively. If the object is moving at constant acceleration, what is the force acting on it?

99. A 120-kg astronaut is riding in a rocket sled that is sliding along an inclined plane. The sled has a horizontal component of acceleration of $5.0\ \text{m/s}^2$ and a downward component of $3.8\ \text{m/s}^2$. Calculate the magnitude of the force on the rider by the sled. (*Hint*: Remember that gravitational acceleration must be considered.)

100. Two forces are acting on a 5.0-kg object that moves with acceleration $2.0\ \text{m/s}^2$ in the positive y-direction. If one of the forces acts in the positive x-direction and has magnitude of 12 N, what is the magnitude of the other force?


101. Suppose that you are viewing a soccer game from a helicopter above the playing field. Two soccer players simultaneously kick a stationary soccer ball on the flat field; the soccer ball has mass 0.420 kg. The first player kicks with force 162 N at $9.0°$ north of west. At the same instant, the second player kicks with force 215 N at $15°$ east of south. Find the acceleration of the ball in $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ form.

102. A 10.0-kg mass hangs from a spring that has the spring constant 535 N/m. Find the position of the end of the spring away from its rest position. (Use $g = 9.80\ \text{m/s}^2$.)

103. A 0.0502-kg pair of fuzzy dice is attached to the rearview mirror of a car by a short string. The car accelerates at constant rate, and the dice hang at an angle of $3.20°$ from the vertical because of the car's acceleration. What is the magnitude of the acceleration of the car?

104. At a circus, a donkey pulls on a sled carrying a small clown with a force given by $2.48\hat{\mathbf{i}} + 4.33\hat{\mathbf{j}}$ N. A horse pulls on the same sled, aiding the hapless donkey, with a force of $6.56\hat{\mathbf{i}} + 5.33\hat{\mathbf{j}}$ N. The mass of the sled is 575 kg. Using $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$ form for the answer to each problem, find (a) the net force on the sled when the two animals act together, (b) the acceleration of the sled, and (c) the velocity after 6.50 s.

105. Hanging from the ceiling over a baby bed, well out of baby's reach, is a string with plastic shapes, as shown here. The string is taut (there is no slack), as shown by the straight segments. Each plastic shape has the same mass m, and they are equally spaced by a distance d, as shown. The angles labeled θ describe the angle formed by the end of the string and the ceiling at each end. The center length of sting is horizontal. The remaining two segments each form an angle with the horizontal, labeled ϕ. Let T_1 be the tension in the leftmost section of the string, T_2 be the tension in the section adjacent to it, and T_3 be the tension in the horizontal segment. (a) Find an equation for the tension in each section of the string in terms of the variables m, g, and θ. (b) Find the angle ϕ in terms of the angle θ. (c) If $\theta = 5.10°$, what is the value of ϕ? (d) Find the distance x between the endpoints in terms of d and θ.

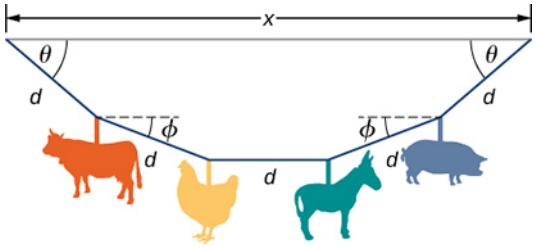

106. A bullet shot from a rifle has mass of 10.0 g and travels to the right at 350 m/s. It strikes a target, a large bag of sand, penetrating it a distance of 34.0 cm. Find the magnitude and direction of the retarding force that slows and stops the bullet.

107. An object is acted on by three simultaneous forces: $\vec{\mathbf{F}}_1 = \left(-3.00\hat{\mathbf{i}} + 2.00\hat{\mathbf{j}}\right)$ N, $\vec{\mathbf{F}}_2 = \left(6.00\hat{\mathbf{i}} - 4.00\hat{\mathbf{j}}\right)$ N, and $\vec{\mathbf{F}}_3 = \left(2.00\hat{\mathbf{i}} + 5.00\hat{\mathbf{j}}\right)$ N. The object experiences acceleration of $4.23\ \text{m/s}^2$. (a) Find the acceleration vector in terms of m. (b) Find the mass of the object. (c) If the object begins from rest, find its speed after 5.00 s. (d) Find the components of the velocity of the object after 5.00 s.

108. In a particle accelerator, a proton has mass 1.67×10^{-27} kg and an initial speed of 2.00×10^5 m/s. It moves in a straight line, and its speed increases to 9.00×10^5 m/s in a distance of 10.0 cm. Assume that the acceleration is constant. Find the magnitude of the force exerted on the proton.

109. A drone is being directed across a frictionless ice-covered lake. The mass of the drone is 1.50 kg, and its velocity is $3.00\hat{\mathbf{i}}$ m/s. After 10.0 s, the velocity is $9.00\hat{\mathbf{i}} + 4.00\hat{\mathbf{j}}$ m/s. If a constant force in the horizontal direction is causing this change in motion, find (a) the components of the force and (b) the magnitude of the force.

CHAPTER 6
Applications of Newton's Laws



Figure 6.1 Stock cars racing in the Grand National Divisional race at Iowa Speedway in May, 2015. Cars often reach speeds of 200 mph (320 km/h). (credit: modification of work by Erik Schneider/U.S. Navy)

Chapter Outline

6.1 Solving Problems with Newton's Laws

6.2 Friction

6.3 Centripetal Force

6.4 Drag Force and Terminal Speed

INTRODUCTION Car racing has grown in popularity in recent years. As each car moves in a curved path around the turn, its wheels also spin rapidly. The wheels complete many revolutions while the car makes only part of one (a circular arc). How can we describe the velocities, accelerations, and forces involved? What force keeps a racecar from spinning out, hitting the wall bordering the track? What provides this force? Why is the track banked? We answer all of these questions in this chapter as we expand our consideration of Newton's laws of motion.

6.1 Solving Problems with Newton's Laws

Learning Objectives

By the end of this section, you will be able to:

- Apply problem-solving techniques to solve for quantities in more complex systems of forces
- Use concepts from kinematics to solve problems using Newton's laws of motion
- Solve more complex equilibrium problems
- Solve more complex acceleration problems
- Apply calculus to more advanced dynamics problems

Success in problem solving is necessary to understand and apply physical principles. We developed a pattern of analyzing and setting up the solutions to problems involving Newton's laws in Newton's Laws of Motion; in this chapter, we continue to discuss these strategies and apply a step-by-step process.

Problem-Solving Strategies

We follow here the basics of problem solving presented earlier in this text, but we emphasize specific strategies that are useful in applying Newton's laws of motion. Once you identify the physical principles involved in the problem and determine that they include Newton's laws of motion, you can apply these steps to find a solution. These techniques also reinforce concepts that are useful in many other areas of physics. Many problem-solving strategies are stated outright in the worked examples, so the following techniques should reinforce skills you have already begun to develop.

PROBLEM-SOLVING STRATEGY

Applying Newton's Laws of Motion

1. Identify the physical principles involved by listing the givens and the quantities to be calculated.
2. Sketch the situation, using arrows to represent all forces.
3. Determine the system of interest. The result is a free-body diagram that is essential to solving the problem.
4. Apply Newton's second law to solve the problem. If necessary, apply appropriate kinematic equations from the chapter on motion along a straight line.
5. Check the solution to see whether it is reasonable.

Let's apply this problem-solving strategy to the challenge of lifting a grand piano into a second-story apartment. Once we have determined that Newton's laws of motion are involved (if the problem involves forces), it is particularly important to draw a careful sketch of the situation. Such a sketch is shown in Figure 6.2(a). Then, as in Figure 6.2(b), we can represent all forces with arrows. Whenever sufficient information exists, it is best to label these arrows carefully and make the length and direction of each correspond to the represented force.

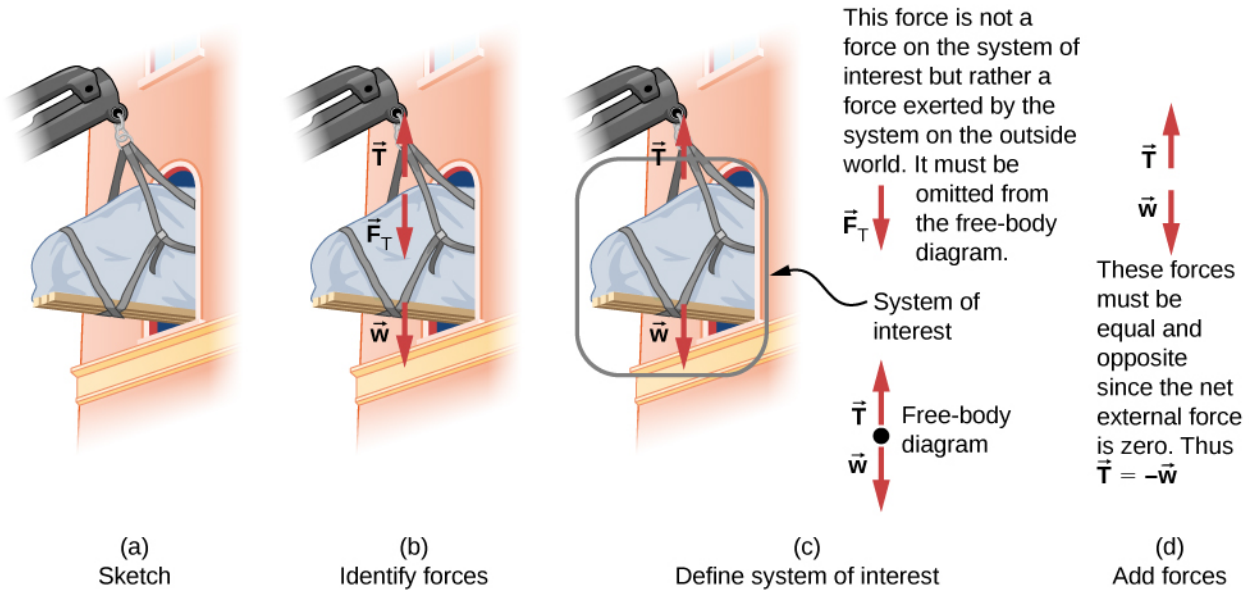


Figure 6.2 (a) A grand piano is being lifted to a second-story apartment. (b) Arrows are used to represent all forces: $\vec{\mathbf{T}}$ is the tension in the rope above the piano, $\vec{\mathbf{F}}_{\mathrm{T}}$ is the force that the piano exerts on the rope, and $\vec{\mathbf{w}}$ is the weight of the piano. All other forces, such as the nudge of a breeze, are assumed to be negligible. (c) Suppose we are given the piano's mass and asked to find the tension in the rope. We then define the system of interest as shown and draw a free-body diagram. Now $\vec{\mathbf{F}}_{\mathrm{T}}$ is no longer shown, because it is not a force acting on the system of interest; rather, $\vec{\mathbf{F}}_{\mathrm{T}}$ acts on the outside world. (d) Showing only the arrows, the head-to-tail method of addition is used. It is apparent that if the piano is stationary, $\vec{\mathbf{T}} = -\vec{\mathbf{w}}$.

As with most problems, we next need to identify what needs to be determined and what is known or can be inferred from the problem as stated, that is, make a list of knowns and unknowns. It is particularly crucial to identify the system of interest, since Newton's second law involves only external forces. We can then determine which forces are external and which are internal, a necessary step to employ Newton's second law. (See Figure 6.2(c).) Newton's third law may be used to identify whether forces are exerted between components of a system (internal) or between the system and something outside (external). As illustrated in Newton's Laws of Motion, the system of interest depends on the question we need to answer. Only forces are shown in free-body diagrams, not acceleration or velocity. We have drawn several free-body diagrams in previous worked examples. Figure 6.2(c) shows a free-body diagram for the system of interest. Note that no internal forces are shown in a free-body diagram.

Once a free-body diagram is drawn, we apply Newton's second law. This is done in Figure 6.2(d) for a particular situation. In general, once external forces are clearly identified in free-body diagrams, it should be a straightforward task to put them into equation form and solve for the unknown, as done in all previous examples. If the problem is one-dimensional—that is, if all forces are parallel—then the forces can be handled algebraically. If the problem is two-dimensional, then it must be broken down into a pair of one-dimensional problems. We do this by projecting the force vectors onto a set of axes chosen for convenience. As seen in previous examples, the choice of axes can simplify the problem. For example, when an incline is involved, a set of axes with one axis parallel to the incline and one perpendicular to it is most convenient. It is almost always convenient to make one axis parallel to the direction of motion, if this is known. Generally, just write Newton's second law in components along the different directions. Then, you have the following equations:

$$\sum F_x = ma_x, \quad \sum F_y = ma_y.$$

(If, for example, the system is accelerating horizontally, then you can then set $a_y = 0$.) We need this information to determine unknown forces acting on a system.

As always, we must check the solution. In some cases, it is easy to tell whether the solution is reasonable. For example, it is reasonable to find that friction causes an object to slide down an incline more slowly than when no friction exists. In practice, intuition develops gradually through problem solving; with experience, it

becomes progressively easier to judge whether an answer is reasonable. Another way to check a solution is to check the units. If we are solving for force and end up with units of millimeters per second, then we have made a mistake.

There are many interesting applications of Newton's laws of motion, a few more of which are presented in this section. These serve also to illustrate some further subtleties of physics and to help build problem-solving skills. We look first at problems involving particle equilibrium, which make use of Newton's first law, and then consider particle acceleration, which involves Newton's second law.

Particle Equilibrium

Recall that a particle in equilibrium is one for which the external forces are balanced. Static equilibrium involves objects at rest, and dynamic equilibrium involves objects in motion without acceleration, but it is important to remember that these conditions are relative. For example, an object may be at rest when viewed from our frame of reference, but the same object would appear to be in motion when viewed by someone moving at a constant velocity. We now make use of the knowledge attained in Newton's Laws of Motion, regarding the different types of forces and the use of free-body diagrams, to solve additional problems in particle equilibrium.

EXAMPLE 6.1

Different Tensions at Different Angles

Consider the traffic light (mass of 15.0 kg) suspended from two wires as shown in Figure 6.3. Find the tension in each wire, neglecting the masses of the wires.

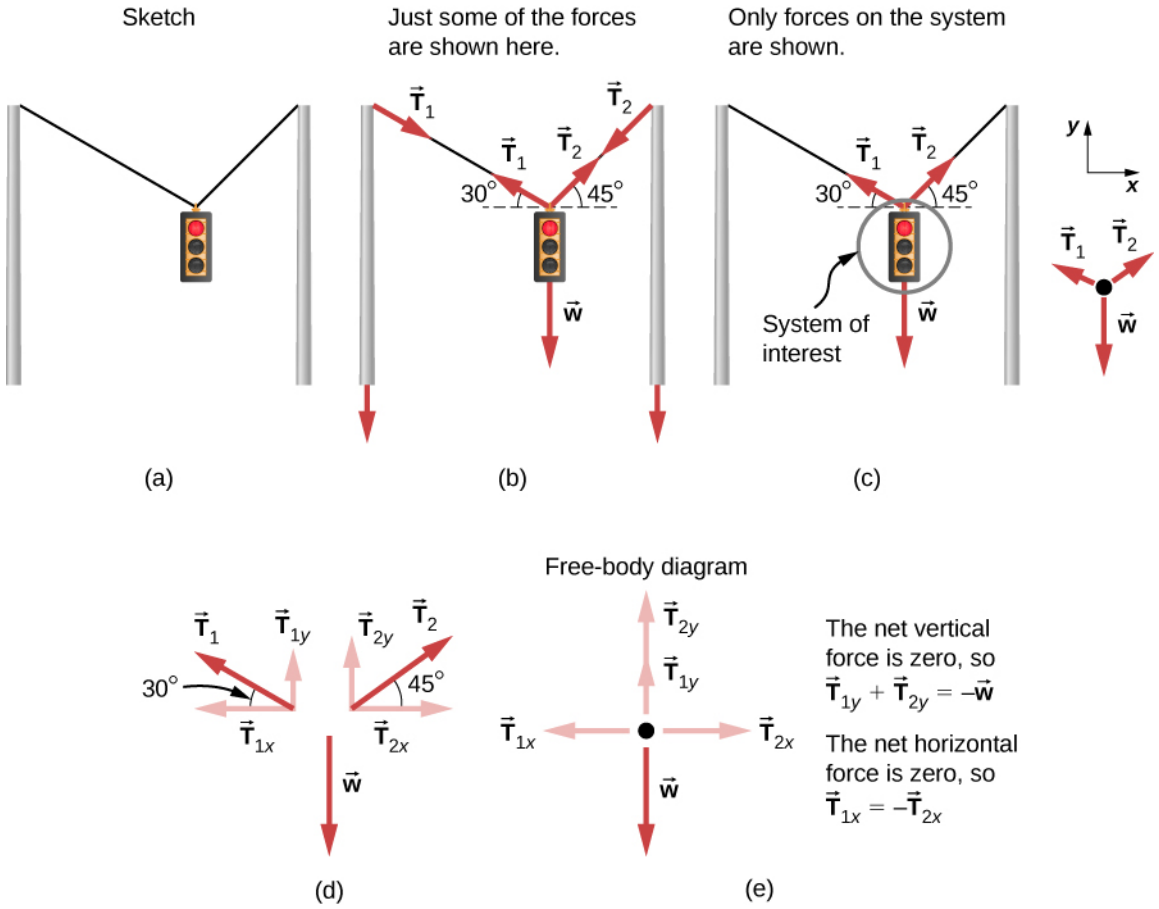


Figure 6.3 A traffic light is suspended from two wires. (b) Some of the forces involved. (c) Only forces acting on the system are shown here. The free-body diagram for the traffic light is also shown. (d) The forces projected onto vertical (*y*) and horizontal (*x*) axes. The

horizontal components of the tensions must cancel, and the sum of the vertical components of the tensions must equal the weight of the traffic light. (e) The free-body diagram shows the vertical and horizontal forces acting on the traffic light.

Strategy

The system of interest is the traffic light, and its free-body diagram is shown in Figure 6.3(c). The three forces involved are not parallel, and so they must be projected onto a coordinate system. The most convenient coordinate system has one axis vertical and one horizontal, and the vector projections on it are shown in Figure 6.3(d). There are two unknowns in this problem (T_1 and T_2), so two equations are needed to find them. These two equations come from applying Newton's second law along the vertical and horizontal axes, noting that the net external force is zero along each axis because acceleration is zero.

Solution

First consider the horizontal or x-axis:

$$F_{\text{net } x} = T_{2x} + T_{1x} = 0.$$

Thus, as you might expect,

$$|T_{1x}| = |T_{2x}|.$$

This gives us the following relationship:

$$T_1 \cos 30^\circ = T_2 \cos 45^\circ.$$

Thus,

$$T_2 = 1.225T_1.$$

Note that T_1 and T_2 are not equal in this case because the angles on either side are not equal. It is reasonable that T_2 ends up being greater than T_1 because it is exerted more vertically than T_1.

Now consider the force components along the vertical or y-axis:

$$F_{\text{net } y} = T_{1y} + T_{2y} - w = 0.$$

This implies

$$T_{1y} + T_{2y} = w.$$

Substituting the expressions for the vertical components gives

$$T_1 \sin 30^\circ + T_2 \sin 45^\circ = w.$$

There are two unknowns in this equation, but substituting the expression for T_2 in terms of T_1 reduces this to one equation with one unknown:

$$T_1(0.500) + (1.225T_1)(0.707) = w = mg,$$

which yields

$$1.366T_1 = (15.0\,\text{kg})(9.80\,\text{m/s}^2).$$

Solving this last equation gives the magnitude of T_1 to be

$$T_1 = 108\,\text{N}.$$

Finally, we find the magnitude of T_2 by using the relationship between them, $T_2 = 1.225T_1$, found above. Thus we obtain

$$T_2 = 132\,\text{N}.$$

Significance

Both tensions would be larger if both wires were more horizontal, and they will be equal if and only if the angles on either side are the same (as they were in the earlier example of a tightrope walker in Newton's Laws of Motion.

Particle Acceleration

We have given a variety of examples of particles in equilibrium. We now turn our attention to particle acceleration problems, which are the result of a nonzero net force. Refer again to the steps given at the beginning of this section, and notice how they are applied to the following examples.

EXAMPLE 6.2

Drag Force on a Barge

Two tugboats push on a barge at different angles (Figure 6.4). The first tugboat exerts a force of 2.7×10^5 N in the x-direction, and the second tugboat exerts a force of 3.6×10^5 N in the y-direction. The mass of the barge is 5.0×10^6 kg and its acceleration is observed to be 7.5×10^{-2} m/s^2 in the direction shown. What is the drag force of the water on the barge resisting the motion? (*Note:* Drag force is a frictional force exerted by fluids, such as air or water. The drag force opposes the motion of the object. Since the barge is flat bottomed, we can assume that the drag force is in the direction opposite of motion of the barge.)

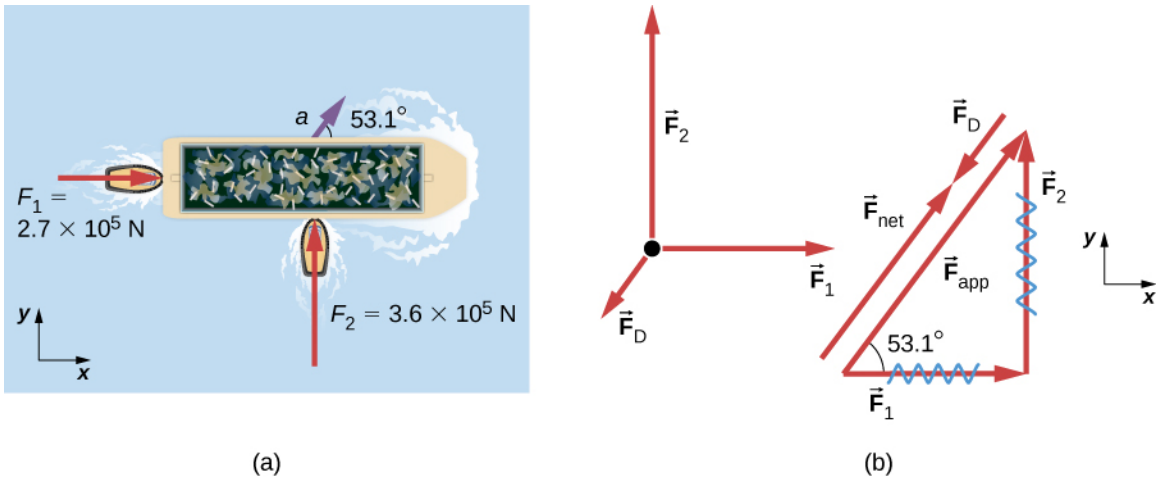


Figure 6.4 (a) A view from above of two tugboats pushing on a barge. (b) The free-body diagram for the ship contains only forces acting in the plane of the water. It omits the two vertical forces—the weight of the barge and the buoyant force of the water supporting it cancel and are not shown. Note that $\vec{\mathbf{F}}_{\text{app}}$ is the total applied force of the tugboats.

Strategy

The directions and magnitudes of acceleration and the applied forces are given in Figure 6.4(a). We define the total force of the tugboats on the barge as $\vec{\mathbf{F}}_{\text{app}}$ so that

$$\vec{\mathbf{F}}_{\text{app}} = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_2.$$

The drag of the water $\vec{\mathbf{F}}_{\text{D}}$ is in the direction opposite to the direction of motion of the boat; this force thus works against $\vec{\mathbf{F}}_{\text{app}}$, as shown in the free-body diagram in Figure 6.4(b). The system of interest here is the barge, since the forces on it are given as well as its acceleration. Because the applied forces are perpendicular, the x- and y-axes are in the same direction as $\vec{\mathbf{F}}_1$ and $\vec{\mathbf{F}}_2$. The problem quickly becomes a one-dimensional problem along the direction of $\vec{\mathbf{F}}_{\text{app}}$, since friction is in the direction opposite to $\vec{\mathbf{F}}_{\text{app}}$. Our strategy is to find the magnitude and direction of the net applied force $\vec{\mathbf{F}}_{\text{app}}$ and then apply Newton's second law to solve for the drag force $\vec{\mathbf{F}}_{\text{D}}$.

Solution

Since F_x and F_y are perpendicular, we can find the magnitude and direction of $\vec{\mathbf{F}}_{\text{app}}$ directly. First, the resultant magnitude is given by the Pythagorean theorem:

$$F_{\text{app}} = \sqrt{F_1^2 + F_2^2} = \sqrt{(2.7 \times 10^5 \text{N})^2 + (3.6 \times 10^5 \text{ N})^2} = 4.5 \times 10^5 \text{ N}.$$

The angle is given by

$$\theta = \tan^{-1}\left(\frac{F_2}{F_1}\right) = \tan^{-1}\left(\frac{3.6 \times 10^5 \text{ N}}{2.7 \times 10^5 \text{ N}}\right) = 53.1°.$$

From Newton's first law, we know this is the same direction as the acceleration. We also know that $\vec{\mathbf{F}}_{\text{D}}$ is in the opposite direction of $\vec{\mathbf{F}}_{\text{app}}$, since it acts to slow down the acceleration. Therefore, the net external force is in the same direction as $\vec{\mathbf{F}}_{\text{app}}$, but its magnitude is slightly less than $\vec{\mathbf{F}}_{\text{app}}$. The problem is now one-dimensional. From the free-body diagram, we can see that

$$F_{\text{net}} = F_{\text{app}} - F_{\text{D}}.$$

However, Newton's second law states that

$$F_{\text{net}} = ma.$$

Thus,

$$F_{\text{app}} - F_{\text{D}} = ma.$$

This can be solved for the magnitude of the drag force of the water F_{D} in terms of known quantities:

$$F_{\text{D}} = F_{\text{app}} - ma.$$

Substituting known values gives

$$F_{\text{D}} = \left(4.5 \times 10^5 \text{ N}\right) - \left(5.0 \times 10^6 \text{ kg}\right)\left(7.5 \times 10^{-2} \text{ m/s}^2\right) = 7.5 \times 10^4 \text{ N}.$$

The direction of $\vec{\mathbf{F}}_{\text{D}}$ has already been determined to be in the direction opposite to $\vec{\mathbf{F}}_{\text{app}}$, or at an angle of 53° south of west.

Significance

The numbers used in this example are reasonable for a moderately large barge. It is certainly difficult to obtain larger accelerations with tugboats, and small speeds are desirable to avoid running the barge into the docks. Drag is relatively small for a well-designed hull at low speeds, consistent with the answer to this example, where F_{D} is less than 1/600th of the weight of the ship.

In Newton's Laws of Motion, we discussed the normal force, which is a contact force that acts normal to the surface so that an object does not have an acceleration perpendicular to the surface. The bathroom scale is an excellent example of a normal force acting on a body. It provides a quantitative reading of how much it must push upward to support the weight of an object. But can you predict what you would see on the dial of a bathroom scale if you stood on it during an elevator ride? Will you see a value greater than your weight when the elevator starts up? What about when the elevator moves upward at a constant speed? Take a guess before reading the next example.

EXAMPLE 6.3

What Does the Bathroom Scale Read in an Elevator?

Figure 6.5 shows a 75.0-kg man (weight of about 165 lb.) standing on a bathroom scale in an elevator. Calculate the scale reading: (a) if the elevator accelerates upward at a rate of 1.20 m/s^2, and (b) if the elevator moves upward at a constant speed of 1 m/s.

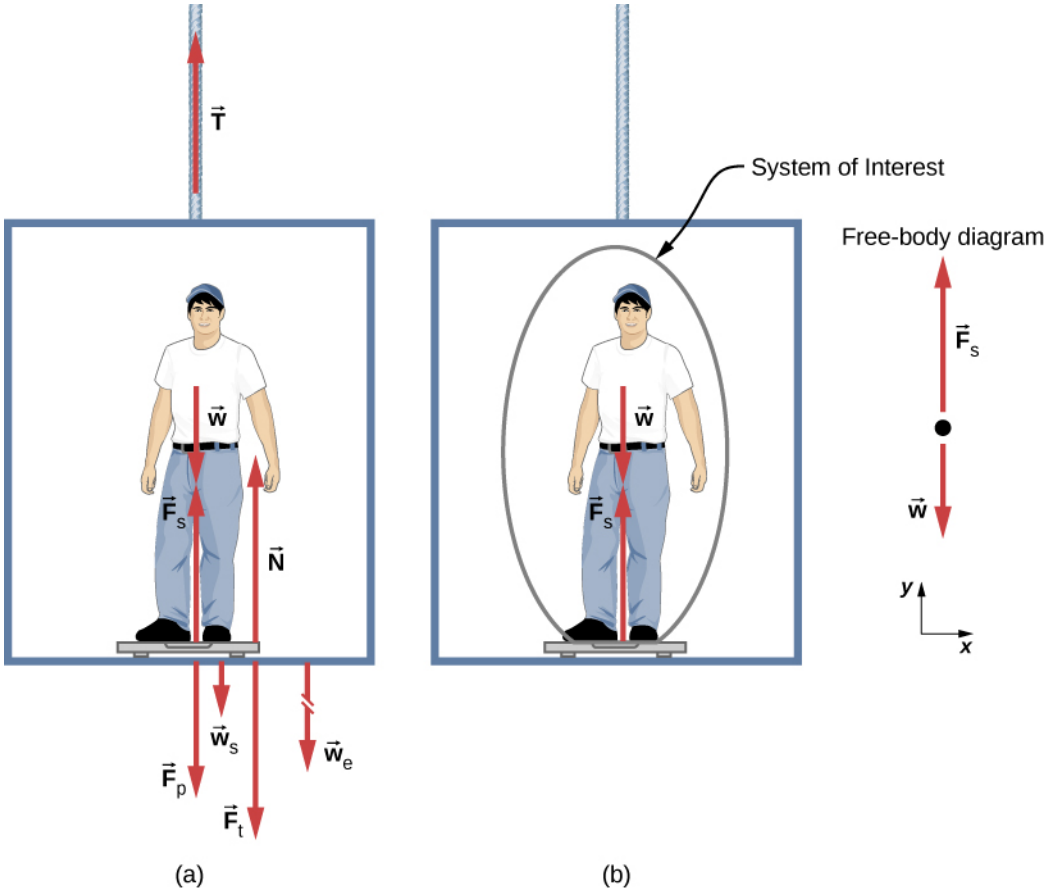


Figure 6.5 (a) The various forces acting when a person stands on a bathroom scale in an elevator. The arrows are approximately correct for when the elevator is accelerating upward—broken arrows represent forces too large to be drawn to scale. $\vec{\mathbf{T}}$ is the tension in the supporting cable, $\vec{\mathbf{w}}$ is the weight of the person, $\vec{\mathbf{w}}_\text{s}$ is the weight of the scale, $\vec{\mathbf{w}}_\text{e}$ is the weight of the elevator, $\vec{\mathbf{F}}_\text{s}$ is the force of the scale on the person, $\vec{\mathbf{F}}_\text{p}$ is the force of the person on the scale, $\vec{\mathbf{F}}_\text{t}$ is the force of the scale on the floor of the elevator, and $\vec{\mathbf{N}}$ is the force of the floor upward on the scale. (b) The free-body diagram shows only the external forces acting *on* the designated system of interest—the person—and is the diagram we use for the solution of the problem.

Strategy

If the scale at rest is accurate, its reading equals $\vec{\mathbf{F}}_\text{p}$, the magnitude of the force the person exerts downward on it. Figure 6.5(a) shows the numerous forces acting on the elevator, scale, and person. It makes this one-dimensional problem look much more formidable than if the person is chosen to be the system of interest and a free-body diagram is drawn, as in Figure 6.5(b). Analysis of the free-body diagram using Newton's laws can produce answers to both Figure 6.5(a) and (b) of this example, as well as some other questions that might arise. The only forces acting on the person are his weight $\vec{\mathbf{w}}$ and the upward force of the scale $\vec{\mathbf{F}}_\text{s}$. According to Newton's third law, $\vec{\mathbf{F}}_\text{p}$ and $\vec{\mathbf{F}}_\text{s}$ are equal in magnitude and opposite in direction, so that we need to find F_s in order to find what the scale reads. We can do this, as usual, by applying Newton's second law,

$$\vec{\mathbf{F}}_\text{net} = m\vec{\mathbf{a}}.$$

From the free-body diagram, we see that $\vec{\mathbf{F}}_\text{net} = \vec{\mathbf{F}}_s - \vec{\mathbf{w}}$, so we have

$$F_\text{s} - w = ma.$$

Solving for F_s gives us an equation with only one unknown:

$$F_\text{s} = ma + w,$$

or, because $w = mg$, simply

$$F_s = ma + mg.$$

No assumptions were made about the acceleration, so this solution should be valid for a variety of accelerations in addition to those in this situation. (*Note:* We are considering the case when the elevator is accelerating upward. If the elevator is accelerating downward, Newton's second law becomes $F_s - w = -ma$.)

Solution

a. We have $a = 1.20\ \text{m/s}^2$, so that

$$F_s = (75.0\ \text{kg})(9.80\ \text{m/s}^2) + (75.0\ \text{kg})(1.20\ \text{m/s}^2)$$

yielding

$$F_s = 825\ \text{N}.$$

b. Now, what happens when the elevator reaches a constant upward velocity? Will the scale still read more than his weight? For any constant velocity—up, down, or stationary—acceleration is zero because $a = \frac{\Delta v}{\Delta t}$ and $\Delta v = 0$. Thus,

$$F_s = ma + mg = 0 + mg$$

or

$$F_s = (75.0\ \text{kg})(9.80\ \text{m/s}^2),$$

which gives

$$F_s = 735\ \text{N}.$$

Significance

The scale reading in Figure 6.5(a) is about 185 lb. What would the scale have read if he were stationary? Since his acceleration would be zero, the force of the scale would be equal to his weight:

$$F_{\text{net}} = ma = 0 = F_s - w$$
$$F_s = w = mg$$
$$F_s = (75.0\ \text{kg})(9.80\ \text{m/s}^2) = 735\ \text{N}.$$

Thus, the scale reading in the elevator is greater than his 735-N (165-lb.) weight. This means that the scale is pushing up on the person with a force greater than his weight, as it must in order to accelerate him upward. Clearly, the greater the acceleration of the elevator, the greater the scale reading, consistent with what you feel in rapidly accelerating versus slowly accelerating elevators. In Figure 6.5(b), the scale reading is 735 N, which equals the person's weight. This is the case whenever the elevator has a constant velocity—moving up, moving down, or stationary.

CHECK YOUR UNDERSTANDING 6.1

Now calculate the scale reading when the elevator accelerates downward at a rate of $1.20\ \text{m/s}^2$.

The solution to the previous example also applies to an elevator accelerating downward, as mentioned. When an elevator accelerates downward, a is negative, and the scale reading is *less* than the weight of the person. If a constant downward velocity is reached, the scale reading again becomes equal to the person's weight. If the elevator is in free fall and accelerating downward at g, then the scale reading is zero and the person appears to be weightless.

EXAMPLE 6.4

Two Attached Blocks

Figure 6.6 shows a block of mass m_1 on a frictionless, horizontal surface. It is pulled by a light string that passes over a frictionless and massless pulley. The other end of the string is connected to a block of mass m_2. Find the acceleration of the blocks and the tension in the string in terms of m_1, m_2, and g.

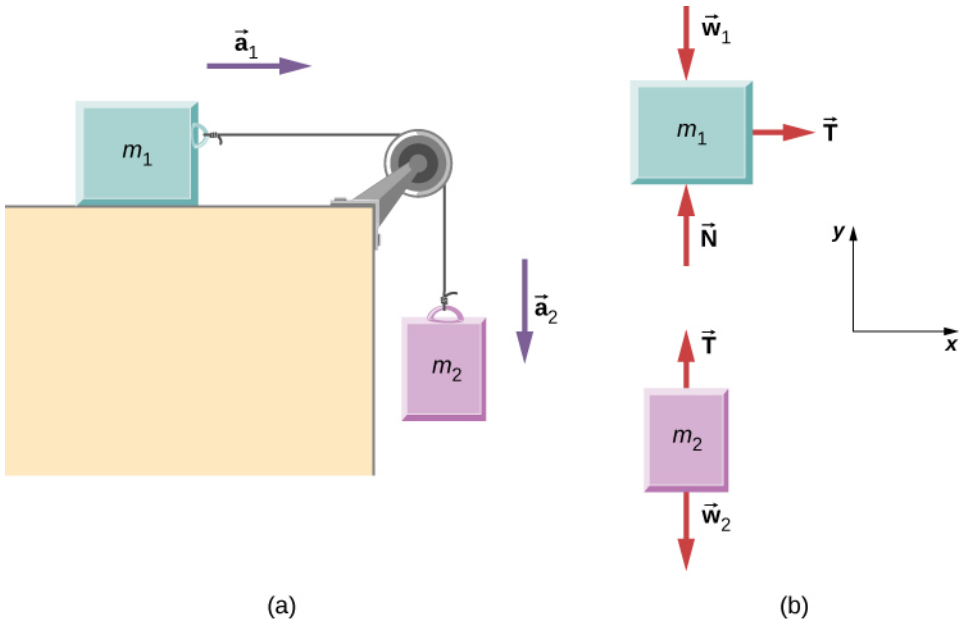


Figure 6.6 (a) Block 1 is connected by a light string to block 2. (b) The free-body diagrams of the blocks.

Strategy

We draw a free-body diagram for each mass separately, as shown in Figure 6.6. Then we analyze each one to find the required unknowns. The forces on block 1 are the gravitational force, the contact force of the surface, and the tension in the string. Block 2 is subjected to the gravitational force and the string tension. Newton's second law applies to each, so we write two vector equations:

For block 1: $\vec{\mathbf{T}} + \vec{\mathbf{w}}_1 + \vec{\mathbf{N}} = m_1\vec{\mathbf{a}}_1$

For block 2: $\vec{\mathbf{T}} + \vec{\mathbf{w}}_2 = m_2\vec{\mathbf{a}}_2$.

Notice that $\vec{\mathbf{T}}$ is the same for both blocks. Since the string and the pulley have negligible mass, and since there is no friction in the pulley, the tension is the same throughout the string. We can now write component equations for each block. All forces are either horizontal or vertical, so we can use the same horizontal/vertical coordinate system for both objects

Solution

The component equations follow from the vector equations above. We see that block 1 has the vertical forces balanced, so we ignore them and write an equation relating the x-components. There are no horizontal forces on block 2, so only the y-equation is written. We obtain these results:

Block 1	**Block 2**
$\sum F_x = ma_x$	$\sum F_y = ma_y$
$T_x = m_1 a_{1x}$	$T_y - m_2 g = m_2 a_{2y}$.

When block 1 moves to the right, block 2 travels an equal distance downward; thus, $a_{1x} = -a_{2y}$. Writing the common acceleration of the blocks as $a = a_{1x} = -a_{2y}$, we now have

$$T = m_1 a$$

and

$$T - m_2 g = -m_2 a.$$

From these two equations, we can express a and T in terms of the masses m_1 and m_2, and g :

$$a = \frac{m_2}{m_1 + m_2} g$$

and

$$T = \frac{m_1 m_2}{m_1 + m_2} g.$$

Significance

Notice that the tension in the string is *less* than the weight of the block hanging from the end of it. A common error in problems like this is to set $T = m_2 g$. You can see from the free-body diagram of block 2 that cannot be correct if the block is accelerating.

CHECK YOUR UNDERSTANDING 6.2

Calculate the acceleration of the system, and the tension in the string, when the masses are $m_1 = 5.00\,\text{kg}$ and $m_2 = 3.00\,\text{kg}$.

EXAMPLE 6.5

Atwood Machine

A classic problem in physics, similar to the one we just solved, is that of the Atwood machine, which consists of a rope running over a pulley, with two objects of different mass attached. It is particularly useful in understanding the connection between force and motion. In Figure 6.7, $m_1 = 2.00\,\text{kg}$ and $m_2 = 4.00\,\text{kg}$. Consider the pulley to be frictionless. (a) If m_2 is released, what will its acceleration be? (b) What is the tension in the string?

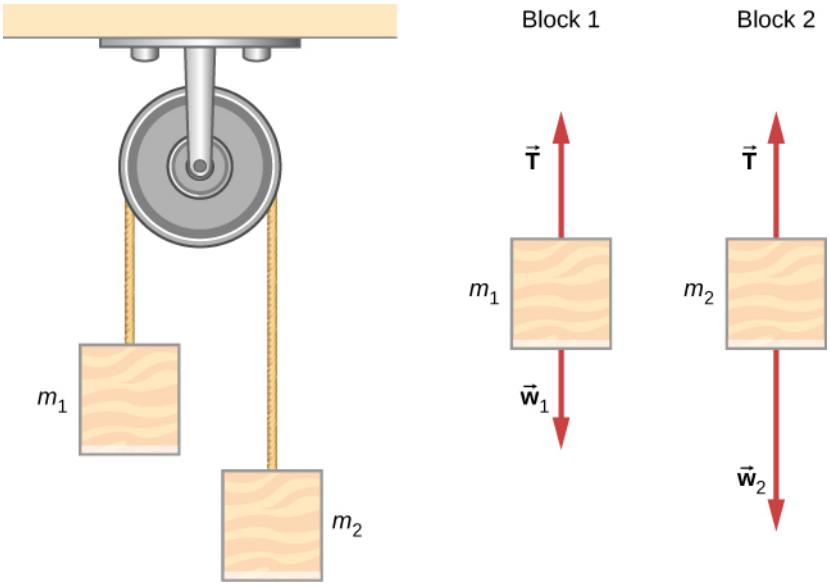


Figure 6.7 An Atwood machine and free-body diagrams for each of the two blocks.

Strategy

We draw a free-body diagram for each mass separately, as shown in the figure. Then we analyze each diagram to find the required unknowns. This may involve the solution of simultaneous equations. It is also important to note the similarity with the previous example. As block 2 accelerates with acceleration a_2 in the downward direction, block 1 accelerates upward with acceleration a_1. Thus, $a = a_1 = -a_2$.

Solution

a. We have

$$\text{For } m_1,\ \sum F_y = T - m_1 g = m_1 a. \qquad \text{For } m_2,\ \sum F_y = T - m_2 g = -m_2 a.$$

(The negative sign in front of $m_2 a$ indicates that m_2 accelerates downward; both blocks accelerate at the same rate, but in opposite directions.) Solve the two equations simultaneously (subtract them) and the result is

$$(m_2 - m_1)g = (m_1 + m_2)a.$$

Solving for a:

$$a = \frac{m_2 - m_1}{m_1 + m_2}g = \frac{4\text{ kg} - 2\text{ kg}}{4\text{ kg} + 2\text{ kg}}(9.8\text{ m/s}^2) = 3.27\text{ m/s}^2.$$

b. Observing the first block, we see that

$$T - m_1 g = m_1 a$$
$$T = m_1(g + a) = (2\text{ kg})(9.8\text{ m/s}^2 + 3.27\text{ m/s}^2) = 26.1\text{ N}.$$

Significance

The result for the acceleration given in the solution can be interpreted as the ratio of the unbalanced force on the system, $(m_2 - m_1)g$, to the total mass of the system, $m_1 + m_2$. We can also use the Atwood machine to measure local gravitational field strength.

CHECK YOUR UNDERSTANDING 6.3

Determine a general formula in terms of m_1, m_2 and g for calculating the tension in the string for the Atwood machine shown above.

Newton's Laws of Motion and Kinematics

Physics is most interesting and most powerful when applied to general situations that involve more than a narrow set of physical principles. Newton's laws of motion can also be integrated with other concepts that have been discussed previously in this text to solve problems of motion. For example, forces produce accelerations, a topic of kinematics, and hence the relevance of earlier chapters.

When approaching problems that involve various types of forces, acceleration, velocity, and/or position, listing the givens and the quantities to be calculated will allow you to identify the principles involved. Then, you can refer to the chapters that deal with a particular topic and solve the problem using strategies outlined in the text. The following worked example illustrates how the problem-solving strategy given earlier in this chapter, as well as strategies presented in other chapters, is applied to an integrated concept problem.

EXAMPLE 6.6

What Force Must a Soccer Player Exert to Reach Top Speed?

A soccer player starts at rest and accelerates forward, reaching a velocity of 8.00 m/s in 2.50 s. (a) What is her average acceleration? (b) What average force does the ground exert forward on the runner so that she achieves this acceleration? The player's mass is 70.0 kg, and air resistance is negligible.

Strategy

To find the answers to this problem, we use the problem-solving strategy given earlier in this chapter. The solutions to each part of the example illustrate how to apply specific problem-solving steps. In this case, we do not need to use all of the steps. We simply identify the physical principles, and thus the knowns and unknowns; apply Newton's second law; and check to see whether the answer is reasonable.

Solution

a. We are given the initial and final velocities (zero and 8.00 m/s forward); thus, the change in velocity is $\Delta v = 8.00$ m/s. We are given the elapsed time, so $\Delta t = 2.50$ s. The unknown is acceleration, which can be found from its definition:

$$a = \frac{\Delta v}{\Delta t}.$$

Substituting the known values yields

$$a = \frac{8.00\ \text{m/s}}{2.50\ \text{s}} = 3.20\ \text{m/s}^2.$$

b. Here we are asked to find the average force the ground exerts on the runner to produce this acceleration. (Remember that we are dealing with the force or forces acting on the object of interest.) This is the reaction force to that exerted by the player backward against the ground, by Newton's third law. Neglecting air resistance, this would be equal in magnitude to the net external force on the player, since this force causes her acceleration. Since we now know the player's acceleration and are given her mass, we can use Newton's second law to find the force exerted. That is,

$$F_{\text{net}} = ma.$$

Substituting the known values of m and a gives

$$F_{\text{net}} = (70.0\ \text{kg})(3.20\ \text{m/s}^2) = 224\ \text{N}.$$

This is a reasonable result: The acceleration is attainable for an athlete in good condition. The force is about 50 pounds, a reasonable average force.

Significance

This example illustrates how to apply problem-solving strategies to situations that include topics from different chapters. The first step is to identify the physical principles, the knowns, and the unknowns involved in the problem. The second step is to solve for the unknown, in this case using Newton's second law. Finally, we check our answer to ensure it is reasonable. These techniques for integrated concept problems will be useful in applications of physics outside of a physics course, such as in your profession, in other science disciplines, and in everyday life.

CHECK YOUR UNDERSTANDING 6.4

The soccer player stops after completing the play described above, but now notices that the ball is in position to be stolen. If she now experiences a force of 126 N to attempt to steal the ball, which is 2.00 m away from her, how long will it take her to get to the ball?

EXAMPLE 6.7

What Force Acts on a Model Helicopter?

A 1.50-kg model helicopter has a velocity of $5.00\hat{\mathbf{j}}$ m/s at $t = 0$. It is accelerated at a constant rate for two seconds (2.00 s) after which it has a velocity of $\left(6.00\hat{\mathbf{i}} + 12.00\hat{\mathbf{j}}\right)$ m/s. What is the magnitude of the resultant force acting on the helicopter during this time interval?

Strategy

We can easily set up a coordinate system in which the x-axis ($\hat{\mathbf{i}}$ direction) is horizontal, and the y-axis ($\hat{\mathbf{j}}$ direction) is vertical. We know that $\Delta t = 2.00s$ and $\Delta v = (6.00\hat{\mathbf{i}} + 12.00\hat{\mathbf{j}}\ \text{m/s}) - (5.00\hat{\mathbf{j}}\ \text{m/s})$. From this, we can calculate the acceleration by the definition; we can then apply Newton's second law.

Solution

We have

$$a = \frac{\Delta v}{\Delta t} = \frac{(6.00\hat{\mathbf{i}} + 12.00\hat{\mathbf{j}}\,\text{m/s}) - (5.00\hat{\mathbf{j}}\ \text{m/s})}{2.00\ \text{s}} = 3.00\hat{\mathbf{i}} + 3.50\hat{\mathbf{j}}\,\text{m/s}^2$$

$$\sum \vec{\mathbf{F}} = m\vec{\mathbf{a}} = (1.50\ \text{kg})(3.00\hat{\mathbf{i}} + 3.50\hat{\mathbf{j}}\ \text{m/s}^2) = 4.50\hat{\mathbf{i}} + 5.25\hat{\mathbf{j}}\ \text{N}.$$

The magnitude of the force is now easily found:

$$F = \sqrt{(4.50\,\text{N})^2 + (5.25\,\text{N})^2} = 6.91\,\text{N}.$$

Significance

The original problem was stated in terms of $\hat{\mathbf{i}} - \hat{\mathbf{j}}$ vector components, so we used vector methods. Compare this example with the previous example.

CHECK YOUR UNDERSTANDING 6.5

Find the direction of the resultant for the 1.50-kg model helicopter.

EXAMPLE 6.8

Baggage Tractor

Figure 6.8(a) shows a baggage tractor pulling luggage carts from an airplane. The tractor has mass 650.0 kg, while cart A has mass 250.0 kg and cart B has mass 150.0 kg. The driving force acting for a brief period of time accelerates the system from rest and acts for 3.00 s. (a) If this driving force is given by $F = (820.0t)$ N, find the speed after 3.00 seconds. (b) What is the horizontal force acting on the connecting cable between the tractor and cart A at this instant?

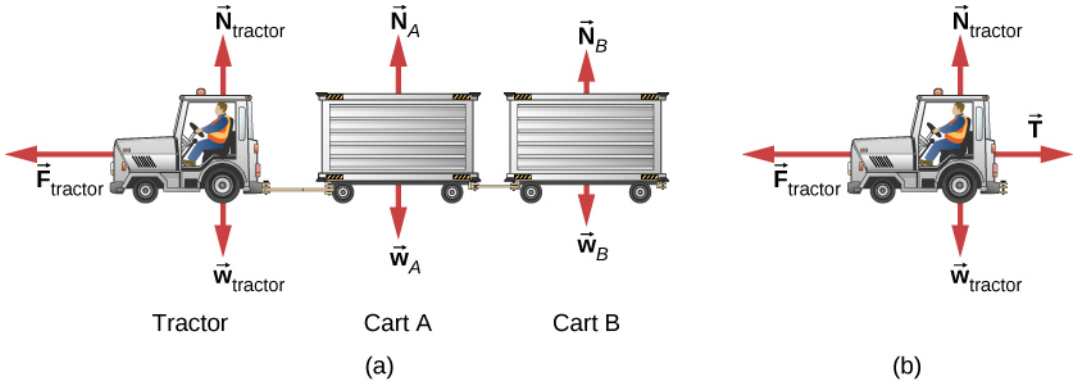


Figure 6.8 (a) A free-body diagram is shown, which indicates all the external forces on the system consisting of the tractor and baggage carts for carrying airline luggage. (b) A free-body diagram of the tractor only is shown isolated in order to calculate the tension in the cable to the carts.

Strategy

A free-body diagram shows the driving force of the tractor, which gives the system its acceleration. We only need to consider motion in the horizontal direction. The vertical forces balance each other and it is not necessary to consider them. For part b, we make use of a free-body diagram of the tractor alone to determine the force between it and cart A. This exposes the coupling force $\vec{\mathbf{T}}$, which is our objective.

Solution

a. $\sum F_x = m_{\text{system}} a_x$ and $\sum F_x = 820.0t$, so

$$\begin{aligned} 820.0t &= (650.0 + 250.0 + 150.0)a \\ a &= 0.7809t. \end{aligned}$$

Since acceleration is a function of time, we can determine the velocity of the tractor by using $a = \frac{dv}{dt}$ with the initial condition that $v_0 = 0$ at $t = 0$. We integrate from $t = 0$ to $t = 3$:

$$dv = adt, \quad \int_0^3 dv = \int_0^{3.00} adt = \int_0^{3.00} 0.7809t\,dt, \quad v = 0.3905t^2\Big]_0^{3.00} = 3.51\,\text{m/s}.$$

b. Refer to the free-body diagram in Figure 6.8(b).

$$\begin{aligned} \sum F_x &= m_{\text{tractor}} a_x \\ 820.0t - T &= m_{\text{tractor}}(0.7805)t \\ (820.0)(3.00) - T &= (650.0)(0.7805)(3.00) \\ T &= 938 \text{ N}. \end{aligned}$$

Significance

Since the force varies with time, we must use calculus to solve this problem. Notice how the total mass of the system was important in solving Figure 6.8(a), whereas only the mass of the truck (since it supplied the force) was of use in Figure 6.8(b).

Recall that $v = \frac{ds}{dt}$ and $a = \frac{dv}{dt}$. If acceleration is a function of time, we can use the calculus forms developed in Motion Along a Straight Line, as shown in this example. However, sometimes acceleration is a function of displacement. In this case, we can derive an important result from these calculus relations. Solving for dt in each, we have $dt = \frac{ds}{v}$ and $dt = \frac{dv}{a}$. Now, equating these expressions, we have $\frac{ds}{v} = \frac{dv}{a}$. We can rearrange this to obtain $ads = vdv$.

EXAMPLE 6.9

Motion of a Projectile Fired Vertically

A 10.0-kg mortar shell is fired vertically upward from the ground, with an initial velocity of 50.0 m/s (see Figure 6.9). Determine the maximum height it will travel if atmospheric resistance is measured as $F_{\text{D}} = (0.0100v^2)$ N, where v is the speed at any instant.

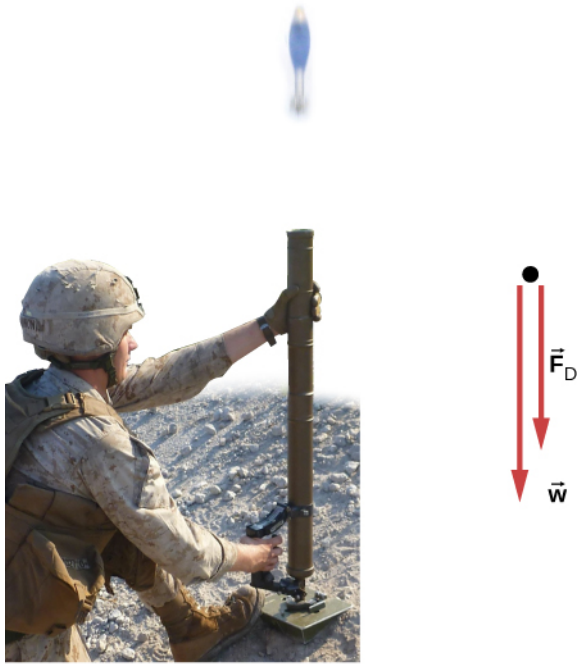


Figure 6.9 (a) The mortar fires a shell straight up; we consider the friction force provided by the air. (b) A free-body diagram is shown which indicates all the forces on the mortar shell. (credit a: modification of work by OS541/DoD; The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement.)

Strategy

The known force on the mortar shell can be related to its acceleration using the equations of motion.

Kinematics can then be used to relate the mortar shell's acceleration to its position.

Solution

Initially, $y_0 = 0$ and $v_0 = 50.0$ m/s. At the maximum height $y = h$, $v = 0$. The free-body diagram shows F_D to act downward, because it slows the upward motion of the mortar shell. Thus, we can write

$$\sum F_y = ma_y$$

$$\begin{aligned} -F_D - w &= ma_y \\ -0.0100v^2 - 98.0 &= 10.0a \\ a &= -0.00100v^2 - 9.80. \end{aligned}$$

The acceleration depends on v and is therefore variable. Since $a = f(v)$, we can relate a to v using the rearrangement described above,

$$ads = vdv.$$

We replace ds with dy because we are dealing with the vertical direction,

$$ady = vdv, \quad (-0.00100v^2 - 9.80)dy = vdv.$$

We now separate the variables (v's and dv's on one side; dy on the other):

$$\int_0^h dy = \int_{50.0}^0 \frac{vdv}{(-0.00100v^2 - 9.80)}$$

$$\int_0^h dy = -\int_{50.0}^0 \frac{vdv}{(0.00100v^2 + 9.80)} = (-5 \times 10^3)\ln(0.00100v^2 + 9.80)\Big|_{50.0}^0.$$

Thus, $h = 114$ m.

Significance

Notice the need to apply calculus since the force is not constant, which also means that acceleration is not constant. To make matters worse, the force depends on v (not t), and so we must use the trick explained prior to the example. The answer for the height indicates a lower elevation if there were air resistance. We will deal with the effects of air resistance and other drag forces in greater detail in Drag Force and Terminal Speed.

CHECK YOUR UNDERSTANDING 6.6

If atmospheric resistance is neglected, find the maximum height for the mortar shell. Is calculus required for this solution?

INTERACTIVE

Explore the forces at work in this simulation (https://openstax.org/l/21forcesatwork) when you try to push a filing cabinet. Create an applied force and see the resulting frictional force and total force acting on the cabinet. Charts show the forces, position, velocity, and acceleration vs. time. View a free-body diagram of all the forces (including gravitational and normal forces).

6.2 Friction

Learning Objectives

By the end of this section, you will be able to:

- Describe the general characteristics of friction
- List the various types of friction
- Calculate the magnitude of static and kinetic friction, and use these in problems involving Newton's laws of motion

When a body is in motion, it has resistance because the body interacts with its surroundings. This resistance is a force of friction. Friction opposes relative motion between systems in contact but also allows us to move, a concept that becomes obvious if you try to walk on ice. Friction is a common yet complex force, and its behavior still not completely understood. Still, it is possible to understand the circumstances in which it behaves.

Static and Kinetic Friction

The basic definition of **friction** is relatively simple to state.

Friction

Friction is a force that opposes relative motion between systems in contact.

There are several forms of friction. One of the simpler characteristics of sliding friction is that it is parallel to the contact surfaces between systems and is always in a direction that opposes motion or attempted motion of the systems relative to each other. If two systems are in contact and moving relative to one another, then the friction between them is called kinetic friction. For example, friction slows a hockey puck sliding on ice. When objects are stationary, static friction can act between them; the static friction is usually greater than the kinetic friction between two objects.

Static and Kinetic Friction

If two systems are in contact and stationary relative to one another, then the friction between them is called **static friction**. If two systems are in contact and moving relative to one another, then the friction between them is called **kinetic friction**.

Imagine, for example, trying to slide a heavy crate across a concrete floor—you might push very hard on the crate and not move it at all. This means that the static friction responds to what you do—it increases to be equal to and in the opposite direction of your push. If you finally push hard enough, the crate seems to slip suddenly and starts to move. Now static friction gives way to kinetic friction. Once in motion, it is easier to keep it in motion than it was to get it started, indicating that the kinetic frictional force is less than the static frictional force. If you add mass to the crate, say by placing a box on top of it, you need to push even harder to get it started and also to keep it moving. Furthermore, if you oiled the concrete you would find it easier to get the crate started and keep it going (as you might expect).

Figure 6.10 is a crude pictorial representation of how friction occurs at the interface between two objects. Close-up inspection of these surfaces shows them to be rough. Thus, when you push to get an object moving (in this case, a crate), you must raise the object until it can skip along with just the tips of the surface hitting, breaking off the points, or both. A considerable force can be resisted by friction with no apparent motion. The harder the surfaces are pushed together (such as if another box is placed on the crate), the more force is needed to move them. Part of the friction is due to adhesive forces between the surface molecules of the two objects, which explains the dependence of friction on the nature of the substances. For example, rubber-soled shoes slip less than those with leather soles. Adhesion varies with substances in contact and is a complicated

aspect of surface physics. Once an object is moving, there are fewer points of contact (fewer molecules adhering), so less force is required to keep the object moving. At small but nonzero speeds, friction is nearly independent of speed.

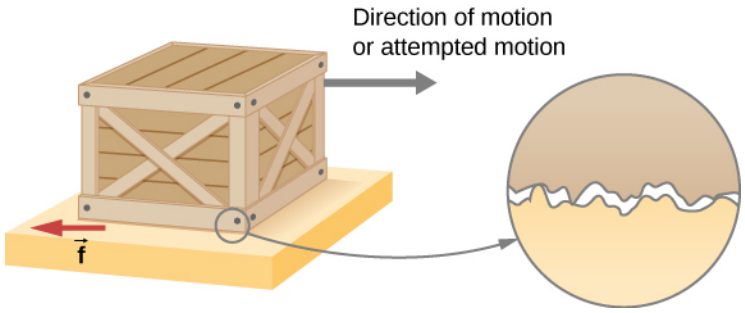


Figure 6.10 Frictional forces, such as $\vec{\mathbf{f}}$, always oppose motion or attempted motion between objects in contact. Friction arises in part because of the roughness of the surfaces in contact, as seen in the expanded view. For the object to move, it must rise to where the peaks of the top surface can skip along the bottom surface. Thus, a force is required just to set the object in motion. Some of the peaks will be broken off, also requiring a force to maintain motion. Much of the friction is actually due to attractive forces between molecules making up the two objects, so that even perfectly smooth surfaces are not friction-free. (In fact, perfectly smooth, clean surfaces of similar materials would adhere, forming a bond called a "cold weld.")

The magnitude of the frictional force has two forms: one for static situations (static friction), the other for situations involving motion (kinetic friction). What follows is an approximate empirical (experimentally determined) model only. These equations for static and kinetic friction are not vector equations.

Magnitude of Static Friction

The magnitude of static friction f_s is

$$f_s \leq \mu_s N, \tag{6.1}$$

where μ_s is the coefficient of static friction and N is the magnitude of the normal force.

The symbol $\leq$ means *less than or equal to*, implying that static friction can have a maximum value of $\mu_s N$. Static friction is a responsive force that increases to be equal and opposite to whatever force is exerted, up to its maximum limit. Once the applied force exceeds

$f_s(\text{max})$, the object moves. Thus,

$$f_s(\text{max}) = \mu_s N.$$

Magnitude of Kinetic Friction

The magnitude of kinetic friction f_k is given by

$$f_k = \mu_k N, \tag{6.2}$$

where μ_k is the coefficient of kinetic friction.

A system in which $f_k = \mu_k N$ is described as a system in which *friction behaves simply*. The transition from static friction to kinetic friction is illustrated in Figure 6.11.

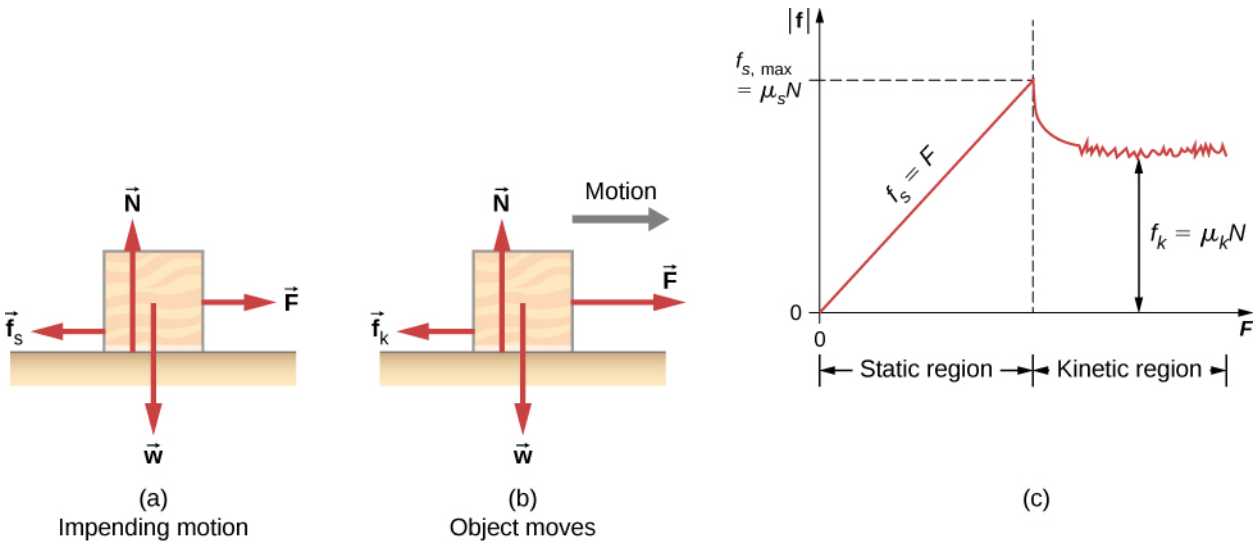


Figure 6.11 (a) The force of friction $\vec{\mathbf{f}}$ between the block and the rough surface opposes the direction of the applied force $\vec{\mathbf{F}}$. The magnitude of the static friction balances that of the applied force. This is shown in the left side of the graph in (c). (b) At some point, the magnitude of the applied force is greater than the force of kinetic friction, and the block moves to the right. This is shown in the right side of the graph. (c) The graph of the frictional force versus the applied force; note that $f_{\mathrm{s}}(\mathrm{max}) > f_{\mathrm{k}}$. This means that $\mu_{\mathrm{s}} > \mu_{\mathrm{k}}$.

As you can see in Table 6.1, the coefficients of kinetic friction are less than their static counterparts. The approximate values of μ are stated to only one or two digits to indicate the approximate description of friction given by the preceding two equations.

System	Static Friction μ_s	Kinetic Friction μ_k
Rubber on dry concrete	1.0	0.7
Rubber on wet concrete	0.5-0.7	0.3-0.5
Wood on wood	0.5	0.3
Waxed wood on wet snow	0.14	0.1
Metal on wood	0.5	0.3
Steel on steel (dry)	0.6	0.3
Steel on steel (oiled)	0.05	0.03
Teflon on steel	0.04	0.04
Bone lubricated by synovial fluid	0.016	0.015
Shoes on wood	0.9	0.7
Shoes on ice	0.1	0.05
Ice on ice	0.1	0.03
Steel on ice	0.4	0.02

Table 6.1 Approximate Coefficients of Static and Kinetic Friction

Equation 6.1 and Equation 6.2 include the dependence of friction on materials and the normal force. The direction of friction is always opposite that of motion, parallel to the surface between objects, and perpendicular to the normal force. For example, if the crate you try to push (with a force parallel to the floor) has a mass of 100 kg, then the normal force is equal to its weight,

$$w = mg = (100\,\text{kg})\left(9.80\,\text{m/s}^2\right) = 980\,\text{N},$$

perpendicular to the floor. If the coefficient of static friction is 0.45, you would have to exert a force parallel to the floor greater than

$$f_s(\text{max}) = \mu_s N = (0.45)(980\,\text{N}) = 440\,\text{N}$$

to move the crate. Once there is motion, friction is less and the coefficient of kinetic friction might be 0.30, so that a force of only

$$f_k = \mu_k N = (0.30)(980\,\text{N}) = 290\,\text{N}$$

keeps it moving at a constant speed. If the floor is lubricated, both coefficients are considerably less than they would be without lubrication. Coefficient of friction is a unitless quantity with a magnitude usually between 0 and 1.0. The actual value depends on the two surfaces that are in contact.

Many people have experienced the slipperiness of walking on ice. However, many parts of the body, especially the joints, have much smaller coefficients of friction—often three or four times less than ice. A joint is formed by the ends of two bones, which are connected by thick tissues. The knee joint is formed by the lower leg bone (the tibia) and the thighbone (the femur). The hip is a ball (at the end of the femur) and socket (part of the pelvis) joint. The ends of the bones in the joint are covered by cartilage, which provides a smooth, almost-

glassy surface. The joints also produce a fluid (synovial fluid) that reduces friction and wear. A damaged or arthritic joint can be replaced by an artificial joint (Figure 6.12). These replacements can be made of metals (stainless steel or titanium) or plastic (polyethylene), also with very small coefficients of friction.

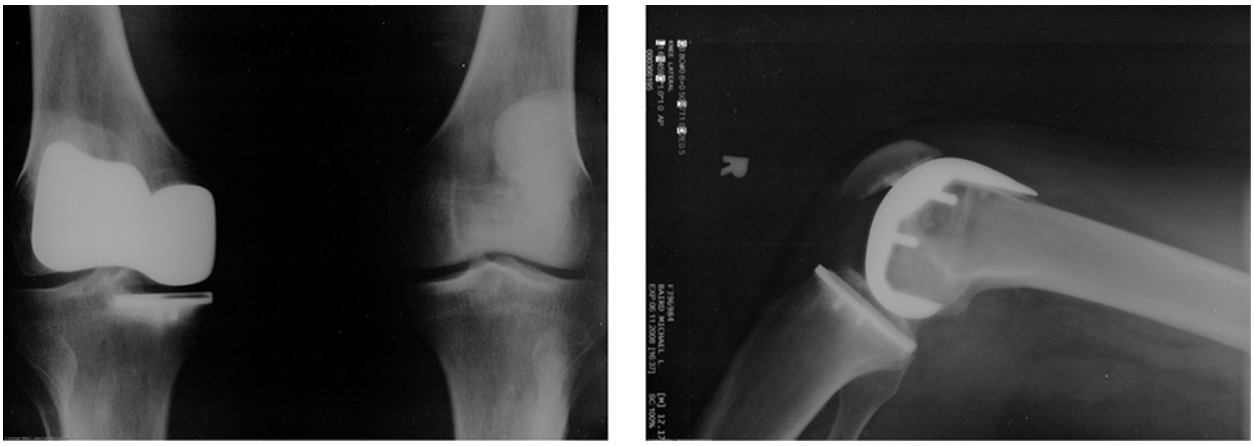


Figure 6.12 Artificial knee replacement is a procedure that has been performed for more than 20 years. These post-operative X-rays show a right knee joint replacement. (credit: modification of work by Mike Baird)

Natural lubricants include saliva produced in our mouths to aid in the swallowing process, and the slippery mucus found between organs in the body, allowing them to move freely past each other during heartbeats, during breathing, and when a person moves. Hospitals and doctor's clinics commonly use artificial lubricants, such as gels, to reduce friction.

The equations given for static and kinetic friction are empirical laws that describe the behavior of the forces of friction. While these formulas are very useful for practical purposes, they do not have the status of mathematical statements that represent general principles (e.g., Newton's second law). In fact, there are cases for which these equations are not even good approximations. For instance, neither formula is accurate for lubricated surfaces or for two surfaces siding across each other at high speeds. Unless specified, we will not be concerned with these exceptions.

EXAMPLE 6.10

Static and Kinetic Friction

A 20.0-kg crate is at rest on a floor as shown in Figure 6.13. The coefficient of static friction between the crate and floor is 0.700 and the coefficient of kinetic friction is 0.600. A horizontal force $\vec{\mathbf{P}}$ is applied to the crate. Find the force of friction if (a) $\vec{\mathbf{P}} = 20.0\,\text{N}\hat{\mathbf{i}}$, (b) $\vec{\mathbf{P}} = 30.0\,\text{N}\hat{\mathbf{i}}$, (c) $\vec{\mathbf{P}} = 120.0\,\text{N}\hat{\mathbf{i}}$, and (d) $\vec{\mathbf{P}} = 180.0\,\text{N}\hat{\mathbf{i}}$.

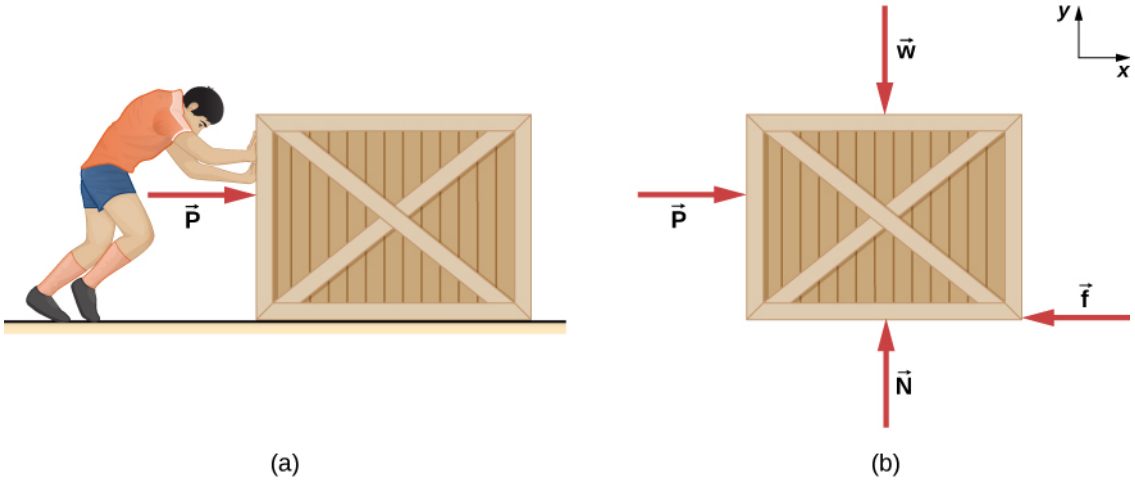


Figure 6.13 (a) A crate on a horizontal surface is pushed with a force $\vec{\mathbf{P}}$. (b) The forces on the crate. Here, $\vec{\mathbf{f}}$ may represent either the static or the kinetic frictional force.

Strategy

The free-body diagram of the crate is shown in Figure 6.13(b). We apply Newton's second law in the horizontal and vertical directions, including the friction force in opposition to the direction of motion of the box.

Solution

Newton's second law GIVES

$$\sum F_x = ma_x \qquad \sum F_y = ma_y$$
$$P - f = ma_x \qquad N - w = 0.$$

Here we are using the symbol f to represent the frictional force since we have not yet determined whether the crate is subject to station friction or kinetic friction. We do this whenever we are unsure what type of friction is acting. Now the weight of the crate is

$$w = (20.0\,\text{kg})(9.80\,\text{m/s}^2) = 196\,\text{N},$$

which is also equal to N. The maximum force of static friction is therefore $(0.700)\,(196\,\text{N}) = 137\,\text{N}$. As long as $\vec{\mathbf{P}}$ is less than 137 N, the force of static friction keeps the crate stationary and $f_\text{s} = \vec{\mathbf{P}}$. Thus, (a) $f_s = 20.0\,\text{N}$, (b) $f_s = 30.0\,\text{N}$, and (c) $f_s = 120.0\,\text{N}$.

(d) If $\vec{\mathbf{P}} = 180.0\,\text{N}$, the applied force is greater than the maximum force of static friction (137 N), so the crate can no longer remain at rest. Once the crate is in motion, kinetic friction acts. Then

$$f_\text{k} = \mu_\text{k} N = (0.600)(196\,\text{N}) = 118\,\text{N},$$

and the acceleration is

$$a_x = \frac{\text{P} - f_\text{k}}{m} = \frac{180.0\,\text{N} - 118\,\text{N}}{20.0\,\text{kg}} = 3.10\,\text{m/s}^2.$$

Significance

This example illustrates how we consider friction in a dynamics problem. Notice that static friction has a value that matches the applied force, until we reach the maximum value of static friction. Also, no motion can occur until the applied force equals the force of static friction, but the force of kinetic friction will then become smaller.

CHECK YOUR UNDERSTANDING 6.7

A block of mass 1.0 kg rests on a horizontal surface. The frictional coefficients for the block and surface are

$\mu_s = 0.50$ and $\mu_k = 0.40$. (a) What is the minimum horizontal force required to move the block? (b) What is the block's acceleration when this force is applied?

Friction and the Inclined Plane

One situation where friction plays an obvious role is that of an object on a slope. It might be a crate being pushed up a ramp to a loading dock or a skateboarder coasting down a mountain, but the basic physics is the same. We usually generalize the sloping surface and call it an inclined plane but then pretend that the surface is flat. Let's look at an example of analyzing motion on an inclined plane with friction.

EXAMPLE 6.11

Downhill Skier

A skier with a mass of 62 kg is sliding down a snowy slope at a constant acceleration. Find the coefficient of kinetic friction for the skier if friction is known to be 45.0 N.

Strategy

The magnitude of kinetic friction is given as 45.0 N. Kinetic friction is related to the normal force N by $f_\text{k} = \mu_\text{k} N$; thus, we can find the coefficient of kinetic friction if we can find the normal force on the skier. The normal force is always perpendicular to the surface, and since there is no motion perpendicular to the surface, the normal force should equal the component of the skier's weight perpendicular to the slope. (See Figure 6.14, which repeats a figure from the chapter on Newton's laws of motion.)

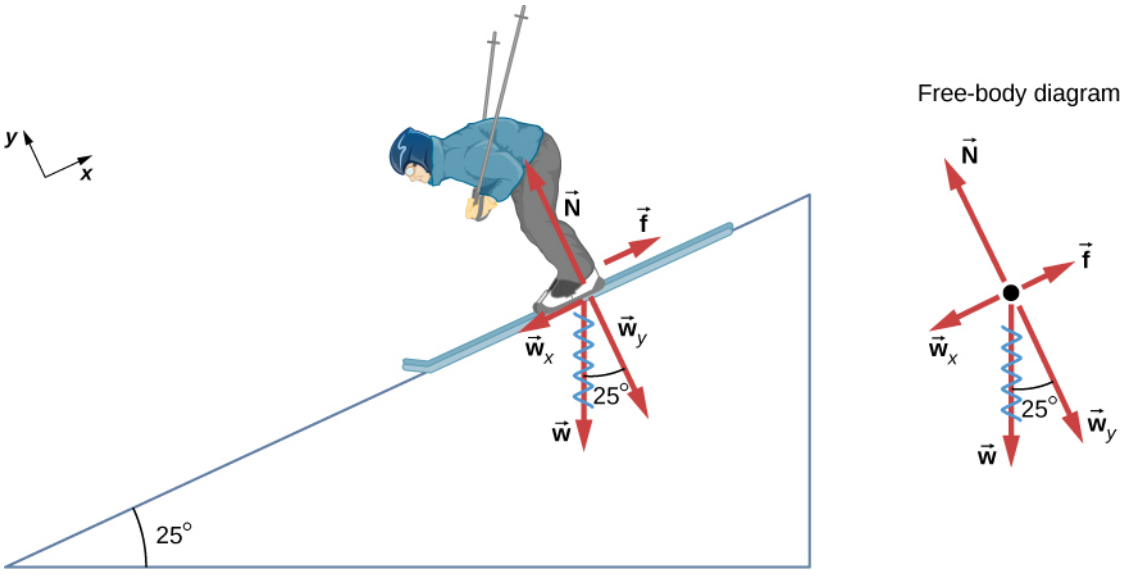


Figure 6.14 The motion of the skier and friction are parallel to the slope, so it is most convenient to project all forces onto a coordinate system where one axis is parallel to the slope and the other is perpendicular (axes shown to left of skier). The normal force $\vec{\mathbf{N}}$ is perpendicular to the slope, and friction $\vec{\mathbf{f}}$ is parallel to the slope, but the skier's weight $\vec{\mathbf{w}}$ has components along both axes, namely $\vec{\mathbf{w}}_y$ and $\vec{\mathbf{w}}_x$. The normal force $\vec{\mathbf{N}}$ is equal in magnitude to $\vec{\mathbf{w}}_y$, so there is no motion perpendicular to the slope.

We have

$$N = w_y = w\cos 25° = mg\cos 25°.$$

Substituting this into our expression for kinetic friction, we obtain

$$f_\text{k} = \mu_\text{k} mg\cos 25°,$$

which can now be solved for the coefficient of kinetic friction μ_k.

Solution

Solving for μ_k gives

$$\mu_k = \frac{f_k}{N} = \frac{f_k}{w \cos 25°} = \frac{f_k}{mg \cos 25°}.$$

Substituting known values on the right-hand side of the equation,

$$\mu_k = \frac{45.0\ \text{N}}{(62\ \text{kg})(9.80\ \text{m/s}^2)(0.906)} = 0.082.$$

Significance

This result is a little smaller than the coefficient listed in Table 6.1 for waxed wood on snow, but it is still reasonable since values of the coefficients of friction can vary greatly. In situations like this, where an object of mass m slides down a slope that makes an angle θ with the horizontal, friction is given by $f_k = \mu_k mg \cos \theta$. All objects slide down a slope with constant acceleration under these circumstances.

We have discussed that when an object rests on a horizontal surface, the normal force supporting it is equal in magnitude to its weight. Furthermore, simple friction is always proportional to the normal force. When an object is not on a horizontal surface, as with the inclined plane, we must find the force acting on the object that is directed perpendicular to the surface; it is a component of the weight.

We now derive a useful relationship for calculating coefficient of friction on an inclined plane. Notice that the result applies only for situations in which the object slides at constant speed down the ramp.

An object slides down an inclined plane at a constant velocity if the net force on the object is zero. We can use this fact to measure the coefficient of kinetic friction between two objects. As shown in Example 6.11, the kinetic friction on a slope is $f_k = \mu_k mg \cos \theta$. The component of the weight down the slope is equal to $mg \sin \theta$ (see the free-body diagram in Figure 6.14). These forces act in opposite directions, so when they have equal magnitude, the acceleration is zero. Writing these out,

$$\mu_k mg \cos \theta = mg \sin \theta.$$

Solving for μ_k, we find that

$$\mu_k = \frac{mg \sin \theta}{mg \cos \theta} = \tan \theta.$$

Put a coin on a book and tilt it until the coin slides at a constant velocity down the book. You might need to tap the book lightly to get the coin to move. Measure the angle of tilt relative to the horizontal and find μ_k. Note that the coin does not start to slide at all until an angle greater than θ is attained, since the coefficient of static friction is larger than the coefficient of kinetic friction. Think about how this may affect the value for μ_k and its uncertainty.

Atomic-Scale Explanations of Friction

The simpler aspects of friction dealt with so far are its macroscopic (large-scale) characteristics. Great strides have been made in the atomic-scale explanation of friction during the past several decades. Researchers are finding that the atomic nature of friction seems to have several fundamental characteristics. These characteristics not only explain some of the simpler aspects of friction—they also hold the potential for the development of nearly friction-free environments that could save hundreds of billions of dollars in energy which is currently being converted (unnecessarily) into heat.

Figure 6.15 illustrates one macroscopic characteristic of friction that is explained by microscopic (small-scale) research. We have noted that friction is proportional to the normal force, but not to the amount of area in contact, a somewhat counterintuitive notion. When two rough surfaces are in contact, the actual contact area is a tiny fraction of the total area because only high spots touch. When a greater normal force is exerted, the actual contact area increases, and we find that the friction is proportional to this area.

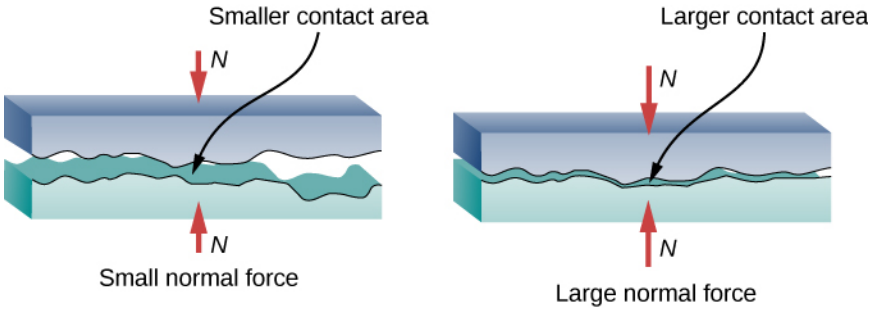


Figure 6.15 Two rough surfaces in contact have a much smaller area of actual contact than their total area. When the normal force is larger as a result of a larger applied force, the area of actual contact increases, as does friction.

However, the atomic-scale view promises to explain far more than the simpler features of friction. The mechanism for how heat is generated is now being determined. In other words, why do surfaces get warmer when rubbed? Essentially, atoms are linked with one another to form lattices. When surfaces rub, the surface atoms adhere and cause atomic lattices to vibrate—essentially creating sound waves that penetrate the material. The sound waves diminish with distance, and their energy is converted into heat. Chemical reactions that are related to frictional wear can also occur between atoms and molecules on the surfaces. Figure 6.16 shows how the tip of a probe drawn across another material is deformed by atomic-scale friction. The force needed to drag the tip can be measured and is found to be related to shear stress, which is discussed in Static Equilibrium and Elasticity. The variation in shear stress is remarkable (more than a factor of 10^{12}) and difficult to predict theoretically, but shear stress is yielding a fundamental understanding of a large-scale phenomenon known since ancient times—friction.

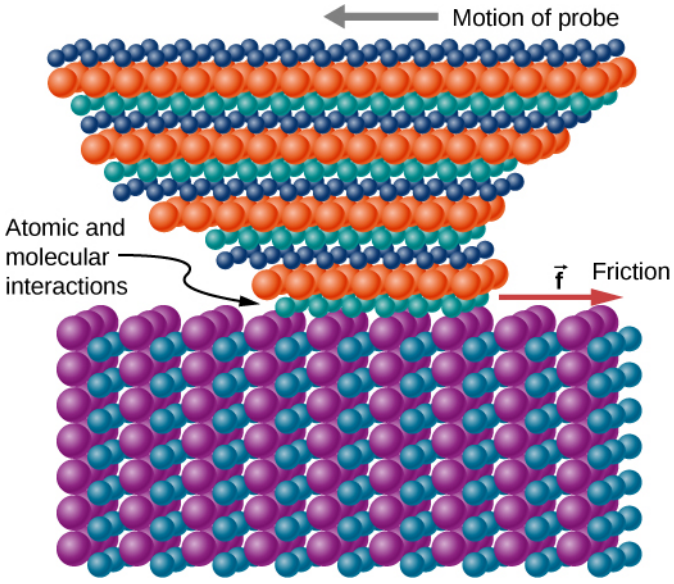


Figure 6.16 The tip of a probe is deformed sideways by frictional force as the probe is dragged across a surface. Measurements of how the force varies for different materials are yielding fundamental insights into the atomic nature of friction.

INTERACTIVE

Describe a model for friction (https://openstax.org/l/21friction) on a molecular level. Describe matter in terms of molecular motion. The description should include diagrams to support the description; how the temperature affects the image; what are the differences and similarities between solid, liquid, and gas particle motion; and how the size and speed of gas molecules relate to everyday objects.

EXAMPLE 6.12

Sliding Blocks

The two blocks of Figure 6.17 are attached to each other by a massless string that is wrapped around a frictionless pulley. When the bottom 4.00-kg block is pulled to the left by the constant force $\vec{\mathbf{P}}$, the top 2.00-kg block slides across it to the right. Find the magnitude of the force necessary to move the blocks at constant speed. Assume that the coefficient of kinetic friction between all surfaces is 0.400.

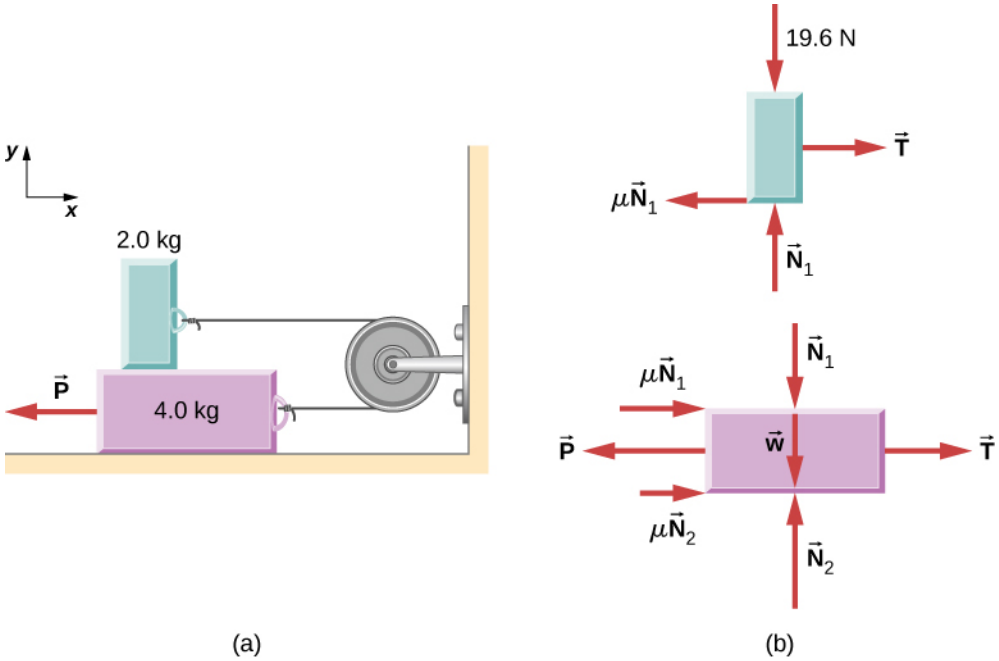


Figure 6.17 (a) Each block moves at constant velocity. (b) Free-body diagrams for the blocks.

Strategy

We analyze the motions of the two blocks separately. The top block is subjected to a contact force exerted by the bottom block. The components of this force are the normal force N_1 and the frictional force $-0.400N_1$. Other forces on the top block are the tension $T\mathrm{i}$ in the string and the weight of the top block itself, 19.6 N. The bottom block is subjected to contact forces due to the top block and due to the floor. The first contact force has components $-N_1$ and $0.400N_1$, which are simply reaction forces to the contact forces that the bottom block exerts on the top block. The components of the contact force of the floor are N_2 and $0.400N_2$. Other forces on this block are $-P$, the tension $T\mathrm{i}$, and the weight –39.2 N.

Solution

Since the top block is moving horizontally to the right at constant velocity, its acceleration is zero in both the horizontal and the vertical directions. From Newton's second law,

$$\begin{aligned} \sum F_x &= m_1 a_x & \sum F_y &= m_1 a_y \\ T - 0.400N_1 &= 0 & N_1 - 19.6\,\mathrm{N} &= 0. \end{aligned}$$

Solving for the two unknowns, we obtain $N_1 = 19.6$ N and $T = 0.40N_1 = 7.84$ N. The bottom block is also not accelerating, so the application of Newton's second law to this block gives

$$\begin{aligned} \sum F_x &= m_2 a_x & \sum F_y &= m_2 a_y \\ T - P + 0.400\,N_1 + 0.400\,N_2 &= 0 & N_2 - 39.2\,\mathrm{N} - N_1 &= 0. \end{aligned}$$

The values of N_1 and T were found with the first set of equations. When these values are substituted into the second set of equations, we can determine N_2 and P. They are

$$N_2 = 58.8\,\text{N} \quad \text{and} \quad P = 39.2\,\text{N}.$$

Significance

Understanding what direction in which to draw the friction force is often troublesome. Notice that each friction force labeled in Figure 6.17 acts in the direction opposite the motion of its corresponding block.

EXAMPLE 6.13

A Crate on an Accelerating Truck

A 50.0-kg crate rests on the bed of a truck as shown in Figure 6.18. The coefficients of friction between the surfaces are $\mu_k = 0.300$ and $\mu_s = 0.400$. Find the frictional force on the crate when the truck is accelerating forward relative to the ground at (a) 2.00 m/s^2, and (b) 5.00 m/s^2.

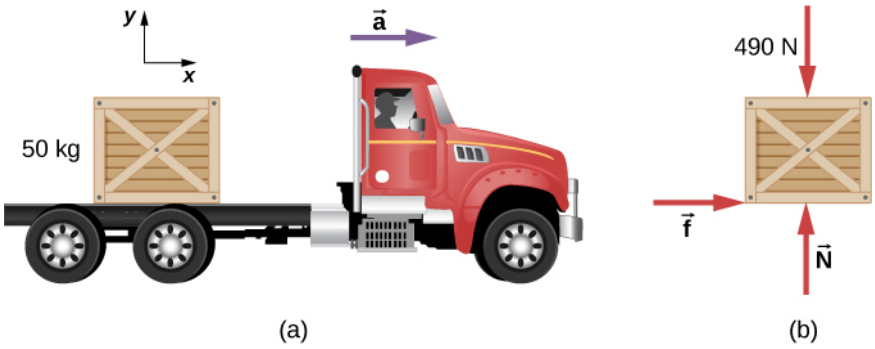


Figure 6.18 (a) A crate rests on the bed of the truck that is accelerating forward. (b) The free-body diagram of the crate.

Strategy

The forces on the crate are its weight and the normal and frictional forces due to contact with the truck bed. We start by *assuming* that the crate is not slipping. In this case, the static frictional force f_s acts on the crate. Furthermore, the accelerations of the crate and the truck are equal.

Solution

a. Application of Newton's second law to the crate, using the reference frame attached to the ground, yields

$$\begin{aligned} \sum F_x &= ma_x & \qquad \sum F_y &= ma_y \\ f_s &= (50.0\,\text{kg})(2.00\,\text{m/s}^2) & N - 4.90 \times 10^2\,\text{N} &= (50.0\,\text{kg})(0) \\ &= 1.00 \times 10^2\,\text{N} & N &= 4.90 \times 10^2\,\text{N}. \end{aligned}$$

We can now check the validity of our no-slip assumption. The maximum value of the force of static friction is

$$\mu_s N = (0.400)(4.90 \times 10^2\,\text{N}) = 196\,\text{N},$$

whereas the *actual* force of static friction that acts when the truck accelerates forward at 2.00 m/s^2 is only 1.00×10^2 N. Thus, the assumption of no slipping is valid.

b. If the crate is to move with the truck when it accelerates at 5.0 m/s^2, the force of static friction must be

$$f_s = ma_x = (50.0\,\text{kg})(5.00\,\text{m/s}^2) = 250\,\text{N}.$$

Since this exceeds the maximum of 196 N, the crate must slip. The frictional force is therefore kinetic and is

$$f_k = \mu_k N = (0.300)(4.90 \times 10^2\,\text{N}) = 147\,\text{N}.$$

The horizontal acceleration of the crate relative to the ground is now found from

$$\begin{aligned} \sum F_x &= ma_x \\ 147\ \text{N} &= (50.0\ \text{kg})a_x, \\ \text{so } a_x &= 2.94\ \text{m/s}^2. \end{aligned}$$

Significance

Relative to the ground, the truck is accelerating forward at $5.0\ \text{m/s}^2$ and the crate is accelerating forward at $2.94\ \text{m/s}^2$. Hence the crate is sliding backward relative to the bed of the truck with an acceleration $2.94\ \text{m/s}^2 - 5.00\ \text{m/s}^2 = -2.06\ \text{m/s}^2$.

EXAMPLE 6.14

Snowboarding

Earlier, we analyzed the situation of a downhill skier moving at constant velocity to determine the coefficient of kinetic friction. Now let's do a similar analysis to determine acceleration. The snowboarder of Figure 6.19 glides down a slope that is inclined at $\theta = 13^0$ to the horizontal. The coefficient of kinetic friction between the board and the snow is $\mu_k = 0.20$. What is the acceleration of the snowboarder?

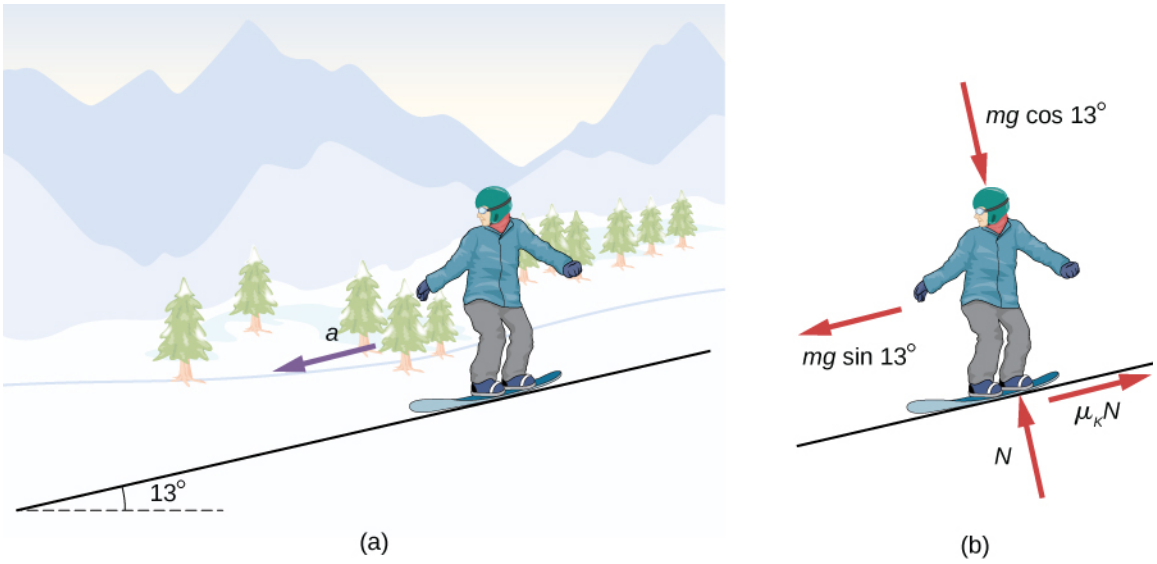


Figure 6.19 (a) A snowboarder glides down a slope inclined at 13° to the horizontal. (b) The free-body diagram of the snowboarder.

Strategy

The forces acting on the snowboarder are her weight and the contact force of the slope, which has a component normal to the incline and a component along the incline (force of kinetic friction). Because she moves along the slope, the most convenient reference frame for analyzing her motion is one with the x-axis along and the y-axis perpendicular to the incline. In this frame, both the normal and the frictional forces lie along coordinate axes, the components of the weight are $mg \sin\theta$ along the slope and $mg \cos\theta$ at right angles into the slope, and the only acceleration is along the x-axis $(a_y = 0)$.

Solution

We can now apply Newton's second law to the snowboarder:

$$\begin{aligned} \sum F_x &= ma_x & \sum F_y &= ma_y \\ mg\sin\theta - \mu_k N &= ma_x & N - mg\cos\theta &= m(0). \end{aligned}$$

From the second equation, $N = mg\cos\theta$. Upon substituting this into the first equation, we find

$$\begin{aligned} a_x &= g(\sin\theta - \mu_\text{k}\cos\theta) \\ &= g(\sin 13^\circ - 0.20\cos 13^\circ) = 0.29\ \text{m/s}^2. \end{aligned}$$

Significance

Notice from this equation that if θ is small enough or μ_k is large enough, a_x is negative, that is, the snowboarder slows down.

CHECK YOUR UNDERSTANDING 6.8

The snowboarder is now moving down a hill with incline 10.0°. What is the skier's acceleration?

6.3 Centripetal Force

Learning Objectives

By the end of this section, you will be able to:

- Explain the equation for centripetal acceleration
- Apply Newton's second law to develop the equation for centripetal force
- Use circular motion concepts in solving problems involving Newton's laws of motion

In Motion in Two and Three Dimensions, we examined the basic concepts of circular motion. An object undergoing circular motion, like one of the race cars shown at the beginning of this chapter, must be accelerating because it is changing the direction of its velocity. We proved that this centrally directed acceleration, called centripetal acceleration, is given by the formula

$$a_\text{c} = \frac{v^2}{r}$$

where v is the velocity of the object, directed along a tangent line to the curve at any instant. If we know the angular velocity ω, then we can use

$$a_\text{c} = r\omega^2.$$

Angular velocity gives the rate at which the object is turning through the curve, in units of rad/s. This acceleration acts along the radius of the curved path and is thus also referred to as a radial acceleration.

An acceleration must be produced by a force. Any force or combination of forces can cause a centripetal or radial acceleration. Just a few examples are the tension in the rope on a tether ball, the force of Earth's gravity on the Moon, friction between roller skates and a rink floor, a banked roadway's force on a car, and forces on the tube of a spinning centrifuge. Any net force causing uniform circular motion is called a **centripetal force**. The direction of a centripetal force is toward the center of curvature, the same as the direction of centripetal acceleration. According to Newton's second law of motion, net force is mass times acceleration: $F_\text{net} = ma$. For uniform circular motion, the acceleration is the centripetal acceleration: $a = a_\text{c}$. Thus, the magnitude of centripetal force F_c is

$$F_\text{c} = ma_\text{c}.$$

By substituting the expressions for centripetal acceleration a_c ($a_\text{c} = \frac{v^2}{r}$; $a_\text{c} = r\omega^2$), we get two expressions for the centripetal force F_c in terms of mass, velocity, angular velocity, and radius of curvature:

$$F_\text{c} = m\frac{v^2}{r};\quad F_\text{c} = mr\omega^2. \tag{6.3}$$

You may use whichever expression for centripetal force is more convenient. Centripetal force $\vec{\mathbf{F}}_\text{c}$ is always perpendicular to the path and points to the center of curvature, because $\vec{\mathbf{a}}_\text{c}$ is perpendicular to the velocity and points to the center of curvature. Note that if you solve the first expression for r, you get

$$r = \frac{mv^2}{F_c}.$$

This implies that for a given mass and velocity, a large centripetal force causes a small radius of curvature—that is, a tight curve, as in Figure 6.20.

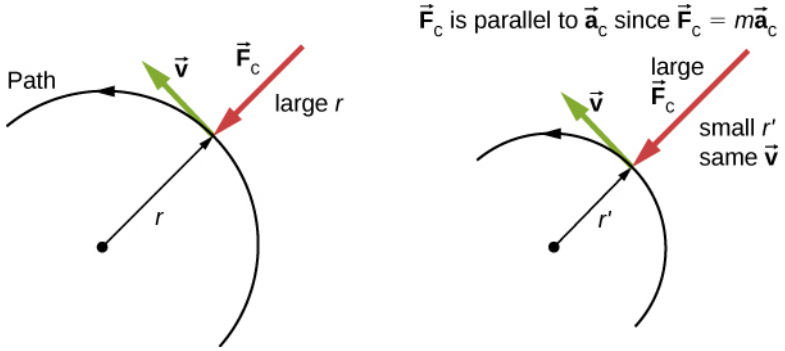


Figure 6.20 The frictional force supplies the centripetal force and is numerically equal to it. Centripetal force is perpendicular to velocity and causes uniform circular motion. The larger the F_c, the smaller the radius of curvature r and the sharper the curve. The second curve has the same v, but a larger F_c produces a smaller r'.

EXAMPLE 6.15

What Coefficient of Friction Do Cars Need on a Flat Curve?

(a) Calculate the centripetal force exerted on a 900.0-kg car that negotiates a 500.0-m radius curve at 25.00 m/s. (b) Assuming an unbanked curve, find the minimum static coefficient of friction between the tires and the road, static friction being the reason that keeps the car from slipping (Figure 6.21).

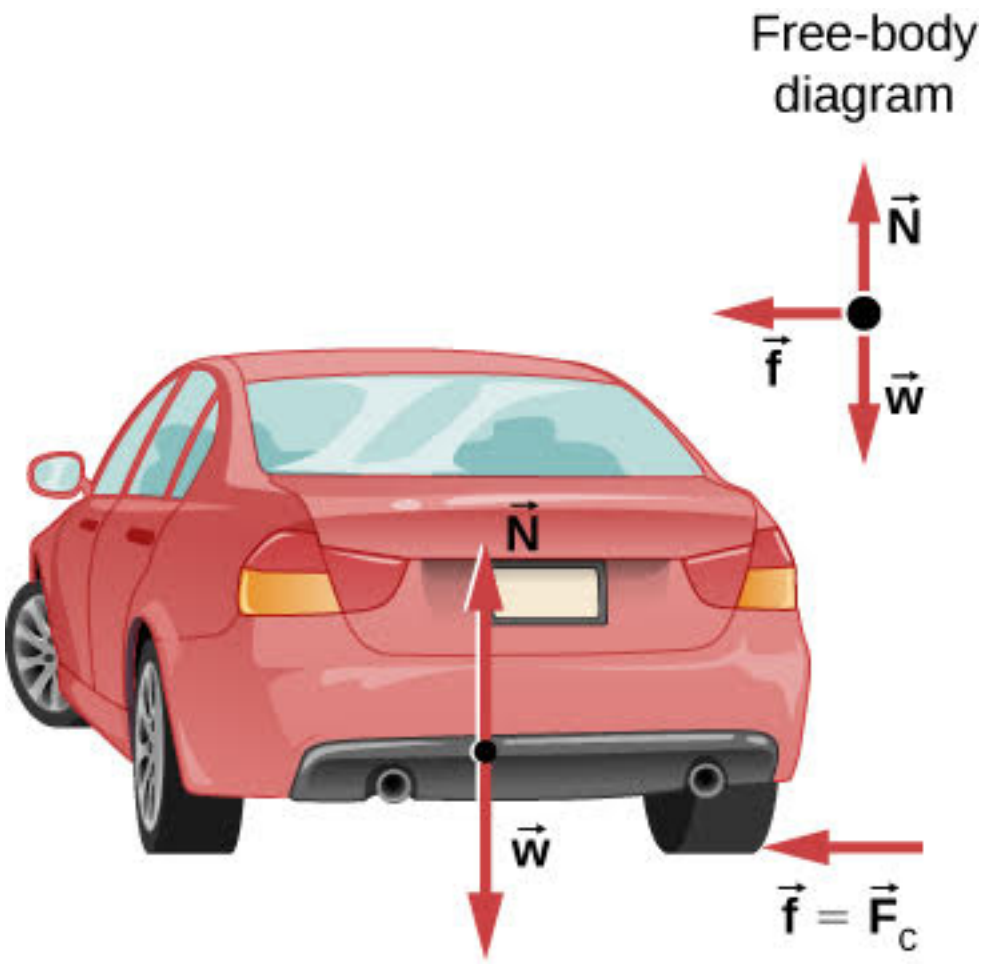


Figure 6.21 This car on level ground is moving away and turning to the left. The centripetal force causing the car to turn in a circular path is due to friction between the tires and the road. A minimum coefficient of friction is needed, or the car will move in a larger-radius curve and leave the roadway.

Strategy

a. We know that $F_c = \frac{mv^2}{r}$. Thus,

$$F_c = \frac{mv^2}{r} = \frac{(900.0\ \text{kg})(25.00\ \text{m/s})^2}{(500.0\ \text{m})} = 1125\ \text{N}.$$

b. Figure 6.21 shows the forces acting on the car on an unbanked (level ground) curve. Friction is to the left, keeping the car from slipping, and because it is the only horizontal force acting on the car, the friction is the centripetal force in this case. We know that the maximum static friction (at which the tires roll but do not slip) is $\mu_s N$, where μ_s is the static coefficient of friction and N is the normal force. The normal force equals the car's weight on level ground, so $N = mg$. Thus the centripetal force in this situation is

$$F_c \equiv f = \mu_s N = \mu_s mg.$$

Now we have a relationship between centripetal force and the coefficient of friction. Using the equation

$$F_c = m\frac{v^2}{r},$$

we obtain

$$m\frac{v^2}{r} = \mu_s mg.$$

We solve this for μ_s, noting that mass cancels, and obtain

$$\mu_s = \frac{v^2}{rg}.$$

Substituting the knowns,

$$\mu_s = \frac{(25.00\ \text{m/s})^2}{(500.0\ \text{m})(9.80\ \text{m/s}^2)} = 0.13.$$

(Because coefficients of friction are approximate, the answer is given to only two digits.)

Significance

The coefficient of friction found in Figure 6.21(b) is much smaller than is typically found between tires and roads. The car still negotiates the curve if the coefficient is greater than 0.13, because static friction is a responsive force, able to assume a value less than but no more than $\mu_s N$. A higher coefficient would also allow the car to negotiate the curve at a higher speed, but if the coefficient of friction is less, the safe speed would be less than 25 m/s. Note that mass cancels, implying that, in this example, it does not matter how heavily loaded the car is to negotiate the turn. Mass cancels because friction is assumed proportional to the normal force, which in turn is proportional to mass. If the surface of the road were banked, the normal force would be greater, as discussed next.

CHECK YOUR UNDERSTANDING 6.9

A car moving at 96.8 km/h travels around a circular curve of radius 182.9 m on a flat country road. What must be the minimum coefficient of static friction to keep the car from slipping?

Banked Curves

Let us now consider **banked curves**, where the slope of the road helps you negotiate the curve (Figure 6.22). The greater the angle θ, the faster you can take the curve. Race tracks for bikes as well as cars, for example, often have steeply banked curves. In an "ideally banked curve," the angle θ is such that you can negotiate the curve at a certain speed without the aid of friction between the tires and the road. We will derive an expression for θ for an ideally banked curve and consider an example related to it.

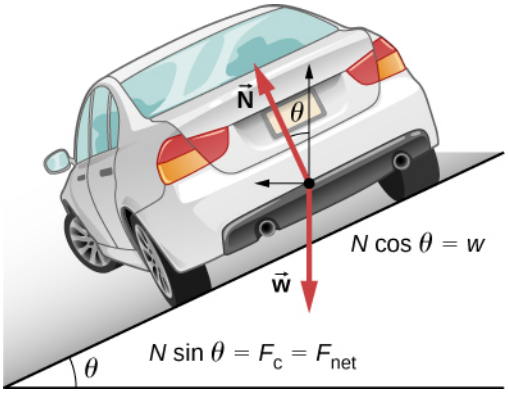


Figure 6.22 The car on this banked curve is moving away and turning to the left.

For **ideal banking**, the net external force equals the horizontal centripetal force in the absence of friction. The components of the normal force N in the horizontal and vertical directions must equal the centripetal force and the weight of the car, respectively. In cases in which forces are not parallel, it is most convenient to consider components along perpendicular axes—in this case, the vertical and horizontal directions.

Figure 6.22 shows a free-body diagram for a car on a frictionless banked curve. If the angle θ is ideal for the speed and radius, then the net external force equals the necessary centripetal force. The only two external forces acting on the car are its weight $\vec{\mathbf{w}}$ and the normal force of the road $\vec{\mathbf{N}}$. (A frictionless surface can only exert a force perpendicular to the surface—that is, a normal force.) These two forces must add to give a net

external force that is horizontal toward the center of curvature and has magnitude mv^2/r. Because this is the crucial force and it is horizontal, we use a coordinate system with vertical and horizontal axes. Only the normal force has a horizontal component, so this must equal the centripetal force, that is,

$$N \sin\theta = \frac{mv^2}{r}.$$

Because the car does not leave the surface of the road, the net vertical force must be zero, meaning that the vertical components of the two external forces must be equal in magnitude and opposite in direction. From Figure 6.22, we see that the vertical component of the normal force is $N \cos\theta$, and the only other vertical force is the car's weight. These must be equal in magnitude; thus,

$$N \cos\theta = mg.$$

Now we can combine these two equations to eliminate N and get an expression for θ, as desired. Solving the second equation for $N = mg/(cos\theta)$ and substituting this into the first yields

$$\begin{aligned} mg\frac{\sin\theta}{\cos\theta} &= \frac{mv^2}{r} \\ mg\tan\theta &= \frac{mv^2}{r} \\ \tan\theta &= \frac{v^2}{rg}. \end{aligned}$$

Taking the inverse tangent gives

$$\theta = \tan^{-1}\left(\frac{v^2}{rg}\right). \qquad 6.4$$

This expression can be understood by considering how θ depends on v and r. A large θ is obtained for a large v and a small r. That is, roads must be steeply banked for high speeds and sharp curves. Friction helps, because it allows you to take the curve at greater or lower speed than if the curve were frictionless. Note that θ does not depend on the mass of the vehicle.

EXAMPLE 6.16

What Is the Ideal Speed to Take a Steeply Banked Tight Curve?

Curves on some test tracks and race courses, such as Daytona International Speedway in Florida, are very steeply banked. This banking, with the aid of tire friction and very stable car configurations, allows the curves to be taken at very high speed. To illustrate, calculate the speed at which a 100.0-m radius curve banked at $31.0°$ should be driven if the road were frictionless.

Strategy

We first note that all terms in the expression for the ideal angle of a banked curve except for speed are known; thus, we need only rearrange it so that speed appears on the left-hand side and then substitute known quantities.

Solution

Starting with

$$\tan\theta = \frac{v^2}{rg},$$

we get

$$v = \sqrt{rg\tan\theta}.$$

Noting that $\tan 31.0° = 0.609$, we obtain

$$v = \sqrt{(100.0\text{ m})(9.80\text{ m/s}^2)(0.609)} = 24.4\text{ m/s}.$$

Significance

This is just about 165 km/h, consistent with a very steeply banked and rather sharp curve. Tire friction enables a vehicle to take the curve at significantly higher speeds.

Airplanes also make turns by banking. The lift force, due to the force of the air on the wing, acts at right angles to the wing. When the airplane banks, the pilot is obtaining greater lift than necessary for level flight. The vertical component of lift balances the airplane's weight, and the horizontal component accelerates the plane. The banking angle shown in Figure 6.23 is given by θ. We analyze the forces in the same way we treat the case of the car rounding a banked curve.

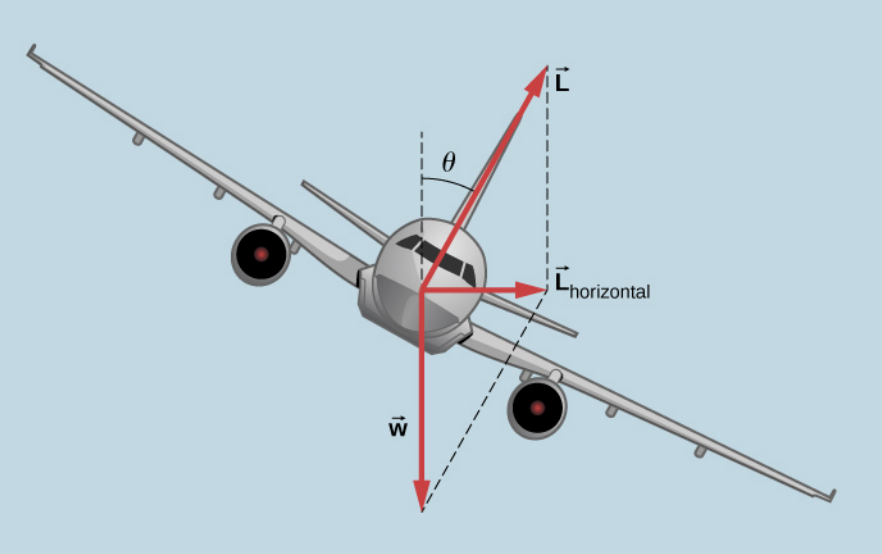


Figure 6.23 In a banked turn, the horizontal component of lift is unbalanced and accelerates the plane. The normal component of lift balances the plane's weight. The banking angle is given by θ. Compare the vector diagram with that shown in Figure 6.22.

INTERACTIVE

Join the ladybug (https://openstax.org/l/21ladybug) in an exploration of rotational motion. Rotate the merry-go-round to change its angle or choose a constant angular velocity or angular acceleration. Explore how circular motion relates to the bug's *xy*-position, velocity, and acceleration using vectors or graphs.

INTERACTIVE

A circular motion requires a force, the so-called centripetal force, which is directed to the axis of rotation. This simplified model of a carousel (https://openstax.org/l/21carousel) demonstrates this force.

Inertial Forces and Noninertial (Accelerated) Frames: The Coriolis Force

What do taking off in a jet airplane, turning a corner in a car, riding a merry-go-round, and the circular motion of a tropical cyclone have in common? Each exhibits inertial forces—forces that merely seem to arise from motion, because the observer's frame of reference is accelerating or rotating. When taking off in a jet, most people would agree it feels as if you are being pushed back into the seat as the airplane accelerates down the runway. Yet a physicist would say that *you* tend to remain stationary while the *seat* pushes forward on you. An even more common experience occurs when you make a tight curve in your car—say, to the right (Figure 6.24). You feel as if you are thrown (that is, *forced*) toward the left relative to the car. Again, a physicist would say that *you* are going in a straight line (recall Newton's first law) but the *car* moves to the right, not that you are

experiencing a force from the left.

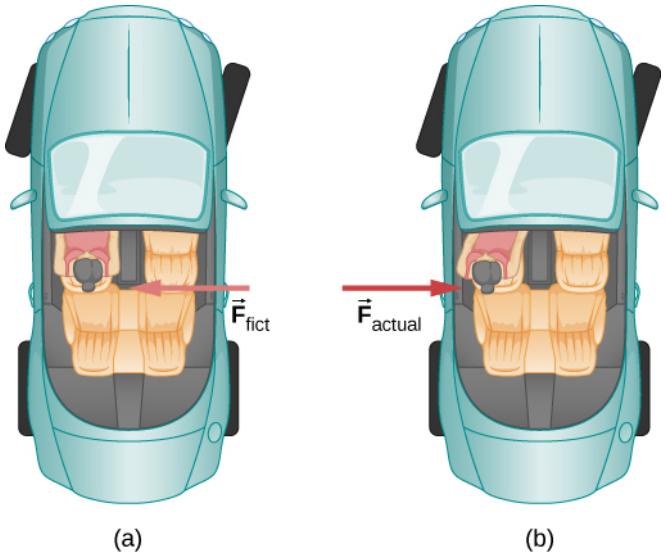


Figure 6.24 (a) The car driver feels herself forced to the left relative to the car when she makes a right turn. This is an inertial force arising from the use of the car as a frame of reference. (b) In Earth's frame of reference, the driver moves in a straight line, obeying Newton's first law, and the car moves to the right. There is no force to the left on the driver relative to Earth. Instead, there is a force to the right on the car to make it turn.

We can reconcile these points of view by examining the frames of reference used. Let us concentrate on people in a car. Passengers instinctively use the car as a frame of reference, whereas a physicist might use Earth. The physicist might make this choice because Earth is nearly an inertial frame of reference, in which all forces have an identifiable physical origin. In such a frame of reference, Newton's laws of motion take the form given in Newton's Laws of Motion. The car is a **noninertial frame of reference** because it is accelerated to the side. The force to the left sensed by car passengers is an **inertial force** having no physical origin (it is due purely to the inertia of the passenger, not to some physical cause such as tension, friction, or gravitation). The car, as well as the driver, is actually accelerating to the right. This inertial force is said to be an inertial force because it does not have a physical origin, such as gravity.

A physicist will choose whatever reference frame is most convenient for the situation being analyzed. There is no problem to a physicist in including inertial forces and Newton's second law, as usual, if that is more convenient, for example, on a merry-go-round or on a rotating planet. Noninertial (accelerated) frames of reference are used when it is useful to do so. Different frames of reference must be considered in discussing the motion of an astronaut in a spacecraft traveling at speeds near the speed of light, as you will appreciate in the study of the special theory of relativity.

Let us now take a mental ride on a merry-go-round—specifically, a rapidly rotating playground merry-go-round (Figure 6.25). You take the merry-go-round to be your frame of reference because you rotate together. When rotating in that noninertial frame of reference, you feel an inertial force that tends to throw you off; this is often referred to as a *centrifugal force* (not to be confused with centripetal force). Centrifugal force is a commonly used term, but it does not actually exist. You must hang on tightly to counteract your inertia (which people often refer to as centrifugal force). In Earth's frame of reference, there is no force trying to throw you off; we emphasize that centrifugal force is a fiction. You must hang on to make yourself go in a circle because otherwise you would go in a straight line, right off the merry-go-round, in keeping with Newton's first law. But the force you exert acts toward the center of the circle.

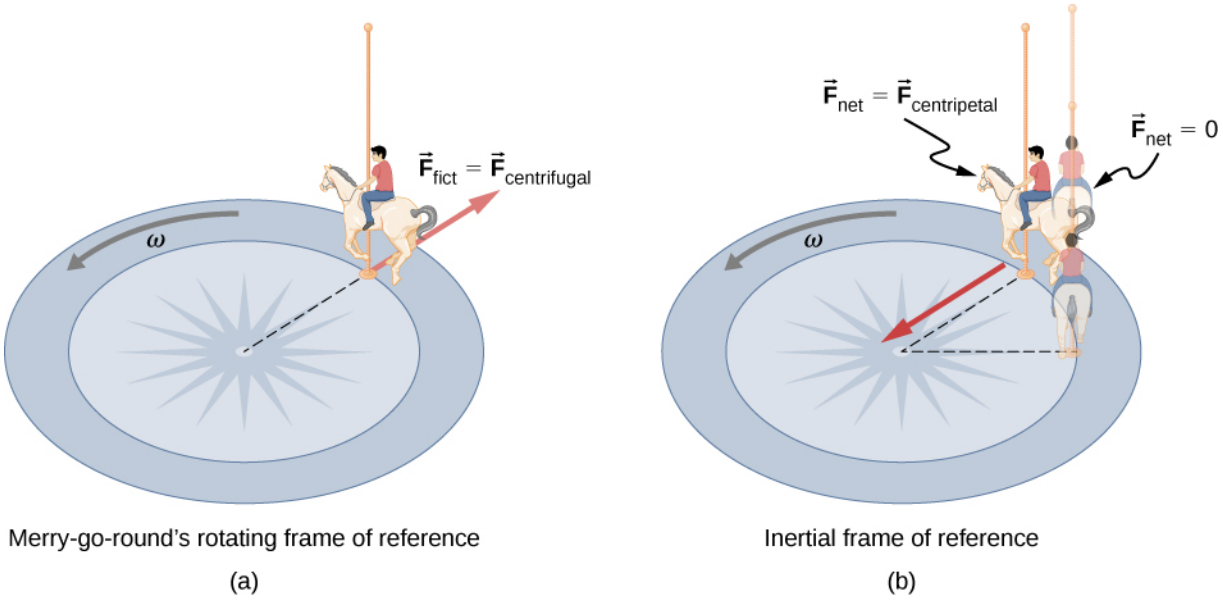


Figure 6.25 (a) A rider on a merry-go-round feels as if he is being thrown off. This inertial force is sometimes mistakenly called the centrifugal force in an effort to explain the rider's motion in the rotating frame of reference. (b) In an inertial frame of reference and according to Newton's laws, it is his inertia that carries him off (the unshaded rider has $F_{\text{net}} = 0$ and heads in a straight line). A force, $F_{\text{centripetal}}$, is needed to cause a circular path.

This inertial effect, carrying you away from the center of rotation if there is no centripetal force to cause circular motion, is put to good use in centrifuges (Figure 6.26). A centrifuge spins a sample very rapidly, as mentioned earlier in this chapter. Viewed from the rotating frame of reference, the inertial force throws particles outward, hastening their sedimentation. The greater the angular velocity, the greater the centrifugal force. But what really happens is that the inertia of the particles carries them along a line tangent to the circle while the test tube is forced in a circular path by a centripetal force.

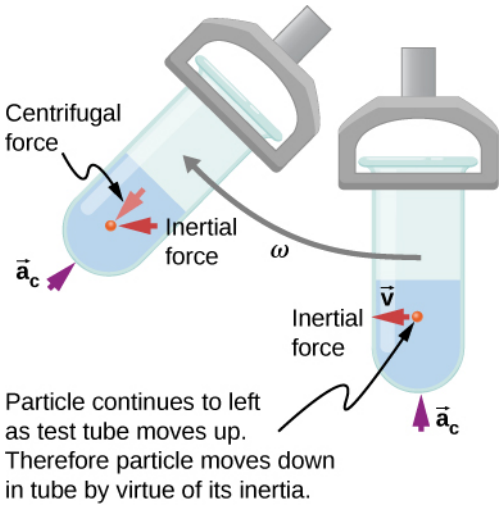


Figure 6.26 Centrifuges use inertia to perform their task. Particles in the fluid sediment settle out because their inertia carries them away from the center of rotation. The large angular velocity of the centrifuge quickens the sedimentation. Ultimately, the particles come into contact with the test tube walls, which then supply the centripetal force needed to make them move in a circle of constant radius.

Let us now consider what happens if something moves in a rotating frame of reference. For example, what if you slide a ball directly away from the center of the merry-go-round, as shown in Figure 6.27? The ball follows a straight path relative to Earth (assuming negligible friction) and a path curved to the right on the merry-go-round's surface. A person standing next to the merry-go-round sees the ball moving straight and the merry-go-round rotating underneath it. In the merry-go-round's frame of reference, we explain the apparent curve to the

right by using an inertial force, called the **Coriolis force**, which causes the ball to curve to the right. The Coriolis force can be used by anyone in that frame of reference to explain why objects follow curved paths and allows us to apply Newton's laws in noninertial frames of reference.

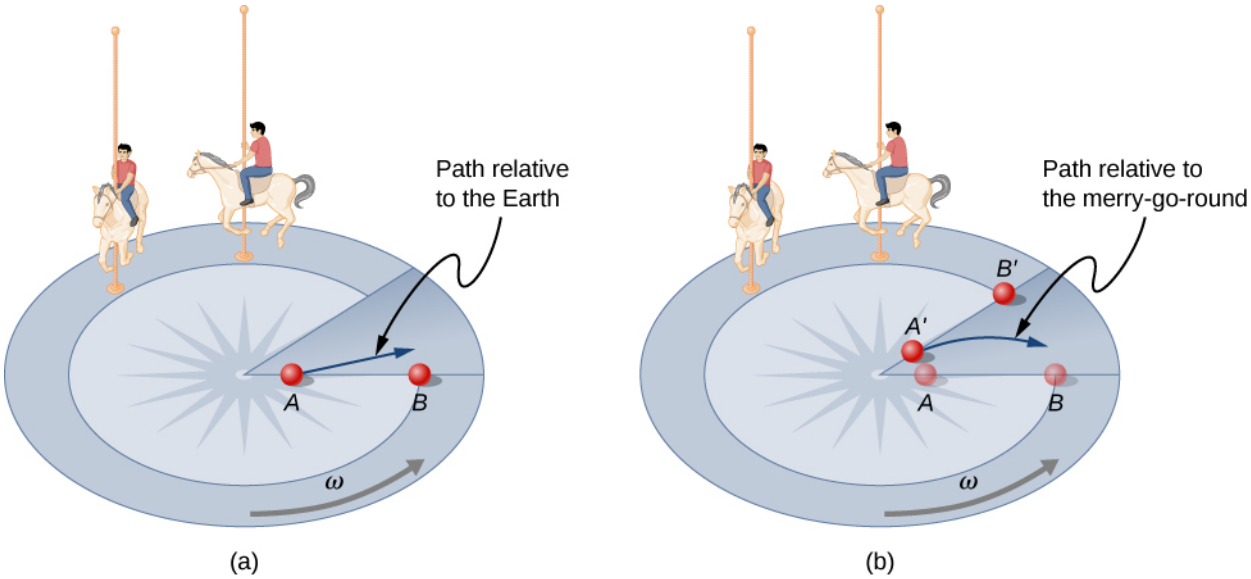


Figure 6.27 Looking down on the counterclockwise rotation of a merry-go-round, we see that a ball slid straight toward the edge follows a path curved to the right. The person slides the ball toward point *B*, starting at point *A*. Both points rotate to the shaded positions (*A*' and *B*') shown in the time that the ball follows the curved path in the rotating frame and a straight path in Earth's frame.

Up until now, we have considered Earth to be an inertial frame of reference with little or no worry about effects due to its rotation. Yet such effects *do* exist—in the rotation of weather systems, for example. Most consequences of Earth's rotation can be qualitatively understood by analogy with the merry-go-round. Viewed from above the North Pole, Earth rotates counterclockwise, as does the merry-go-round in Figure 6.27. As on the merry-go-round, any motion in Earth's Northern Hemisphere experiences a Coriolis force to the right. Just the opposite occurs in the Southern Hemisphere; there, the force is to the left. Because Earth's angular velocity is small, the Coriolis force is usually negligible, but for large-scale motions, such as wind patterns, it has substantial effects.

The Coriolis force causes hurricanes in the Northern Hemisphere to rotate in the counterclockwise direction, whereas tropical cyclones in the Southern Hemisphere rotate in the clockwise direction. (The terms hurricane, typhoon, and tropical storm are regionally specific names for cyclones, which are storm systems characterized by low pressure centers, strong winds, and heavy rains.) Figure 6.28 helps show how these rotations take place. Air flows toward any region of low pressure, and tropical cyclones contain particularly low pressures. Thus winds flow toward the center of a tropical cyclone or a low-pressure weather system at the surface. In the Northern Hemisphere, these inward winds are deflected to the right, as shown in the figure, producing a counterclockwise circulation at the surface for low-pressure zones of any type. Low pressure at the surface is associated with rising air, which also produces cooling and cloud formation, making low-pressure patterns quite visible from space. Conversely, wind circulation around high-pressure zones is clockwise in the Southern Hemisphere but is less visible because high pressure is associated with sinking air, producing clear skies.

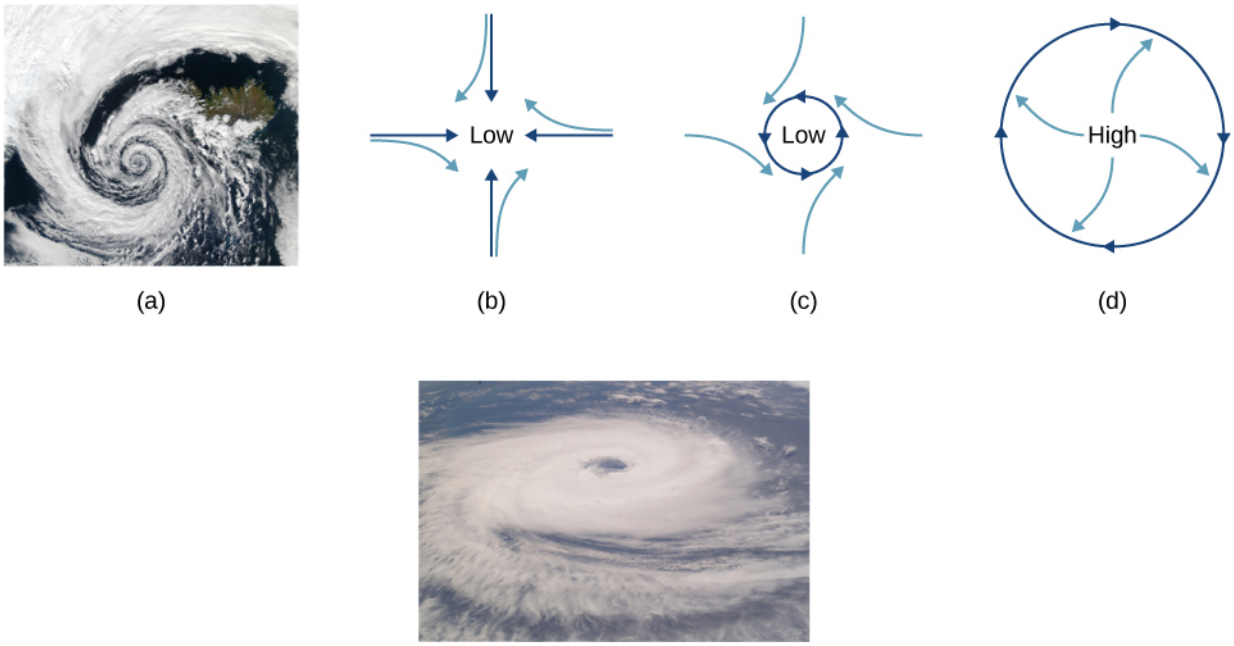


Figure 6.28 (a) The counterclockwise rotation of this Northern Hemisphere hurricane is a major consequence of the Coriolis force. (b) Without the Coriolis force, air would flow straight into a low-pressure zone, such as that found in tropical cyclones. (c) The Coriolis force deflects the winds to the right, producing a counterclockwise rotation. (d) Wind flowing away from a high-pressure zone is also deflected to the right, producing a clockwise rotation. (e) The opposite direction of rotation is produced by the Coriolis force in the Southern Hemisphere, leading to tropical cyclones. (credit a and credit e: modifications of work by NASA)

The rotation of tropical cyclones and the path of a ball on a merry-go-round can just as well be explained by inertia and the rotation of the system underneath. When noninertial frames are used, inertial forces, such as the Coriolis force, must be invented to explain the curved path. There is no identifiable physical source for these inertial forces. In an inertial frame, inertia explains the path, and no force is found to be without an identifiable source. Either view allows us to describe nature, but a view in an inertial frame is the simplest in the sense that all forces have origins and explanations.

6.4 Drag Force and Terminal Speed

Learning Objectives

By the end of this section, you will be able to:

- Express the drag force mathematically
- Describe applications of the drag force
- Define terminal velocity
- Determine an object's terminal velocity given its mass

Another interesting force in everyday life is the force of drag on an object when it is moving in a fluid (either a gas or a liquid). You feel the drag force when you move your hand through water. You might also feel it if you move your hand during a strong wind. The faster you move your hand, the harder it is to move. You feel a smaller drag force when you tilt your hand so only the side goes through the air—you have decreased the area of your hand that faces the direction of motion.

Drag Forces

Like friction, the **drag force** always opposes the motion of an object. Unlike simple friction, the drag force is proportional to some function of the velocity of the object in that fluid. This functionality is complicated and depends upon the shape of the object, its size, its velocity, and the fluid it is in. For most large objects such as cyclists, cars, and baseballs not moving too slowly, the magnitude of the drag force F_D is proportional to the square of the speed of the object. We can write this relationship mathematically as $F_D \propto v^2$. When taking into

account other factors, this relationship becomes

$$F_{\mathrm{D}} = \frac{1}{2} C \rho A v^2, \tag{6.5}$$

where C is the drag coefficient, A is the area of the object facing the fluid, and ρ is the density of the fluid. (Recall that density is mass per unit volume.) This equation can also be written in a more generalized fashion as $F_{\mathrm{D}} = bv^n$, where b is a constant equivalent to $0.5C\rho A$. We have set the exponent n for these equations as 2 because when an object is moving at high velocity through air, the magnitude of the drag force is proportional to the square of the speed. As we shall see in Fluid Mechanics, for small particles moving at low speeds in a fluid, the exponent n is equal to 1.

Drag Force

Drag force F_{D} is proportional to the square of the speed of the object. Mathematically,

$$F_{\mathrm{D}} = \frac{1}{2} C \, \rho \, A v^2,$$

where C is the drag coefficient, A is the area of the object facing the fluid, and ρ is the density of the fluid.

Athletes as well as car designers seek to reduce the drag force to lower their race times (Figure 6.29). Aerodynamic shaping of an automobile can reduce the drag force and thus increase a car's gas mileage.

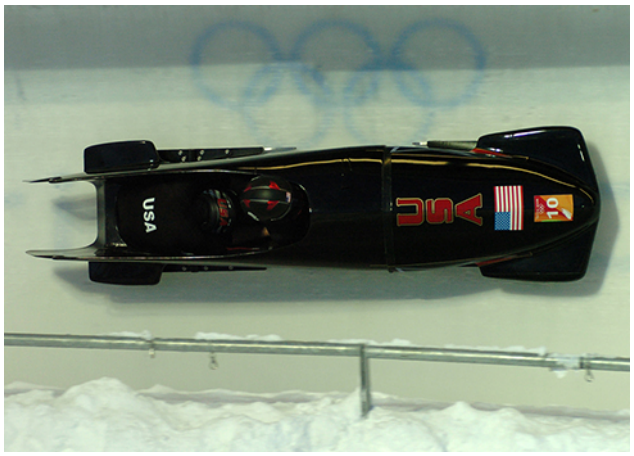


Figure 6.29 From racing cars to bobsled racers, aerodynamic shaping is crucial to achieving top speeds. Bobsleds are designed for speed and are shaped like a bullet with tapered fins. (credit: "U.S. Army"/Wikimedia Commons)

The value of the drag coefficient C is determined empirically, usually with the use of a wind tunnel (Figure 6.30).



Figure 6.30 NASA researchers test a model plane in a wind tunnel. (credit: NASA/Ames)

The drag coefficient can depend upon velocity, but we assume that it is a constant here. Table 6.2 lists some typical drag coefficients for a variety of objects. Notice that the drag coefficient is a dimensionless quantity. At highway speeds, over 50% of the power of a car is used to overcome air drag. The most fuel-efficient cruising speed is about 70–80 km/h (about 45–50 mi/h). For this reason, during the 1970s oil crisis in the United States, maximum speeds on highways were set at about 90 km/h (55 mi/h).

Object	*C*
Airfoil	0.05
Toyota Camry	0.28
Ford Focus	0.32
Honda Civic	0.36
Ferrari Testarossa	0.37
Dodge Ram Pickup	0.43
Sphere	0.45
Hummer H2 SUV	0.64
Skydiver (feet first)	0.70
Bicycle	0.90

Object	C
Skydiver (horizontal)	1.0
Circular flat plate	1.12

Table 6.2 Typical Values of Drag Coefficient C

Substantial research is under way in the sporting world to minimize drag. The dimples on golf balls are being redesigned, as are the clothes that athletes wear. Bicycle racers and some swimmers and runners wear full bodysuits. Australian Cathy Freeman wore a full body suit in the 2000 Sydney Olympics and won a gold medal in the 400-m race. Many swimmers in the 2008 Beijing Olympics wore (Speedo) body suits; it might have made a difference in breaking many world records (Figure 6.31). Most elite swimmers (and cyclists) shave their body hair. Such innovations can have the effect of slicing away milliseconds in a race, sometimes making the difference between a gold and a silver medal. One consequence is that careful and precise guidelines must be continuously developed to maintain the integrity of the sport.



Figure 6.31 Body suits, such as this LZR Racer Suit, have been credited with aiding in many world records after their release in 2008. Smoother "skin" and more compression forces on a swimmer's body provide at least 10% less drag. (credit: NASA/Kathy Barnstorff)

Terminal Velocity

Some interesting situations connected to Newton's second law occur when considering the effects of drag forces upon a moving object. For instance, consider a skydiver falling through air under the influence of gravity. The two forces acting on him are the force of gravity and the drag force (ignoring the small buoyant force). The downward force of gravity remains constant regardless of the velocity at which the person is moving. However, as the person's velocity increases, the magnitude of the drag force increases until the magnitude of the drag force is equal to the gravitational force, thus producing a net force of zero. A zero net force means that there is no acceleration, as shown by Newton's second law. At this point, the person's velocity remains constant and we say that the person has reached his **terminal velocity** (v_{T}). Since F_{D} is proportional to the speed squared, a heavier skydiver must go faster for F_{D} to equal his weight. Let's see how this works out more quantitatively.

At the terminal velocity,

$$F_{\mathrm{net}} = mg - F_{\mathrm{D}} = ma = 0.$$

Thus,

$$mg = F_{\mathrm{D}}.$$

Using the equation for drag force, we have

$$mg = \frac{1}{2}C\rho A v_{\mathrm{T}}^2.$$

Solving for the velocity, we obtain

$$v_{\mathrm{T}} = \sqrt{\frac{2mg}{\rho CA}}.$$

Assume the density of air is $\rho = 1.21\ \mathrm{kg/m^3}$. A 75-kg skydiver descending head first has a cross-sectional area of approximately $A = 0.18\ \mathrm{m^2}$ and a drag coefficient of approximately $C = 0.70$. We find that

$$v_{\mathrm{T}} = \sqrt{\frac{2(75\ \mathrm{kg})(9.80\ \mathrm{m/s^2})}{(1.21\ \mathrm{kg/m^3})(0.70)(0.18\ \mathrm{m^2})}} = 98\ \mathrm{m/s} = 350\ \mathrm{km/h}.$$

This means a skydiver with a mass of 75 kg achieves a terminal velocity of about 350 km/h while traveling in a headfirst position, minimizing the area and his drag. In a spread-eagle position, that terminal velocity may decrease to about 200 km/h as the area increases. This terminal velocity becomes much smaller after the parachute opens.

EXAMPLE 6.17

Terminal Velocity of a Skydiver

Find the terminal velocity of an 85-kg skydiver falling in a spread-eagle position.

Strategy

At terminal velocity, $F_{\mathrm{net}} = 0$. Thus, the drag force on the skydiver must equal the force of gravity (the person's weight). Using the equation of drag force, we find $mg = \frac{1}{2}\rho CAv^2$.

Solution

The terminal velocity v_{T} can be written as

$$v_{\mathrm{T}} = \sqrt{\frac{2mg}{\rho CA}} = \sqrt{\frac{2(85\ \mathrm{kg})(9.80\ \mathrm{m/s^2})}{(1.21\ \mathrm{kg/m^3})(1.0)(0.70\ \mathrm{m^2})}} = 44\ \mathrm{m/s}.$$

Significance

This result is consistent with the value for v_{T} mentioned earlier. The 75-kg skydiver going feet first had a terminal velocity of $v_{\mathrm{T}} = 98$ m/s. He weighed less but had a smaller frontal area and so a smaller drag due to the air.

CHECK YOUR UNDERSTANDING 6.10

Find the terminal velocity of a 50-kg skydiver falling in spread-eagle fashion.

The size of the object that is falling through air presents another interesting application of air drag. If you fall from a 5-m-high branch of a tree, you will likely get hurt—possibly fracturing a bone. However, a small squirrel does this all the time, without getting hurt. You do not reach a terminal velocity in such a short distance, but the squirrel does.

The following interesting quote on animal size and terminal velocity is from a 1928 essay by a British biologist, J. B. S. Haldane, titled "On Being the Right Size."

"To the mouse and any smaller animal, [gravity] presents practically no dangers. You can drop a mouse down a thousand-yard mine shaft; and, on arriving at the bottom, it gets a slight shock and walks away, provided that the ground is fairly soft. A rat is killed, a man is broken, and a horse splashes. For the resistance presented to

movement by the air is proportional to the surface of the moving object. Divide an animal's length, breadth, and height each by ten; its weight is reduced to a thousandth, but its surface only to a hundredth. So the resistance to falling in the case of the small animal is relatively ten times greater than the driving force."

The above quadratic dependence of air drag upon velocity does not hold if the object is very small, is going very slow, or is in a denser medium than air. Then we find that the drag force is proportional just to the velocity. This relationship is given by Stokes' law.

Stokes' Law

For a spherical object falling in a medium, the drag force is

$$F_S = 6\pi r\eta v, \tag{6.6}$$

where r is the radius of the object, η is the viscosity of the fluid, and v is the object's velocity.

Good examples of Stokes' law are provided by microorganisms, pollen, and dust particles. Because each of these objects is so small, we find that many of these objects travel unaided only at a constant (terminal) velocity. Terminal velocities for bacteria (size about $1\ \mu m$) can be about $2\ \mu m/s$. To move at a greater speed, many bacteria swim using flagella (organelles shaped like little tails) that are powered by little motors embedded in the cell.

Sediment in a lake can move at a greater terminal velocity (about $5\ \mu m/s$), so it can take days for it to reach the bottom of the lake after being deposited on the surface.

If we compare animals living on land with those in water, you can see how drag has influenced evolution. Fish, dolphins, and even massive whales are streamlined in shape to reduce drag forces. Birds are streamlined and migratory species that fly large distances often have particular features such as long necks. Flocks of birds fly in the shape of a spearhead as the flock forms a streamlined pattern (Figure 6.32). In humans, one important example of streamlining is the shape of sperm, which need to be efficient in their use of energy.



Figure 6.32 Geese fly in a V formation during their long migratory travels. This shape reduces drag and energy consumption for individual birds, and also allows them a better way to communicate. (credit: modification of work by "Julo"/Wikimedia Commons)

INTERACTIVE

In lecture demonstrations, we do measurements of the drag force (https://openstax.org/l/21dragforce) on different objects. The objects are placed in a uniform airstream created by a fan. Calculate the Reynolds number and the drag coefficient.

The Calculus of Velocity-Dependent Frictional Forces

When a body slides across a surface, the frictional force on it is approximately constant and given by $\mu_k N$. Unfortunately, the frictional force on a body moving through a liquid or a gas does not behave so simply. This drag force is generally a complicated function of the body's velocity. However, for a body moving in a straight line at moderate speeds through a liquid such as water, the frictional force can often be approximated by

$$f_R = -bv,$$

where b is a constant whose value depends on the dimensions and shape of the body and the properties of the liquid, and v is the velocity of the body. Two situations for which the frictional force can be represented by this equation are a motorboat moving through water and a small object falling slowly through a liquid.

Let's consider the object falling through a liquid. The free-body diagram of this object with the positive direction downward is shown in Figure 6.33. Newton's second law in the vertical direction gives the differential equation

$$mg - bv = m\frac{dv}{dt},$$

where we have written the acceleration as dv/dt. As v increases, the frictional force $-bv$ increases until it matches mg. At this point, there is no acceleration and the velocity remains constant at the terminal velocity v_T. From the previous equation,

$$mg - bv_T = 0,$$

so

$$v_T = \frac{mg}{b}.$$

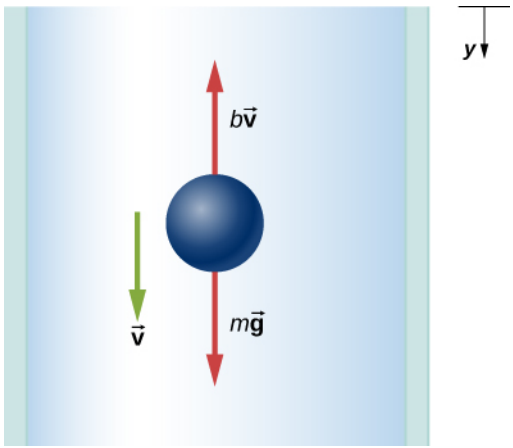


Figure 6.33 Free-body diagram of an object falling through a resistive medium.

We can find the object's velocity by integrating the differential equation for v. First, we rearrange terms in this equation to obtain

$$\frac{dv}{g - (b/m)v} = dt.$$

Assuming that $v = 0$ at $t = 0$, integration of this equation yields

$$\int_0^v \frac{dv'}{g - (b/m)v'} = \int_0^t dt',$$

or

$$-\frac{m}{b}\ln\left(g - \frac{b}{m}v'\right)\Big|_0^v = t'\Big|_0^t,$$

where v' and t' are dummy variables of integration. With the limits given, we find

$$-\frac{m}{b}[\ln\left(g-\frac{b}{m}v\right)-\ln g]=t.$$

Since $\ln A-\ln B=\ln(A/B)$, and $\ln(A/B)=x$ implies $e^x=A/B$, we obtain

$$\frac{g-(bv/m)}{g}=e^{-bt/m},$$

and

$$v=\frac{mg}{b}(1-e^{-bt/m}).$$

Notice that as $t\to\infty$, $v\to mg/b=v_{\mathrm{T}}$, which is the terminal velocity.

The position at any time may be found by integrating the equation for v. With $v=dy/dt$,

$$dy=\frac{mg}{b}(1-e^{-bt/m})dt.$$

Assuming $y=0$ when $t=0$,

$$\int_0^y dy'=\frac{mg}{b}\int_0^t(1-e^{-bt'/m})\,dt',$$

which integrates to

$$y=\frac{mg}{b}t+\frac{m^2g}{b^2}(e^{-bt/m}-1).$$

EXAMPLE 6.18

Effect of the Resistive Force on a Motorboat

A motorboat is moving across a lake at a speed v_0 when its motor suddenly freezes up and stops. The boat then slows down under the frictional force $f_R=-bv$. (a) What are the velocity and position of the boat as functions of time? (b) If the boat slows down from 4.0 to 1.0 m/s in 10 s, how far does it travel before stopping?

Solution

a. With the motor stopped, the only horizontal force on the boat is $f_R=-bv$, so from Newton's second law,

$$m\frac{dv}{dt}=-bv,$$

which we can write as

$$\frac{dv}{v}=-\frac{b}{m}dt.$$

Integrating this equation between the time zero when the velocity is v_0 and the time t when the velocity is v, we have

$$\int_0^v\frac{dv'}{v'}=-\frac{b}{m}\int_0^t dt'.$$

Thus,

$$\ln\frac{v}{v_0}=-\frac{b}{m}t,$$

which, since $\ln A=x$ implies $e^x=A$, we can write this as

$$v=v_0e^{-bt/m}.$$

Now from the definition of velocity,

$$\frac{dx}{dt} = v_0 e^{-bt/m},$$

so we have

$$dx = v_0 e^{-bt/m} dt.$$

With the initial position zero, we have

$$\int_0^x dx' = v_0 \int_0^t e^{-bt'/m} dt',$$

and

$$x = -\frac{mv_0}{b} e^{-bt'/m}\Big|_0^t = \frac{mv_0}{b}(1 - e^{-bt/m}).$$

As time increases, $e^{-bt/m} \to 0$, and the position of the boat approaches a limiting value

$$x_{\max} = \frac{mv_0}{b}.$$

Although this tells us that the boat takes an infinite amount of time to reach $x_{\max}$, the boat effectively stops after a reasonable time. For example, at $t = 10m/b$, we have

$$v = v_0 e^{-10} \simeq 4.5 \times 10^{-5} v_0,$$

whereas we also have

$$x = x_{\max}(1 - e^{-10}) \simeq 0.99995 x_{\max}.$$

Therefore, the boat's velocity and position have essentially reached their final values.

b. With $v_0 = 4.0$ m/s and $v = 1.0$ m/s, we have $1.0 \text{ m/s} = (4.0 \text{ m/s})e^{-(b/m)(10 \text{ s})}$, so

$$\ln 0.25 = -\ln 4.0 = -\frac{b}{m}(10 \text{ s}),$$

and

$$\frac{b}{m} = \frac{1}{10} \ln 4.0 \text{ s}^{-1} = 0.14 \text{ s}^{-1}.$$

Now the boat's limiting position is

$$x_{\max} = \frac{mv_0}{b} = \frac{4.0 \text{ m/s}}{0.14 \text{ s}^{-1}} = 29 \text{ m}.$$

Significance

In the both of the previous examples, we found "limiting" values. The terminal velocity is the same as the limiting velocity, which is the velocity of the falling object after a (relatively) long time has passed. Similarly, the limiting distance of the boat is the distance the boat will travel after a long amount of time has passed. Due to the properties of exponential decay, the time involved to reach either of these values is actually not too long (certainly not an infinite amount of time!) but they are quickly found by taking the limit to infinity.

CHECK YOUR UNDERSTANDING 6.11

Suppose the resistive force of the air on a skydiver can be approximated by $f = -bv^2$. If the terminal velocity of a 100-kg skydiver is 60 m/s, what is the value of b?

CHAPTER REVIEW

Key Terms

banked curve curve in a road that is sloping in a manner that helps a vehicle negotiate the curve

centripetal force any net force causing uniform circular motion

Coriolis force inertial force causing the apparent deflection of moving objects when viewed in a rotating frame of reference

drag force force that always opposes the motion of an object in a fluid; unlike simple friction, the drag force is proportional to some function of the velocity of the object in that fluid

friction force that opposes relative motion or attempts at motion between systems in contact

ideal banking sloping of a curve in a road, where the angle of the slope allows the vehicle to negotiate the curve at a certain speed without the aid of friction between the tires and the road; the net external force on the vehicle equals the horizontal centripetal force in the absence of friction

inertial force force that has no physical origin

kinetic friction force that opposes the motion of two systems that are in contact and moving relative to each other

noninertial frame of reference accelerated frame of reference

static friction force that opposes the motion of two systems that are in contact and are not moving relative to each other

terminal velocity constant velocity achieved by a falling object, which occurs when the weight of the object is balanced by the upward drag force

Key Equations

Magnitude of static friction	$f_\text{s} \leq \mu_\text{s} N$
Magnitude of kinetic friction	$f_k = \mu_k N$
Centripetal force	$F_\text{c} = m\frac{v^2}{r}$ or $F_\text{c} = mr\omega^2$
Ideal angle of a banked curve	$\tan\theta = \frac{v^2}{rg}$
Drag force	$F_D = \frac{1}{2}C\rho A v^2$
Stokes' law	$F_\text{s} = 6\pi r\eta v$

Summary

6.1 Solving Problems with Newton's Laws

- Newton's laws of motion can be applied in numerous situations to solve motion problems.
- Some problems contain multiple force vectors acting in different directions on an object. Be sure to draw diagrams, resolve all force vectors into horizontal and vertical components, and draw a free-body diagram. Always analyze the direction in which an object accelerates so that you can determine whether $F_\text{net} = ma$ or $F_\text{net} = 0$.
- The normal force on an object is not always equal in magnitude to the weight of the object. If an object is accelerating vertically, the normal force is less than or greater than the weight of the object. Also, if the object is on an inclined plane, the normal force is always less than the full weight of the object.
- Some problems contain several physical quantities, such as forces, acceleration, velocity, or position. You can apply concepts from kinematics and dynamics to solve these problems.

6.2 Friction

- Friction is a contact force that opposes the motion or attempted motion between two systems. Simple friction is proportional to the normal force N supporting the two systems.

- The magnitude of static friction force between two materials stationary relative to each other is determined using the coefficient of static friction, which depends on both materials.
- The kinetic friction force between two materials moving relative to each other is determined using the coefficient of kinetic friction, which also depends on both materials and is always less than the coefficient of static friction.

6.3 Centripetal Force

- Centripetal force $\vec{\mathbf{F}}_{\mathrm{c}}$ is a "center-seeking" force that always points toward the center of rotation. It is perpendicular to linear velocity and has the magnitude
$$F_{\mathrm{c}} = ma_{\mathrm{c}}.$$

- Rotating and accelerated frames of reference are noninertial. Inertial forces, such as the Coriolis force, are needed to explain motion in such frames.

6.4 Drag Force and Terminal Speed

- Drag forces acting on an object moving in a fluid oppose the motion. For larger objects (such as a baseball) moving at a velocity in air, the drag force is determined using the drag coefficient (typical values are given in Table 6.2), the area of the object facing the fluid, and the fluid density.
- For small objects (such as a bacterium) moving in a denser medium (such as water), the drag force is given by Stokes' law.

Conceptual Questions

6.1 Solving Problems with Newton's Laws

1. To simulate the apparent weightlessness of space orbit, astronauts are trained in the hold of a cargo aircraft that is accelerating downward at *g*. Why do they appear to be weightless, as measured by standing on a bathroom scale, in this accelerated frame of reference? Is there any difference between their apparent weightlessness in orbit and in the aircraft?

6.2 Friction

2. The glue on a piece of tape can exert forces. Can these forces be a type of simple friction? Explain, considering especially that tape can stick to vertical walls and even to ceilings.

3. When you learn to drive, you discover that you need to let up slightly on the brake pedal as you come to a stop or the car will stop with a jerk. Explain this in terms of the relationship between static and kinetic friction.

4. When you push a piece of chalk across a chalkboard, it sometimes screeches because it rapidly alternates between slipping and sticking to the board. Describe this process in more detail, in particular, explaining how it is related to the fact that kinetic friction is less than static friction. (The same slip-grab process occurs when tires screech on pavement.)

5. A physics major is cooking breakfast when she notices that the frictional force between her steel spatula and Teflon frying pan is only 0.200 N. Knowing the coefficient of kinetic friction between the two materials, she quickly calculates the normal force. What is it?


6.3 Centripetal Force

6. If you wish to reduce the stress (which is related to centripetal force) on high-speed tires, would you use large- or small-diameter tires? Explain.

7. Define centripetal force. Can any type of force (for example, tension, gravitational force, friction, and so on) be a centripetal force? Can any combination of forces be a centripetal force?

8. If centripetal force is directed toward the center, why do you feel that you are 'thrown' away from the center as a car goes around a curve? Explain.

9. Race car drivers routinely cut corners, as shown below (Path 2). Explain how this allows the curve to be taken at the greatest speed.

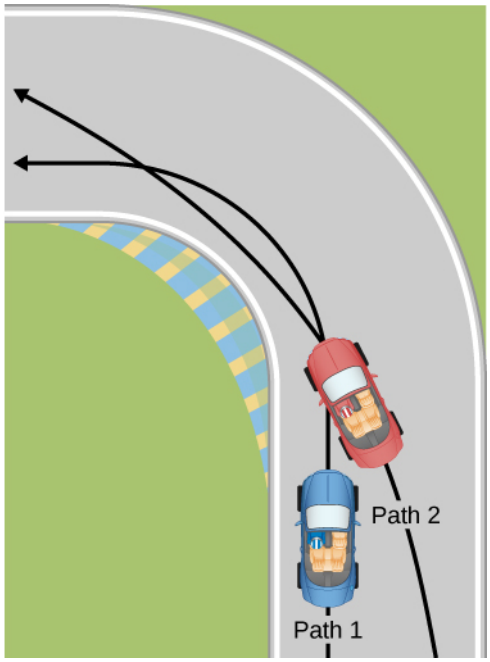


10. Many amusement parks have rides that make vertical loops like the one shown below. For safety, the cars are attached to the rails in such a way that they cannot fall off. If the car goes over the top at just the right speed, gravity alone will supply the centripetal force. What other force acts and what is its direction if:
(a) The car goes over the top at faster than this speed?
(b) The car goes over the top at slower than this speed?



11. What causes water to be removed from clothes in a spin-dryer?

12. As a skater forms a circle, what force is responsible for making his turn? Use a free-body diagram in your answer.


13. Suppose a child is riding on a merry-go-round at a distance about halfway between its center and edge. She has a lunch box resting on wax paper, so that there is very little friction between it and the merry-go-round. Which path shown below will the lunch box take when she lets go? The lunch box leaves a trail in the dust on the merry-go-round. Is that trail straight, curved to the left, or curved to the right? Explain your answer.

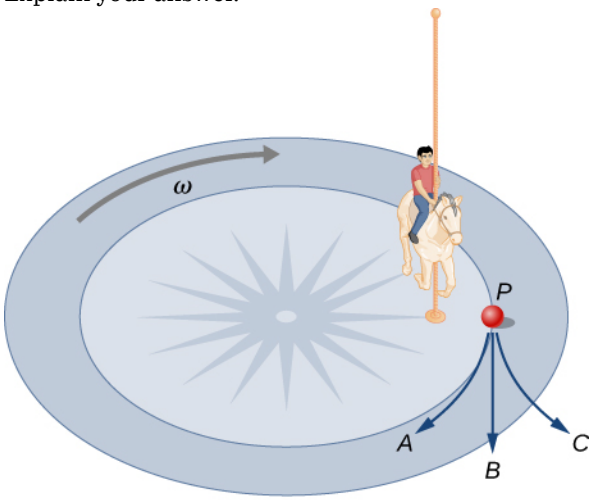

Merry-go-round's rotating frame of reference

14. Do you feel yourself thrown to either side when you negotiate a curve that is ideally banked for your car's speed? What is the direction of the force exerted on you by the car seat?

15. Suppose a mass is moving in a circular path on a frictionless table as shown below. In Earth's frame of reference, there is no centrifugal force pulling the mass away from the center of rotation, yet there is a force stretching the string attaching the mass to the nail. Using concepts related to centripetal force and Newton's third law, explain what force stretches the string, identifying its physical origin.

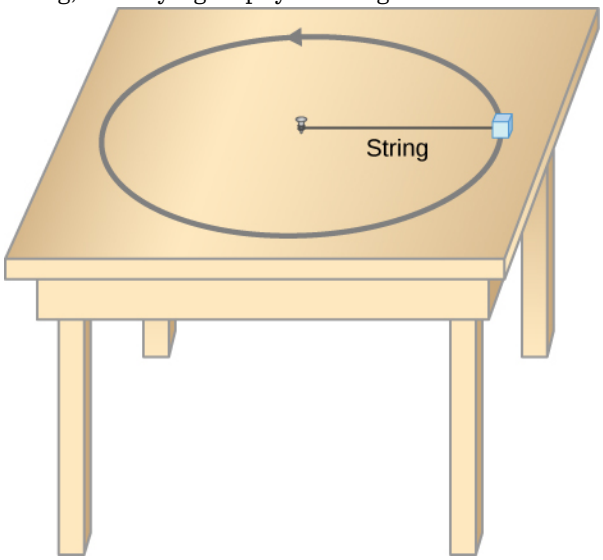

16. When a toilet is flushed or a sink is drained, the water (and other material) begins to rotate about the drain on the way down. Assuming no initial rotation and a flow initially directly straight toward the drain, explain what causes the rotation and which direction it has in the Northern Hemisphere. (Note that this is a small effect and in most toilets the rotation is caused by directional water jets.) Would the direction of rotation reverse if water were forced up the drain?

17. A car rounds a curve and encounters a patch of ice with a very low coefficient of kinetic fiction. The car slides off the road. Describe the path of the car as it leaves the road.

18. In one amusement park ride, riders enter a large vertical barrel and stand against the wall on its horizontal floor. The barrel is spun up and the floor drops away. Riders feel as if they are pinned to the wall by a force something like the gravitational force. This is an inertial force sensed and used by the riders to explain events in the rotating frame of reference of the barrel. Explain in an inertial frame of reference (Earth is nearly one) what pins the riders to the wall, and identify all forces acting on them.

19. Two friends are having a conversation. Anna says a satellite in orbit is in free fall because the satellite keeps falling toward Earth. Tom says a satellite in orbit is not in free fall because the acceleration due to gravity is not $9.80\ \text{m/s}^2$. Who do you agree with and why?

20. A nonrotating frame of reference placed at the center of the Sun is very nearly an inertial one. Why is it not exactly an inertial frame?

6.4 Drag Force and Terminal Speed

21. Athletes such as swimmers and bicyclists wear body suits in competition. Formulate a list of pros and cons of such suits.

22. Two expressions were used for the drag force experienced by a moving object in a liquid. One depended upon the speed, while the other was proportional to the square of the speed. In which types of motion would each of these expressions be more applicable than the other one?

23. As cars travel, oil and gasoline leaks onto the road surface. If a light rain falls, what does this do to the control of the car? Does a heavy rain make any difference?


24. Why can a squirrel jump from a tree branch to the ground and run away undamaged, while a human could break a bone in such a fall?

Problems

6.1 Solving Problems with Newton's Laws

25. A 30.0-kg girl in a swing is pushed to one side and held at rest by a horizontal force $\vec{\mathbf{F}}$ so that the swing ropes are $30.0°$ with respect to the vertical. (a) Calculate the tension in each of the two ropes supporting the swing under these conditions. (b) Calculate the magnitude of $\vec{\mathbf{F}}$.

26. Find the tension in each of the three cables supporting the traffic light if it weighs 2.00×10^2 N.

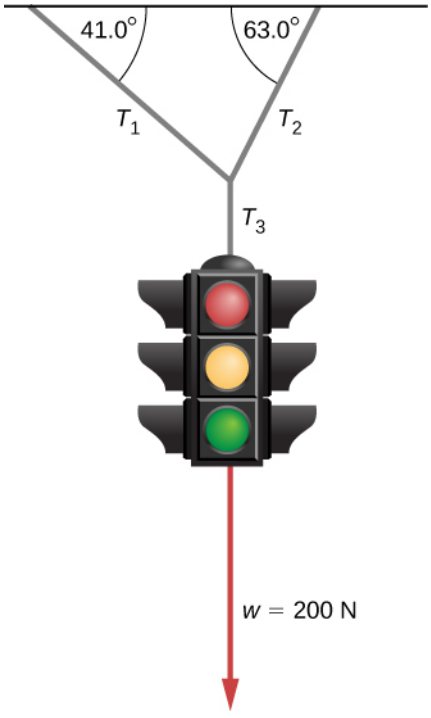


27. Three forces act on an object, considered to be a


particle, which moves with constant velocity $v = (3\hat{\mathbf{i}} - 2\hat{\mathbf{j}})$ m/s. Two of the forces are $\vec{\mathbf{F}}_1 = (3\hat{\mathbf{i}} + 5\hat{\mathbf{j}} - 6\hat{\mathbf{k}})$ N and $\vec{\mathbf{F}}_2 = (4\hat{\mathbf{i}} - 7\hat{\mathbf{j}} + 2\hat{\mathbf{k}})$ N. Find the third force.

28. A flea jumps by exerting a force of 1.20×10^{-5} N straight down on the ground. A breeze blowing on the flea parallel to the ground exerts a force of 0.500×10^{-6} N on the flea while the flea is still in contact with the ground. Find the direction and magnitude of the acceleration of the flea if its mass is 6.00×10^{-7} kg. Do not neglect the gravitational force.

29. Two muscles in the back of the leg pull upward on the Achilles tendon, as shown below. (These muscles are called the medial and lateral heads of the gastrocnemius muscle.) Find the magnitude and direction of the total force on the Achilles tendon. What type of movement could be caused by this force?

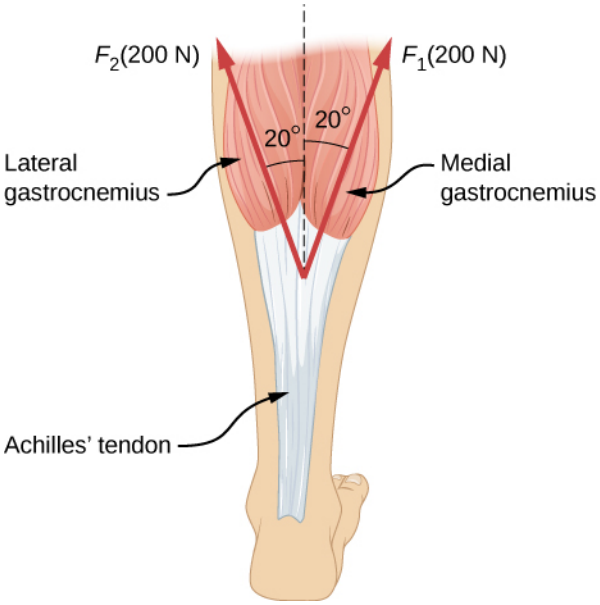

30. After a mishap, a 76.0-kg circus performer clings to a trapeze, which is being pulled to the side by another circus artist, as shown here. Calculate the tension in the two ropes if the person is momentarily motionless. Include a free-body diagram in your solution.

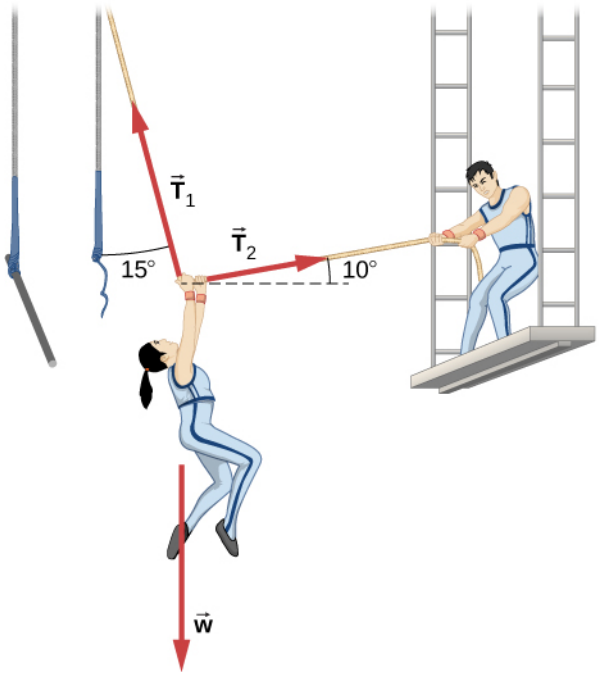

31. A 35.0-kg dolphin accelerates opposite to the motion from 12.0 to 7.50 m/s in 2.30 s to join another dolphin in play. What average force was exerted to slow the first dolphin if it was moving horizontally? (The gravitational force is balanced by the buoyant force of the water.)

32. When starting a foot race, a 70.0-kg sprinter exerts an average force of 650 N backward on the ground for 0.800 s. (a) What is his final speed? (b) How far does he travel?

33. A large rocket has a mass of 2.00×10^6 kg at takeoff, and its engines produce a thrust of 3.50×10^7 N. (a) Find its initial acceleration if it takes off vertically. (b) How long does it take to reach a velocity of 120 km/h straight up, assuming constant mass and thrust?

34. A basketball player jumps straight up for a ball. To do this, he lowers his body 0.300 m and then accelerates through this distance by forcefully straightening his legs. This player leaves the floor with a vertical velocity sufficient to carry him 0.900 m above the floor. (a) Calculate his velocity when he leaves the floor. (b) Calculate his acceleration while he is straightening his legs. He goes from zero to the velocity found in (a) in a distance of 0.300 m. (c) Calculate the force he exerts on the floor to do this, given that his mass is 110.0 kg.

35. A 2.50-kg fireworks shell is fired straight up from a mortar and reaches a height of 110.0 m. (a) Neglecting air resistance (a poor assumption, but we will make it for this example), calculate the shell's velocity when it

leaves the mortar. (b) The mortar itself is a tube 0.450 m long. Calculate the average acceleration of the shell in the tube as it goes from zero to the velocity found in (a). (c) What is the average force on the shell in the mortar? Express your answer in newtons and as a ratio to the weight of the shell.

36. A 0.500-kg potato is fired at an angle of $80.0°$ above the horizontal from a PVC pipe used as a "potato gun" and reaches a height of 110.0 m. (a) Neglecting air resistance, calculate the potato's velocity when it leaves the gun. (b) The gun itself is a tube 0.450 m long. Calculate the average acceleration of the potato in the tube as it goes from zero to the velocity found in (a). (c) What is the average force on the potato in the gun? Express your answer in newtons and as a ratio to the weight of the potato.

37. An elevator filled with passengers has a mass of 1.70×10^3 kg. (a) The elevator accelerates upward from rest at a rate of $1.20\ \text{m/s}^2$ for 1.50 s. Calculate the tension in the cable supporting the elevator. (b) The elevator continues upward at constant velocity for 8.50 s. What is the tension in the cable during this time? (c) The elevator accelerates opposite to the motion at a rate of $0.600\ \text{m/s}^2$ for 3.00 s. What is the tension in the cable during acceleration opposite to the motion? (d) How high has the elevator moved above its original starting point, and what is its final velocity?


38. A 20.0-g ball hangs from the roof of a freight car by a string. When the freight car begins to move, the string makes an angle of $35.0°$ with the vertical. (a) What is the acceleration of the freight car? (b) What is the tension in the string?

39. A student's backpack, full of textbooks, is hung from a spring scale attached to the ceiling of an elevator. When the elevator is accelerating downward at $3.8\ \text{m/s}^2$, the scale reads 60 N. (a) What is the mass of the backpack? (b) What does the scale read if the elevator moves upward while speeding up at a rate $3.8\ \text{m/s}^2$? (c) What does the scale read if the elevator moves upward at constant velocity? (d) If the elevator had no brakes and the cable supporting it were to break loose so that the elevator could fall freely, what would the spring scale read?


40. A service elevator takes a load of garbage, mass 10.0 kg, from a floor of a skyscraper under construction, down to ground level, accelerating downward at a rate of $1.2\ \text{m/s}^2$. Find the magnitude of the force the garbage exerts on the floor of the service elevator?

41. A roller coaster car starts from rest at the top of a track 30.0 m long and inclined at $20.0°$ to the horizontal. Assume that friction can be ignored. (a) What is the acceleration of the car? (b) How much time elapses before it reaches the bottom of the track?


42. The device shown below is the Atwood's machine considered in Example 6.5. Assuming that the masses of the string and the frictionless pulley are negligible, (a) find an equation for the acceleration of the two blocks; (b) find an equation for the tension in the string; and (c) find both the acceleration and tension when block 1 has mass 2.00 kg and block 2 has mass 4.00 kg.

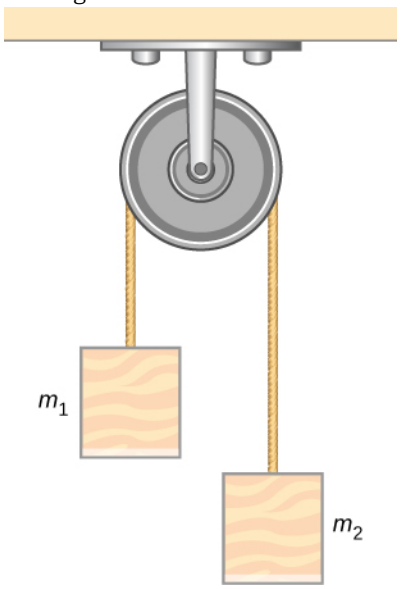


43. Two blocks are connected by a massless rope as shown below. The mass of the block on the table is 4.0 kg and the hanging mass is 1.0 kg. The table and the pulley are frictionless. (a) Find the acceleration of the system. (b) Find the tension in the rope. (c) Find the speed with which the hanging mass hits the floor if it starts from rest and is initially located 1.0 m from the floor.

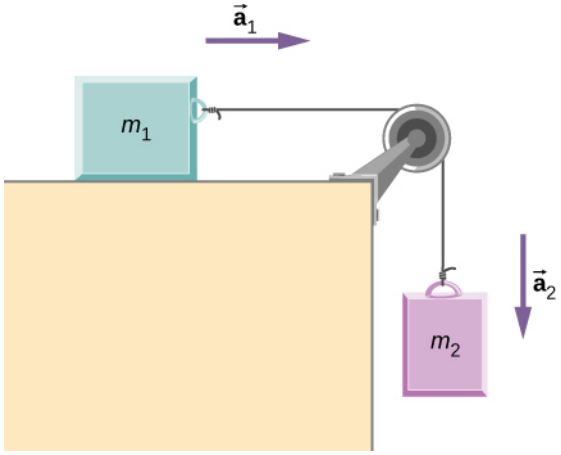

44. Shown below are two carts connected by a cord that passes over a small frictionless pulley. Each cart rolls freely with negligible friction. Calculate the acceleration of the carts and the tension in the cord.

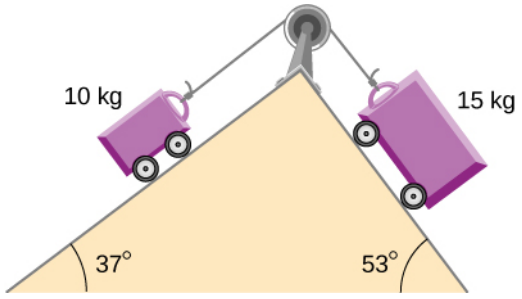

45. A 2.00 kg block (mass 1) and a 4.00 kg block (mass 2) are connected by a light string as shown; the inclination of the ramp is $40.0°$. Friction is negligible. What is (a) the acceleration of each block and (b) the tension in the string?

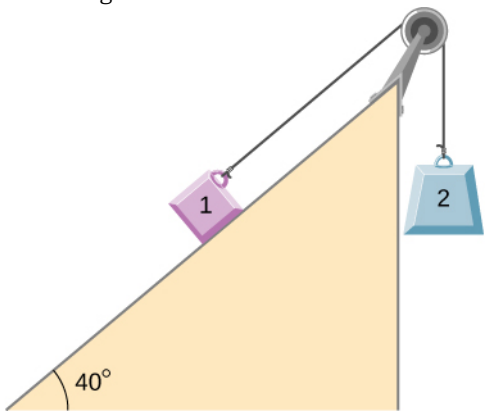

6.2 Friction

46. (a) When rebuilding his car's engine, a physics major must exert 3.00×10^2 N of force to insert a dry steel piston into a steel cylinder. What is the normal force between the piston and cylinder? (b) What force would he have to exert if the steel parts were oiled?


47. (a) What is the maximum frictional force in the knee joint of a person who supports 66.0 kg of her mass on that knee? (b) During strenuous exercise, it is possible to exert forces to the joints that are easily 10 times greater than the weight being supported. What is the maximum force of friction under such conditions? The frictional forces in joints are relatively small in all circumstances except when the joints deteriorate, such as from injury or arthritis. Increased frictional forces can cause further damage and pain.

48. Suppose you have a 120-kg wooden crate resting on a wood floor, with coefficient of static friction 0.500 between these wood surfaces. (a) What maximum force can you exert horizontally on the crate without moving it? (b) If you continue to exert this force once the crate starts to slip, what will its acceleration then be? The coefficient of sliding friction is known to be 0.300 for this situation.

49. (a) If half of the weight of a small 1.00×10^3-kg utility truck is supported by its two drive wheels, what is the maximum acceleration it can achieve on dry concrete? (b) Will a metal cabinet lying on the wooden bed of the truck slip if it accelerates at this rate? (c) Solve both problems assuming the truck has four-wheel drive.


50. A team of eight dogs pulls a sled with waxed wood runners on wet snow (mush!). The dogs have average masses of 19.0 kg, and the loaded sled with its rider has a mass of 210 kg. (a) Calculate the acceleration of the dogs starting from rest if each dog exerts an average force of 185 N backward on the snow. (b) Calculate the force in the coupling between the dogs and the sled.

51. Consider the 65.0-kg ice skater being pushed by two others shown below. (a) Find the direction and magnitude of $\mathbf{F}_{\text{tot}}$, the total force exerted on her by the others, given that the magnitudes F_1 and F_2 are 26.4 N and 18.6 N, respectively. (b) What is her initial acceleration if she is initially stationary and wearing steel-bladed skates that point in the direction of $\mathbf{F}_{\text{tot}}$? (c) What is her acceleration assuming she is already moving in the direction of $\mathbf{F}_{\text{tot}}$? (Remember that friction always acts in the direction opposite that of motion or attempted motion between surfaces in contact.)

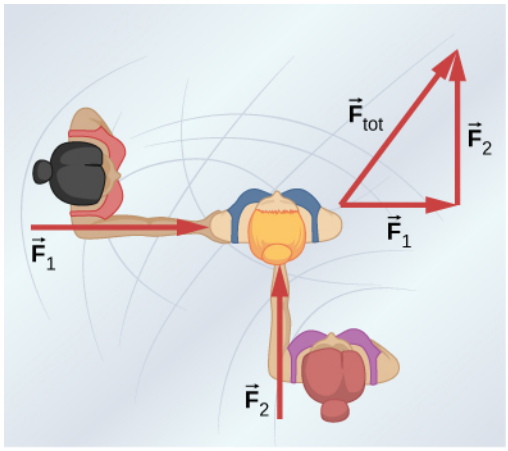


(a)

Free-body diagram




(b)

52. Show that the acceleration of any object down a frictionless incline that makes an angle θ with the horizontal is $a = g \sin\theta$. (Note that this acceleration is independent of mass.)

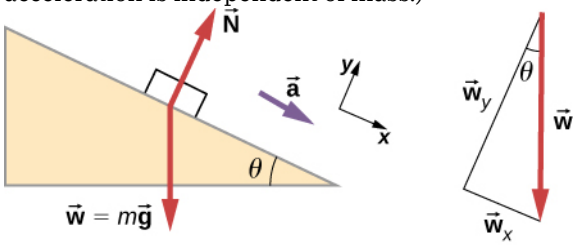


53. Show that the acceleration of any object down an incline where friction behaves simply (that is, where $f_k = \mu_k N$) is $a = g(\sin\theta - \mu_k \cos\theta)$. Note that the acceleration is independent of mass and reduces to the expression found in the previous problem when friction becomes negligibly small ($\mu_k = 0$).

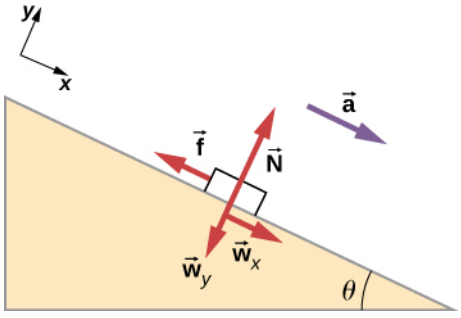

54. Calculate the acceleration opposite to the motion of a snow boarder going up a $5.00°$ slope, assuming the coefficient of friction for waxed wood on wet snow. The result of the preceding problem may be useful, but be careful to consider the fact that the snow boarder is going uphill.

55. A machine at a post office sends packages out a chute and down a ramp to be loaded into delivery vehicles. (a) Calculate the acceleration of a box heading down a $10.0°$ slope, assuming the coefficient of friction for a parcel on waxed wood is 0.100. (b) Find the angle of the slope down which this box could move at a constant velocity. You can neglect air resistance in both parts.

56. If an object is to rest on an incline without slipping, then friction must equal the component of the weight of the object parallel to the incline. This requires greater and greater friction for steeper slopes. Show that the maximum angle of an incline above the horizontal for which an object will not slide down is $\theta = \tan^{-1} \mu_s$. You may use the result of the previous problem. Assume that $a = 0$ and that static friction has reached its maximum value.

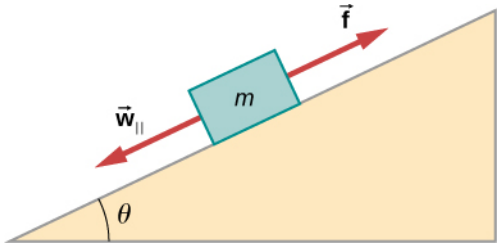

57. Calculate the maximum acceleration of a car that is heading down a $6.00°$ slope (one that makes an angle of $6.00°$ with the horizontal) under the following road conditions. You may assume that the weight of the car is evenly distributed on all four tires and that the coefficient of static friction is involved—that is, the tires are not allowed to slip during the acceleration opposite to the motion. (Ignore rolling.) Calculate for a car: (a) On dry concrete. (b) On wet concrete. (c) On ice, assuming that $\mu_s = 0.100$, the same as for shoes on ice.


58. Calculate the maximum acceleration of a car that is heading up a $4.00°$ slope (one that makes an angle of $4.00°$ with the horizontal) under the following road conditions. Assume that only half the weight of the car is supported by the two drive wheels and that the coefficient of static friction is involved—that is, the tires are not

allowed to slip during the acceleration. (Ignore rolling.) (a) On dry concrete. (b) On wet concrete. (c) On ice, assuming that $\mu_s = 0.100$, the same as for shoes on ice.


59. Repeat the preceding problem for a car with four-wheel drive.

60. A freight train consists of two 8.00×10^5-kg engines and 45 cars with average masses of 5.50×10^5 kg. (a) What force must each engine exert backward on the track to accelerate the train at a rate of $5.00 \times 10^{-2}\,\text{m/s}^2$ if the force of friction is $7.50 \times 10^5\,\text{N}$, assuming the engines exert identical forces? This is not a large frictional force for such a massive system. Rolling friction for trains is small, and consequently, trains are very energy-efficient transportation systems. (b) What is the force in the coupling between the 37th and 38th cars (this is the force each exerts on the other), assuming all cars have the same mass and that friction is evenly distributed among all of the cars and engines?


61. Consider the 52.0-kg mountain climber shown below. (a) Find the tension in the rope and the force that the mountain climber must exert with her feet on the vertical rock face to remain stationary. Assume that the force is exerted parallel to her legs. Also, assume negligible force exerted by her arms. (b) What is the minimum coefficient of friction between her shoes and the cliff?

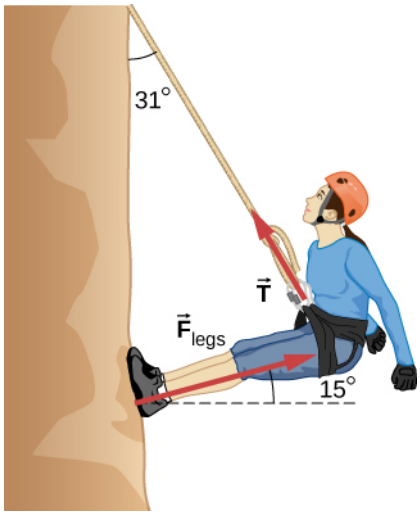

62. A contestant in a winter sporting event pushes a 45.0-kg block of ice across a frozen lake as shown below. The coefficient of friction of ice can be found in Table 6.1. (a) Calculate the minimum force F he must exert to get the block moving. (b) What is its acceleration once it starts to move, if that force is maintained?

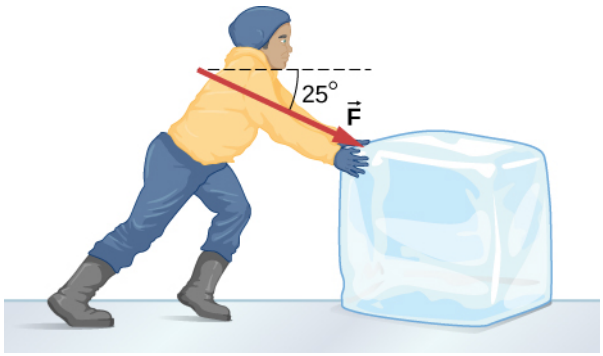

63. The contestant now pulls the block of ice with a rope over his shoulder at the same angle above the horizontal as shown below. The coefficient of friction of ice can be found in Table 6.1. Calculate the minimum force F he must exert to get the block moving. (b) What is its acceleration once it starts to move, if that force is maintained?

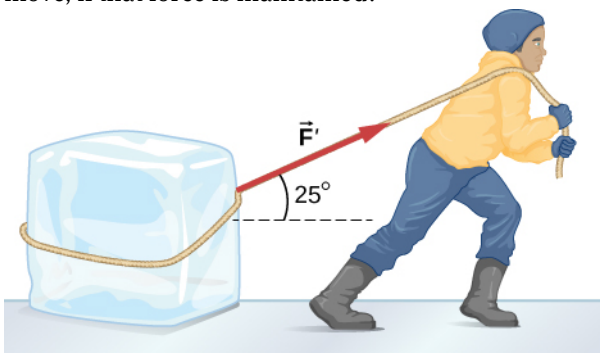

64. At a post office, a parcel that is a 20.0-kg box slides down a ramp inclined at 30.0° with the horizontal. The coefficient of kinetic friction between the box and plane is 0.0300. (a) Find the acceleration of the box. (b) Find the velocity of the box as it reaches the end of the plane, if the length of the plane is 2 m and the box starts at rest.

6.3 Centripetal Force

65. (a) A 22.0-kg child is riding a playground merry-go-round that is rotating at 40.0 rev/min. What centripetal force is exerted if he is 1.25 m from its center? (b) What centripetal force is exerted if the merry-go-round rotates at 3.00 rev/min and he is 8.00 m from its center? (c) Compare each force with his weight.

66. Calculate the centripetal force on the end of a 100-m (radius) wind turbine blade that is rotating at 0.5 rev/s. Assume the mass is 4 kg.


67. What is the ideal banking angle for a gentle turn of 1.20-km radius on a highway with a 105 km/h speed limit (about 65 mi/h), assuming everyone travels at the limit?

68. What is the ideal speed to take a 100.0-m-radius

curve banked at a $20.0°$ angle?


69. (a) What is the radius of a bobsled turn banked at $75.0°$ and taken at 30.0 m/s, assuming it is ideally banked? (b) Calculate the centripetal acceleration. (c) Does this acceleration seem large to you?

70. Part of riding a bicycle involves leaning at the correct angle when making a turn, as seen below. To be stable, the force exerted by the ground must be on a line going through the center of gravity. The force on the bicycle wheel can be resolved into two perpendicular components—friction parallel to the road (this must supply the centripetal force) and the vertical normal force (which must equal the system's weight). (a) Show that θ (as defined as shown) is related to the speed v and radius of curvature r of the turn in the same way as for an ideally banked roadway—that is, $\theta = \tan^{-1}(v^2/rg)$. (b) Calculate θ for a 12.0-m/s turn of radius 30.0 m (as in a race).

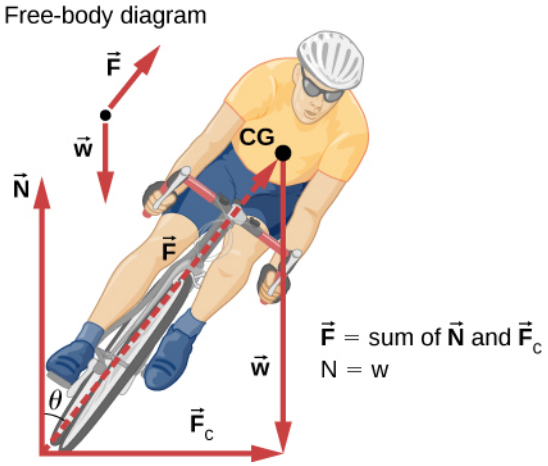


71. If a car takes a banked curve at less than the ideal speed, friction is needed to keep it from sliding toward the inside of the curve (a problem on icy mountain roads). (a) Calculate the ideal speed to take a 100.0 m radius curve banked at $15.0°$. (b) What is the minimum coefficient of friction needed for a frightened driver to take the same curve at 20.0 km/h?

72. Modern roller coasters have vertical loops like the one shown here. The radius of curvature is smaller at the top than on the sides so that the downward centripetal acceleration at the top will be greater than the acceleration due to gravity, keeping the passengers pressed firmly into their seats. What is the speed of the roller coaster at the top of the loop if the radius of curvature there is 15.0 m and the downward acceleration of the car is 1.50 g?

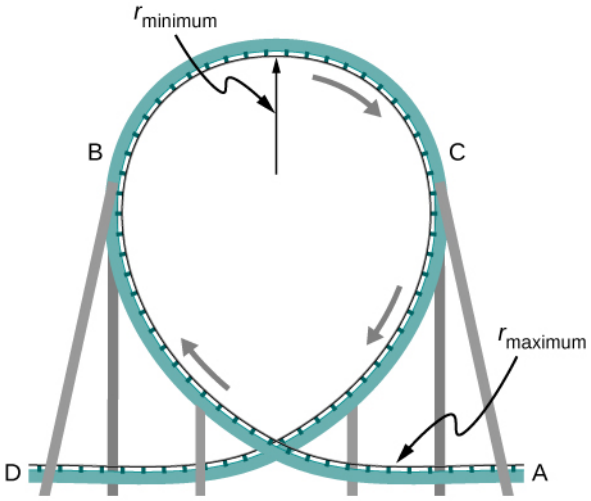

73. A child of mass 40.0 kg is in a roller coaster car that travels in a loop of radius 7.00 m. At point A the speed of the car is 10.0 m/s, and at point B, the speed is 10.5 m/s. Assume the child is not holding on and does not wear a seat belt. (a) What is the force of the car seat on the child at point A? (b) What is the force of the car seat on the child at point B? (c) What minimum speed is required to keep the child in his seat at point A?

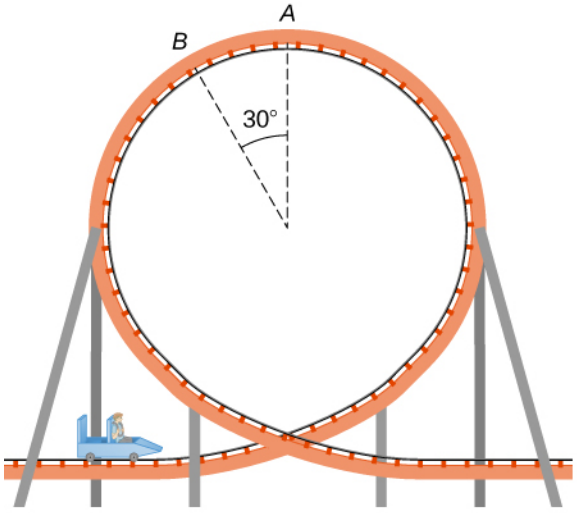

74. In the simple Bohr model of the ground state of the hydrogen atom, the electron travels in a circular orbit around a fixed proton. The radius of the orbit is 5.28×10^{-11} m, and the speed of the electron is 2.18×10^{6} m/s. The mass of an electron is 9.11×10^{-31} kg. What is the force on the electron?

75. Railroad tracks follow a circular curve of radius 500.0 m and are banked at an angle of $5.0°$. For trains of what speed are these tracks designed?

76. The CERN particle accelerator is circular with a circumference of 7.0 km. (a) What is the acceleration of the protons

($m = 1.67 \times 10^{-27}$ kg) that move around the accelerator at 5% of the speed of light? (The speed of light is $v = 3.00 \times 10^8$ m/s.) (b) What is the force on the protons?

77. A car rounds an unbanked curve of radius 65 m. If the coefficient of static friction between the road and car is 0.70, what is the maximum speed at which the car can traverse the curve without slipping?

78. A banked highway is designed for traffic moving at 90.0 km/h. The radius of the curve is 310 m. What is the angle of banking of the highway?

6.4 Drag Force and Terminal Speed

79. The terminal velocity of a person falling in air depends upon the weight and the area of the person facing the fluid. Find the terminal velocity (in meters per second and kilometers per hour) of an 80.0-kg skydiver falling in a headfirst position with a surface area of $0.140\ \text{m}^2$.

80. A 60.0-kg and a 90.0-kg skydiver jump from an airplane at an altitude of 6.00×10^3 m, both falling in a headfirst position. Make some assumption on their frontal areas and calculate their terminal velocities. How long will it take for each skydiver to reach the ground (assuming the time to reach terminal velocity is small)? Assume all values are accurate to three significant digits.

81. A 560-g squirrel with a surface area of $930\ \text{cm}^2$ falls from a 5.0-m tree to the ground. Estimate its terminal velocity. (Use a drag coefficient for a horizontal skydiver.) What will be the velocity of a 56-kg person hitting the ground, assuming no drag contribution in such a short distance?

82. To maintain a constant speed, the force provided by a car's engine must equal the drag force plus the force of friction of the road (the rolling resistance). (a) What are the drag forces at 70 km/h and 100 km/h for a Toyota Camry? (Drag area is $0.70\ \text{m}^2$) (b) What is the drag force at 70 km/h and 100 km/h for a Hummer H2? (Drag area is $2.44\ \text{m}^2$) Assume all values are accurate to three significant digits.

83. By what factor does the drag force on a car increase as it goes from 65 to 110 km/h?

84. Calculate the velocity a spherical rain drop would achieve falling from 5.00 km (a) in the absence of air drag (b) with air drag. Take the size across of the drop to be 4 mm, the density to be $1.00 \times 10^3\ \text{kg/m}^3$, and the surface area to be πr^2.

85. Using Stokes' law, verify that the units for viscosity are kilograms per meter per second.

86. Find the terminal velocity of a spherical bacterium (diameter $2.00\ \mu\text{m}$) falling in water. You will first need to note that the drag force is equal to the weight at terminal velocity. Take the density of the bacterium to be $1.10 \times 10^3\ \text{kg/m}^3$.

87. Stokes' law describes sedimentation of particles in liquids and can be used to measure viscosity. Particles in liquids achieve terminal velocity quickly. One can measure the time it takes for a particle to fall a certain distance and then use Stokes' law to calculate the viscosity of the liquid. Suppose a steel ball bearing (density $7.8 \times 10^3\ \text{kg/m}^3$, diameter 3.0 mm) is dropped in a container of motor oil. It takes 12 s to fall a distance of 0.60 m. Calculate the viscosity of the oil.

88. Suppose that the resistive force of the air on a skydiver can be approximated by $f = -bv^2$. If the terminal velocity of a 50.0-kg skydiver is 60.0 m/s, what is the value of b?

89. A small diamond of mass 10.0 g drops from a swimmer's earring and falls through the water, reaching a terminal velocity of 2.0 m/s. (a) Assuming the frictional force on the diamond obeys $f = -bv$, what is b? (b) How far does the diamond fall before it reaches 90 percent of its terminal speed?


Additional Problems

90. (a) What is the final velocity of a car originally traveling at 50.0 km/h that accelerates opposite to the motion at a rate of $0.400\ \text{m/s}^2$ for 50.0 s? Assume a coefficient of friction of 1.0. (b) What is unreasonable about the result? (c) Which premise is unreasonable, or which premises are inconsistent?


91. A 75.0-kg woman stands on a bathroom scale in an elevator that accelerates from rest to 30.0 m/s in 2.00 s. (a) Calculate the scale reading in newtons and compare it with her weight. (The scale exerts an upward force on her equal to its reading.) (b) What is unreasonable about the result? (c) Which premise is unreasonable, or which premises are inconsistent?

92. (a) Calculate the minimum coefficient of friction needed for a car to negotiate an unbanked 50.0 m radius curve at 30.0 m/s. (b) What is unreasonable about the result? (c) Which premises are unreasonable or inconsistent?


93. As shown below, if $M = 5.50\,\text{kg}$, what is the tension in string 1?

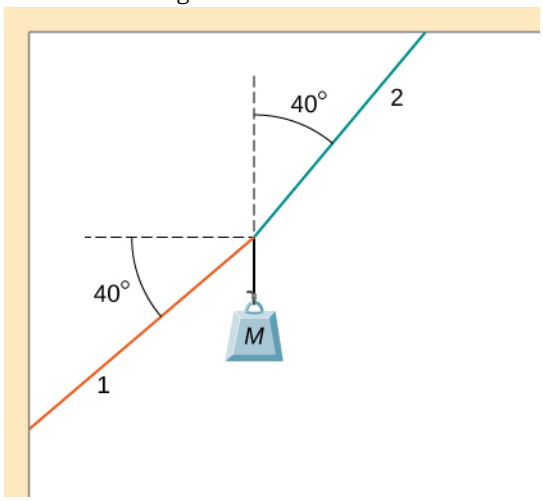

94. As shown below, if $F = 60.0\,\text{N}$ and $M = 4.00\,\text{kg}$, what is the magnitude of the acceleration of the suspended object? All surfaces are frictionless.

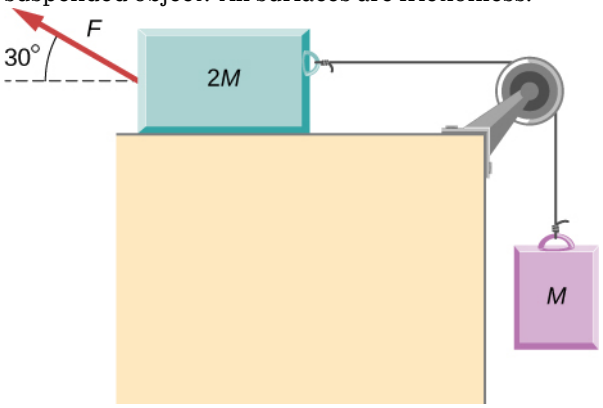

95. As shown below, if $M = 6.0\,\text{kg}$, what is the tension in the connecting string? The pulley and all surfaces are frictionless.

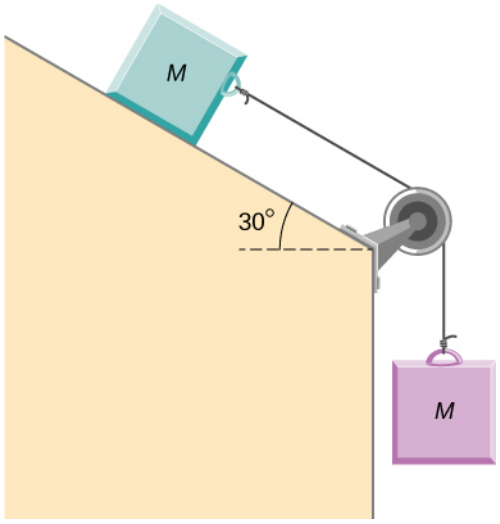


96. A small space probe is released from a spaceship. The space probe has mass 20.0 kg and contains 90.0 kg of fuel. It starts from rest in deep space, from the origin of a coordinate system based on the spaceship, and burns fuel at the rate of 3.00 kg/s. The engine provides a constant thrust of 120.0 N. (a) Write an expression for the mass of the space probe as a function of time, between 0 and 30 seconds, assuming that the engine ignites fuel beginning at $t = 0$. (b) What is the velocity after 15.0 s? (c) What is the position of the space probe after 15.0 s, with initial position at the origin? (d) Write an expression for the position as a function of time, for $t > 30.0\,\text{s}$.

97. A half-full recycling bin has mass 3.0 kg and is pushed up a $40.0°$ incline with constant speed under the action of a 26-N force acting up and parallel to the incline. The incline has friction. What magnitude force must act up and parallel to the incline for the bin to move down the incline at constant velocity?

98. A child has mass 6.0 kg and slides down a $35°$ incline with constant speed under the action of a 34-N force acting up and parallel to the incline. What is the coefficient of kinetic friction between the child and the surface of the incline?

99. The two barges shown here are coupled by a cable of negligible mass. The mass of the front barge is 2.00×10^3 kg and the mass of the rear barge is 3.00×10^3 kg. A tugboat pulls the front barge with a horizontal force of magnitude 20.0×10^3 N, and the frictional forces of the water on the front and rear barges are 8.00×10^3 N and 10.0×10^3 N, respectively. Find the horizontal acceleration of the barges and the tension in the connecting cable.

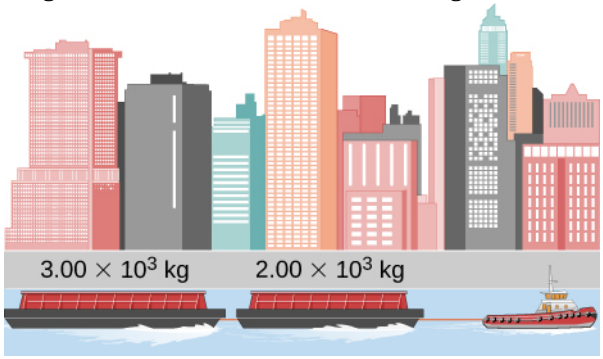

100. If the order of the barges of the preceding exercise is reversed so that the tugboat pulls the 3.00×10^3-kg barge with a force of 20.0×10^3 N, what are the acceleration of the barges and the tension in the coupling cable?

101. An object with mass m moves along the x-axis. Its position at any time is given by $x(t) = pt^3 + qt^2$ where p and q are constants. Find the net force on this object for any time t.

102. A helicopter with mass 2.35×10^4 kg has a position given by $\vec{\mathbf{r}}(t) = (0.020\,t^3)\hat{\mathbf{i}} + (2.2t)\hat{\mathbf{j}} - (0.060\,t^2)\hat{\mathbf{k}}$. Find the net force on the helicopter at $t = 3.0$ s.

103. Located at the origin, an electric car of mass m is at rest and in equilibrium. A time dependent force of $\vec{\mathbf{F}}(t)$ is applied at time $t = 0$, and its components are $F_x(t) = p + nt$ and $F_y(t) = qt$ where p, q, and n are constants. Find the position $\vec{\mathbf{r}}(t)$ and velocity $\vec{\mathbf{v}}(t)$ as functions of time t.


104. A particle of mass m is located at the origin. It is at rest and in equilibrium. A time-dependent force of $\vec{\mathbf{F}}(t)$ is applied at time $t = 0$, and its components are $F_x(t) = pt$ and $F_y(t) = n + qt$ where p, q, and n are constants. Find the position $\vec{\mathbf{r}}(t)$ and velocity $\vec{\mathbf{v}}(t)$ as functions of time t.

105. A 2.0-kg object has a velocity of $4.0\hat{\mathbf{i}}$ m/s at $t = 0$. A constant resultant force of $(2.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}})$ N then acts on the object for 3.0 s. What is the magnitude of the object's velocity at the end of the 3.0-s interval?


106. A 1.5-kg mass has an acceleration of $(4.0\hat{\mathbf{i}} - 3.0\hat{\mathbf{j}})$ m/s^2. Only two forces act on the mass. If one of the forces is $(2.0\hat{\mathbf{i}} - 1.4\hat{\mathbf{j}})$ N, what is the magnitude of the other force?

107. A box is dropped onto a conveyor belt moving at 3.4 m/s. If the coefficient of friction between the box and the belt is 0.27, how long will it take before the box moves without slipping?

108. Shown below is a 10.0-kg block being pushed by a horizontal force $\vec{\mathbf{F}}$ of magnitude 200.0 N. The coefficient of kinetic friction between the two surfaces is 0.50. Find the acceleration of the block.

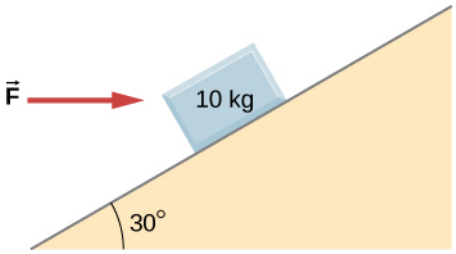

109. As shown below, the mass of block 1 is $m_1 = 4.0$ kg, while the mass of block 2 is $m_2 = 8.0$ kg. The coefficient of friction between m_1 and the inclined surface is $\mu_k = 0.40$. What is the acceleration of the system?

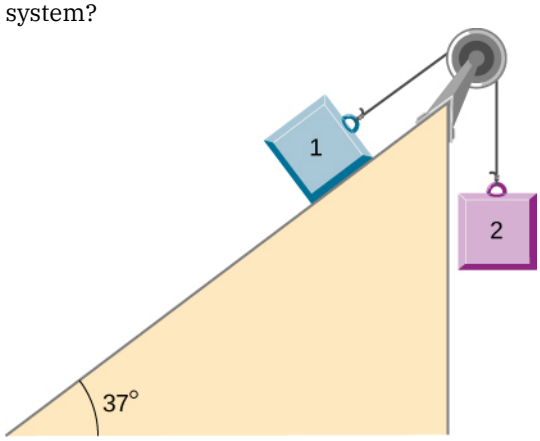


110. A student is attempting to move a 30-kg mini-fridge into her dorm room. During a moment of inattention, the mini-fridge slides down a 35 degree incline at constant speed when she applies a force of 25 N acting up and parallel to the incline. What is the coefficient of kinetic friction between the fridge and the surface of the incline?

111. A crate of mass 100.0 kg rests on a rough surface inclined at an angle of $37.0°$ with the horizontal. A massless rope to which a force can be applied parallel to the surface is attached to the crate and leads to the top of the incline. In its present state, the crate is just ready to slip and start to move down the plane. The coefficient of friction is 80% of that for the static case. (a) What is the coefficient of static friction? (b) What is the maximum force that can be applied upward along the plane on the rope and not move the block? (c) With a slightly greater applied force, the block will slide up the plane. Once it begins to move, what is its acceleration and what reduced force is necessary to keep it moving upward at constant speed? (d) If the block is given a slight nudge to get it started down the plane, what will be its acceleration in that direction? (e) Once the block begins to slide downward, what upward force on the rope is required to keep the block from accelerating downward?

112. A car is moving at high speed along a highway when the driver makes an emergency braking. The wheels become locked (stop rolling), and the resulting skid marks are 32.0 meters long. If the coefficient of kinetic friction between tires and road is 0.550, and the acceleration was constant during braking, how fast was the car going when the wheels became locked?

113. A crate having mass 50.0 kg falls horizontally off the back of the flatbed truck, which is traveling at 100 km/h. Find the value of the coefficient of kinetic friction between the road and crate if the crate slides 50 m on the road in coming to rest. The initial speed of the crate is the same as the truck, 100 km/h.

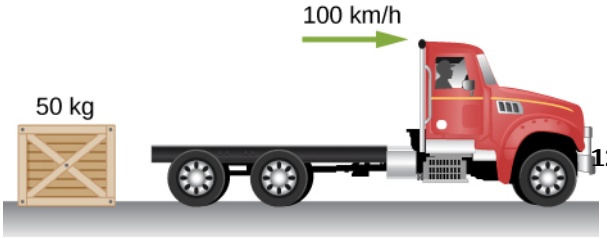

114. A 15-kg sled is pulled across a horizontal, snow-covered surface by a force applied to a rope at 30 degrees with the horizontal. The coefficient of kinetic friction between the sled and the snow is 0.20. (a) If the force is 33 N, what is the horizontal acceleration of the sled? (b) What must the force be in order to pull the sled at constant velocity?

115. A 30.0-g ball at the end of a string is swung in a vertical circle with a radius of 25.0 cm. The tangential velocity is 200.0 cm/s. Find the tension in the string: (a) at the top of the circle, (b) at the bottom of the circle, and (c) at a distance of 12.5 cm from the center of the circle ($r = 12.5$ cm).

116. A particle of mass 0.50 kg starts moves through a circular path in the *xy*-plane with a position given by $\vec{\mathbf{r}}(t) = (4.0\cos 3t)\hat{\mathbf{i}} + (4.0\sin 3t)\hat{\mathbf{j}}$ where r is in meters and t is in seconds. (a) Find the velocity and acceleration vectors as functions of time. (b) Show that the acceleration vector always points toward the center of the circle (and thus represents centripetal acceleration). (c) Find the centripetal force vector as a function of time.

117. A stunt cyclist rides on the interior of a cylinder 12 m in radius. The coefficient of static friction between the tires and the wall is 0.68. Find the value of the minimum speed for the cyclist to perform the stunt.

118. When a body of mass 0.25 kg is attached to a vertical massless spring, it is extended 5.0 cm from its unstretched length of 4.0 cm. The body and spring are placed on a horizontal frictionless surface and rotated about the held end of the spring at 2.0 rev/s. How far is the spring stretched?


119. A piece of bacon starts to slide down the pan when one side of a pan is raised up 5.0 cm. If the length of the pan from pivot to the raising point is 23.5 cm, what is the coefficient of static friction between the pan and the bacon?

120. A plumb bob hangs from the roof of a railroad car. The car rounds a circular track of radius 300.0 m at a speed of 90.0 km/h. At what angle relative to the vertical does the plumb bob hang?


121. An airplane flies at 120.0 m/s and banks at a $30°$ angle. If its mass is 2.50×10^3 kg, (a) what is the magnitude of the lift force? (b) what is the radius of the turn?

122. The position of a particle is given by $\vec{\mathbf{r}}(t) = A\left(\cos \omega t \hat{\mathbf{i}} + \sin \omega t \hat{\mathbf{j}}\right)$, where ω is a constant. (a) Show that the particle moves in a circle of radius A. (b) Calculate $d\vec{\mathbf{r}}/dt$ and then show that the speed of the particle is a constant $A\omega$. (c) Determine $d^2\vec{\mathbf{r}}/dt^2$ and show that a is given by $a_c = r\omega^2$. (d) Calculate the centripetal force on the particle. [*Hint*: For (b) and (c), you will need to use $(d/dt)(\cos \omega t) = -\omega \sin \omega t$ and $(d/dt)(\sin \omega t) = \omega \cos \omega t$.


123. Two blocks connected by a string are pulled across a horizontal surface by a force applied to one of the blocks, as shown below. The coefficient of kinetic friction between the blocks and the surface is 0.25. If each block has an acceleration of 2.0 m/s^2 to the right, what is the magnitude F of the applied force?

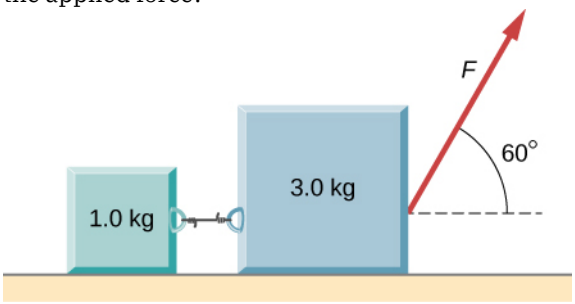


124. As shown below, the coefficient of kinetic friction between the surface and the larger block is 0.20, and the coefficient of kinetic friction between the surface and the smaller block is 0.30. If $F = 10\,\text{N}$ and $M = 1.0\,\text{kg}$, what is the tension in the connecting string?

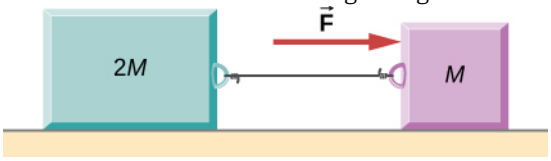

125. In the figure, the coefficient of kinetic friction between the surface and the blocks is μ_k. If $M = 1.0\,\text{kg}$, find an expression for the magnitude of the acceleration of either block (in terms of F, μ_k, and g).

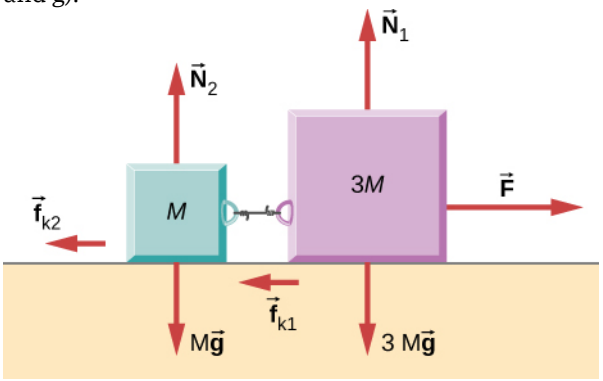


126. Two blocks are stacked as shown below, and rest on a frictionless surface. There is friction between the two blocks (coefficient of friction μ). An external force is applied to the top block at an angle θ with the horizontal. What is the maximum force F that can be applied for the two blocks to move together?

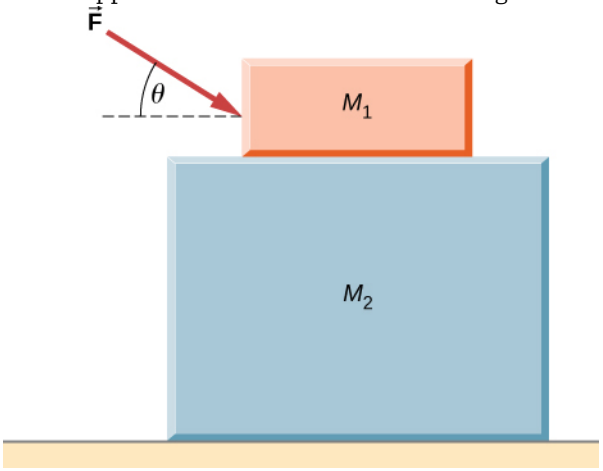

127. A box rests on the (horizontal) back of a truck. The coefficient of static friction between the box and the surface on which it rests is 0.24. What maximum distance can the truck travel (starting from rest and moving horizontally with constant acceleration) in 3.0 s without having the box slide?


128. A double-incline plane is shown below. The coefficient of friction on the left surface is 0.30, and on the right surface 0.16. Calculate the acceleration of the system.

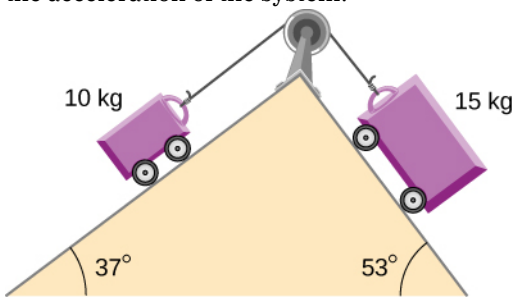


Challenge Problems

129. In a later chapter, you will find that the weight of a particle varies with altitude such that $w = \frac{mgr_0{}^2}{r^2}$ where r_0 is the radius of Earth and r is the distance from Earth's center. If the particle is fired vertically with velocity v_0 from Earth's surface, determine its velocity as a function of position r. (*Hint:* use $adr = vdv$, the rearrangement mentioned in the text.)

130. A large centrifuge, like the one shown below, is used to expose aspiring astronauts to accelerations similar to those experienced in rocket launches and atmospheric reentries. (a) At what angular velocity is the centripetal acceleration $10g$ if the rider is 15.0 m from the center of rotation? (b) The rider's cage hangs on a pivot at the end of the arm, allowing it to swing outward during rotation as shown in the bottom accompanying figure. At what angle θ below the horizontal will the cage hang when the centripetal acceleration is $10g$? (*Hint:* The arm supplies centripetal force and supports the weight of the cage. Draw a free-body diagram of the forces to see what the angle θ should be.)

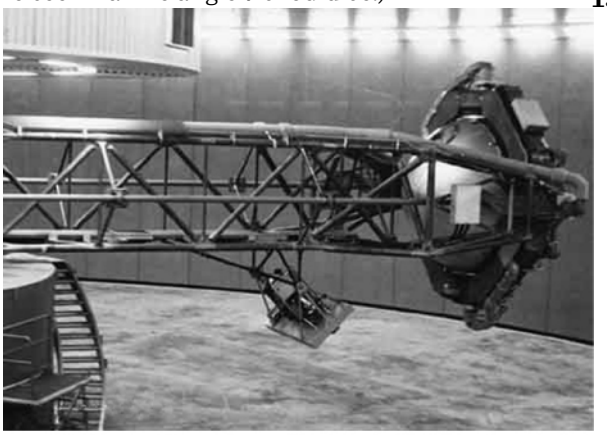

(a)

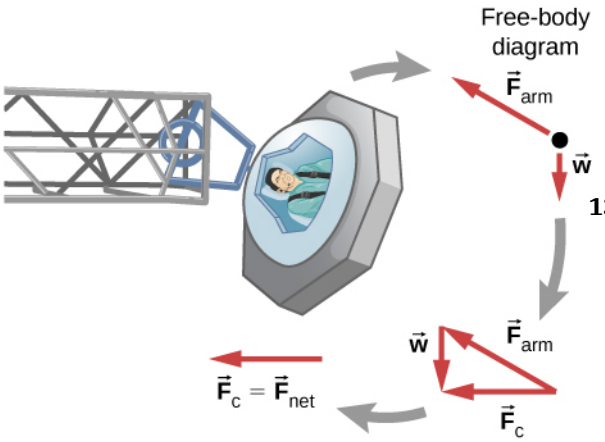

(b)

131. A car of mass 1000.0 kg is traveling along a level road at 100.0 km/h when its brakes are applied. Calculate the stopping distance if the coefficient of kinetic friction of the tires is 0.500. Neglect air resistance. (*Hint:* since the distance traveled is of interest rather than the time, x is the desired independent variable and not t. Use the Chain Rule to change the variable: $\frac{dv}{dt} = \frac{dv}{dx}\frac{dx}{dt} = v\frac{dv}{dx}$.)

132. An airplane flying at 200.0 m/s makes a turn that takes 4.0 min. What bank angle is required? What is the percentage increase in the perceived weight of the passengers?

133. A skydiver is at an altitude of 1520 m. After 10.0 seconds of free fall, he opens his parachute and finds that the air resistance, F_D, is given by the formula $F_D = -bv$, where b is a constant and v is the velocity. If $b = 0.750$, and the mass of the skydiver is 82.0 kg, first set up differential equations for the velocity and the position, and then find: (a) the speed of the skydiver when the parachute opens, (b) the distance fallen before the parachute opens, (c) the terminal velocity after the parachute opens (find the limiting velocity), and (d) the time the skydiver is in the air after the parachute opens.

134. In a television commercial, a small, spherical bead of mass 4.00 g is released from rest at $t = 0$ in a bottle of liquid shampoo. The terminal speed is observed to be 2.00 cm/s. Find (a) the value of the constant b in the equation $v = \frac{mg}{b}(1 - e^{-bt/m})$, and (b) the value of the resistive force when the bead reaches terminal speed.

135. A boater and motor boat are at rest on a lake. Together, they have mass 200.0 kg. If the thrust of the motor is a constant force of 40.0 N in the direction of motion, and if the resistive force of the water is numerically equivalent to 2 times the speed v of the boat, set up and solve the differential equation to find: (a) the velocity of the boat at time t; (b) the limiting velocity (the velocity after a long time has passed).

CHAPTER 7
Work and Kinetic Energy



Figure 7.1 A sprinter exerts her maximum power with the greatest force in the short time her foot is in contact with the ground. This adds to her kinetic energy, preventing her from slowing down during the race. Pushing back hard on the track generates a reaction force that propels the sprinter forward to win at the finish. (credit: modification of work by Marie-Lan Nguyen)

Chapter Outline

7.1 Work

7.2 Kinetic Energy

7.3 Work-Energy Theorem

7.4 Power

INTRODUCTION In this chapter, we discuss some basic physical concepts involved in every physical motion in the universe, going beyond the concepts of force and change in motion, which we discussed in Motion in Two and Three Dimensions and Newton's Laws of Motion. These concepts are work, kinetic energy, and power. We explain how these quantities are related to one another, which will lead us to a fundamental relationship called the work-energy theorem. In the next chapter, we generalize this idea to the broader principle of conservation of energy.

The application of Newton's laws usually requires solving differential equations that relate the forces acting on an object to the accelerations they produce. Often, an analytic solution is intractable or impossible, requiring lengthy numerical solutions or simulations to get approximate results. In such situations, more general relations, like the work-energy theorem (or the conservation of energy), can still provide useful answers to

many questions and require a more modest amount of mathematical calculation. In particular, you will see how the work-energy theorem is useful in relating the speeds of a particle, at different points along its trajectory, to the forces acting on it, even when the trajectory is otherwise too complicated to deal with. Thus, some aspects of motion can be addressed with fewer equations and without vector decompositions.

7.1 Work

Learning Objectives

By the end of this section, you will be able to:

- Represent the work done by any force
- Evaluate the work done for various forces

In physics, **work** is done on an object when energy is transferred to the object. In other words, work is done when a force acts on something that undergoes a displacement from one position to another. Forces can vary as a function of position, and displacements can be along various paths between two points. We first define the increment of work dW done by a force $\vec{\mathbf{F}}$ acting through an infinitesimal displacement $d\vec{\mathbf{r}}$ as the dot product of these two vectors:

$$dW = \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = \left|\vec{\mathbf{F}}\right| \left|d\vec{\mathbf{r}}\right| \cos\theta. \tag{7.1}$$

Then, we can add up the contributions for infinitesimal displacements, along a path between two positions, to get the total work.

Work Done by a Force

The work done by a force is the integral of the force with respect to displacement along the path of the displacement:

$$W_{AB} = \int_{\text{path } AB} \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}. \tag{7.2}$$

The vectors involved in the definition of the work done by a force acting on a particle are illustrated in Figure 7.2.




Figure 7.2 Vectors used to define work. The force acting on a particle and its infinitesimal displacement are shown at one point along the path between *A* and *B*. The infinitesimal work is the dot product of these two vectors; the total work is the integral of the dot product along the path.

We choose to express the dot product in terms of the magnitudes of the vectors and the cosine of the angle between them, because the meaning of the dot product for work can be put into words more directly in terms of magnitudes and angles. We could equally well have expressed the dot product in terms of the various components introduced in Vectors. In two dimensions, these were the x- and y-components in Cartesian coordinates, or the r- and φ-components in polar coordinates; in three dimensions, it was just x-, y-, and z-components. Which choice is more convenient depends on the situation. In words, you can express Equation 7.1 for the work done by a force acting over a displacement as a product of one component acting parallel to the other component. From the properties of vectors, it doesn't matter if you take the component of the force parallel to the displacement or the component of the displacement parallel to the force—you get the same

result either way.

Recall that the magnitude of a force times the cosine of the angle the force makes with a given direction is the component of the force in the given direction. The components of a vector can be positive, negative, or zero, depending on whether the angle between the vector and the component-direction is between $0°$ and $90°$ or $90°$ and $180°$, or is equal to $90°$. As a result, the work done by a force can be positive, negative, or zero, depending on whether the force is generally in the direction of the displacement, generally opposite to the displacement, or perpendicular to the displacement. The maximum work is done by a given force when it is along the direction of the displacement ($\cos\theta = \pm 1$), and zero work is done when the force is perpendicular to the displacement ($\cos\theta = 0$).

The units of work are units of force multiplied by units of length, which in the SI system is newtons times meters, $\mathrm{N} \cdot \mathrm{m}$. This combination is called a joule, for historical reasons that we will mention later, and is abbreviated as J. In the English system, still used in the United States, the unit of force is the pound (lb) and the unit of distance is the foot (ft), so the unit of work is the foot-pound ($\mathrm{ft} \cdot \mathrm{lb}$).

Work Done by Constant Forces and Contact Forces

The simplest work to evaluate is that done by a force that is constant in magnitude and direction. In this case, we can factor out the force; the remaining integral is just the total displacement, which only depends on the end points A and B, but not on the path between them:

$$W_{AB} = \vec{\mathbf{F}} \cdot \int_A^B d\vec{\mathbf{r}} = \vec{\mathbf{F}} \cdot \left(\vec{\mathbf{r}}_B - \vec{\mathbf{r}}_A\right) = \left|\vec{\mathbf{F}}\right| \left|\vec{\mathbf{r}}_B - \vec{\mathbf{r}}_A\right| \cos\theta \quad \text{(constant force)}.$$

We can also see this by writing out Equation 7.2 in Cartesian coordinates and using the fact that the components of the force are constant:

$$\begin{aligned} W_{AB} &= \int_{\text{path } AB} \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = \int_{\text{path } AB} \left(F_x dx + F_y dy + F_z dz\right) = F_x \int_A^B dx + F_y \int_A^B dy + F_z \int_A^B dz \\ &= F_x\left(x_B - x_A\right) + F_y\left(y_B - y_A\right) + F_z\left(z_B - z_A\right) = \vec{\mathbf{F}} \cdot \left(\vec{\mathbf{r}}_B - \vec{\mathbf{r}}_A\right). \end{aligned}$$

Figure 7.3(a) shows a person exerting a constant force $\vec{\mathbf{F}}$ along the handle of a lawn mower, which makes an angle θ with the horizontal. The horizontal displacement of the lawn mower, over which the force acts, is $\vec{\mathbf{d}}$. The work done on the lawn mower is $W = \vec{\mathbf{F}} \cdot \vec{\mathbf{d}} = Fd\cos\theta$, which the figure also illustrates as the horizontal component of the force times the magnitude of the displacement.

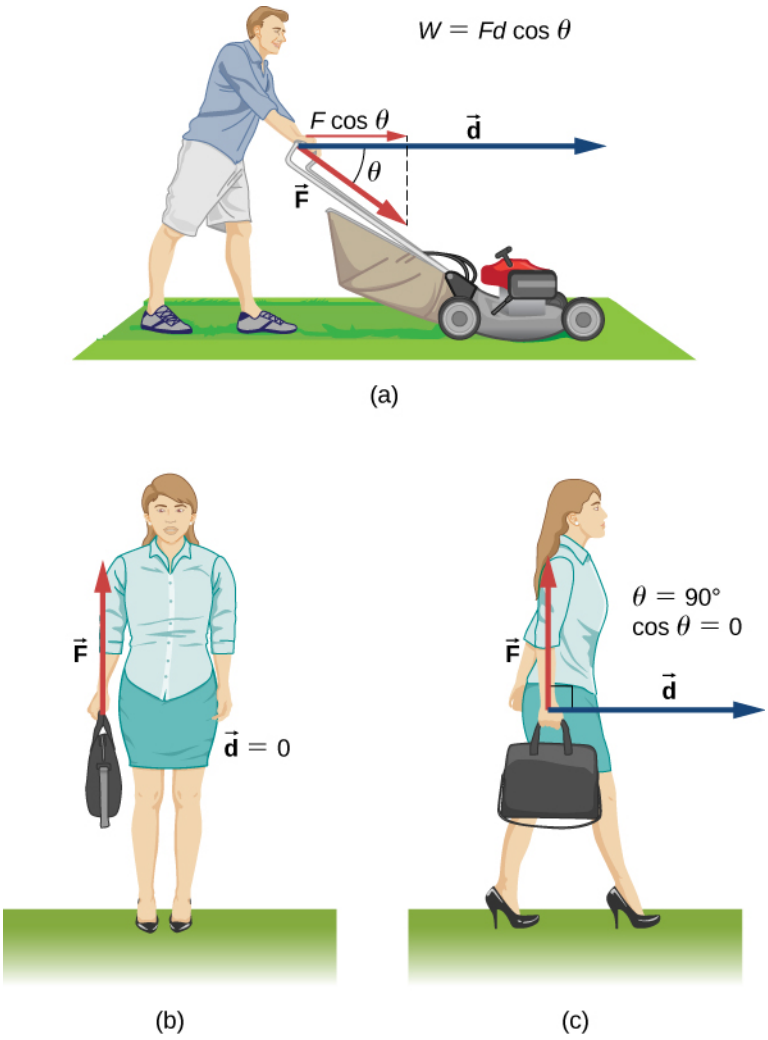


Figure 7.3 Work done by a constant force. (a) A person pushes a lawn mower with a constant force. The component of the force parallel to the displacement is the work done, as shown in the equation in the figure. (b) A person holds a briefcase. No work is done because the displacement is zero. (c) The person in (b) walks horizontally while holding the briefcase. No work is done because $\cos\theta$ is zero.

Figure 7.3(b) shows a person holding a briefcase. The person must exert an upward force, equal in magnitude to the weight of the briefcase, but this force does no work, because the displacement over which it acts is zero.

In Figure 7.3(c), where the person in (b) is walking horizontally with constant speed, the work done by the person on the briefcase is still zero, but now because the angle between the force exerted and the displacement is $90°$ ($\vec{\mathbf{F}}$ perpendicular to $\vec{\mathbf{d}}$) and $\cos 90° = 0$.

EXAMPLE 7.1

Calculating the Work You Do to Push a Lawn Mower

How much work is done on the lawn mower by the person in Figure 7.3(a) if he exerts a constant force of 75.0 N at an angle $35°$ below the horizontal and pushes the mower 25.0 m on level ground?

Strategy

We can solve this problem by substituting the given values into the definition of work done on an object by a constant force, stated in the equation $W = Fd\cos\theta$. The force, angle, and displacement are given, so that only the work W is unknown.

Solution

The equation for the work is

$$W = Fd\cos\theta.$$

Substituting the known values gives

$$W = (75.0\text{ N})(25.0\text{ m})\cos(35.0^\circ) = 1.54 \times 10^3\text{ J}.$$

Significance

Even though one and a half kilojoules may seem like a lot of work, we will see in Potential Energy and Conservation of Energy that it's only about as much work as you could do by burning one sixth of a gram of fat.

When you mow the grass, other forces act on the lawn mower besides the force you exert—namely, the contact force of the ground and the gravitational force of Earth. Let's consider the work done by these forces in general. For an object moving on a surface, the displacement $d\vec{\mathbf{r}}$ is tangent to the surface. The part of the contact force on the object that is perpendicular to the surface is the normal force $\vec{\mathbf{N}}$. Since the cosine of the angle between the normal and the tangent to a surface is zero, we have

$$dW_\text{N} = \vec{\mathbf{N}} \cdot d\vec{\mathbf{r}} = \vec{\mathbf{0}}.$$

The normal force never does work under these circumstances. (Note that if the displacement $d\vec{\mathbf{r}}$ did have a relative component perpendicular to the surface, the object would either leave the surface or break through it, and there would no longer be any normal contact force. However, if the object is more than a particle, and has an internal structure, the normal contact force can do work on it, for example, by displacing it or deforming its shape. This will be mentioned in the next chapter.)

The part of the contact force on the object that is parallel to the surface is friction, $\vec{\mathbf{f}}$. For this object sliding along the surface, kinetic friction $\vec{\mathbf{f}}_\text{k}$ is opposite to $d\vec{\mathbf{r}}$, relative to the surface, so the work done by kinetic friction is negative. If the magnitude of $\vec{\mathbf{f}}_\text{k}$ is constant (as it would be if all the other forces on the object were constant), then the work done by friction is

$$W_\text{fr} = \int_A^B \vec{\mathbf{f}}_k \cdot d\vec{\mathbf{r}} = -f_k \int_A^B |dr| = -f_k\, |l_{AB}|, \qquad 7.3$$

where $|l_{AB}|$ is the path length on the surface. The force of static friction does no work in the reference frame between two surfaces because there is never displacement between the surfaces. As an external force, static friction can do work. Static friction can keep someone from sliding off a sled when the sled is moving and perform positive work on the person. If you're driving your car at the speed limit on a straight, level stretch of highway, the negative work done by air resistance is balanced by the positive work done by the static friction of the road on the drive wheels. You can pull the rug out from under an object in such a way that it slides backward relative to the rug, but forward relative to the floor. In this case, kinetic friction exerted by the rug on the object could be in the same direction as the displacement of the object, relative to the floor, and do positive work. The bottom line is that you need to analyze each particular case to determine the work done by the forces, whether positive, negative or zero.

EXAMPLE 7.2

Moving a Couch

You decide to move your couch to a new position on your horizontal living room floor. The normal force on the couch is 1 kN and the coefficient of friction is 0.6. (a) You first push the couch 3 m parallel to a wall and then 1 m perpendicular to the wall (*A* to *B* in Figure 7.4). How much work is done by the frictional force? (b) You don't like the new position, so you move the couch straight back to its original position (*B* to *A* in Figure 7.4). What was the total work done against friction moving the couch away from its original position and back again?

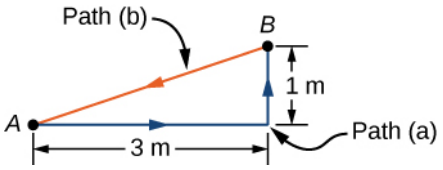


Figure 7.4 Top view of paths for moving a couch.

Strategy

The magnitude of the force of kinetic friction on the couch is constant, equal to the coefficient of friction times the normal force, $f_K = \mu_K N$. Therefore, the work done by it is $W_{\text{fr}} = -f_K d$, where d is the path length traversed. The segments of the paths are the sides of a right triangle, so the path lengths are easily calculated. In part (b), you can use the fact that the work done against a force is the negative of the work done by the force.

Solution

a. The work done by friction i

$$W = -(0.6)(1\text{ kN})(3\text{ m} + 1\text{ m}) = -2.4\text{ kJ}.$$

b. The length of the path along the hypotenuse is $\sqrt{10}$ m, so the total work done against friction is

$$W = (0.6)(1\text{ kN})(3\text{ m} + 1\text{ m} + \sqrt{10}\text{ m}) = 4.3\text{ kJ}.$$

Significance

The total path over which the work of friction was evaluated began and ended at the same point (it was a closed path), so that the total displacement of the couch was zero. However, the total work was not zero. The reason is that forces like friction are classified as nonconservative forces, or dissipative forces, as we discuss in the next chapter.

CHECK YOUR UNDERSTANDING 7.1

Can kinetic friction ever be a constant force for all paths?

The other force on the lawn mower mentioned above was Earth's gravitational force, or the weight of the mower. Near the surface of Earth, the gravitational force on an object of mass m has a constant magnitude, mg, and constant direction, vertically down. Therefore, the work done by gravity on an object is the dot product of its weight and its displacement. In many cases, it is convenient to express the dot product for gravitational work in terms of the x-, y-, and z-components of the vectors. A typical coordinate system has the x-axis horizontal and the y-axis vertically up. Then the gravitational force is $-mg\hat{\mathbf{j}}$, so the work done by gravity, over any path from A to B, is

$$W_{\text{grav},AB} = -mg\hat{\mathbf{j}} \cdot (\vec{\mathbf{r}}_B - \vec{\mathbf{r}}_A) = -mg(y_B - y_A). \quad 7.4$$

The work done by a constant force of gravity on an object depends only on the object's weight and the difference in height through which the object is displaced. Gravity does negative work on an object that moves upward ($y_B > y_A$), or, in other words, you must do positive work against gravity to lift an object upward. Alternately, gravity does positive work on an object that moves downward ($y_B < y_A$), or you do negative work against gravity to "lift" an object downward, controlling its descent so it doesn't drop to the ground. ("Lift" is used as opposed to "drop".)

EXAMPLE 7.3

Shelving a Book

You lift an oversized library book, weighing 20 N, 1 m vertically down from a shelf, and carry it 3 m horizontally to a table (Figure 7.5). How much work does gravity do on the book? (b) When you're finished, you

move the book in a straight line back to its original place on the shelf. What was the total work done against gravity, moving the book away from its original position on the shelf and back again?

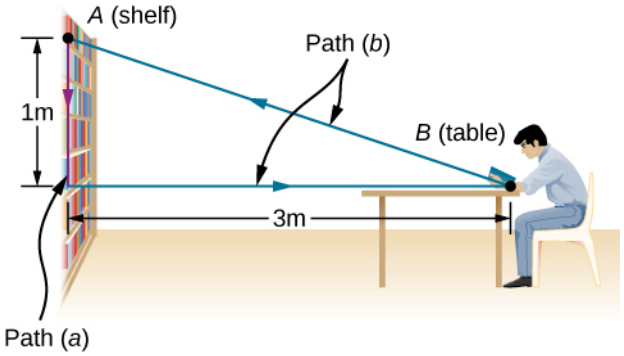


Figure 7.5 Side view of the paths for moving a book to and from a shelf.

Strategy

We have just seen that the work done by a constant force of gravity depends only on the weight of the object moved and the difference in height for the path taken, $W_{AB} = -mg\,(y_B - y_A)$. We can evaluate the difference in height to answer (a) and (b).

Solution

a. Since the book starts on the shelf and is lifted down $y_B - y_A = -1$ m, we have
$$W = -(20\text{ N})(-1\text{ m}) = 20\text{ J}.$$

b. There is zero difference in height for any path that begins and ends at the same place on the shelf, so $W = 0$.

Significance

Gravity does positive work (20 J) when the book moves down from the shelf. The gravitational force between two objects is an attractive force, which does positive work when the objects get closer together. Gravity does zero work (0 J) when the book moves horizontally from the shelf to the table and negative work (−20 J) when the book moves from the table back to the shelf. The total work done by gravity is zero $[20\text{ J} + 0\text{ J} + (-20\text{ J}) = 0]$. Unlike friction or other dissipative forces, described in Example 7.2, the total work done against gravity, over any closed path, is zero. Positive work is done against gravity on the upward parts of a closed path, but an equal amount of negative work is done against gravity on the downward parts. In other words, work done *against* gravity, lifting an object *up*, is "given back" when the object comes back down. Forces like gravity (those that do zero work over any closed path) are classified as conservative forces and play an important role in physics.

CHECK YOUR UNDERSTANDING 7.2

Can Earth's gravity ever be a constant force for all paths?

Work Done by Forces that Vary

In general, forces may vary in magnitude and direction at points in space, and paths between two points may be curved. The infinitesimal work done by a variable force can be expressed in terms of the components of the force and the displacement along the path,

$$dW = F_x\,dx + F_y\,dy + F_z\,dz.$$

Here, the components of the force are functions of position along the path, and the displacements depend on the equations of the path. (Although we chose to illustrate dW in Cartesian coordinates, other coordinates are better suited to some situations.) Equation 7.2 defines the total work as a line integral, or the limit of a sum of infinitesimal amounts of work. The physical concept of work is straightforward: you calculate the work for tiny

displacements and add them up. Sometimes the mathematics can seem complicated, but the following example demonstrates how cleanly they can operate.

EXAMPLE 7.4

Work Done by a Variable Force over a Curved Path

An object moves along a parabolic path $y = (0.5\ \text{m}^{-1})x^2$ from the origin $A = (0, 0)$ to the point $B = (2\ \text{m}, 2\ \text{m})$ under the action of a force $\vec{\mathbf{F}} = (5\ \text{N/m})y\hat{\mathbf{i}} + (10\ \text{N/m})x\hat{\mathbf{j}}$ (Figure 7.6). Calculate the work done.

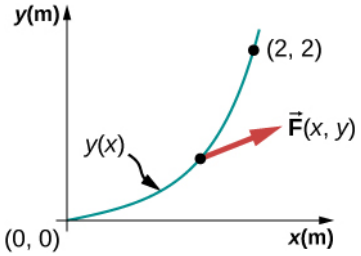


Figure 7.6 The parabolic path of a particle acted on by a given force.

Strategy

The components of the force are given functions of x and y. We can use the equation of the path to express y and dy in terms of x and dx; namely,

$$y = (0.5\ \text{m}^{-1})x^2 \text{ and } dy = 2(0.5\ \text{m}^{-1})xdx.$$

Then, the integral for the work is just a definite integral of a function of x.

Solution

The infinitesimal element of work is

$$\begin{aligned} dW &= F_x dx + F_y dy = (5\ \text{N/m})ydx + (10\ \text{N/m})xdy \\ &= (5\ \text{N/m})(0.5\ \text{m}^{-1})x^2 dx + (10\ \text{N/m})2(0.5\ \text{m}^{-1})x^2 dx = (12.5\ \text{N/m}^2)x^2 dx. \end{aligned}$$

The integral of x^2 is $x^3/3$, so

$$W = \int_0^{2\ \text{m}} (12.5\ \text{N/m}^2)x^2 dx = (12.5\ \text{N/m}^2)\frac{x^3}{3}\Big|_0^{2\ \text{m}} = (12.5\ \text{N/m}^2)\left(\frac{8}{3}\right) = 33.3\ \text{J}.$$

Significance

This integral was not hard to do. You can follow the same steps, as in this example, to calculate line integrals representing work for more complicated forces and paths. In this example, everything was given in terms of x- and y-components, which are easiest to use in evaluating the work in this case. In other situations, magnitudes and angles might be easier.

CHECK YOUR UNDERSTANDING 7.3

Find the work done by the same force in Example 7.4 over a cubic path, $y = (0.25\ \text{m}^{-2})x^3$, between the same points $A = (0, 0)$ and $B = (2\ \text{m}, 2\ \text{m})$.

You saw in Example 7.4 that to evaluate a line integral, you could reduce it to an integral over a single variable or parameter. Usually, there are several ways to do this, which may be more or less convenient, depending on the particular case. In Example 7.4, we reduced the line integral to an integral over x, but we could equally well have chosen to reduce everything to a function of y. We didn't do that because the functions in y involve the square root and fractional exponents, which may be less familiar, but for illustrative purposes, we do this now. Solving for x and dx, in terms of y, along the parabolic path, we get

$$x = \sqrt{y/(0.5\ \text{m}^{-1})} = \sqrt{(2\ \text{m})y}\ \text{and}\ dx = \sqrt{(2\ \text{m})} \times \frac{1}{2} dy/\sqrt{y} = dy/\sqrt{(2\ \text{m}^{-1})y}.$$

The components of the force, in terms of y, are

$$F_x = (5\ \text{N/m})y\ \text{and}\ F_y = (10\ \text{N/m})x = (10\ \text{N/m})\sqrt{(2\ \text{m})y},$$

so the infinitesimal work element becomes

$$\begin{aligned} dW &= F_x\,dx + F_y\,dy = \frac{(5\ \text{N/m})y\,dy}{\sqrt{(2\ \text{m}^{-1})y}} + (10\ \text{N/m})\sqrt{(2\ \text{m})y}\,dy \\ &= (5\ \text{N}\cdot\text{m}^{-1/2})\left(\frac{1}{\sqrt{2}} + 2\sqrt{2}\right)\sqrt{y}\,dy = (17.7\ \text{N}\cdot\text{m}^{-1/2})y^{1/2}dy. \end{aligned}$$

The integral of $y^{1/2}$ is $\frac{2}{3}y^{3/2}$, so the work done from A to B is

$$W = \int_0^{2\ \text{m}} (17.7\ \text{N}\cdot\text{m}^{-1/2})y^{1/2}dy = (17.7\ \text{N}\cdot\text{m}^{-1/2})\frac{2}{3}(2\ \text{m})^{3/2} = 33.3\ \text{J}.$$

As expected, this is exactly the same result as before.

One very important and widely applicable variable force is the force exerted by a perfectly elastic spring, which satisfies Hooke's law $\vec{\mathbf{F}} = -k\Delta\vec{\mathbf{x}}$, where k is the spring constant, and $\Delta\vec{\mathbf{x}} = \vec{\mathbf{x}} - \vec{\mathbf{x}}_{\text{eq}}$ is the displacement from the spring's unstretched (equilibrium) position (Newton's Laws of Motion). Note that the unstretched position is only the same as the equilibrium position if no other forces are acting (or, if they are, they cancel one another). Forces between molecules, or in any system undergoing small displacements from a stable equilibrium, behave approximately like a spring force.

To calculate the work done by a spring force, we can choose the x-axis along the length of the spring, in the direction of increasing length, as in Figure 7.7, with the origin at the equilibrium position $x_{\text{eq}} = 0$. (Then positive x corresponds to a stretch and negative x to a compression.) With this choice of coordinates, the spring force has only an x-component, $F_x = -kx$, and the work done when x changes from x_A to x_B is

$$W_{\text{spring},AB} = \int_A^B F_x\,dx = -k\int_A^B x\,dx = -k\frac{x^2}{2}\Big|_A^B = -\frac{1}{2}k\left(x_B^2 - x_A^2\right). \qquad 7.5$$

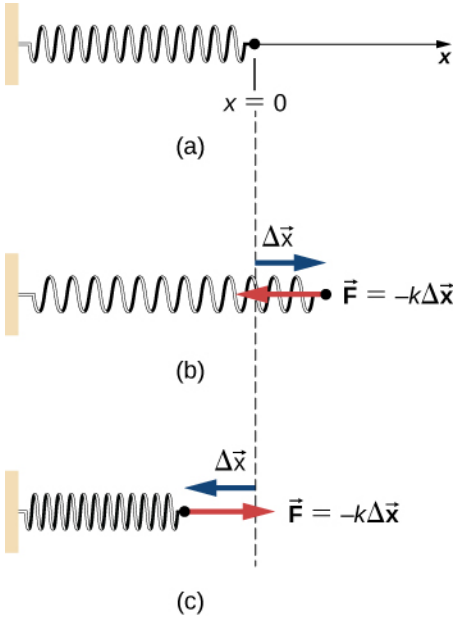


Figure 7.7 (a) The spring exerts no force at its equilibrium position. The spring exerts a force in the opposite direction to (b) an extension

or stretch, and (c) a compression.

Notice that W_{AB} depends only on the starting and ending points, A and B, and is independent of the actual path between them, as long as it starts at A and ends at B. That is, the actual path could involve going back and forth before ending.

Another interesting thing to notice about Equation 7.5 is that, for this one-dimensional case, you can readily see the correspondence between the work done by a force and the area under the curve of the force versus its displacement. Recall that, in general, a one-dimensional integral is the limit of the sum of infinitesimals, $f(x)dx$, representing the area of strips, as shown in Figure 7.8. In Equation 7.5, since $F = -kx$ is a straight line with slope $-k$, when plotted versus x, the "area" under the line is just an algebraic combination of triangular "areas," where "areas" above the x-axis are positive and those below are negative, as shown in Figure 7.9. The magnitude of one of these "areas" is just one-half the triangle's base, along the x-axis, times the triangle's height, along the force axis. (There are quotation marks around "area" because this base-height product has the units of work, rather than square meters.)

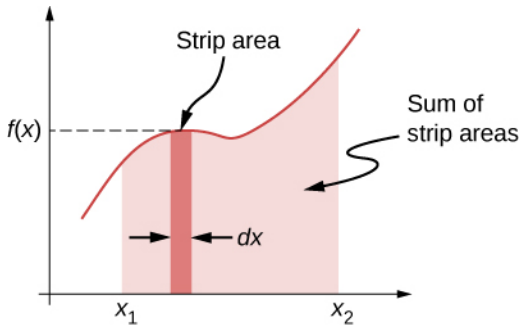


Figure 7.8 A curve of *f(x)* versus *x* showing the area of an infinitesimal strip, *f(x)dx*, and the sum of such areas, which is the integral of *f(x)* from x_1 to x_2.

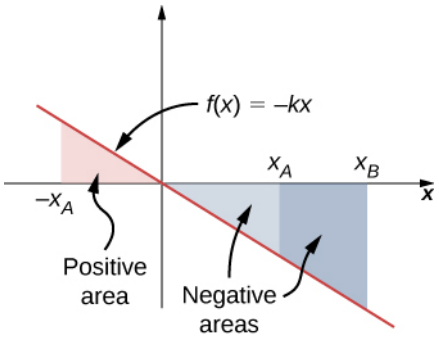


Figure 7.9 Curve of the spring force $f(x) = -kx$ versus x, showing areas under the line, between x_A and x_B, for both positive and negative values of x_A. When x_A is negative, the total area under the curve for the integral in Equation 7.5 is the sum of positive and negative triangular areas. When x_A is positive, the total area under the curve is the difference between two negative triangles.

EXAMPLE 7.5

Work Done by a Spring Force

A perfectly elastic spring requires 0.54 J of work to stretch 6 cm from its equilibrium position, as in Figure 7.7(b). (a) What is its spring constant k? (b) How much work is required to stretch it an additional 6 cm?

Strategy

Work "required" means work done against the spring force, which is the negative of the work in Equation 7.5, that is

$$W = \frac{1}{2}k(x_B^2 - x_A^2).$$

For part (a), $x_A = 0$ and $x_B = 6\text{cm}$; for part (b), $x_B = 6\text{cm}$ and $x_B = 12\text{cm}$. In part (a), the work is given and you can solve for the spring constant; in part (b), you can use the value of k, from part (a), to solve for the work.

Solution

a. $W = 0.54\,\text{J} = \frac{1}{2}k[(6\,\text{cm})^2 - 0]$, so $k = 3\,\text{N/cm}$.
b. $W = \frac{1}{2}(3\,\text{N/cm})[(12\,\text{cm})^2 - (6\,\text{cm})^2] = 1.62\,\text{J}$.

Significance

Since the work done by a spring force is independent of the path, you only needed to calculate the difference in the quantity $½kx^2$ at the end points. Notice that the work required to stretch the spring from 0 to 12 cm is four times that required to stretch it from 0 to 6 cm, because that work depends on the square of the amount of stretch from equilibrium, $½kx^2$. In this circumstance, the work to stretch the spring from 0 to 12 cm is also equal to the work for a composite path from 0 to 6 cm followed by an additional stretch from 6 cm to 12 cm. Therefore, $4W(0\text{ cm to }6\text{ cm}) = W(0\text{ cm to }6\text{ cm}) + W(6\text{ cm to }12\text{ cm})$, or $W(6\text{ cm to }12\text{ cm}) = 3W(0\text{ cm to }6\text{ cm})$, as we found above.

CHECK YOUR UNDERSTANDING 7.4

The spring in Example 7.5 is compressed 6 cm from its equilibrium length. (a) Does the spring force do positive or negative work and (b) what is the magnitude?

7.2 Kinetic Energy

Learning Objectives

By the end of this section, you will be able to:

- Calculate the kinetic energy of a particle given its mass and its velocity or momentum
- Evaluate the kinetic energy of a body, relative to different frames of reference

It's plausible to suppose that the greater the velocity of a body, the greater effect it could have on other bodies. This does not depend on the direction of the velocity, only its magnitude. At the end of the seventeenth century, a quantity was introduced into mechanics to explain collisions between two perfectly elastic bodies, in which one body makes a head-on collision with an identical body at rest. The first body stops, and the second body moves off with the initial velocity of the first body. (If you have ever played billiards or croquet, or seen a model of Newton's Cradle, you have observed this type of collision.) The idea behind this quantity was related to the forces acting on a body and was referred to as "the energy of motion." Later on, during the eighteenth century, the name **kinetic energy** was given to energy of motion.

With this history in mind, we can now state the classical definition of kinetic energy. Note that when we say "classical," we mean non-relativistic, that is, at speeds much less that the speed of light. At speeds comparable to the speed of light, the special theory of relativity requires a different expression for the kinetic energy of a particle, as discussed in Relativity.

Since objects (or systems) of interest vary in complexity, we first define the kinetic energy of a particle with mass m.

Kinetic Energy

The kinetic energy of a particle is one-half the product of the particle's mass m and the square of its speed v:

$$K = \frac{1}{2}mv^2. \qquad 7.6$$

We then extend this definition to any system of particles by adding up the kinetic energies of all the constituent

particles:

$$K = \sum \frac{1}{2} m v^2. \tag{7.7}$$

Note that just as we can express Newton's second law in terms of either the rate of change of momentum or mass times the rate of change of velocity, so the kinetic energy of a particle can be expressed in terms of its mass and momentum ($\vec{\mathbf{p}} = m\vec{\mathbf{v}}$), instead of its mass and velocity. Since $v = p/m$, we see that

$$K = \frac{1}{2} m \left(\frac{p}{m} \right)^2 = \frac{p^2}{2m}$$

also expresses the kinetic energy of a single particle. Sometimes, this expression is more convenient to use than Equation 7.6.

The units of kinetic energy are mass times the square of speed, or $\text{kg} \cdot \text{m}^2/\text{s}^2$. But the units of force are mass times acceleration, $\text{kg} \cdot \text{m/s}^2$, so the units of kinetic energy are also the units of force times distance, which are the units of work, or joules. You will see in the next section that work and kinetic energy have the same units, because they are different forms of the same, more general, physical property.

EXAMPLE 7.6

Kinetic Energy of an Object

(a) What is the kinetic energy of an 80-kg athlete, running at 10 m/s? (b) The Chicxulub crater in Yucatan, one of the largest existing impact craters on Earth, is thought to have been created by an asteroid, traveling at 22 km/s and releasing 4.2×10^{23} J of kinetic energy upon impact. What was its mass? (c) In nuclear reactors, thermal neutrons, traveling at about 2.2 km/s, play an important role. What is the kinetic energy of such a particle?

Strategy

To answer these questions, you can use the definition of kinetic energy in Equation 7.6. You also have to look up the mass of a neutron.

Solution

Don't forget to convert km into m to do these calculations, although, to save space, we omitted showing these conversions.

a. $K = \frac{1}{2}(80\,\text{kg})(10\,\text{m/s})^2 = 4.0\,\text{kJ}$.
b. $m = 2K/v^2 = 2(4.2 \times 10^{23}\text{J})/(22\,\text{km/s})^2 = 1.7 \times 10^{15}\,\text{kg}$.
c. $K = \frac{1}{2}(1.68 \times 10^{-27}\,\text{kg})(2.2\,\text{km/s})^2 = 4.1 \times 10^{-21}\,\text{J}$.

Significance

In this example, we used the way mass and speed are related to kinetic energy, and we encountered a very wide range of values for the kinetic energies. Different units are commonly used for such very large and very small values. The energy of the impactor in part (b) can be compared to the explosive yield of TNT and nuclear explosions, 1 megaton $= 4.18 \times 10^{15}$ J. The Chicxulub asteroid's kinetic energy was about a hundred million megatons. At the other extreme, the energy of subatomic particle is expressed in electron-volts, $1\,\text{eV} = 1.6 \times 10^{-19}$ J. The thermal neutron in part (c) has a kinetic energy of about one fortieth of an electron-volt.

CHECK YOUR UNDERSTANDING 7.5

(a) A car and a truck are each moving with the same kinetic energy. Assume that the truck has more mass than the car. Which has the greater speed? (b) A car and a truck are each moving with the same speed. Which has the greater kinetic energy?

Because velocity is a relative quantity, you can see that the value of kinetic energy must depend on your frame of reference. You can generally choose a frame of reference that is suited to the purpose of your analysis and that simplifies your calculations. One such frame of reference is the one in which the observations of the system are made (likely an external frame). Another choice is a frame that is attached to, or moves with, the system (likely an internal frame). The equations for relative motion, discussed in Motion in Two and Three Dimensions, provide a link to calculating the kinetic energy of an object with respect to different frames of reference.

EXAMPLE 7.7

Kinetic Energy Relative to Different Frames

A 75.0-kg person walks down the central aisle of a subway car at a speed of 1.50 m/s relative to the car, whereas the train is moving at 15.0 m/s relative to the tracks. (a) What is the person's kinetic energy relative to the car? (b) What is the person's kinetic energy relative to the tracks? (c) What is the person's kinetic energy relative to a frame moving with the person?

Strategy

Since speeds are given, we can use $\frac{1}{2}mv^2$ to calculate the person's kinetic energy. However, in part (a), the person's speed is relative to the subway car (as given); in part (b), it is relative to the tracks; and in part (c), it is zero. If we denote the car frame by C, the track frame by T, and the person by P, the relative velocities in part (b) are related by $\vec{\mathbf{v}}_{\mathrm{PT}} = \vec{\mathbf{v}}_{\mathrm{PC}} + \vec{\mathbf{v}}_{\mathrm{CT}}$. We can assume that the central aisle and the tracks lie along the same line, but the direction the person is walking relative to the car isn't specified, so we will give an answer for each possibility, $v_{\mathrm{PT}} = v_{\mathrm{CT}} \pm v_{\mathrm{PC}}$, as shown in Figure 7.10.



Figure 7.10 The possible motions of a person walking in a train are (a) toward the front of the car and (b) toward the back of the car.

Solution

a. $K = \frac{1}{2}(75.0\ \mathrm{kg})(1.50\ \mathrm{m/s})^2 = 84.4\ \mathrm{J}$.

b. $v_{\mathrm{PT}} = (15.0 \pm 1.50)\ \mathrm{m/s}$. Therefore, the two possible values for kinetic energy relative to the car are

$$K = \frac{1}{2}(75.0\ \mathrm{kg})(13.5\ \mathrm{m/s})^2 = 6.83\ \mathrm{kJ}$$

and

$$K = \frac{1}{2}(75.0\ \mathrm{kg})(16.5\ \mathrm{m/s})^2 = 10.2\ \mathrm{kJ}.$$

c. In a frame where $v_{\mathrm{P}} = 0$, $K = 0$ as well.

Significance

You can see that the kinetic energy of an object can have very different values, depending on the frame of reference. However, the kinetic energy of an object can never be negative, since it is the product of the mass and the square of the speed, both of which are always positive or zero.

CHECK YOUR UNDERSTANDING 7.6

You are rowing a boat parallel to the banks of a river. Your kinetic energy relative to the banks is less than your kinetic energy relative to the water. Are you rowing with or against the current?

The kinetic energy of a particle is a single quantity, but the kinetic energy of a system of particles can sometimes be divided into various types, depending on the system and its motion. For example, if all the particles in a system have the same velocity, the system is undergoing translational motion and has translational kinetic energy. If an object is rotating, it could have rotational kinetic energy, or if it's vibrating, it could have vibrational kinetic energy. The kinetic energy of a system, relative to an internal frame of reference, may be called internal kinetic energy. The kinetic energy associated with random molecular motion may be called thermal energy. These names will be used in later chapters of the book, when appropriate. Regardless of the name, every kind of kinetic energy is the same physical quantity, representing energy associated with motion.

EXAMPLE 7.8

Special Names for Kinetic Energy

(a) A player lobs a mid-court pass with a 624-g basketball, which covers 15 m in 2 s. What is the basketball's horizontal translational kinetic energy while in flight? (b) An average molecule of air, in the basketball in part (a), has a mass of 29 u, and an average speed of 500 m/s, relative to the basketball. There are about 3×10^{23} molecules inside it, moving in random directions, when the ball is properly inflated. What is the average translational kinetic energy of the random motion of all the molecules inside, relative to the basketball? (c) How fast would the basketball have to travel relative to the court, as in part (a), so as to have a kinetic energy equal to the amount in part (b)?

Strategy

In part (a), first find the horizontal speed of the basketball and then use the definition of kinetic energy in terms of mass and speed, $K = \frac{1}{2}mv^2$. Then in part (b), convert unified units to kilograms and then use $K = \frac{1}{2}mv^2$ to get the average translational kinetic energy of one molecule, relative to the basketball. Then multiply by the number of molecules to get the total result. Finally, in part (c), we can substitute the amount of kinetic energy in part (b), and the mass of the basketball in part (a), into the definition $K = \frac{1}{2}mv^2$, and solve for v.

Solution

a. The horizontal speed is (15 m)/(2 s), so the horizontal kinetic energy of the basketball is

$$\frac{1}{2}(0.624\ \text{kg})(7.5\ \text{m/s})^2 = 17.6\ \text{J}.$$

b. The average translational kinetic energy of a molecule is

$$\frac{1}{2}(29\ \text{u})(1.66 \times 10^{-27}\ \text{kg/u})(500\ \text{m/s})^2 = 6.02 \times 10^{-21}\ \text{J},$$

and the total kinetic energy of all the molecules is

$$(3 \times 10^{23})(6.02 \times 10^{-21}\ \text{J}) = 1.80\ \text{kJ}.$$

c. $v = \sqrt{2(1.8\ \text{kJ})/(0.624\ \text{kg})} = 76.0\ \text{m/s}.$

Significance

In part (a), this kind of kinetic energy can be called the horizontal kinetic energy of an object (the basketball), relative to its surroundings (the court). If the basketball were spinning, all parts of it would have not just the average speed, but it would also have rotational kinetic energy. Part (b) reminds us that this kind of kinetic energy can be called internal or thermal kinetic energy. Notice that this energy is about a hundred times the energy in part (a). How to make use of thermal energy will be the subject of the chapters on thermodynamics. In part (c), since the energy in part (b) is about 100 times that in part (a), the speed should be about 10 times as big, which it is (76 compared to 7.5 m/s).

7.3 Work-Energy Theorem

Learning Objectives

By the end of this section, you will be able to:

- Apply the work-energy theorem to find information about the motion of a particle, given the forces acting on it
- Use the work-energy theorem to find information about the forces acting on a particle, given information about its motion

We have discussed how to find the work done on a particle by the forces that act on it, but how is that work manifested in the motion of the particle? According to Newton's second law of motion, the sum of all the forces acting on a particle, or the net force, determines the rate of change in the momentum of the particle, or its motion. Therefore, we should consider the work done by all the forces acting on a particle, or the **net work**, to see what effect it has on the particle's motion.

Let's start by looking at the net work done on a particle as it moves over an infinitesimal displacement, which is the dot product of the net force and the displacement: $dW_{\text{net}} = \vec{\mathbf{F}}_{\text{net}} \cdot d\vec{\mathbf{r}}$. Newton's second law tells us that $\vec{\mathbf{F}}_{\text{net}} = m(d\vec{\mathbf{v}}/dt)$, so $dW_{\text{net}} = m(d\vec{\mathbf{v}}/dt) \cdot d\vec{\mathbf{r}}$. For the mathematical functions describing the motion of a physical particle, we can rearrange the differentials dt, etc., as algebraic quantities in this expression, that is,

$$dW_{\text{net}} = m\left(\frac{d\vec{\mathbf{v}}}{dt}\right) \cdot d\vec{\mathbf{r}} = md\vec{\mathbf{v}} \cdot \left(\frac{d\vec{\mathbf{r}}}{dt}\right) = m\vec{\mathbf{v}} \cdot d\vec{\mathbf{v}},$$

where we substituted the velocity for the time derivative of the displacement and used the commutative property of the dot product [Equation 2.30]. Since derivatives and integrals of scalars are probably more familiar to you at this point, we express the dot product in terms of Cartesian coordinates before we integrate between any two points A and B on the particle's trajectory. This gives us the net work done on the particle:

$$\begin{aligned} W_{\text{net},AB} &= \int_A^B (mv_x\,dv_x + mv_y\,dv_y + mv_z\,dv_z) \\ &= \tfrac{1}{2}m\left|v_x^2 + v_y^2 + v_z^2\right|_A^B = \left|\tfrac{1}{2}mv^2\right|_A^B = K_B - K_A. \end{aligned} \qquad \textbf{7.8}$$

In the middle step, we used the fact that the square of the velocity is the sum of the squares of its Cartesian components, and in the last step, we used the definition of the particle's kinetic energy. This important result is called the **work-energy theorem** (Figure 7.11).

Work-Energy Theorem

The net work done on a particle equals the change in the particle's kinetic energy:

$$W_{\text{net}} = K_B - K_A. \qquad \textbf{7.9}$$



Figure 7.11 Horse pulls are common events at state fairs. The work done by the horses pulling on the load results in a change in kinetic energy of the load, ultimately going faster. (credit: modification of work by "Jassen"/ Flickr)

According to this theorem, when an object slows down, its final kinetic energy is less than its initial kinetic energy, the change in its kinetic energy is negative, and so is the net work done on it. If an object speeds up, the net work done on it is positive. When calculating the net work, you must include all the forces that act on an object. If you leave out any forces that act on an object, or if you include any forces that don't act on it, you will get a wrong result.

The importance of the work-energy theorem, and the further generalizations to which it leads, is that it makes some types of calculations much simpler to accomplish than they would be by trying to solve Newton's second law. For example, in Newton's Laws of Motion, we found the speed of an object sliding down a frictionless plane by solving Newton's second law for the acceleration and using kinematic equations for constant acceleration, obtaining

$$v_{\mathrm{f}}^2 = v_{\mathrm{i}}^2 + 2g(s_{\mathrm{f}} - s_{\mathrm{i}})\sin\theta,$$

where s is the displacement down the plane.

We can also get this result from the work-energy theorem in Equation 7.1. Since only two forces are acting on the object-gravity and the normal force-and the normal force doesn't do any work, the net work is just the work done by gravity. The work dW is the dot product of the force of gravity or $\vec{\mathbf{F}} = -\mathrm{mg}\hat{\mathrm{j}}$ and the displacement $\vec{dr} = dx\hat{i} + dy\hat{j}$. After taking the dot product and integrating from an initial position y_i to a final position y_f, one finds the net work as

$$W_{\mathrm{net}} = W_{\mathrm{grav}} = -mg(y_{\mathrm{f}} - y_{\mathrm{i}}),$$

where y is positive up. The work-energy theorem says that this equals the change in kinetic energy:

$$-mg(y_{\mathrm{f}} - y_{\mathrm{i}}) = \frac{1}{2}m(v_{\mathrm{f}}^2 - v_{\mathrm{i}}^2).$$

Using a right triangle, we can see that $(y_{\mathrm{f}} - y_{\mathrm{i}}) = (s_{\mathrm{f}} - s_{\mathrm{i}})\sin\theta$, so the result for the final speed is the same.

What is gained by using the work-energy theorem? The answer is that for a frictionless plane surface, not much. However, Newton's second law is easy to solve only for this particular case, whereas the work-energy theorem gives the final speed for any shaped frictionless surface. For an arbitrary curved surface, the normal force is not constant, and Newton's second law may be difficult or impossible to solve analytically. Constant or not, for motion along a surface, the normal force never does any work, because it's perpendicular to the displacement. A calculation using the work-energy theorem avoids this difficulty and applies to more general situations.

PROBLEM-SOLVING STRATEGY

Work-Energy Theorem

1. Draw a free-body diagram for each force on the object.
2. Determine whether or not each force does work over the displacement in the diagram. Be sure to keep any positive or negative signs in the work done.
3. Add up the total amount of work done by each force.
4. Set this total work equal to the change in kinetic energy and solve for any unknown parameter.
5. Check your answers. If the object is traveling at a constant speed or zero acceleration, the total work done should be zero and match the change in kinetic energy. If the total work is positive, the object must have sped up or increased kinetic energy. If the total work is negative, the object must have slowed down or decreased kinetic energy.

EXAMPLE 7.9

Loop-the-Loop

The frictionless track for a toy car includes a loop-the-loop of radius R. How high, measured from the bottom of the loop, must the car be placed to start from rest on the approaching section of track and go all the way around the loop?

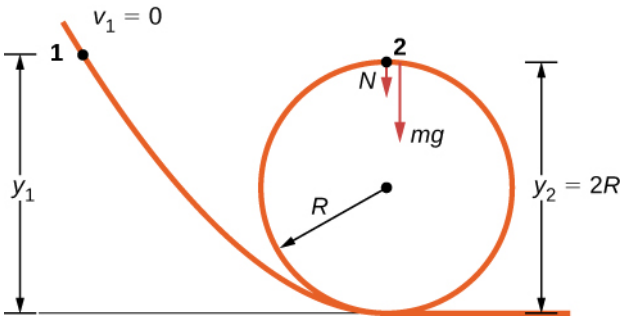


Figure 7.12 A frictionless track for a toy car has a loop-the-loop in it. How high must the car start so that it can go around the loop without falling off?

Strategy

The free-body diagram at the final position of the object is drawn in Figure 7.12. The gravitational work is the only work done over the displacement that is not zero. Since the weight points in the same direction as the net vertical displacement, the total work done by the gravitational force is positive. From the work-energy theorem, the starting height determines the speed of the car at the top of the loop,

$$-mg(y_2 - y_1) = \frac{1}{2}m{v_2}^2,$$

where the notation is shown in the accompanying figure. At the top of the loop, the normal force and gravity are both down and the acceleration is centripetal, so

$$a_{\text{top}} = \frac{F}{m} = \frac{N + mg}{m} = \frac{v_2^2}{R}.$$

The condition for maintaining contact with the track is that there must be some normal force, however slight; that is, $N > 0$. Substituting for v_2^2 and N, we can find the condition for y_1.

Solution

Implement the steps in the strategy to arrive at the desired result:

$$N = -mg + \frac{mv_2^2}{R} = \frac{-mgR + 2mg(y_1 - R)}{R} > 0 \quad \text{or} \quad y_1 > \frac{5R}{2}.$$

Significance

On the surface of the loop, the normal component of gravity and the normal contact force must provide the centripetal acceleration of the car going around the loop. The tangential component of gravity slows down or speeds up the car. A child would find out how high to start the car by trial and error, but now that you know the work-energy theorem, you can predict the minimum height (as well as other more useful results) from physical principles. By using the work-energy theorem, you did not have to solve a differential equation to determine the height.

CHECK YOUR UNDERSTANDING 7.7

Suppose the radius of the loop-the-loop in Example 7.9 is 15 cm and the toy car starts from rest at a height of 45 cm above the bottom. What is its speed at the top of the loop?

INTERACTIVE

Visit Carleton College's site to see a video (https://openstax.org/l/21carcollvidrol) of a looping rollercoaster.

In situations where the motion of an object is known, but the values of one or more of the forces acting on it are not known, you may be able to use the work-energy theorem to get some information about the forces. Work depends on the force and the distance over which it acts, so the information is provided via their product.

EXAMPLE 7.10

Determining a Stopping Force

A bullet has a mass of 40 grains (2.60 g) and a muzzle velocity of 1100 ft./s (335 m/s). It can penetrate eight 1-inch pine boards, each with thickness 0.75 inches. What is the average stopping force exerted by the wood, as shown in Figure 7.13?

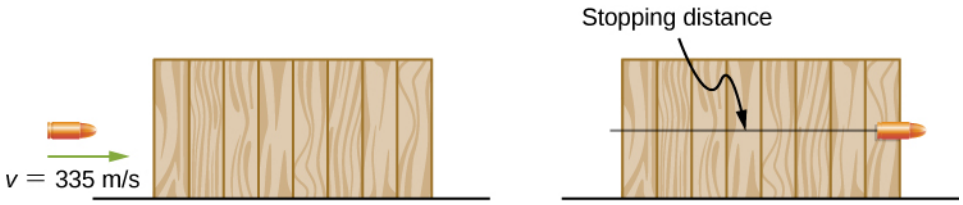


Figure 7.13 The boards exert a force to stop the bullet. As a result, the boards do work and the bullet loses kinetic energy.

Strategy

We can assume that under the general conditions stated, the bullet loses all its kinetic energy penetrating the boards, so the work-energy theorem says its initial kinetic energy is equal to the average stopping force times the distance penetrated. The change in the bullet's kinetic energy and the net work done stopping it are both negative, so when you write out the work-energy theorem, with the net work equal to the average force times the stopping distance, that's what you get. The total thickness of eight 1-inch pine boards that the bullet penetrates is $8 \times \frac{3}{4}$ in. $= 6$ in. $= 15.2$ cm.

Solution

Applying the work-energy theorem, we get

$$W_{\text{net}} = -F_{\text{ave}} \Delta s_{\text{stop}} = -K_{\text{initial}},$$

so

$$F_{\text{ave}} = \frac{\frac{1}{2}mv^2}{\Delta s_{\text{stop}}} = \frac{\frac{1}{2}(2.6 \times 10^{-3}\,\text{kg})(335\,\text{m/s})^2}{0.152\,\text{m}} = 960\,\text{N}.$$

Significance

We could have used Newton's second law and kinematics in this example, but the work-energy theorem also supplies an answer to less simple situations. The penetration of a bullet, fired vertically upward into a block of wood, is discussed in one section of Asif Shakur's recent article ["Bullet-Block Science Video Puzzle." *The Physics Teacher* (January 2015) 53(1): 15-16]. If the bullet is fired dead center into the block, it loses all its kinetic energy and penetrates slightly farther than if fired off-center. The reason is that if the bullet hits off-center, it has a little kinetic energy after it stops penetrating, because the block rotates. The work-energy theorem implies that a smaller change in kinetic energy results in a smaller penetration. You will understand more of the physics in this interesting article after you finish reading Angular Momentum.

INTERACTIVE

Learn more about work and energy in this PhET simulation (https://openstax.org/l/21PhETSimRamp) called "the ramp." Try changing the force pushing the box and the frictional force along the incline. The work and energy plots can be examined to note the total work done and change in kinetic energy of the box.

7.4 Power

Learning Objectives

By the end of this section, you will be able to:

- Relate the work done during a time interval to the power delivered
- Find the power expended by a force acting on a moving body

The concept of work involves force and displacement; the work-energy theorem relates the net work done on a body to the difference in its kinetic energy, calculated between two points on its trajectory. None of these quantities or relations involves time explicitly, yet we know that the time available to accomplish a particular amount of work is frequently just as important to us as the amount itself. In the chapter-opening figure, several sprinters may have achieved the same velocity at the finish, and therefore did the same amount of work, but the winner of the race did it in the least amount of time.

We express the relation between work done and the time interval involved in doing it, by introducing the concept of power. Since work can vary as a function of time, we first define **average power** as the work done during a time interval, divided by the interval,

$$P_{\text{ave}} = \frac{\Delta W}{\Delta t}. \qquad 7.10$$

Then, we can define the **instantaneous power** (frequently referred to as just plain **power**).

Power

Power is defined as the rate of doing work, or the limit of the average power for time intervals approaching zero,

$$P = \frac{dW}{dt}. \qquad 7.11$$

If the power is constant over a time interval, the average power for that interval equals the instantaneous power, and the work done by the agent supplying the power is $W = P\Delta t$. If the power during an interval varies with time, then the work done is the time integral of the power,

$$W = \int P dt.$$

The work-energy theorem relates how work can be transformed into kinetic energy. Since there are other forms of energy as well, as we discuss in the next chapter, we can also define power as the rate of transfer of energy. Work and energy are measured in units of joules, so power is measured in units of joules per second, which has been given the SI name watts, abbreviation W: $1\ \text{J/s} = 1\ \text{W}$. Another common unit for expressing the power capability of everyday devices is horsepower: $1\ \text{hp} = 746\ \text{W}$.

EXAMPLE 7.11

Pull-Up Power

An 80-kg army trainee does pull-ups on a horizontal bar (Figure 7.14). It takes the trainee 0.8 seconds to raise the body from a lower position to where the chin is above the bar. How much power do the trainee's muscles supply moving his body from the lower position to where the chin is above the bar? (*Hint:* Make reasonable estimates for any quantities needed.)

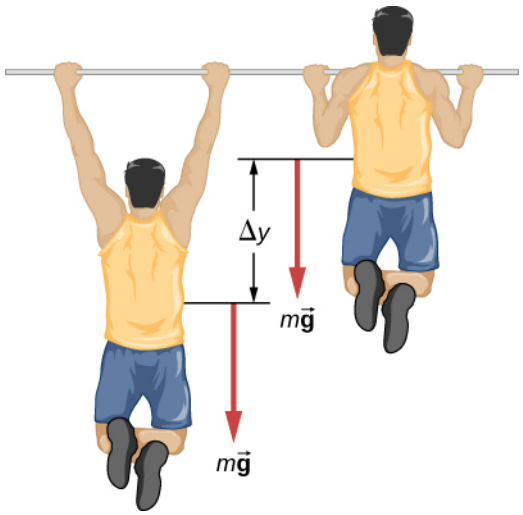


Figure 7.14 What is the power expended in doing ten pull-ups in ten seconds?

Strategy

The work done against gravity, going up or down a distance Δy, is $mg\Delta y$. Let's assume that $\Delta y = 2\text{ft} \approx 60\ \text{cm}$. Also, assume that the arms comprise 10% of the body mass and are not included in the moving mass. With these assumptions, we can calculate the work done.

Solution

The result we get, applying our assumptions, is

$$P = \frac{\text{mg}(\Delta y)}{t} = \frac{0.9\ (80\ \text{kg})(9.8\ \text{m/s}^2)(0.60\ \text{m})}{0.8\ \text{s}} = 529\ \text{W}.$$

Significance

This is typical for power expenditure in strenuous exercise; in everyday units, it's somewhat more than one horsepower ($1\ \text{hp} = 746\ \text{W}$).

CHECK YOUR UNDERSTANDING 7.8

Estimate the power expended by a weightlifter raising a 150-kg barbell 2 m in 3 s.

The power involved in moving a body can also be expressed in terms of the forces acting on it. If a force $\vec{\mathbf{F}}$ acts

on a body that is displaced $d\vec{\mathbf{r}}$ in a time dt, the power expended by the force is

$$P = \frac{dW}{dt} = \frac{\vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}}{dt} = \vec{\mathbf{F}} \cdot \left(\frac{d\vec{\mathbf{r}}}{dt}\right) = \vec{\mathbf{F}} \cdot \vec{\mathbf{v}}, \qquad 7.12$$

where $\vec{\mathbf{v}}$ is the velocity of the body. The fact that the limits implied by the derivatives exist, for the motion of a real body, justifies the rearrangement of the infinitesimals.

EXAMPLE 7.12

Automotive Power Driving Uphill

How much power must an automobile engine expend to move a 1200-kg car up a 15% grade at 90 km/h (Figure 7.15)? Assume that 25% of this power is dissipated overcoming air resistance and friction.

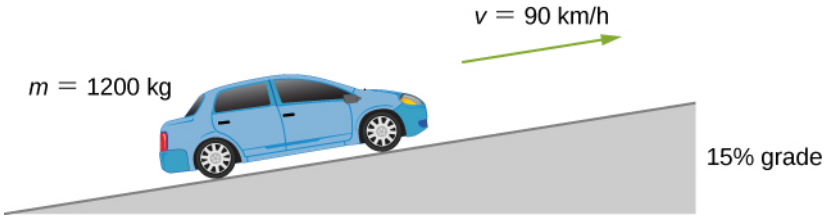


Figure 7.15 We want to calculate the power needed to move a car up a hill at constant speed.

Strategy

At constant velocity, there is no change in kinetic energy, so the net work done to move the car is zero. Therefore the power supplied by the engine to move the car equals the power expended against gravity and air resistance. By assumption, 75% of the power is supplied against gravity, which equals $m\vec{\mathbf{g}} \cdot \vec{\mathbf{v}} = mgv \sin\theta$, where θ is the angle of the incline. A 15% grade means $\tan\theta = 0.15$. This reasoning allows us to solve for the power required.

Solution

Carrying out the suggested steps, we find

$$0.75\, P = mgv \sin(\tan^{-1} 0.15),$$

or

$$P = \frac{(1200 \times 9.8\ \text{N})(90\ \text{m}/3.6\ \text{s})\sin(8.53°)}{0.75} = 58\ \text{kW},$$

or about 78 hp. (You should supply the steps used to convert units.)

Significance

This is a reasonable amount of power for the engine of a small to mid-size car to supply (1 hp = 0.746 kW). Note that this is only the power expended to move the car. Much of the engine's power goes elsewhere, for example, into waste heat. That's why cars need radiators. Any remaining power could be used for acceleration, or to operate the car's accessories.

CHAPTER REVIEW

Key Terms

average power work done in a time interval divided by the time interval

kinetic energy energy of motion, one-half an object's mass times the square of its speed

net work work done by all the forces acting on an object

power (or instantaneous power) rate of doing work

work done when a force acts on something that undergoes a displacement from one position to another

work-energy theorem net work done on a particle is equal to the change in its kinetic energy

Key Equations

Work done by a force over an infinitesimal displacement	$dW = \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = \left\|\vec{\mathbf{F}}\right\| \left\|d\vec{\mathbf{r}}\right\| \cos\theta$
Work done by a force acting along a path from A to B	$W_{AB} = \int_{\text{path}\,AB} \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$
Work done by a constant force of kinetic friction	$W_{\text{fr}} = -f_k \left\|l_{AB}\right\|$
Work done going from A to B by Earth's gravity, near its surface	$W_{\text{grav},AB} = -mg\left(y_B - y_A\right)$
Work done going from A to B by one-dimensional spring force	$W_{\text{spring},AB} = -\left(\frac{1}{2}k\right)\left(x_B^2 - x_A^2\right)$
Kinetic energy of a non-relativistic particle	$K = \frac{1}{2}mv^2 = \frac{p^2}{2m}$
Work-energy theorem	$W_{\text{net}} = K_B - K_A$
Power as rate of doing work	$P = \frac{dW}{dt}$
Power as the dot product of force and velocity	$P = \vec{\mathbf{F}} \cdot \vec{\mathbf{v}}$

Summary

7.1 Work

- The infinitesimal increment of work done by a force, acting over an infinitesimal displacement, is the dot product of the force and the displacement.
- The work done by a force, acting over a finite path, is the integral of the infinitesimal increments of work done along the path.
- The work done *against* a force is the negative of the work done *by* the force.
- The work done by a normal or frictional contact force must be determined in each particular case.
- The work done by the force of gravity, on an object near the surface of Earth, depends only on the weight of the object and the difference in height through which it moved.
- The work done by a spring force, acting from an initial position to a final position, depends only on the spring constant and the squares of those positions.

7.2 Kinetic Energy

- The kinetic energy of a particle is the product of one-half its mass and the square of its speed, for non-relativistic speeds.
- The kinetic energy of a system is the sum of the kinetic energies of all the particles in the system.
- Kinetic energy is relative to a frame of reference, is always positive, and is sometimes given special names for different types of motion.

7.3 Work-Energy Theorem

- Because the net force on a particle is equal to its mass times the derivative of its velocity, the integral for the net work done on the particle is equal to the change in the particle's kinetic energy. This is the work-energy theorem.
- You can use the work-energy theorem to find certain properties of a system, without having to solve the differential equation for Newton's second law.

7.4 Power

- Power is the rate of doing work; that is, the derivative of work with respect to time.
- Alternatively, the work done, during a time interval, is the integral of the power supplied over the time interval.
- The power delivered by a force, acting on a moving particle, is the dot product of the force and the particle's velocity.

Conceptual Questions

7.1 Work

1. Give an example of something we think of as work in everyday circumstances that is not work in the scientific sense. Is energy transferred or changed in form in your example? If so, explain how this is accomplished without doing work.


2. Give an example of a situation in which there is a force and a displacement, but the force does no work. Explain why it does no work.

3. Describe a situation in which a force is exerted for a long time but does no work. Explain.

4. A body moves in a circle at constant speed. Does the centripetal force that accelerates the body do any work? Explain.

5. Suppose you throw a ball upward and catch it when it returns at the same height. How much work does the gravitational force do on the ball over its entire trip?

6. Why is it more difficult to do sit-ups while on a slant board than on a horizontal surface? (See below.)

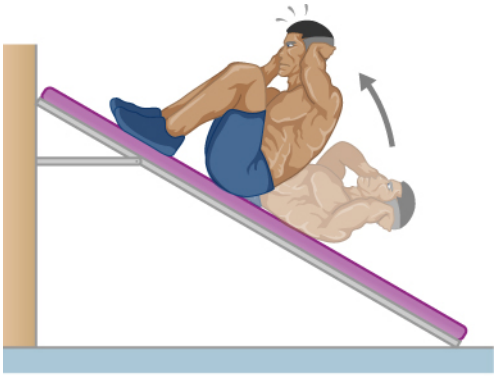



7. As a young man, Tarzan climbed up a vine to reach his tree house. As he got older, he decided to build and use a staircase instead. Since the work of the gravitational force mg is path independent, what did the King of the Apes gain in using stairs?

7.2 Kinetic Energy

8. A particle of m has a velocity of $v_x\hat{\mathbf{i}} + v_y\hat{\mathbf{j}} + v_z\hat{\mathbf{k}}$. Is its kinetic energy given by $m({v_x}^2\hat{\mathbf{i}} + {v_y}^2\hat{\mathbf{j}} + {v_z}^2\hat{\mathbf{k}})/2$? If not, what is the correct expression?


9. One particle has mass m and a second particle has mass $2m$. The second particle is moving with speed v and the first with speed $2v$. How do their kinetic energies compare?

10. A person drops a pebble of mass m_1 from a height h, and it hits the floor with kinetic energy K. The person drops another pebble of mass m_2

from a height of $2h$, and it hits the floor with the same kinetic energy K. How do the masses of the pebbles compare?

7.3 Work-Energy Theorem

11. The person shown below does work on the lawn mower. Under what conditions would the mower gain energy from the person pushing the mower? Under what conditions would it lose energy?

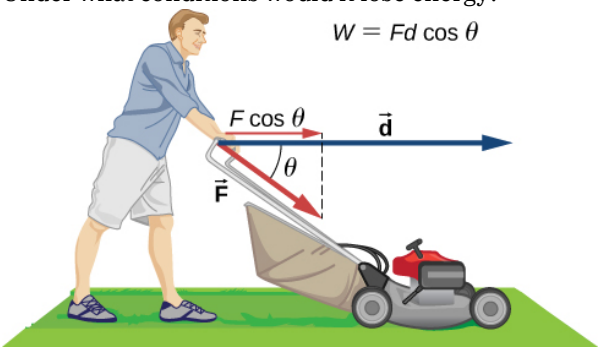

12. Work done on a system puts energy into it. Work done by a system removes energy from it. Give an example for each statement.

13. Two marbles of masses m and $2m$ are dropped from a height h. Compare their kinetic energies when they reach the ground.

14. Compare the work required to accelerate a car of mass 2000 kg from 30.0 to 40.0 km/h with that required for an acceleration from 50.0 to 60.0 km/h.

15. Suppose you are jogging at constant velocity. Are you doing any work on the environment and vice versa?

16. Two forces act to double the speed of a particle, initially moving with kinetic energy of 1 J. One of the forces does 4 J of work. How much work does the other force do?

7.4 Power

17. Most electrical appliances are rated in watts. Does this rating depend on how long the appliance is on? (When off, it is a zero-watt device.) Explain in terms of the definition of power.

18. Explain, in terms of the definition of power, why energy consumption is sometimes listed in kilowatt-hours rather than joules. What is the relationship between these two energy units?

19. A spark of static electricity, such as that you might receive from a doorknob on a cold dry day, may carry a few hundred watts of power. Explain why you are not injured by such a spark.

20. Does the work done in lifting an object depend on how fast it is lifted? Does the power expended depend on how fast it is lifted?

21. Can the power expended by a force be negative?

22. How can a 50-W light bulb use more energy than a 1000-W oven?

Problems

7.1 Work


23. How much work does a supermarket checkout attendant do on a can of soup he pushes 0.600 m horizontally with a force of 5.00 N?

24. A 75.0-kg person climbs stairs, gaining 2.50 m in height. Find the work done to accomplish this task.

25. (a) Calculate the work done on a 1500-kg elevator car by its cable to lift it 40.0 m at constant speed, assuming friction averages 100 N. (b) What is the work done on the lift by the gravitational force in this process? (c) What is the total work done on the lift?


26. Suppose a car travels 108 km at a speed of 30.0 m/s, and uses 2.0 gal of gasoline. Only 30% of the gasoline goes into useful work by the force that keeps the car moving at constant speed despite friction. (The energy content of gasoline is about 140 MJ/gal.) (a) What is the magnitude of the force exerted to keep the car moving at constant speed? (b) If the required force is directly proportional to speed, how many gallons will be used to drive 108 km at a speed of 28.0 m/s?

27. Calculate the work done by an 85.0-kg man who pushes a crate 4.00 m up along a ramp that makes an angle of 20.0° with the horizontal (see below). He exerts a force of 500 N on the crate parallel to the ramp and moves at a constant speed. Be certain to include the work he does on the crate and on his body to get up the ramp.

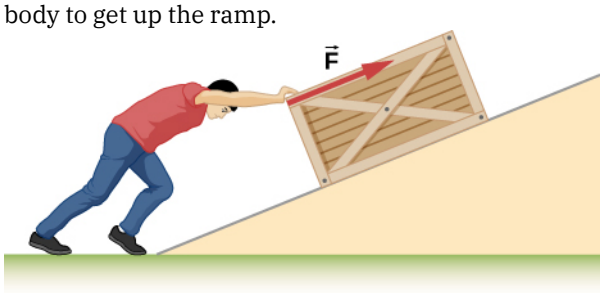


28. How much work is done by the boy pulling his sister 30.0 m in a wagon as shown below? Assume no

friction acts on the wagon.

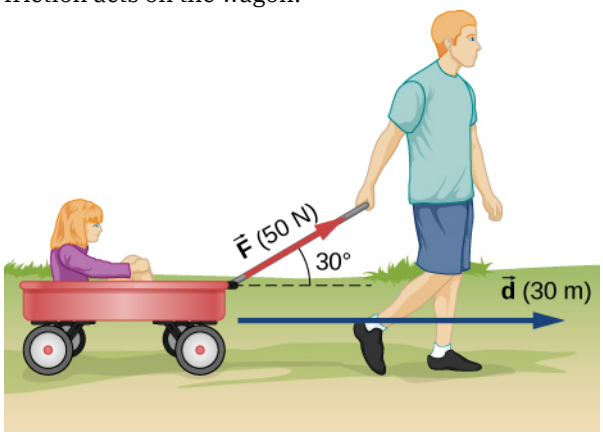

29. A shopper pushes a grocery cart 20.0 m at constant speed on level ground, against a 35.0 N frictional force. He pushes in a direction 25.0° below the horizontal. (a) What is the work done on the cart by friction? (b) What is the work done on the cart by the gravitational force? (c) What is the work done on the cart by the shopper? (d) Find the force the shopper exerts, using energy considerations. (e) What is the total work done on the cart?

30. Suppose the ski patrol lowers a rescue sled and victim, having a total mass of 90.0 kg, down a 60.0° slope at constant speed, as shown below. The coefficient of friction between the sled and the snow is 0.100. (a) How much work is done by friction as the sled moves 30.0 m along the hill? (b) How much work is done by the rope on the sled in this distance? (c) What is the work done by the gravitational force on the sled? (d) What is the total work done?

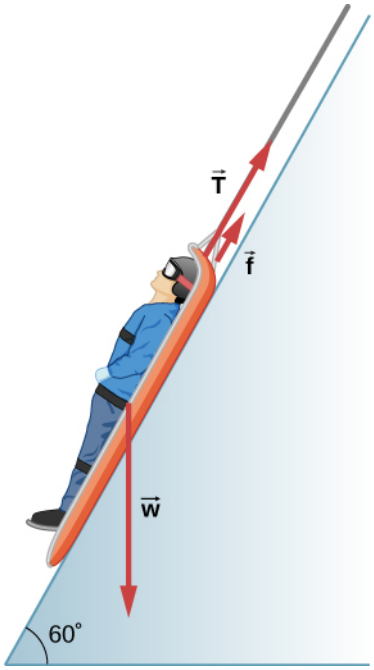

31. A constant 20-N force pushes a small ball in the direction of the force over a distance of 5.0 m. What is the work done by the force?

32. A toy cart is pulled a distance of 6.0 m in a straight line across the floor. The force pulling the cart has a magnitude of 20 N and is directed at 37° above the horizontal. What is the work done by this force?

33. A 5.0-kg box rests on a horizontal surface. The coefficient of kinetic friction between the box and surface is $\mu_K = 0.50$. A horizontal force pulls the box at constant velocity for 10 cm. Find the work done by (a) the applied horizontal force, (b) the frictional force, and (c) the net force.

34. A sled plus passenger with total mass 50 kg is pulled 20 m across the snow ($\mu_k = 0.20$) at constant velocity by a force directed 25° above the horizontal. Calculate (a) the work of the applied force, (b) the work of friction, and (c) the total work.

35. Suppose that the sled plus passenger of the preceding problem is pushed 20 m across the snow at constant velocity by a force directed 30° below the horizontal. Calculate (a) the work of the applied force, (b) the work of friction, and (c) the total work.

36. How much work does the force $F(x) = (-2.0/x)$ N do on a particle as it moves from $x = 2.0$ m to $x = 5.0$ m?

37. How much work is done against the gravitational force on a 5.0-kg briefcase when it is carried from the ground floor to the roof of the Empire State Building, a vertical climb of 380 m?

38. It takes 500 J of work to compress a spring 10 cm. What is the force constant of the spring?

39. A bungee cord is essentially a very long rubber band that can stretch up to four times its unstretched length. However, its spring constant varies over its stretch [see Menz, P.G. "The Physics of Bungee Jumping." *The Physics Teacher* (November 1993) 31: 483-487]. Take the length of the cord to be along the *x*-direction and define the stretch *x* as the length of the cord *l* minus its un-stretched length l_0; that is, $x = l - l_0$ (see below). Suppose a particular bungee cord has a spring constant, for $0 \le x \le 4.88$ m, of $k_1 = 204$ N/m and for $x \ge 4.88$ m, of $k_2 = 111$ N/m. (Recall that the spring constant is the slope of the force *F(x)* versus its stretch *x*.) (a) What is the tension in the cord when the stretch is 16.7 m (the

maximum desired for a given jump)? (b) How much work must be done against the elastic force of the bungee cord to stretch it 16.7 m?

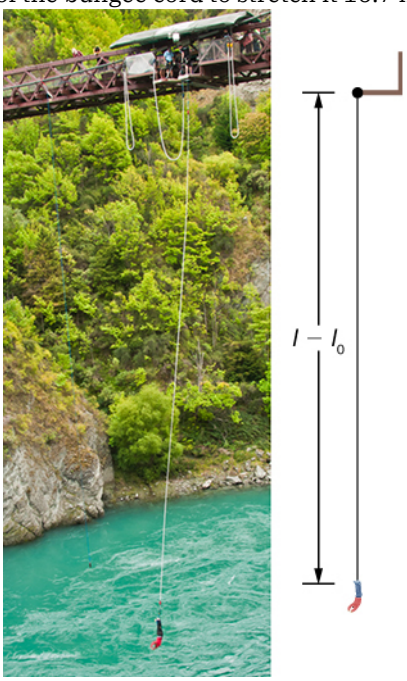


Figure 7.16 (credit: modification of work by Graeme Churchard)

40. A bungee cord exerts a nonlinear elastic force of magnitude $F(x) = k_1 x + k_2 x^3$, where x is the distance the cord is stretched, $k_1 = 204$ N/m and $k_2 = -0.233$ N/m^3. How much work must be done on the cord to stretch it 16.7 m?

41. Engineers desire to model the magnitude of the elastic force of a bungee cord using the equation $F(x) = a\left[\frac{x+9\text{ m}}{9\text{ m}} - \left(\frac{9\text{ m}}{x+9\text{ m}}\right)^2\right]$, where x is the stretch of the cord along its length and a is a constant. If it takes 22.0 kJ of work to stretch the cord by 16.7 m, determine the value of the constant a.

42. A particle moving in the xy-plane is subject to a force $\vec{\mathbf{F}}(x, y) = (50\text{ N/m})(x\hat{\mathbf{i}} + \frac{y^2}{3\text{m}}\hat{\mathbf{j}})$ where x and y are in meters. Calculate the work done on the particle by this force, as it moves in a straight line from the point (3 m, 4 m) to the point (6 m, 8 m).

43. A particle moves along a curved path $y(x) = (10\text{ m})\{1 + \cos[(0.1\text{ m}^{-1})x]\}$, from $x = 0$ to $x = 10\pi$ m, subject to a tangential force of variable magnitude $F(x) = (10\text{ N})\sin[(0.1\text{ m}^{-1})x]$. How much work does the force do? (*Hint:* Consult a table of integrals or use a numerical integration program.)

7.2 Kinetic Energy

44. Compare the kinetic energy of a 20,000-kg truck moving at 110 km/h with that of an 80.0-kg astronaut in orbit moving at 27,500 km/h.

45. (a) How fast must a 3000-kg elephant move to have the same kinetic energy as a 65.0-kg sprinter running at 10.0 m/s? (b) Discuss how the larger energies needed for the movement of larger animals would relate to metabolic rates.

46. Estimate the kinetic energy of a 90,000-ton aircraft carrier moving at a speed of at 30 knots. You will need to look up the definition of a nautical mile to use in converting the unit for speed, where 1 knot equals 1 nautical mile per hour. Furthermore for this problem, 1 ton is equivalent to 2,000 pounds.

47. Calculate the kinetic energies of (a) a 2000.0-kg automobile moving at 100.0 km/h; (b) an 80.-kg runner sprinting at 10. m/s; and (c) a 9.1×10^{-31} -kg electron moving at 2.0×10^7 m/s.

48. A 5.0-kg body has three times the kinetic energy of an 8.0-kg body. Calculate the ratio of the speeds of these bodies.

49. An 8.0-g bullet has a speed of 800 m/s. (a) What is its kinetic energy? (b) What is its kinetic energy if the speed is halved?

7.3 Work-Energy Theorem

50. (a) Calculate the force needed to bring a 950-kg car to rest from a speed of 90.0 km/h in a distance of 120 m (a fairly typical distance for a non-panic stop). (b) Suppose instead the car hits a concrete abutment at full speed and is brought to a stop in 2.00 m. Calculate the force exerted on the car and compare it with the force found in part (a).

51. A car's bumper is designed to withstand a 4.0-km/h (1.1-m/s) collision with an immovable object without damage to the body of the car. The bumper cushions the shock by absorbing the force over a distance. Calculate the magnitude of the average force on a bumper that collapses 0.200 m while bringing a 900-kg car to rest from an initial speed of 1.1 m/s.

52. Boxing gloves are padded to lessen the force of a blow. (a) Calculate the force exerted by a boxing glove on an opponent's face, if the glove and face compress 7.50 cm during a blow in which

the 7.00-kg arm and glove are brought to rest from an initial speed of 10.0 m/s. (b) Calculate the force exerted by an identical blow in the days when no gloves were used, and the knuckles and face would compress only 2.00 cm. Assume the change in mass by removing the glove is negligible. (c) Discuss the magnitude of the force with glove on. Does it seem high enough to cause damage even though it is lower than the force with no glove?

53. Using energy considerations, calculate the average force a 60.0-kg sprinter exerts backward on the track to accelerate from 2.00 to 8.00 m/s in a distance of 25.0 m, if he encounters a headwind that exerts an average force of 30.0 N against him.

54. A 5.0-kg box has an acceleration of $2.0\ \text{m/s}^2$ when it is pulled by a horizontal force across a surface with $\mu_K = 0.50$. Find the work done over a distance of 10 cm by (a) the horizontal force, (b) the frictional force, and (c) the net force. (d) What is the change in kinetic energy of the box?

55. A constant 10-N horizontal force is applied to a 20-kg cart at rest on a level floor. If friction is negligible, what is the speed of the cart when it has been pushed 8.0 m?

56. In the preceding problem, the 10-N force is applied at an angle of $45°$ below the horizontal. What is the speed of the cart when it has been pushed 8.0 m?

57. Compare the work required to stop a 100-kg crate sliding at 1.0 m/s and an 8.0-g bullet traveling at 500 m/s.


58. A wagon with its passenger sits at the top of a hill. The wagon is given a slight push and rolls 100 m down a $10°$ incline to the bottom of the hill. What is the wagon's speed when it reaches the end of the incline. Assume that the retarding force of friction is negligible.

59. An 8.0-g bullet with a speed of 800 m/s is shot into a wooden block and penetrates 20 cm before stopping. What is the average force of the wood on the bullet? Assume the block does not move.

60. A 2.0-kg block starts with a speed of 10 m/s at the bottom of a plane inclined at $37°$ to the horizontal. The coefficient of sliding friction between the block and plane is $\mu_k = 0.30$. (a) Use the work-energy principle to determine how far the block slides along the plane before momentarily coming to rest. (b) After stopping, the block slides back down the plane. What is its speed when it reaches the bottom? (*Hint:* For the round trip, only the force of friction does work on the block.)


61. When a 3.0-kg block is pushed against a massless spring of force constant 4.5×10^3 N/m, the spring is compressed 8.0 cm. The block is released, and it slides 2.0 m (from the point at which it is released) across a horizontal surface before friction stops it. What is the coefficient of kinetic friction between the block and the surface?

62. A small block of mass 200 g starts at rest at A, slides to B where its speed is $v_B = 8.0$ m/s, then slides along the horizontal surface a distance 10 m before coming to rest at C. (See below.) (a) What is the work of friction along the curved surface? (b) What is the coefficient of kinetic friction along the horizontal surface?

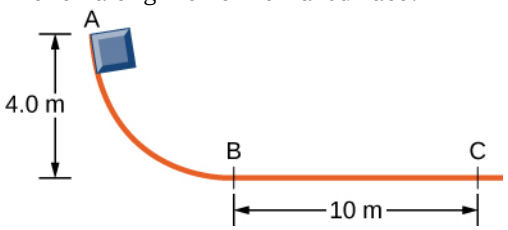

63. A small object is placed at the top of an incline that is essentially frictionless. The object slides down the incline onto a rough horizontal surface, where it stops in 5.0 s after traveling 60 m. (a) What is the speed of the object at the bottom of the incline and its acceleration along the horizontal surface? (b) What is the height of the incline?

64. When released, a 100-g block slides down the path shown below, reaching the bottom with a speed of 4.0 m/s. How much work does the force of friction do?

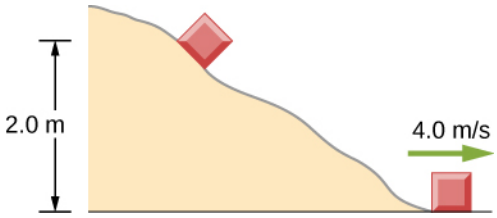

65. A 0.22LR-caliber bullet like that mentioned in Example 7.10 is fired into a door made of a single thickness of 1-inch pine boards. How fast would the bullet be traveling after it penetrated through the door?

66. A sled starts from rest at the top of a snow-covered incline that makes a $22°$ angle with the horizontal. After sliding 75 m down the slope, its speed is 14 m/s. Use the work-energy theorem to calculate the coefficient of kinetic

friction between the runners of the sled and the snowy surface.

7.4 Power

67. A person in good physical condition can put out 100 W of useful power for several hours at a stretch, perhaps by pedaling a mechanism that drives an electric generator. Neglecting any problems of generator efficiency and practical considerations such as resting time: (a) How many people would it take to run a 4.00-kW electric clothes dryer? (b) How many people would it take to replace a large electric power plant that generates 800 MW?

68. What is the cost of operating a 3.00-W electric clock for a year if the cost of electricity is \$0.0900 per $\text{kW} \cdot \text{h}$?

69. A large household air conditioner may consume 15.0 kW of power. What is the cost of operating this air conditioner 3.00 h per day for 30.0 d if the cost of electricity is \$0.110 per $\text{kW} \cdot \text{h}$?

70. (a) What is the average power consumption in watts of an appliance that uses 5.00 $\text{kW} \cdot \text{h}$ of energy per day? (b) How many joules of energy does this appliance consume in a year?

71. (a) What is the average useful power output of a person who does 6.00×10^6 J of useful work in 8.00 h? (b) Working at this rate, how long will it take this person to lift 2000 kg of bricks 1.50 m to a platform? (Work done to lift his body can be omitted because it is not considered useful output here.)

72. A 500-kg dragster accelerates from rest to a final speed of 110 m/s in 400 m (about a quarter of a mile) and encounters an average frictional force of 1200 N. What is its average power output in watts and horsepower if this takes 7.30 s?

73. (a) How long will it take an 850-kg car with a useful power output of 40.0 hp (1 hp equals 746 W) to reach a speed of 15.0 m/s, neglecting friction? (b) How long will this acceleration take if the car also climbs a 3.00-m high hill in the process?

74. (a) Find the useful power output of an elevator motor that lifts a 2500-kg load a height of 35.0 m in 12.0 s, if it also increases the speed from rest to 4.00 m/s. Note that the total mass of the counterbalanced system is 10,000 kg—so that only 2500 kg is raised in height, but the full 10,000 kg is accelerated. (b) What does it cost, if electricity is \$0.0900 per $\text{kW} \cdot \text{h}$?

75. (a) How long would it take a 1.50×10^5-kg airplane with engines that produce 100 MW of power to reach a speed of 250 m/s and an altitude of 12.0 km if air resistance were negligible? (b) If it actually takes 900 s, what is the power? (c) Given this power, what is the average force of air resistance if the airplane takes 1200 s? (*Hint:* You must find the distance the plane travels in 1200 s assuming constant acceleration.)

76. Calculate the power output needed for a 950-kg car to climb a 2.00° slope at a constant 30.0 m/s while encountering wind resistance and friction totaling 600 N.

77. A man of mass 80 kg runs up a flight of stairs 20 m high in 10 s. (a) how much power is used to lift the man? (b) If the man's body is 25% efficient, how much power does he expend?

78. The man of the preceding problem consumes approximately 1.05×10^7 J (2500 food calories) of energy per day in maintaining a constant weight. What is the average power he produces over a day? Compare this with his power production when he runs up the stairs.

79. An electron in a television tube is accelerated uniformly from rest to a speed of 8.4×10^7 m/s over a distance of 2.5 cm. What is the power delivered to the electron at the instant that its displacement is 1.0 cm?

80. Coal is lifted out of a mine a vertical distance of 50 m by an engine that supplies 500 W to a conveyor belt. How much coal per minute can be brought to the surface? Ignore the effects of friction.

81. A girl pulls her 15-kg wagon along a flat sidewalk by applying a 10-N force at 37° to the horizontal. Assume that friction is negligible and that the wagon starts from rest. (a) How much work does the girl do on the wagon in the first 2.0 s. (b) How much instantaneous power does she exert at $t = 2.0$ s?


82. A typical automobile engine has an efficiency of 25%. Suppose that the engine of a 1000-kg automobile has a maximum power output of 140 hp. What is the maximum grade that the automobile can climb at 50 km/h if the frictional retarding force on it is 300 N?

83. When jogging at 13 km/h on a level surface, a 70-kg man uses energy at a rate of approximately 850 W. Using the facts that the "human engine" is approximately 25% efficient, determine the rate at which this man uses energy when jogging up a 5.0° slope at this same speed. Assume that the frictional

retarding force is the same in both cases.

Additional Problems

84. A cart is pulled a distance D on a flat, horizontal surface by a constant force F that acts at an angle θ with the horizontal direction. The other forces on the object during this time are gravity (F_w), normal forces (F_{N1}) and (F_{N2}), and rolling frictions F_{r1} and F_{r2}, as shown below. What is the work done by each force?

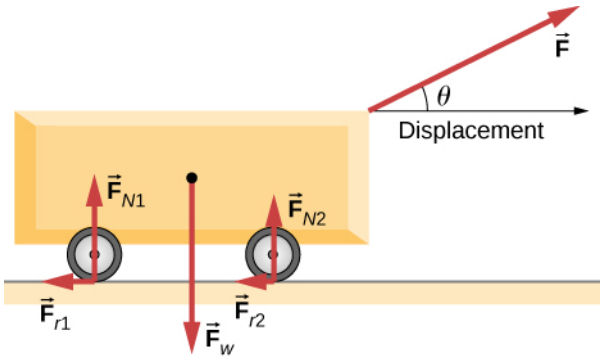

85. Consider a particle on which several forces act, one of which is known to be constant in time: $\vec{\mathbf{F}}_1 = (3\text{ N})\hat{\mathbf{i}} + (4\text{ N})\hat{\mathbf{j}}$. As a result, the particle moves along the x-axis from $x = 0$ to $x = 5$ m in some time interval. What is the work done by $\vec{\mathbf{F}}_1$?


86. Consider a particle on which several forces act, one of which is known to be constant in time: $\vec{\mathbf{F}}_1 = (3\text{ N})\hat{\mathbf{i}} + (4\text{ N})\hat{\mathbf{j}}$. As a result, the particle moves first along the x-axis from $x = 0$ to $x = 5$ m and then parallel to the y-axis from $y = 0$ to $y = 6$ m. What is the work done by $\vec{\mathbf{F}}_1$?

87. Consider a particle on which several forces act, one of which is known to be constant in time: $\vec{\mathbf{F}}_1 = (3\text{ N})\hat{\mathbf{i}} + (4\text{ N})\hat{\mathbf{j}}$. As a result, the particle moves along a straight path from a Cartesian coordinate of (0 m, 0 m) to (5 m, 6 m). What is the work done by $\vec{\mathbf{F}}_1$?

88. Consider a particle on which a force acts that depends on the position of the particle. This force is given by $\vec{\mathbf{F}}_1 = (2y)\hat{\mathbf{i}} + (3x)\hat{\mathbf{j}}$. Find the work done by this force when the particle moves from the origin to a point 5 meters to the right on the x-axis.

89. A boy pulls a 5-kg cart with a 20-N force at an angle of 30° above the horizontal for a length of time. Over this time frame, the cart moves a distance of 12 m on the horizontal floor. (a) Find the work done on the cart by the boy. (b) What will be the work done by the boy if he pulled with the same force horizontally instead of at an angle of 30° above the horizontal over the same distance?

90. A crate of mass 200 kg is to be brought from a site on the ground floor to a third floor apartment. The workers know that they can either use the elevator first, then slide it along the third floor to the apartment, or first slide the crate to another location marked C below, and then take the elevator to the third floor and slide it on the third floor a shorter distance. The trouble is that the third floor is very rough compared to the ground floor. Given that the coefficient of kinetic friction between the crate and the ground floor is 0.100 and between the crate and the third floor surface is 0.300, find the work needed by the workers for each path shown from A to E. Assume that the force the workers need to do is just enough to slide the crate at constant velocity (zero acceleration). *Note:* The work by the elevator against the force of gravity is not done by the workers.

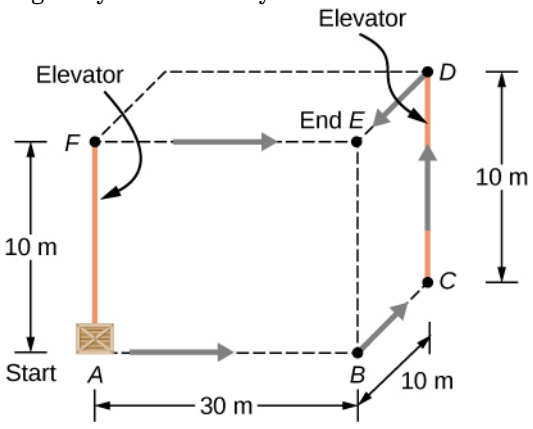

91. A hockey puck of mass 0.17 kg is shot across a rough floor with the roughness different at different places, which can be described by a position-dependent coefficient of kinetic friction. For a puck moving along the x-axis, the coefficient of kinetic friction is the following function of x, where x is in m: $\mu(x) = 0.1 + 0.05x$. Find the work done by the kinetic frictional force on the hockey puck when it has moved (a) from $x = 0$ to $x = 2$ m, and (b) from $x = 2$ m to $x = 4$ m.

92. A horizontal force of 20 N is required to keep a 5.0 kg box traveling at a constant speed up a frictionless incline for a vertical height change of 3.0 m. (a) What is the work done by gravity during this change in height? (b) What is the work done by the normal force? (c) What is the work done by the horizontal force?

93. A 7.0-kg box slides along a horizontal frictionless floor at 1.7 m/s and collides with a relatively massless spring that compresses 23 cm before the box comes to a stop. (a) How much kinetic energy does the box have before it collides with the spring? (b) Calculate the work done by the spring. (c) Determine the spring constant of the spring.

94. You are driving your car on a straight road with a coefficient of friction between the tires and the road of 0.55. A large piece of debris falls in front of your view and you immediate slam on the brakes, leaving a skid mark of 30.5 m (100-feet) long before coming to a stop. A policeman sees your car stopped on the road, looks at the skid mark, and gives you a ticket for traveling over the 13.4 m/s (30 mph) speed limit. Should you fight the speeding ticket in court?

95. A crate is being pushed across a rough floor surface. If no force is applied on the crate, the crate will slow down and come to a stop. If the crate of mass 50 kg moving at speed 8 m/s comes to rest in 10 seconds, what is the rate at which the frictional force on the crate takes energy away from the crate?


96. Suppose a horizontal force of 20 N is required to maintain a speed of 8 m/s of a 50 kg crate. (a) What is the power of this force? (b) Note that the acceleration of the crate is zero despite the fact that 20 N force acts on the crate horizontally. What happens to the energy given to the crate as a result of the work done by this 20 N force?

97. Grains from a hopper falls at a rate of 10 kg/s vertically onto a conveyor belt that is moving horizontally at a constant speed of 2 m/s. (a) What force is needed to keep the conveyor belt moving at the constant velocity? (b) What is the minimum power of the motor driving the conveyor belt?

98. A cyclist in a race must climb a 5° hill at a speed of 8 m/s. If the mass of the bike and the biker together is 80 kg, what must be the power output of the biker to achieve the goal?


Challenge Problems

99. Shown below is a 40-kg crate that is pushed at constant velocity a distance 8.0 m along a 30° incline by the horizontal force $\vec{\mathbf{F}}$. The coefficient of kinetic friction between the crate and the incline is $\mu_k = 0.40$. Calculate the work done by (a) the applied force, (b) the frictional force, (c) the gravitational force, and (d) the net force.

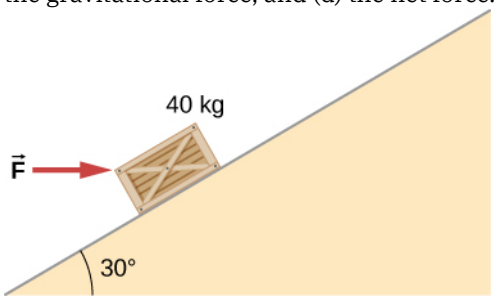

100. The surface of the preceding problem is modified so that the coefficient of kinetic friction is decreased. The same horizontal force is applied to the crate, and after being pushed 8.0 m, its speed is 5.0 m/s. How much work is now done by the force of friction? Assume that the crate starts at rest.

101. The force $F(x)$ varies with position, as shown below. Find the work done by this force on a particle as it moves from $x = 1.0$ m to $x = 5.0$ m.

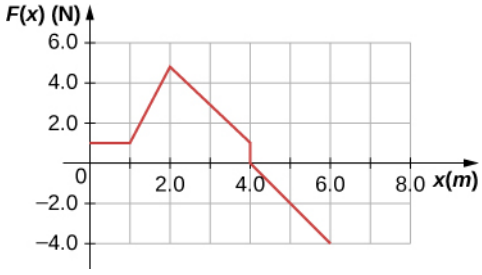

102. Find the work done by the same force in Example 7.4, between the same points, $A = (0, 0)$ and $B = (2\text{ m}, 2\text{ m})$, over a circular arc of radius 2 m, centered at (0, 2 m). Evaluate the path integral using Cartesian coordinates. (*Hint:* You will probably need to consult a table of integrals.)

103. Answer the preceding problem using polar coordinates.

104. Find the work done by the same force in Example 7.4, between the same points, $A = (0, 0)$ and $B = (2\text{ m}, 2\text{ m})$, over a circular arc of radius 2 m, centered at (2 m, 0). Evaluate the path integral using Cartesian coordinates. (*Hint:* You will probably need to consult a table of integrals.)

105. Answer the preceding problem using polar coordinates.

106. Constant power P is delivered to a car of mass m by its engine. Show that if air resistance can be ignored, the distance covered in a time t by the car, starting from rest, is given by $s = (8P/9m)^{1/2}t^{3/2}$.

107. Suppose that the air resistance a car encounters is independent of its speed. When the car travels at 15 m/s, its engine delivers 20 hp to its wheels. (a) What is the power delivered to the wheels when the car travels at 30 m/s? (b) How much energy does the car use in covering 10 km at 15 m/s? At 30 m/s? Assume that the engine is 25% efficient. (c) Answer the same questions if the force of air resistance is proportional to the speed of the automobile. (d) What do these results, plus your experience with gasoline consumption, tell you about air resistance?

108. Consider a linear spring, as in Figure 7.7(a), with mass M uniformly distributed along its length. The left end of the spring is fixed, but the right end, at the equilibrium position $x = 0$, is moving with speed v in the x-direction. What is the total kinetic energy of the spring? (*Hint:* First express the kinetic energy of an infinitesimal element of the spring dm in terms of the total mass, equilibrium length, speed of the right-hand end, and position along the spring; then integrate.)

CHAPTER 8
Potential Energy and Conservation of Energy



Figure 8.1 Shown here is part of a Ball Machine sculpture by George Rhoads. A ball in this contraption is lifted, rolls, falls, bounces, and collides with various objects, but throughout its travels, its kinetic energy changes in definite, predictable amounts, which depend on its position and the objects with which it interacts. (credit: modification of work by Roland Tanglao)

Chapter Outline

8.1 Potential Energy of a System

8.2 Conservative and Non-Conservative Forces

8.3 Conservation of Energy

8.4 Potential Energy Diagrams and Stability

8.5 Sources of Energy

INTRODUCTION In George Rhoads' rolling ball sculpture, the principle of conservation of energy governs the changes in the ball's kinetic energy and relates them to changes and transfers for other types of energy associated with the ball's interactions. In this chapter, we introduce the important concept of potential energy. This will enable us to formulate the law of conservation of mechanical energy and to apply it to simple systems, making solving problems easier. In the final section on sources of energy, we will consider energy transfers and the general law of conservation of energy. Throughout this book, the law of conservation of energy will be applied in increasingly more detail, as you encounter more complex and varied systems, and other forms of

energy.

8.1 Potential Energy of a System

Learning Objectives

By the end of this section, you will be able to:

- Relate the difference of potential energy to work done on a particle for a system without friction or air drag
- Explain the meaning of the zero of the potential energy function for a system
- Calculate and apply the gravitational potential energy for an object near Earth's surface and the elastic potential energy of a mass-spring system

In Work, we saw that the work done on an object by the constant gravitational force, near the surface of Earth, over any displacement is a function only of the difference in the positions of the end-points of the displacement. This property allows us to define a different kind of energy for the system than its kinetic energy, which is called **potential energy**. We consider various properties and types of potential energy in the following subsections.

Potential Energy Basics

In Motion in Two and Three Dimensions, we analyzed the motion of a projectile, like kicking a football in Figure 8.2. For this example, let's ignore friction and air resistance. As the football rises, the work done by the gravitational force on the football is negative, because the ball's displacement is positive vertically and the force due to gravity is negative vertically. We also noted that the ball slowed down until it reached its highest point in the motion, thereby decreasing the ball's kinetic energy. This loss in kinetic energy translates to a gain in gravitational potential energy of the football-Earth system.

As the football falls toward Earth, the work done on the football is now positive, because the displacement and the gravitational force both point vertically downward. The ball also speeds up, which indicates an increase in kinetic energy. Therefore, energy is converted from gravitational potential energy back into kinetic energy.

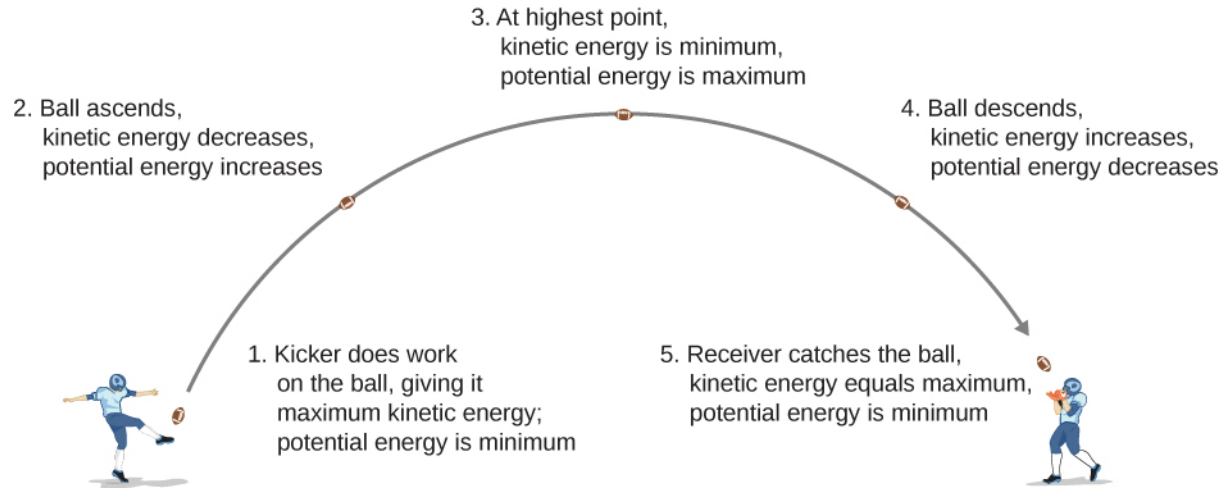


Figure 8.2 As a football starts its descent toward the wide receiver, gravitational potential energy is converted back into kinetic energy.

Based on this scenario, we can define the difference of potential energy from point A to point B as the negative of the work done:

$$\Delta U_{AB} = U_B - U_A = -W_{AB}. \tag{8.1}$$

This formula explicitly states a **potential energy difference**, not just an absolute potential energy. Therefore, we need to define potential energy at a given position in such a way as to state standard values of potential energy on their own, rather than potential energy differences. We do this by rewriting the potential energy function in terms of an arbitrary constant,

$$\Delta U = U(\vec{\mathbf{r}}) - U(\vec{\mathbf{r}}_0). \quad 8.2$$

The choice of the potential energy at a starting location of $\vec{\mathbf{r}}_0$ is made out of convenience in the given problem. Most importantly, whatever choice is made should be stated and kept consistent throughout the given problem. There are some well-accepted choices of initial potential energy. For example, the lowest height in a problem is usually defined as zero potential energy, or if an object is in space, the farthest point away from the system is often defined as zero potential energy. Then, the potential energy, with respect to zero at $\vec{\mathbf{r}}_0$, is just $U(\vec{r})$.

As long as there is no friction or air resistance, the change in kinetic energy of the football equals negative of the change in gravitational potential energy of the football. This can be generalized to any potential energy:

$$\Delta K_{AB} = -\Delta U_{AB}. \quad 8.3$$

Let's look at a specific example, choosing zero potential energy for gravitational potential energy at convenient points.

EXAMPLE 8.1

Basic Properties of Potential Energy

A particle moves along the x-axis under the action of a force given by $F = -ax^2$, where $a = 3\ \text{N/m}^2$. (a) What is the difference in its potential energy as it moves from $x_A = 1\ \text{m}$ to $x_B = 2\ \text{m}$? (b) What is the particle's potential energy at $x = 1\ \text{m}$ with respect to a given 0.5 J of potential energy at $x = 0$?

Strategy

(a) The difference in potential energy is the negative of the work done, as defined by Equation 8.1. The work is defined in the previous chapter as the dot product of the force with the distance. Since the particle is moving forward in the x-direction, the dot product simplifies to a multiplication ($\hat{\mathbf{i}} \cdot \hat{\mathbf{i}} = 1$). To find the total work done, we need to integrate the function between the given limits. After integration, we can state the work or the change in potential energy. (b) The potential energy function, with respect to zero at $x = 0$, is the indefinite integral encountered in part (a), with the constant of integration determined from Equation 8.3. Then, we substitute the x-value into the function of potential energy to calculate the potential energy at $x = 1\ \text{m}$.

Solution

a. The work done by the given force as the particle moves from coordinate x to $x + dx$ in one dimension is

$$dW = \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = F dx = -ax^2 dx.$$

Substituting this expression into Equation 8.1, we obtain

$$\Delta U = -W = \int_{x_1}^{x_2} ax^2 dx = \frac{1}{3}(3\ \text{N/m}^2)x^3\Big|_{1\ \text{m}}^{2\ \text{m}} = 7\ \text{J}.$$

b. The indefinite integral for the potential energy function in part (a) is

$$U(x) = \frac{1}{3}ax^3 + \text{const.},$$

and we want the constant to be determined by

$$U(0) = 0.5\ \text{J}.$$

Thus, the potential energy with respect to zero at $x = 0$ is just

$$U(x) = \frac{1}{3}ax^3 + 0.5\ \text{J}.$$

Therefore, the potential energy at $x = 1\ \text{m}$ is

$$U(1\ \text{m}) = \frac{1}{3}\left(3\ \text{N/m}^2\right)(1\ \text{m})^3 + 0.5\ \text{J} = 1.5\ \text{J}.$$

Significance

In this one-dimensional example, any function we can integrate, independent of path, is conservative. Notice how we applied the definition of potential energy difference to determine the potential energy function with respect to zero at a chosen point. Also notice that the potential energy, as determined in part (b), at $x = 1$ m is $U\,(1\text{ m}) = 1$ J and at $x = 2$ m is $U\,(2\text{ m}) = 8$ J; their difference is the result in part (a).

CHECK YOUR UNDERSTANDING 8.1

In Example 8.1, what are the potential energies of the particle at $x = 1$ m and $x = 2$ m with respect to zero at $x = 1.5$ m? Verify that the difference of potential energy is still 7 J.

Systems of Several Particles

In general, a system of interest could consist of several particles. The difference in the potential energy of the system is the negative of the work done by gravitational or elastic forces, which, as we will see in the next section, are conservative forces. The potential energy difference depends only on the initial and final positions of the particles, and on some parameters that characterize the interaction (like mass for gravity or the spring constant for a Hooke's law force).

It is important to remember that potential energy is a property of the interactions between objects in a chosen system, and not just a property of each object. This is especially true for electric forces, although in the examples of potential energy we consider below, parts of the system are either so big (like Earth, compared to an object on its surface) or so small (like a massless spring), that the changes those parts undergo are negligible when included in the system.

Types of Potential Energy

For each type of interaction present in a system, you can label a corresponding type of potential energy. The total potential energy of the system is the sum of the potential energies of all the types. (This follows from the additive property of the dot product in the expression for the work done.) Let's look at some specific examples of types of potential energy discussed in Work. First, we consider each of these forces when acting separately, and then when both act together.

Gravitational potential energy near Earth's surface

The system of interest consists of our planet, Earth, and one or more particles near its surface (or bodies small enough to be considered as particles, compared to Earth). The gravitational force on each particle (or body) is just its weight mg near the surface of Earth, acting vertically down. According to Newton's third law, each particle exerts a force on Earth of equal magnitude but in the opposite direction. Newton's second law tells us that the magnitude of the acceleration produced by each of these forces on Earth is mg divided by Earth's mass. Since the ratio of the mass of any ordinary object to the mass of Earth is vanishingly small, the motion of Earth can be completely neglected. Therefore, we consider this system to be a group of single-particle systems, subject to the uniform gravitational force of Earth.

In Work, the work done on a body by Earth's uniform gravitational force, near its surface, depended on the mass of the body, the acceleration due to gravity, and the difference in height the body traversed, as given by Equation 7.4. By definition, this work is the negative of the difference in the gravitational potential energy, so that difference is

$$\Delta U_{\text{grav}} = -W_{\text{grav},AB} = mg\,(y_B - y_A)\,. \tag{8.4}$$

You can see from this that the gravitational potential energy function, near Earth's surface, is

$$U\,(y) = mgy + \text{const.} \tag{8.5}$$

You can choose the value of the constant, as described in the discussion of Equation 8.2; however, for solving most problems, the most convenient constant to choose is zero for when $y = 0$, which is the lowest vertical

position in the problem.

EXAMPLE 8.2

Gravitational Potential Energy of a Hiker

The summit of Great Blue Hill in Milton, MA, is 147 m above its base and has an elevation above sea level of 195 m (Figure 8.3). (Its Native American name, *Massachusett*, was adopted by settlers for naming the Bay Colony and state near its location.) A 75-kg hiker ascends from the base to the summit. What is the gravitational potential energy of the hiker-Earth system with respect to zero gravitational potential energy at base height, when the hiker is (a) at the base of the hill, (b) at the summit, and (c) at sea level, afterward?

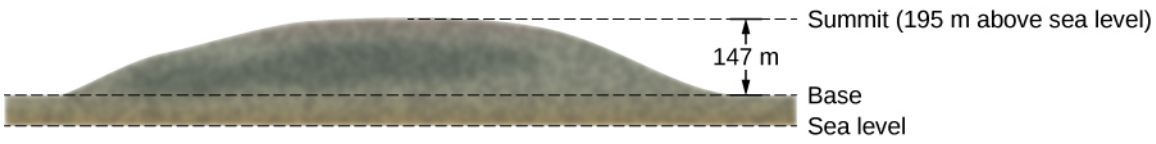


Figure 8.3 Sketch of the profile of Great Blue Hill, Milton, MA. The altitudes of the three levels are indicated.

Strategy

First, we need to pick an origin for the y-axis and then determine the value of the constant that makes the potential energy zero at the height of the base. Then, we can determine the potential energies from Equation 8.5, based on the relationship between the zero potential energy height and the height at which the hiker is located.

Solution

a. Let's choose the origin for the y-axis at base height, where we also want the zero of potential energy to be. This choice makes the constant equal to zero and
$$U\,(\text{base}) = U\,(0) = 0.$$

b. At the summit, $y = 147$ m, so
$$U\,(\text{summit}) = U\,(147\text{ m}) = mgh = (75\ \times\ 9.8\text{ N})\,(147\text{ m}) = 108\text{ kJ}.$$

c. At sea level, $y = (147 - 195)\text{ m} = -48$ m, so
$$U\,(\text{sea-level}) = (75\ \times\ 9.8\text{ N})\,(-48\text{ m}) = -35.3\text{ kJ}.$$

Significance

Besides illustrating the use of Equation 8.4 and Equation 8.5, the values of gravitational potential energy we found are reasonable. The gravitational potential energy is higher at the summit than at the base, and lower at sea level than at the base. Gravity does work on you on your way up, too! It does negative work and not quite as much (in magnitude), as your muscles do. But it certainly does work. Similarly, your muscles do work on your way down, as negative work. The numerical values of the potential energies depend on the choice of zero of potential energy, but the physically meaningful differences of potential energy do not. [Note that since Equation 8.2 is a difference, the numerical values do not depend on the origin of coordinates.]

CHECK YOUR UNDERSTANDING 8.2

What are the values of the gravitational potential energy of the hiker at the base, summit, and sea level, with respect to a sea-level zero of potential energy?

Elastic potential energy

In Work, we saw that the work done by a perfectly elastic spring, in one dimension, depends only on the spring constant and the squares of the displacements from the unstretched position, as given in Equation 7.5. This

work involves only the properties of a Hooke's law interaction and not the properties of real springs and whatever objects are attached to them. Therefore, we can define the difference of elastic potential energy for a spring force as the negative of the work done by the spring force in this equation, before we consider systems that embody this type of force. Thus,

$$\Delta U = -W_{AB} = \frac{1}{2}k(x_B^2 - x_A^2), \tag{8.6}$$

where the object travels from point A to point B. The potential energy function corresponding to this difference is

$$U(x) = \frac{1}{2}kx^2 + \text{const.} \tag{8.7}$$

If the spring force is the only force acting, it is simplest to take the zero of potential energy at $x = 0$, when the spring is at its unstretched length. Then, the constant is Equation 8.7 is zero. (Other choices may be more convenient if other forces are acting.)

EXAMPLE 8.3

Spring Potential Energy

A system contains a perfectly elastic spring, with an unstretched length of 20 cm and a spring constant of 4 N/cm. (a) How much elastic potential energy does the spring contribute when its length is 23 cm? (b) How much more potential energy does it contribute if its length increases to 26 cm?

Strategy

When the spring is at its unstretched length, it contributes nothing to the potential energy of the system, so we can use Equation 8.7 with the constant equal to zero. The value of x is the length minus the unstretched length. When the spring is expanded, the spring's displacement or difference between its relaxed length and stretched length should be used for the x-value in calculating the potential energy of the spring.

Solution

a. The displacement of the spring is $x = 23\text{ cm} - 20\text{ cm} = 3\text{ cm}$, so the contributed potential energy is $U = \frac{1}{2}kx^2 = \frac{1}{2}(4\text{ N/cm})\,(3\text{ cm})^2 = 0.18\text{ J}$.
b. When the spring's displacement is $x = 26\text{ cm} - 20\text{ cm} = 6\text{ cm}$, the potential energy is $U = \frac{1}{2}kx^2 = \frac{1}{2}(4\text{ N/cm})\,(6\text{ cm})^2 = 0.72\text{ J}$, which is a 0.54-J increase over the amount in part (a).

Significance

Calculating the elastic potential energy and potential energy differences from Equation 8.7 involves solving for the potential energies based on the given lengths of the spring. Since U depends on x^2, the potential energy for a compression (negative x) is the same as for an extension of equal magnitude.

CHECK YOUR UNDERSTANDING 8.3

When the length of the spring in Example 8.3 changes from an initial value of 22.0 cm to a final value, the elastic potential energy it contributes changes by -0.0800 J. Find the final length.

Gravitational and elastic potential energy

A simple system embodying both gravitational and elastic types of potential energy is a one-dimensional, vertical mass-spring system. This consists of a massive particle (or block), hung from one end of a perfectly elastic, massless spring, the other end of which is fixed, as illustrated in Figure 8.4.

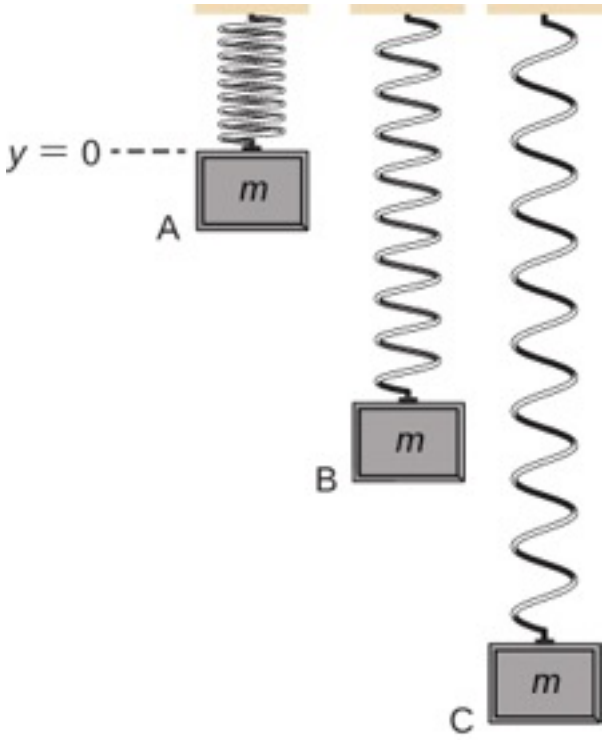


Figure 8.4 A vertical mass-spring system, with the positive *y*-axis pointing upward. The mass is initially at an unstretched spring length, point A. Then it is released, expanding past point B to point C, where it comes to a stop.

First, let's consider the potential energy of the system. We need to define the constant in the potential energy function of Equation 8.5. Often, the ground is a suitable choice for when the gravitational potential energy is zero; however, in this case, the highest point or when $y = 0$ is a convenient location for zero gravitational potential energy. Note that this choice is arbitrary, and the problem can be solved correctly even if another choice is picked.

We must also define the elastic potential energy of the system and the corresponding constant, as detailed in Equation 8.7. This is where the spring is unstretched, or at the $y = 0$ position.

If we consider that the total energy of the system is conserved, then the energy at point A equals point C. The block is placed just on the spring so its initial kinetic energy is zero. By the setup of the problem discussed previously, both the gravitational potential energy and elastic potential energy are equal to zero. Therefore, the initial energy of the system is zero. When the block arrives at point C, its kinetic energy is zero. However, it now has both gravitational potential energy and elastic potential energy. Therefore, we can solve for the distance y that the block travels before coming to a stop:

$$\begin{aligned} K_{\mathrm{A}} + U_A &= K_C + U_{\mathrm{C}} \\ 0 &= 0 + mgy_C + \tfrac{1}{2}k(y_C)^2 \\ y_{\mathrm{C}} &= \tfrac{-2mg}{k} \end{aligned}$$



Figure 8.5 A bungee jumper transforms gravitational potential energy at the start of the jump into elastic potential energy at the bottom of the jump.

EXAMPLE 8.4

Potential Energy of a Vertical Mass-Spring System

A block weighing 1.2 N is hung from a spring with a spring constant of 6.0 N/m, as shown in Figure 8.4. (a) What is the maximum expansion of the spring, as seen at point C? (b) What is the total potential energy at point B, halfway between A and C? (c) What is the speed of the block at point B?

Strategy

In part (a) we calculate the distance y_C as discussed in the previous text. Then in part (b), we use half of the y value to calculate the potential energy at point B using equations Equation 8.4 and Equation 8.6. This energy must be equal to the kinetic energy, Equation 7.6, at point B since the initial energy of the system is zero. By calculating the kinetic energy at point B, we can now calculate the speed of the block at point B.

Solution

a. Since the total energy of the system is zero at point A as discussed previously, the maximum expansion of the spring is calculated to be:

$$\begin{aligned} y_{\mathrm{C}} &= \frac{-2mg}{k} \\ y_{\mathrm{C}} &= \frac{-2(1.2\ \mathrm{N})}{(6.0\mathrm{N/m})} = -0.40\ \mathrm{m} \end{aligned}$$

b. The position of y_B is half of the position at y_C or -0.20 m. The total potential energy at point B would therefore be:

$$\begin{aligned} U_B &= mgy_B + \tfrac{1}{2}k(y_C)^2 \\ U_B &= (1.2\ \mathrm{N})(-0.20\ \mathrm{m}) + \tfrac{1}{2}(6\ \mathrm{N/m})(-0.20\ \mathrm{m})^2 \\ U_{\mathrm{B}} &= -0.12\ \mathrm{J} \end{aligned}$$

c. The mass of the block is the weight divided by gravity.

$$m = \frac{F_w}{g} = \frac{1.2\ \mathrm{N}}{9.8\mathrm{m/s}^2} = 0.12\mathrm{kg}$$

The kinetic energy at point B therefore is 0.12 J because the total energy is zero. Therefore, the speed of the block at point B is equal to

$$K = \frac{1}{2}mv^2$$
$$v = \sqrt{\frac{2K}{m}} = \sqrt{\frac{2(0.12\,\text{J})}{(0.12\,\text{kg})}} = 1.4\ \text{m/s}$$

Significance

Even though the potential energy due to gravity is relative to a chosen zero location, the solutions to this problem would be the same if the zero energy points were chosen at different locations.

CHECK YOUR UNDERSTANDING 8.4

Suppose the mass in Equation 8.6 is doubled while keeping the all other conditions the same. Would the maximum expansion of the spring increase, decrease, or remain the same? Would the speed at point B be larger, smaller, or the same compared to the original mass?

INTERACTIVE

View this simulation (https://openstax.org/l/21conenerskat) to learn about conservation of energy with a skater! Build tracks, ramps and jumps for the skater and view the kinetic energy, potential energy and friction as he moves. You can also take the skater to different planets or even space!

A sample chart of a variety of energies is shown in Table 8.1 to give you an idea about typical energy values associated with certain events. Some of these are calculated using kinetic energy, whereas others are calculated by using quantities found in a form of potential energy that may not have been discussed at this point.

Object/phenomenon	Energy in joules
Big Bang	10^{68}
Annual world energy use	4.0×10^{20}
Large fusion bomb (9 megaton)	3.8×10^{16}
Hiroshima-size fission bomb (10 kiloton)	4.2×10^{13}
1 barrel crude oil	5.9×10^{9}
1 metric ton TNT	4.2×10^{9}
1 gallon of gasoline	1.2×10^{8}
Daily adult food intake (recommended)	1.2×10^{7}
1000-kg car at 90 km/h	3.1×10^{5}
Tennis ball at 100 km/h	22
Mosquito $\left(10^{-2}\ \text{g at } 0.5\ \text{m/s}\right)$	1.3×10^{-6}

Object/phenomenon	Energy in joules
Single electron in a TV tube beam	4.0×10^{-15}
Energy to break one DNA strand	10^{-19}

Table 8.1 Energy of Various Objects and Phenomena

8.2 Conservative and Non-Conservative Forces

Learning Objectives

By the end of this section, you will be able to:

- Characterize a conservative force in several different ways
- Specify mathematical conditions that must be satisfied by a conservative force and its components
- Relate the conservative force between particles of a system to the potential energy of the system
- Calculate the components of a conservative force in various cases

In Potential Energy and Conservation of Energy, any transition between kinetic and potential energy conserved the total energy of the system. This was path independent, meaning that we can start and stop at any two points in the problem, and the total energy of the system—kinetic plus potential—at these points are equal to each other. This is characteristic of a **conservative force**. We dealt with conservative forces in the preceding section, such as the gravitational force and spring force. When comparing the motion of the football in Figure 8.2, the total energy of the system never changes, even though the gravitational potential energy of the football increases, as the ball rises relative to ground and falls back to the initial gravitational potential energy when the football player catches the ball. **Non-conservative forces** are dissipative forces such as friction or air resistance. These forces take energy away from the system as the system progresses, energy that you can't get back. These forces are path dependent; therefore it matters where the object starts and stops.

Conservative Force

The work done by a conservative force is independent of the path; in other words, the work done by a conservative force is the same for any path connecting two points:

$$W_{AB,\text{path-1}} = \int_{AB,\text{path-1}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} = W_{AB,\text{path-2}} = \int_{AB,\text{path-2}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}}. \quad 8.8$$

The work done by a non-conservative force depends on the path taken.

Equivalently, a force is conservative if the work it does around any closed path is zero:

$$W_{\text{closed path}} = \oint \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} = 0. \quad 8.9$$

[In Equation 8.9, we use the notation of a circle in the middle of the integral sign for a line integral over a closed path, a notation found in most physics and engineering texts.] Equation 8.8 and Equation 8.9 are equivalent because any closed path is the sum of two paths: the first going from A to B, and the second going from B to A. The work done going along a path from B to A is the negative of the work done going along the same path from A to B, where A and B are any two points on the closed path:

$$0 = \int \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} = \int_{AB,\text{path-1}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} + \int_{BA,\text{path-2}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}}$$
$$= \int_{AB,\text{path-1}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} - \int_{AB,\text{path-2}} \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} = 0.$$

You might ask how we go about proving whether or not a force is conservative, since the definitions involve any and all paths from A to B, or any and all closed paths, but to do the integral for the work, you have to choose a particular path. One answer is that the work done is independent of path if the infinitesimal work $\vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$ is an **exact differential**, the way the infinitesimal net work was equal to the exact differential of the kinetic energy, $dW_{\text{net}} = m\vec{\mathbf{v}} \cdot d\vec{\mathbf{v}} = d\frac{1}{2}mv^2$,

when we derived the work-energy theorem in Work-Energy Theorem. There are mathematical conditions that you can use to test whether the infinitesimal work done by a force is an exact differential, and the force is conservative. These conditions only involve differentiation and are thus relatively easy to apply. In two dimensions, the condition for $\vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = F_x\,dx + F_y\,dy$ to be an exact differential is

$$\frac{dF_x}{dy} = \frac{dF_y}{dx}. \tag{8.10}$$

You may recall that the work done by the force in Example 7.4 depended on the path. For that force,

$$F_x = (5\ \text{N/m})\,y \text{ and } F_y = (10\ \text{N/m})\,x.$$

Therefore,

$$(dF_x/dy) = 5\ \text{N/m} \neq \left(dF_y/dx\right) = 10\ \text{N/m},$$

which indicates it is a non-conservative force. Can you see what you could change to make it a conservative force?

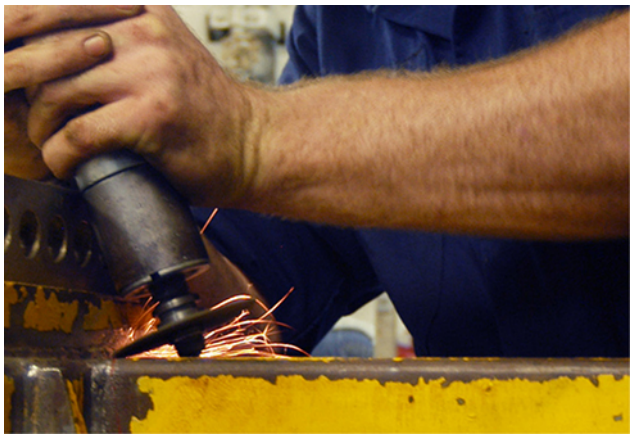


Figure 8.6 A grinding wheel applies a non-conservative force, because the work done depends on how many rotations the wheel makes, so it is path-dependent. (credit: modification of work by Grantez Stephens, U.S. Navy)

EXAMPLE 8.5

Conservative or Not?

Which of the following two-dimensional forces are conservative and which are not? Assume a and b are constants with appropriate units:

(a) $axy^3\,\hat{\mathbf{i}} + ayx^3\,\hat{\mathbf{j}}$, (b) $a\left[\left(y^2/x\right)\hat{\mathbf{i}} + 2y\ln(x/b)\,\hat{\mathbf{j}}\right]$, (c) $\frac{ax\hat{\mathbf{i}}+ay\hat{\mathbf{j}}}{x^2+y^2}$

Strategy

Apply the condition stated in Equation 8.10, namely, using the derivatives of the components of each force indicated. If the derivative of the *y*-component of the force with respect to *x* is equal to the derivative of the *x*-component of the force with respect to *y*, the force is a conservative force, which means the path taken for potential energy or work calculations always yields the same results.

Solution

a. $\frac{dF_x}{dy} = \frac{d\left(axy^3\right)}{dy} = 3axy^2$ and $\frac{dF_y}{dx} = \frac{d\left(ayx^3\right)}{dx} = 3ayx^2$, so this force is non-conservative.

b. $\frac{dF_x}{dy} = \frac{d\left(ay^2/x\right)}{dy} = \frac{2ay}{x}$ and $\frac{dF_y}{dx} = \frac{d(2ay\ln(x/b))}{dx} = \frac{2ay}{x}$, so this force is conservative.

c. $\frac{dF_x}{dy} = \frac{d\left(ax/\left(x^2+y^2\right)\right)}{dy} = -\frac{ax(2y)}{\left(x^2+y^2\right)^2} = \frac{dF_y}{dx} = \frac{d\left(ay/\left(x^2+y^2\right)\right)}{dx}$, again conservative.

Significance

The conditions in Equation 8.10 are derivatives as functions of a single variable; in three dimensions, similar conditions exist that involve more derivatives.

CHECK YOUR UNDERSTANDING 8.5

A two-dimensional, conservative force is zero on the *x*- and *y*-axes, and satisfies the condition $(dF_x/dy) = \left(dF_y/dx\right) = \left(4\ \text{N/m}^3\right)xy$. What is the magnitude of the force at the point $x = y = 1$ m?

Before leaving this section, we note that non-conservative forces do not have potential energy associated with them because the energy is lost to the system and can't be turned into useful work later. So there is always a conservative force associated with every potential energy. We have seen that potential energy is defined in relation to the work done by conservative forces. That relation, Equation 8.1, involved an integral for the work; starting with the force and displacement, you integrated to get the work and the change in potential energy. However, integration is the inverse operation of differentiation; you could equally well have started with the potential energy and taken its derivative, with respect to displacement, to get the force. The infinitesimal increment of potential energy is the dot product of the force and the infinitesimal displacement,

$$dU = -\vec{\mathbf{F}} \cdot d\vec{\mathbf{l}} = -F_l\, dl.$$

Here, we chose to represent the displacement in an arbitrary direction by $d\vec{\mathbf{l}}$, so as not to be restricted to any particular coordinate direction. We also expressed the dot product in terms of the magnitude of the infinitesimal displacement and the component of the force in its direction. Both these quantities are scalars, so you can divide by *dl* to get

$$F_l = -\frac{dU}{dl}. \qquad 8.11$$

This equation gives the relation between force and the potential energy associated with it. In words, the component of a conservative force, in a particular direction, equals the negative of the derivative of the corresponding potential energy, with respect to a displacement in that direction. For one-dimensional motion, say along the *x*-axis, Equation 8.11 give the entire vector force, $\vec{\mathbf{F}} = F_x\hat{\mathbf{i}} = -\frac{\partial U}{\partial x}\hat{\mathbf{i}}$.

In two dimensions,

$$\vec{\mathbf{F}} = F_x\hat{\mathbf{i}} + F_y\hat{\mathbf{j}} = -\left(\frac{\partial U}{\partial x}\right)\hat{\mathbf{i}} - \left(\frac{\partial U}{\partial y}\right)\hat{\mathbf{j}}.$$

From this equation, you can see why Equation 8.11 is the condition for the work to be an exact differential, in

terms of the derivatives of the components of the force. In general, a partial derivative notation is used. If a function has many variables in it, the derivative is taken only of the variable the partial derivative specifies. The other variables are held constant. In three dimensions, you add another term for the z-component, and the result is that the force is the negative of the gradient of the potential energy. However, we won't be looking at three-dimensional examples just yet.

EXAMPLE 8.6

Force due to a Quartic Potential Energy

The potential energy for a particle undergoing one-dimensional motion along the x-axis is

$$U(x) = \frac{1}{4}cx^4,$$

where $c = 8\ \text{N/m}^3$. Its total energy at $x = 0$ is 2 J, and it is not subject to any non-conservative forces. Find (a) the positions where its kinetic energy is zero and (b) the forces at those positions.

Strategy

(a) We can find the positions where $K = 0$, so the potential energy equals the total energy of the given system. (b) Using Equation 8.11, we can find the force evaluated at the positions found from the previous part, since the mechanical energy is conserved.

Solution

a. The total energy of the system of 2 J equals the quartic elastic energy as given in the problem,

$$2\ \text{J} = \frac{1}{4}\left(8\ \text{N/m}^3\right) {x_\text{f}}^4.$$

Solving for x_f results in $x_\text{f} = \pm 1\ \text{m}$.

b. From Equation 8.11,

$$F_x = -dU/dx = -cx^3.$$

Thus, evaluating the force at ± 1 m, we get

$$\vec{\mathbf{F}} = -(8\ \text{N/m}^3)(\pm 1\ \text{m})^3\hat{\mathbf{i}} = \pm 8\ \text{N}\hat{\mathbf{i}}.$$

At both positions, the magnitude of the forces is 8 N and the directions are toward the origin, since this is the potential energy for a restoring force.

Significance

Finding the force from the potential energy is mathematically easier than finding the potential energy from the force, because differentiating a function is generally easier than integrating one.

CHECK YOUR UNDERSTANDING 8.6

Find the forces on the particle in Example 8.6 when its kinetic energy is 1.0 J at $x = 0$.

8.3 Conservation of Energy

Learning Objectives

By the end of this section, you will be able to:

- Formulate the principle of conservation of mechanical energy, with or without the presence of non-conservative forces
- Use the conservation of mechanical energy to calculate various properties of simple systems

In this section, we elaborate and extend the result we derived in Potential Energy of a System, where we re-wrote the work-energy theorem in terms of the change in the kinetic and potential energies of a particle. This will lead us to a discussion of the important principle of the conservation of mechanical energy. As you

continue to examine other topics in physics, in later chapters of this book, you will see how this conservation law is generalized to encompass other types of energy and energy transfers. The last section of this chapter provides a preview.

The terms 'conserved quantity' and 'conservation law' have specific, scientific meanings in physics, which are different from the everyday meanings associated with the use of these words. (The same comment is also true about the scientific and everyday uses of the word 'work.') In everyday usage, you could conserve water by not using it, or by using less of it, or by re-using it. Water is composed of molecules consisting of two atoms of hydrogen and one of oxygen. Bring these atoms together to form a molecule and you create water; dissociate the atoms in such a molecule and you destroy water. However, in scientific usage, a **conserved quantity** for a system stays constant, changes by a definite amount that is transferred to other systems, and/or is converted into other forms of that quantity. A conserved quantity, in the scientific sense, can be transformed, but not strictly created or destroyed. Thus, there is no physical law of conservation of water.

Systems with a Single Particle or Object

We first consider a system with a single particle or object. Returning to our development of Equation 8.2, recall that we first separated all the forces acting on a particle into conservative and non-conservative types, and wrote the work done by each type of force as a separate term in the work-energy theorem. We then replaced the work done by the conservative forces by the change in the potential energy of the particle, combining it with the change in the particle's kinetic energy to get Equation 8.2. Now, we write this equation without the middle step and define the sum of the kinetic and potential energies, $K + U = E$; to be the **mechanical energy** of the particle.

Conservation of Energy

The mechanical energy E of a particle stays constant unless forces outside the system or non-conservative forces do work on it, in which case, the change in the mechanical energy is equal to the work done by the non-conservative forces:

$$W_{\text{nc},AB} = \Delta(K + U)_{AB} = \Delta E_{AB}. \qquad 8.12$$

This statement expresses the concept of **energy conservation** for a classical particle as long as there is no non-conservative work. Recall that a classical particle is just a point mass, is nonrelativistic, and obeys Newton's laws of motion. In Relativity, we will see that conservation of energy still applies to a non-classical particle, but for that to happen, we have to make a slight adjustment to the definition of energy.

It is sometimes convenient to separate the case where the work done by non-conservative forces is zero, either because no such forces are assumed present, or, like the normal force, they do zero work when the motion is parallel to the surface. Then

$$0 = W_{\text{nc},AB} = \Delta(K + U)_{AB} = \Delta E_{AB}. \qquad 8.13$$

In this case, the conservation of mechanical energy can be expressed as follows: The mechanical energy of a particle does not change if all the non-conservative forces that may act on it do no work. Understanding the concept of energy conservation is the important thing, not the particular equation you use to express it.

PROBLEM-SOLVING STRATEGY

Conservation of Energy

1. Identify the body or bodies to be studied (the system). Often, in applications of the principle of mechanical energy conservation, we study more than one body at the same time.
2. Identify all forces acting on the body or bodies.
3. Determine whether each force that does work is conservative. If a non-conservative force (e.g., friction) is

doing work, then mechanical energy is not conserved. The system must then be analyzed with non-conservative work, Equation 8.13.

4. For every force that does work, choose a reference point and determine the potential energy function for the force. The reference points for the various potential energies do not have to be at the same location.
5. Apply the principle of mechanical energy conservation by setting the sum of the kinetic energies and potential energies equal at every point of interest.

EXAMPLE 8.7

Simple Pendulum

A particle of mass m is hung from the ceiling by a massless string of length 1.0 m, as shown in Figure 8.7. The particle is released from rest, when the angle between the string and the downward vertical direction is 30°. What is its speed when it reaches the lowest point of its arc?

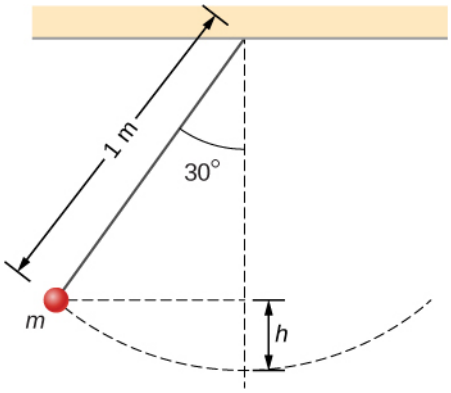


Figure 8.7 A particle hung from a string constitutes a simple pendulum. It is shown when released from rest, along with some distances used in analyzing the motion.

Strategy

Using our problem-solving strategy, the first step is to define that we are interested in the particle-Earth system. Second, only the gravitational force is acting on the particle, which is conservative (step 3). We neglect air resistance in the problem, and no work is done by the string tension, which is perpendicular to the arc of the motion. Therefore, the mechanical energy of the system is conserved, as represented by Equation 8.13, $0 = \Delta(K + U)$. Because the particle starts from rest, the increase in the kinetic energy is just the kinetic energy at the lowest point. This increase in kinetic energy equals the decrease in the gravitational potential energy, which we can calculate from the geometry. In step 4, we choose a reference point for zero gravitational potential energy to be at the lowest vertical point the particle achieves, which is mid-swing. Lastly, in step 5, we set the sum of energies at the highest point (initial) of the swing to the lowest point (final) of the swing to ultimately solve for the final speed.

Solution

We are neglecting non-conservative forces, so we write the energy conservation formula relating the particle at the highest point (initial) and the lowest point in the swing (final) as

$$K_\mathrm{i} + U_\mathrm{i} = K_\mathrm{f} + U_\mathrm{f}.$$

Since the particle is released from rest, the initial kinetic energy is zero. At the lowest point, we define the gravitational potential energy to be zero. Therefore our conservation of energy formula reduces to

$$\begin{aligned} 0 + mgh &= \tfrac{1}{2}mv^2 + 0 \\ v &= \sqrt{2gh}. \end{aligned}$$

The vertical height of the particle is not given directly in the problem. This can be solved for by using

trigonometry and two givens: the length of the pendulum and the angle through which the particle is vertically pulled up. Looking at the diagram, the vertical dashed line is the length of the pendulum string. The vertical height is labeled h. The other partial length of the vertical string can be calculated with trigonometry. That piece is solved for by

$$\cos\theta = x/L, x = L\cos\theta.$$

Therefore, by looking at the two parts of the string, we can solve for the height h,

$$\begin{aligned} x + h &= L \\ L\cos\theta + h &= L \\ h &= L - L\cos\theta = L(1 - \cos\theta). \end{aligned}$$

We substitute this height into the previous expression solved for speed to calculate our result:

$$v = \sqrt{2gL\,(1-\cos\theta)} = \sqrt{2\left(9.8\ \text{m/s}^2\right)(1\ \text{m})\,(1-\cos 30°)} = 1.62\ \text{m/s}.$$

Significance

We found the speed directly from the conservation of mechanical energy, without having to solve the differential equation for the motion of a pendulum (see Oscillations). We can approach this problem in terms of bar graphs of total energy. Initially, the particle has all potential energy, being at the highest point, and no kinetic energy. When the particle crosses the lowest point at the bottom of the swing, the energy moves from the potential energy column to the kinetic energy column. Therefore, we can imagine a progression of this transfer as the particle moves between its highest point, lowest point of the swing, and back to the highest point (Figure 8.8). As the particle travels from the lowest point in the swing to the highest point on the far right hand side of the diagram, the energy bars go in reverse order from (c) to (b) to (a).

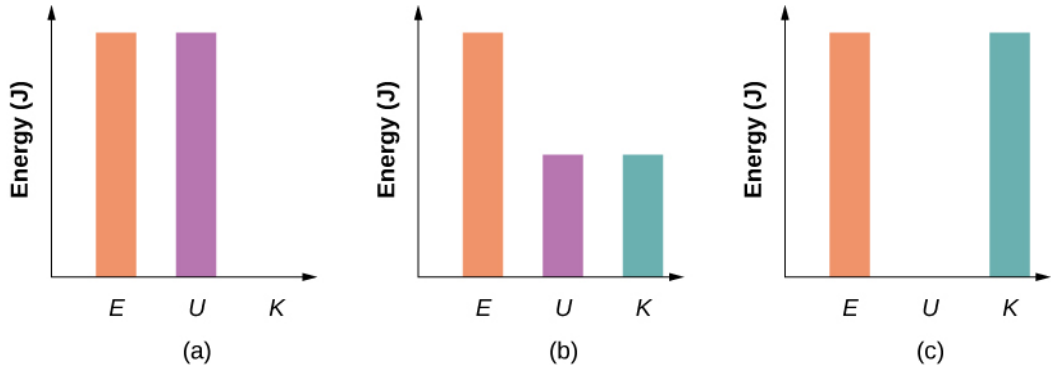


Figure 8.8 Bar graphs representing the total energy (E), potential energy (U), and kinetic energy (K) of the particle in different positions. (a) The total energy of the system equals the potential energy and the kinetic energy is zero, which is found at the highest point the particle reaches. (b) The particle is midway between the highest and lowest point, so the kinetic energy plus potential energy bar graphs equal the total energy. (c) The particle is at the lowest point of the swing, so the kinetic energy bar graph is the highest and equal to the total energy of the system.

CHECK YOUR UNDERSTANDING 8.7

How high above the bottom of its arc is the particle in the simple pendulum above, when its speed is 0.81 m/s?

EXAMPLE 8.8

Air Resistance on a Falling Object

A helicopter is hovering at an altitude of 1 km when a panel from its underside breaks loose and plummets to the ground (Figure 8.9). The mass of the panel is 15 kg, and it hits the ground with a speed of 45 m/s. How

much mechanical energy was dissipated by air resistance during the panel's descent?

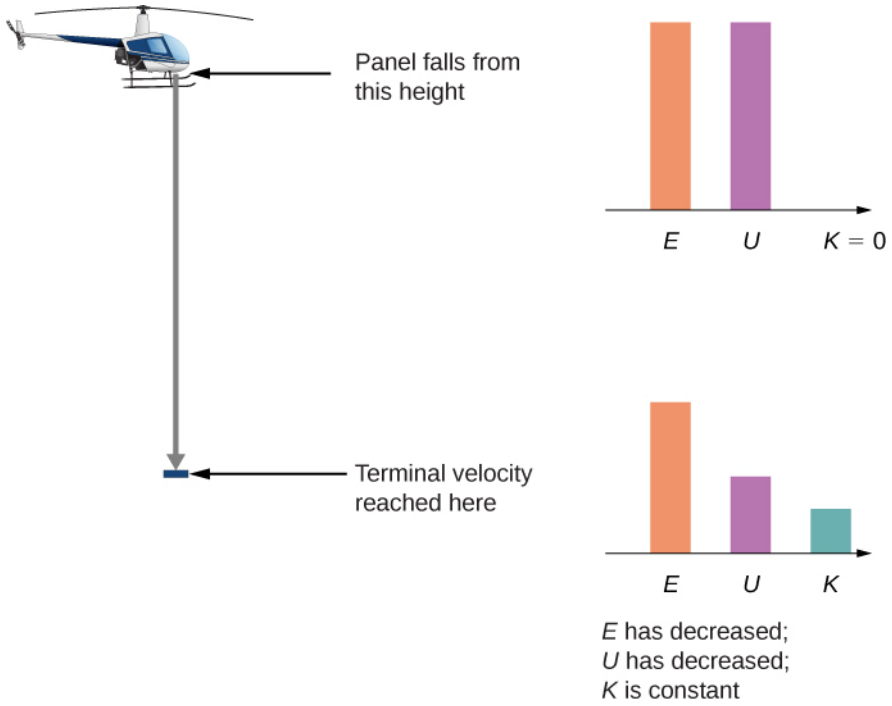


Figure 8.9 A helicopter loses a panel that falls until it reaches terminal velocity of 45 m/s. How much did air resistance contribute to the dissipation of energy in this problem?

Strategy

Step 1: Here only one body is being investigated.

Step 2: Gravitational force is acting on the panel, as well as air resistance, which is stated in the problem.

Step 3: Gravitational force is conservative; however, the non-conservative force of air resistance does negative work on the falling panel, so we can use the conservation of mechanical energy, in the form expressed by Equation 8.12, to find the energy dissipated. This energy is the magnitude of the work:

$$\Delta E_{\text{diss}} = \left|W_{\text{nc,if}}\right| = \left|\Delta(K+U)_{\text{if}}\right|.$$

Step 4: The initial kinetic energy, at $y_{\text{i}} = 1$ km, is zero. We set the gravitational potential energy to zero at ground level out of convenience.

Step 5: The non-conservative work is set equal to the energies to solve for the work dissipated by air resistance.

Solution

The mechanical energy dissipated by air resistance is the algebraic sum of the gain in the kinetic energy and loss in potential energy. Therefore the calculation of this energy is

$$\begin{aligned}\Delta E_{\text{diss}} &= \left|K_{\text{f}} - K_{\text{i}} + U_{\text{f}} - U_{\text{i}}\right| \\ &= \left|\tfrac{1}{2}(15\text{ kg})\,(45\text{ m/s})^2 - 0 + 0 - (15\text{ kg})\left(9.8\text{ m/s}^2\right)(1000\text{ m})\right| = 130\text{ kJ}.\end{aligned}$$

Significance

Most of the initial mechanical energy of the panel (U_{i}), 147 kJ, was lost to air resistance. Notice that we were able to calculate the energy dissipated without knowing what the force of air resistance was, only that it was dissipative.

CHECK YOUR UNDERSTANDING 8.8

You probably recall that, neglecting air resistance, if you throw a projectile straight up, the time it takes to reach its maximum height equals the time it takes to fall from the maximum height back to the starting height. Suppose you cannot neglect air resistance, as in Example 8.8. Is the time the projectile takes to go up (a) greater than, (b) less than, or (c) equal to the time it takes to come back down? Explain.

In these examples, we were able to use conservation of energy to calculate the speed of a particle just at particular points in its motion. But the method of analyzing particle motion, starting from energy conservation, is more powerful than that. More advanced treatments of the theory of mechanics allow you to calculate the full time dependence of a particle's motion, for a given potential energy. In fact, it is often the case that a better model for particle motion is provided by the form of its kinetic and potential energies, rather than an equation for force acting on it. (This is especially true for the quantum mechanical description of particles like electrons or atoms.)

We can illustrate some of the simplest features of this energy-based approach by considering a particle in one-dimensional motion, with potential energy $U(x)$ and no non-conservative interactions present. Equation 8.12 and the definition of velocity require

$$\begin{aligned} K &= \tfrac{1}{2}mv^2 = E - U(x) \\ v &= \frac{dx}{dt} = \sqrt{\frac{2(E-U(x))}{m}}. \end{aligned}$$

Separate the variables x and t and integrate, from an initial time $t = 0$ to an arbitrary time, to get

$$t = \int_0^t dt = \int_{x_0}^{x} \frac{dx}{\sqrt{2\left[E - U(x)\right]/m}}. \qquad 8.14$$

If you can do the integral in Equation 8.14, then you can solve for x as a function of t.

EXAMPLE 8.9

Constant Acceleration

Use the potential energy $U(x) = -E(x/x_0)$, for $E > 0$, in Equation 8.14 to find the position x of a particle as a function of time t.

Strategy

Since we know how the potential energy changes as a function of x, we can substitute for $U(x)$ in Equation 8.14, integrate, and then solve for x. This results in an expression of x as a function of time with constants of energy E, mass m, and the initial position x_0.

Solution

Following the first two suggested steps in the above strategy,

$$t = \int_{x_0}^{x} \frac{dx}{\sqrt{(2E/mx_0)(x_0 - x)}} = \frac{1}{\sqrt{(2E/mx_0)}}\left|-2\sqrt{(x_0 - x)}\right|_{x_0}^{x} = -\frac{2\sqrt{(x_0 - x)}}{\sqrt{(2E/mx_0)}}.$$

Solving for the position, we obtain $x(t) = x_0 - \frac{1}{2}(E/mx_0)t^2$.

Significance

The position as a function of time, for this potential, represents one-dimensional motion with constant acceleration, $a = (E/mx_0)$, starting at rest from position x_0. This is not so surprising, since this is a potential energy for a constant force, $F = -dU/dx = E/x_0$, and $a = F/m$.

CHECK YOUR UNDERSTANDING 8.9

What potential energy $U(x)$ can you substitute in Equation 8.13 that will result in motion with constant velocity of 2 m/s for a particle of mass 1 kg and mechanical energy 1 J?

We will look at another more physically appropriate example of the use of Equation 8.13 after we have explored some further implications that can be drawn from the functional form of a particle's potential energy.

Systems with Several Particles or Objects

Systems generally consist of more than one particle or object. However, the conservation of mechanical energy, in one of the forms in Equation 8.12 or Equation 8.13, is a fundamental law of physics and applies to any system. You just have to include the kinetic and potential energies of all the particles, and the work done by all the non-conservative forces acting on them. Until you learn more about the dynamics of systems composed of many particles, in Linear Momentum and Collisions, Fixed-Axis Rotation, and Angular Momentum, it is better to postpone discussing the application of energy conservation to then.

8.4 Potential Energy Diagrams and Stability

Learning Objectives

By the end of this section, you will be able to:

- Create and interpret graphs of potential energy
- Explain the connection between stability and potential energy

Often, you can get a good deal of useful information about the dynamical behavior of a mechanical system just by interpreting a graph of its potential energy as a function of position, called a **potential energy diagram**. This is most easily accomplished for a one-dimensional system, whose potential energy can be plotted in one two-dimensional graph—for example, $U(x)$ versus x—on a piece of paper or a computer program. For systems whose motion is in more than one dimension, the motion needs to be studied in three-dimensional space. We will simplify our procedure for one-dimensional motion only.

First, let's look at an object, freely falling vertically, near the surface of Earth, in the absence of air resistance. The mechanical energy of the object is conserved, $E = K + U$, and the potential energy, with respect to zero at ground level, is $U(y) = mgy$, which is a straight line through the origin with slope mg. In the graph shown in Figure 8.10, the x-axis is the height above the ground y and the y-axis is the object's energy.

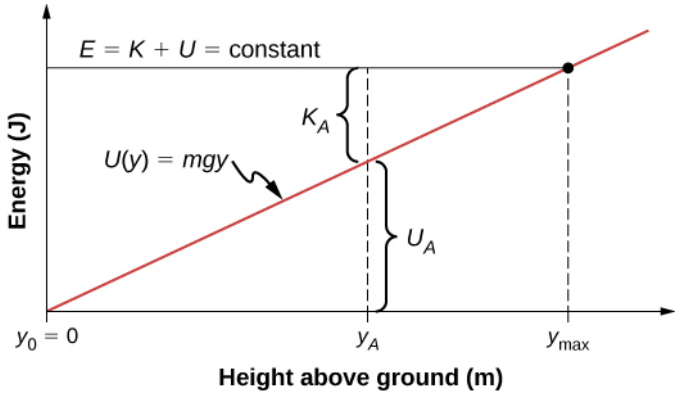


Figure 8.10 The potential energy graph for an object in vertical free fall, with various quantities indicated.

The line at energy E represents the constant mechanical energy of the object, whereas the kinetic and potential energies, K_A and U_A, are indicated at a particular height y_A. You can see how the total energy is divided between kinetic and potential energy as the object's height changes. Since kinetic energy can never be negative, there is a maximum potential energy and a maximum height, which an object with the given total energy cannot exceed:

$$K = E - U \geq 0,$$
$$U \leq E.$$

If we use the gravitational potential energy reference point of zero at y_0, we can rewrite the gravitational potential energy U as mgy. Solving for y results in

$$y \leq E/mg = y_{\max}.$$

We note in this expression that the quantity of the total energy divided by the weight (mg) is located at the maximum height of the particle, or $y_{\max}$. At the maximum height, the kinetic energy and the speed are zero, so if the object were initially traveling upward, its velocity would go through zero there, and $y_{\max}$ would be a turning point in the motion. At ground level, $y_0 = 0$, the potential energy is zero, and the kinetic energy and the speed are maximum:

$$\begin{aligned} U_0 &= 0 = E - K_0, \\ E &= K_0 = \tfrac{1}{2}mv_0{}^2, \\ v_0 &= \pm\sqrt{2E/m}. \end{aligned}$$

The maximum speed $\pm v_0$ gives the initial velocity necessary to reach $y_{\max}$, the maximum height, and $-v_0$ represents the final velocity, after falling from $y_{\max}$. You can read all this information, and more, from the potential energy diagram we have shown.

Consider a mass-spring system on a frictionless, stationary, horizontal surface, so that gravity and the normal contact force do no work and can be ignored (Figure 8.11). This is like a one-dimensional system, whose mechanical energy E is a constant and whose potential energy, with respect to zero energy at zero displacement from the spring's unstretched length, $x = 0$, is $U(x) = \frac{1}{2}kx^2$.

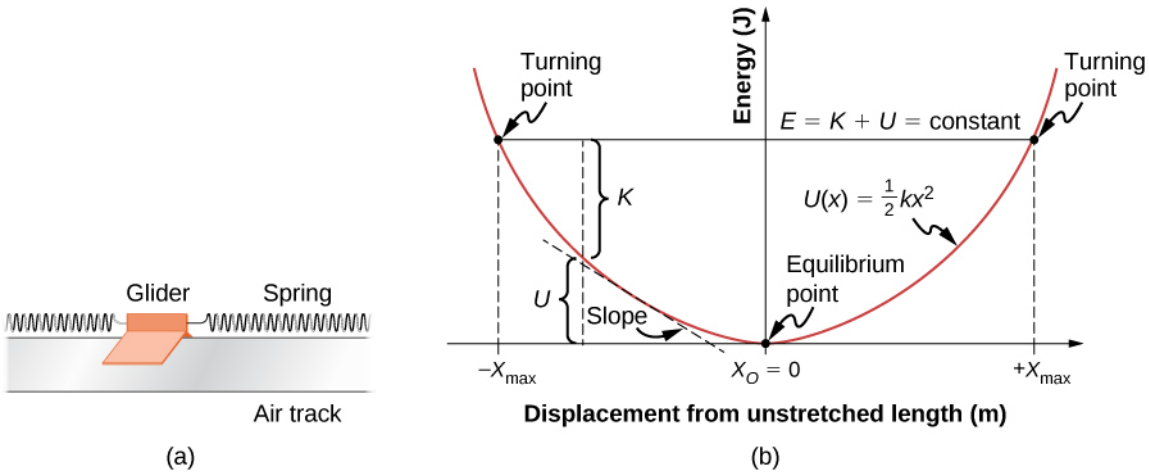


Figure 8.11 (a) A glider between springs on an air track is an example of a horizontal mass-spring system. (b) The potential energy diagram for this system, with various quantities indicated.

You can read off the same type of information from the potential energy diagram in this case, as in the case for the body in vertical free fall, but since the spring potential energy describes a variable force, you can learn more from this graph. As for the object in vertical free fall, you can deduce the physically allowable range of motion and the maximum values of distance and speed, from the limits on the kinetic energy, $0 \leq K \leq E$. Therefore, $K = 0$ and $U = E$ at a **turning point**, of which there are two for the elastic spring potential energy,

$$x_{\max} = \pm\sqrt{2E/k}.$$

The glider's motion is confined to the region between the turning points, $-x_{\max} \leq x \leq x_{\max}$. This is true for any (positive) value of E because the potential energy is unbounded with respect to x. For this reason, as well as the shape of the potential energy curve, $U(x)$ is called an infinite potential well. At the bottom of the potential well, $x = 0, U = 0$ and the kinetic energy is a maximum, $K = E$, so $v_{\max} = \pm\sqrt{2E/m}$.

However, from the slope of this potential energy curve, you can also deduce information about the force on the glider and its acceleration. We saw earlier that the negative of the slope of the potential energy is the spring force, which in this case is also the net force, and thus is proportional to the acceleration. When $x = 0$, the

slope, the force, and the acceleration are all zero, so this is an **equilibrium point**. The negative of the slope, on either side of the equilibrium point, gives a force pointing back to the equilibrium point, $F = \pm kx$, so the equilibrium is termed stable and the force is called a restoring force. This implies that $U(x)$ has a relative minimum there. If the force on either side of an equilibrium point has a direction opposite from that direction of position change, the equilibrium is termed unstable, and this implies that $U(x)$ has a relative maximum there.

EXAMPLE 8.10

Quartic and Quadratic Potential Energy Diagram

The potential energy for a particle undergoing one-dimensional motion along the x-axis is $U(x) = 2\left(x^4 - x^2\right)$, where U is in joules and x is in meters. The particle is not subject to any non-conservative forces and its mechanical energy is constant at $E = -0.25\,\text{J}$. (a) Is the motion of the particle confined to any regions on the x-axis, and if so, what are they? (b) Are there any equilibrium points, and if so, where are they and are they stable or unstable?

Strategy

First, we need to graph the potential energy as a function of x. The function is zero at the origin, becomes negative as x increases in the positive or negative directions (x^2 is larger than x^4 for $x < 1$), and then becomes positive at sufficiently large $|x|$. Your graph should look like a double potential well, with the zeros determined by solving the equation $U(x) = 0$, and the extremes determined by examining the first and second derivatives of $U(x)$, as shown in Figure 8.12.

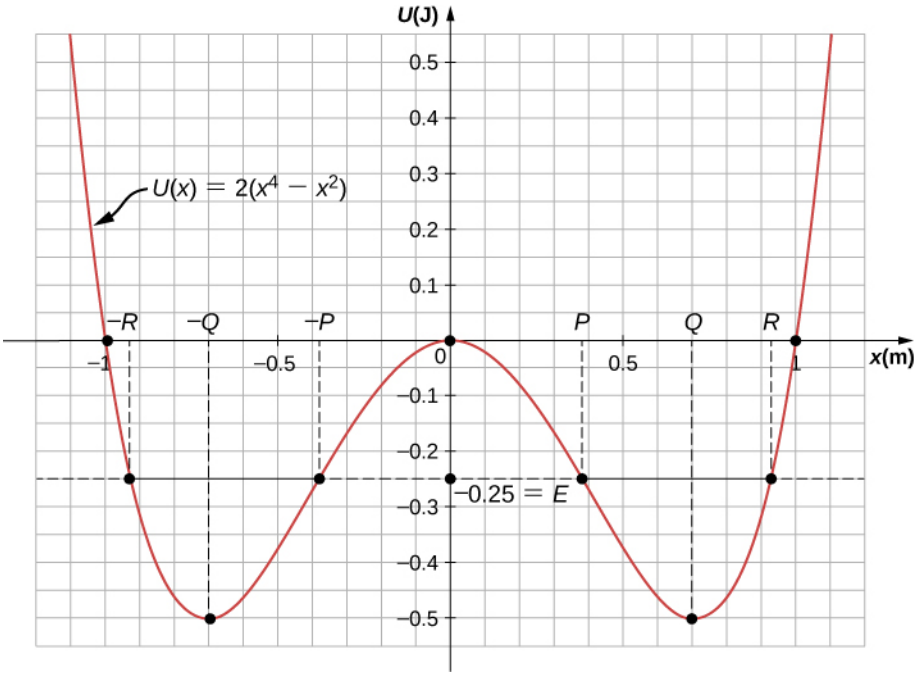


Figure 8.12 The potential energy graph for a one-dimensional, quartic and quadratic potential energy, with various quantities indicated.

You can find the values of (a) the allowed regions along the x-axis, for the given value of the mechanical energy, from the condition that the kinetic energy can't be negative, and (b) the equilibrium points and their stability from the properties of the force (stable for a relative minimum and unstable for a relative maximum of potential energy).

You can just eyeball the graph to reach qualitative answers to the questions in this example. That, after all, is the value of potential energy diagrams. You can see that there are two allowed regions for the motion ($E > U$) and three equilibrium points (slope $dU/dx = 0$), of which the central one is unstable $\left(d^2U/dx^2 < 0\right)$, and the

other two are stable $\left(d^2U/dx^2 > 0\right)$.

Solution

a. To find the allowed regions for x, we use the condition

$$K = E - U = -\frac{1}{4} - 2\left(x^4 - x^2\right) \geq 0.$$

If we complete the square in x^2, this condition simplifies to $2\left(x^2 - \frac{1}{2}\right)^2 \leq \frac{1}{4}$, which we can solve to obtain

$$\frac{1}{2} - \sqrt{\frac{1}{8}} \leq x^2 \leq \frac{1}{2} + \sqrt{\frac{1}{8}}.$$

This represents two allowed regions, $x_p \leq x \leq x_R$ and $-x_R \leq x \leq -x_p$, where $x_p = 0.38$ and $x_R = 0.92$ (in meters).

b. To find the equilibrium points, we solve the equation

$$dU/dx = 8x^3 - 4x = 0$$

and find $x = 0$ and $x = \pm x_Q$, where $x_Q = 1/\sqrt{2} = 0.707$ (meters). The second derivative

$$d^2U/dx^2 = 24x^2 - 4$$

is negative at $x = 0$, so that position is a relative maximum and the equilibrium there is unstable. The second derivative is positive at $x = \pm x_Q$, so these positions are relative minima and represent stable equilibria.

Significance

The particle in this example can oscillate in the allowed region about either of the two stable equilibrium points we found, but it does not have enough energy to escape from whichever potential well it happens to initially be in. The conservation of mechanical energy and the relations between kinetic energy and speed, and potential energy and force, enable you to deduce much information about the qualitative behavior of the motion of a particle, as well as some quantitative information, from a graph of its potential energy.

CHECK YOUR UNDERSTANDING 8.10

Repeat Example 8.10 when the particle's mechanical energy is +0.25 J.

Before ending this section, let's practice applying the method based on the potential energy of a particle to find its position as a function of time, for the one-dimensional, mass-spring system considered earlier in this section.

EXAMPLE 8.11

Sinusoidal Oscillations

Find $x(t)$ for a particle moving with a constant mechanical energy $E > 0$ and a potential energy $U(x) = \frac{1}{2}kx^2$, when the particle starts from rest at time $t = 0$.

Strategy

We follow the same steps as we did in Example 8.9. Substitute the potential energy U into Equation 8.14 and factor out the constants, like m or k. Integrate the function and solve the resulting expression for position, which is now a function of time.

Solution

Substitute the potential energy in Equation 8.14 and integrate using an integral solver found on a web search:

$$t = \int_{x_0}^{x} \frac{dx}{\sqrt{(k/m)\left[(2E/k) - x^2\right]}} = \sqrt{\frac{m}{k}}\left[\sin^{-1}\left(\frac{x}{\sqrt{2E/k}}\right) - \sin^{-1}\left(\frac{x_0}{\sqrt{2E/k}}\right)\right].$$

From the initial conditions at $t = 0$, the initial kinetic energy is zero and the initial potential energy is $\frac{1}{2}k{x_0}^2 = E$, from which you can see that $x_0/\sqrt{(2E/k)} = \pm 1$ and $\sin^{-1}(\pm) = \pm 90^0$. Now you can solve for x:

$$x(t) = \sqrt{(2E/k)}\sin\left[\left(\sqrt{k/m}\right)t \pm 90^0\right] = \pm\sqrt{(2E/k)}\cos\left[\left(\sqrt{k/m}\right)t\right].$$

Significance

A few paragraphs earlier, we referred to this mass-spring system as an example of a harmonic oscillator. Here, we anticipate that a harmonic oscillator executes sinusoidal oscillations with a maximum displacement of $\sqrt{(2E/k)}$ (called the amplitude) and a rate of oscillation of $(1/2\pi)\sqrt{k/m}$ (called the frequency). Further discussions about oscillations can be found in Oscillations.

CHECK YOUR UNDERSTANDING 8.11

Find $x(t)$ for the mass-spring system in Example 8.11 if the particle starts from $x_0 = 0$ at $t = 0$. What is the particle's initial velocity?

8.5 Sources of Energy

Learning Objectives

By the end of this section, you will be able to:

- Describe energy transformations and conversions in general terms
- Explain what it means for an energy source to be renewable or nonrenewable

In this chapter, we have studied energy. We learned that energy can take different forms and can be transferred from one form to another. You will find that energy is discussed in many everyday, as well as scientific, contexts, because it is involved in all physical processes. It will also become apparent that many situations are best understood, or most easily conceptualized, by considering energy. So far, no experimental results have contradicted the conservation of energy. In fact, whenever measurements have appeared to conflict with energy conservation, new forms of energy have been discovered or recognized in accordance with this principle.

What are some other forms of energy? Many of these are covered in later chapters (also see Figure 8.13), but let's detail a few here:

- Atoms and molecules inside all objects are in random motion. The internal kinetic energy from these random motions is called *thermal energy*, because it is related to the temperature of the object. Note that thermal energy can also be transferred from one place to another, not transformed or converted, by the familiar processes of conduction, convection, and radiation. In this case, the energy is known as *heat energy*.
- *Electrical energy* is a common form that is converted to many other forms and does work in a wide range of practical situations.
- Fuels, such as gasoline and food, have *chemical energy*, which is potential energy arising from their molecular structure. Chemical energy can be converted into thermal energy by reactions like oxidation. Chemical reactions can also produce electrical energy, such as in batteries. Electrical energy can, in turn, produce thermal energy and light, such as in an electric heater or a light bulb.
- Light is just one kind of electromagnetic radiation, or *radiant energy*, which also includes radio, infrared, ultraviolet, X-rays, and gamma rays. All bodies with thermal energy can radiate energy in electromagnetic waves.
- *Nuclear energy* comes from reactions and processes that convert measurable amounts of mass into energy. Nuclear energy is transformed into radiant energy in the Sun, into thermal energy in the boilers of

nuclear power plants, and then into electrical energy in the generators of power plants. These and all other forms of energy can be transformed into one another and, to a certain degree, can be converted into mechanical work.

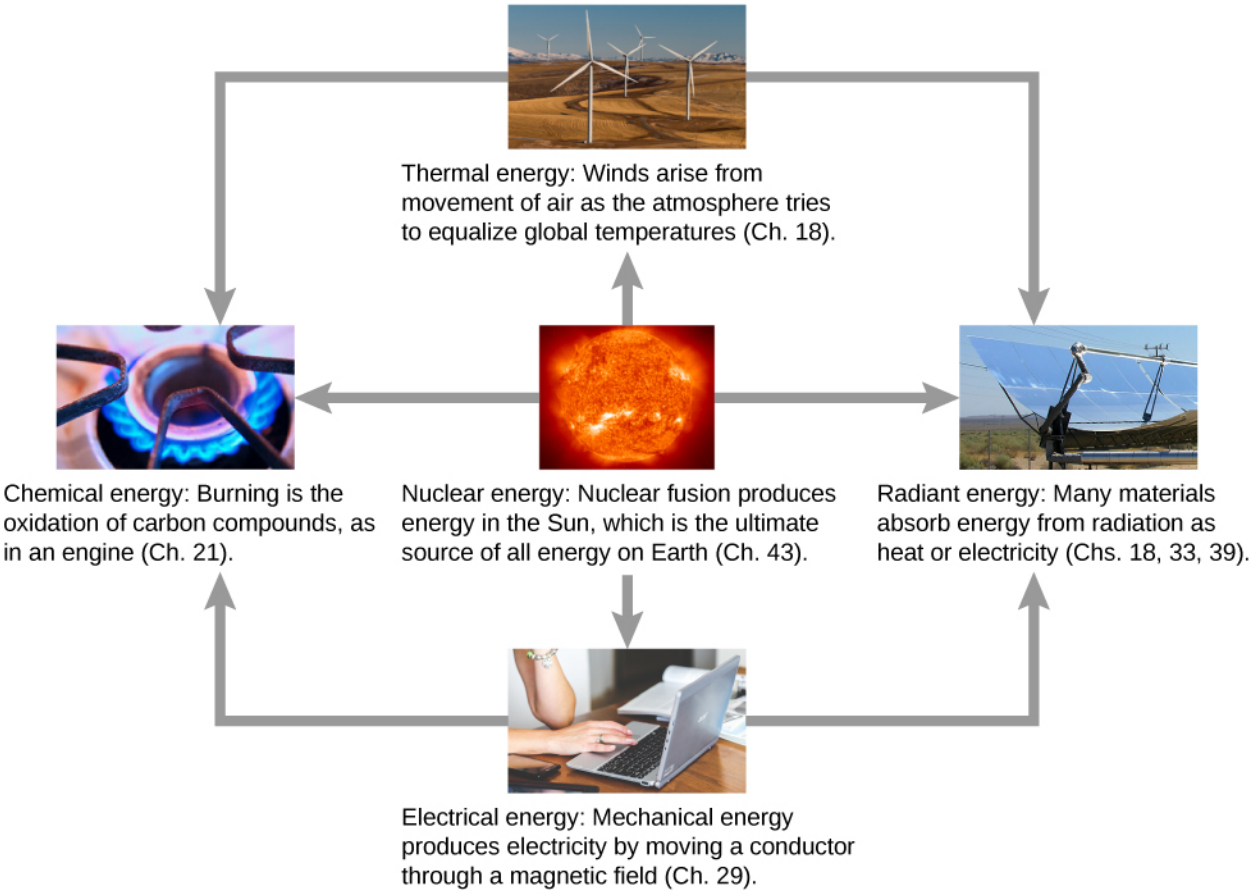


Figure 8.13 Energy that we use in society takes many forms, which be converted from one into another depending on the process involved. We will study many of these forms of energy in later chapters in this text. (credit "sun": modification of work by EIT - SOHO Consortium, ESA, NASA credit "solar panels": "modification of work by "kjkolb"/Wikimedia Commons; credit "gas burner": modification of work by Steven Depolo)

The transformation of energy from one form into another happens all the time. The chemical energy in food is converted into thermal energy through metabolism; light energy is converted into chemical energy through photosynthesis. Another example of energy conversion occurs in a solar cell. Sunlight impinging on a solar cell produces electricity, which can be used to run electric motors or heat water. In an example encompassing many steps, the chemical energy contained in coal is converted into thermal energy as it burns in a furnace, to transform water into steam, in a boiler. Some of the thermal energy in the steam is then converted into mechanical energy as it expands and spins a turbine, which is connected to a generator to produce electrical energy. In these examples, not all of the initial energy is converted into the forms mentioned, because some energy is always transferred to the environment.

Energy is an important element at all levels of society. We live in a very interdependent world, and access to adequate and reliable energy resources is crucial for economic growth and for maintaining the quality of our lives. The principal energy resources used in the world are shown in Figure 8.14. The figure distinguishes between two major types of energy sources: **renewable** and **non-renewable**, and further divides each type into a few more specific kinds. Renewable sources are energy sources that are replenished through naturally occurring, ongoing processes, on a time scale that is much shorter than the anticipated lifetime of the civilization using the source. Non-renewable sources are depleted once some of the energy they contain is

extracted and converted into other kinds of energy. The natural processes by which non-renewable sources are formed typically take place over geological time scales.

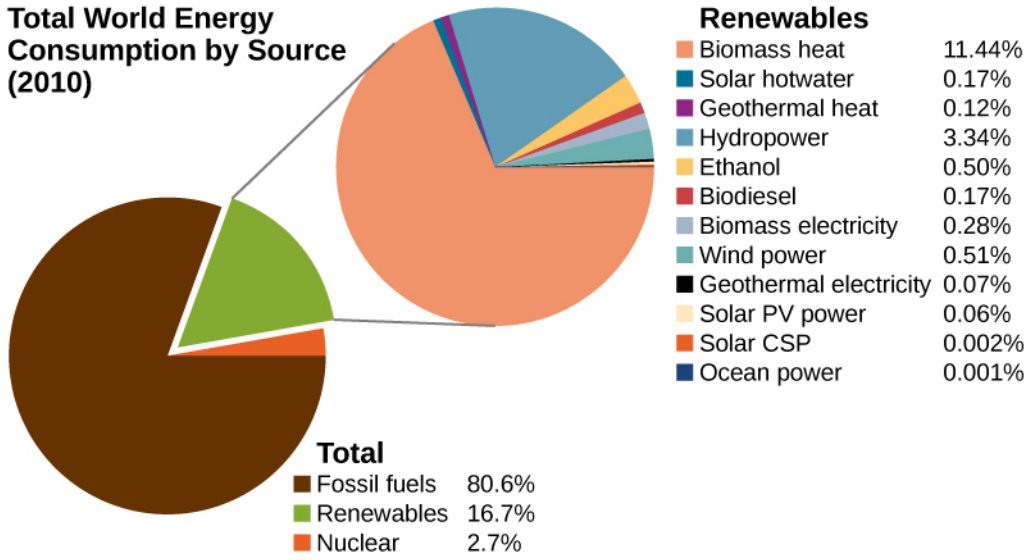


Figure 8.14 World energy consumption by source; the percentage of renewables is increasing, accounting for 19% in 2012.

Our most important non-renewable energy sources are fossil fuels, such as coal, petroleum, and natural gas. These account for about 81% of the world's energy consumption, as shown in the figure. Burning fossil fuels creates chemical reactions that transform potential energy, in the molecular structures of the reactants, into thermal energy and products. This thermal energy can be used to heat buildings or to operate steam-driven machinery. Internal combustion and jet engines convert some of the energy of rapidly expanding gases, released from burning gasoline, into mechanical work. Electrical power generation is mostly derived from transferring energy in expanding steam, via turbines, into mechanical work, which rotates coils of wire in magnetic fields to generate electricity. Nuclear energy is the other non-renewable source shown in Figure 8.14 and supplies about 3% of the world's consumption. Nuclear reactions release energy by transforming potential energy, in the structure of nuclei, into thermal energy, analogous to energy release in chemical reactions. The thermal energy obtained from nuclear reactions can be transferred and converted into other forms in the same ways that energy from fossil fuels are used.

An unfortunate byproduct of relying on energy produced from the combustion of fossil fuels is the release of carbon dioxide into the atmosphere and its contribution to global warming. Nuclear energy poses environmental problems as well, including the safety and disposal of nuclear waste. Besides these important consequences, reserves of non-renewable sources of energy are limited and, given the rapidly growing rate of world energy consumption, may not last for more than a few hundred years. Considerable effort is going on to develop and expand the use of renewable sources of energy, involving a significant percentage of the world's physicists and engineers.

Four of the renewable energy sources listed in Figure 8.14—those using material from plants as fuel (biomass heat, ethanol, biodiesel, and biomass electricity)—involve the same types of energy transformations and conversions as just discussed for fossil and nuclear fuels. The other major types of renewable energy sources are hydropower, wind power, geothermal power, and solar power.

Hydropower is produced by converting the gravitational potential energy of falling or flowing water into kinetic energy and then into work to run electric generators or machinery. Converting the mechanical energy in ocean surface waves and tides is in development. Wind power also converts kinetic energy into work, which can be used directly to generate electricity, operate mills, and propel sailboats.

The interior of Earth has a great deal of thermal energy, part of which is left over from its original formation (gravitational potential energy converted into thermal energy) and part of which is released from radioactive minerals (a form of natural nuclear energy). It will take a very long time for this geothermal energy to escape

into space, so people generally regard it as a renewable source, when actually, it's just inexhaustible on human time scales.

The source of solar power is energy carried by the electromagnetic waves radiated by the Sun. Most of this energy is carried by visible light and infrared (heat) radiation. When suitable materials absorb electromagnetic waves, radiant energy is converted into thermal energy, which can be used to heat water, or when concentrated, to make steam and generate electricity (Figure 8.15). However, in another important physical process, known as the photoelectric effect, energetic radiation impinging on certain materials is directly converted into electricity. Materials that do this are called photovoltaics (PV in Figure 8.14). Some solar power systems use lenses or mirrors to concentrate the Sun's rays, before converting their energy through photovoltaics, and these are qualified as CSP in Figure 8.14.



Figure 8.15 Solar cell arrays found in a sunny area converting the solar energy into stored electrical energy. (credit: modification of work by Sarah Swenty, U.S. Fish and Wildlife Service)

As we finish this chapter on energy and work, it is relevant to draw some distinctions between two sometimes misunderstood terms in the area of energy use. As we mentioned earlier, the "law of conservation of energy" is a very useful principle in analyzing physical processes. It cannot be proven from basic principles but is a very good bookkeeping device, and no exceptions have ever been found. It states that the total amount of energy in an isolated system always remains constant. Related to this principle, but remarkably different from it, is the important philosophy of energy conservation. This concept has to do with seeking to decrease the amount of energy used by an individual or group through reducing activities (e.g., turning down thermostats, diving fewer kilometers) and/or increasing conversion efficiencies in the performance of a particular task, such as developing and using more efficient room heaters, cars that have greater miles-per-gallon ratings, energy-efficient compact fluorescent lights, etc.

Since energy in an isolated system is not destroyed, created, or generated, you might wonder why we need to be concerned about our energy resources, since energy is a conserved quantity. The problem is that the final result of most energy transformations is waste heat, that is, work that has been "degraded" in the energy transformation. We will discuss this idea in more detail in the chapters on thermodynamics.

CHAPTER REVIEW

Key Terms

conservative force force that does work independent of path

conserved quantity one that cannot be created or destroyed, but may be transformed between different forms of itself

energy conservation total energy of an isolated system is constant

equilibrium point position where the assumed conservative, net force on a particle, given by the slope of its potential energy curve, is zero

exact differential is the total differential of a function and requires the use of partial derivatives if the function involves more than one dimension

mechanical energy sum of the kinetic and potential energies

non-conservative force force that does work that depends on path

non-renewable energy source that is not renewable, but is depleted by human consumption

potential energy function of position, energy possessed by an object relative to the system considered

potential energy diagram graph of a particle's potential energy as a function of position

potential energy difference negative of the work done acting between two points in space

renewable energy source that is replenished by natural processes, over human time scales

turning point position where the velocity of a particle, in one-dimensional motion, changes sign

Key Equations

Difference of potential energy	$\Delta U_{AB} = U_B - U_A = -W_{AB}$
Potential energy with respect to zero of potential energy at $\vec{\mathbf{r}}_0$	$\Delta U = U\left(\vec{\mathbf{r}}\right) - U\left(\vec{\mathbf{r}}_0\right)$
Gravitational potential energy near Earth's surface	$U\left(y\right) = mgy + \text{const.}$
Potential energy for an ideal spring	$U\left(x\right) = \frac{1}{2}kx^2 + \text{const.}$
Work done by conservative force over a closed path	$W_{\text{closed path}} = \int \vec{\mathbf{F}}_{\text{cons}} \cdot d\vec{\mathbf{r}} = 0$
Condition for conservative force in two dimensions	$\left(\frac{dF_x}{dy}\right) = \left(\frac{dF_y}{dx}\right)$
Conservative force is the negative derivative of potential energy	$F_l = -\frac{dU}{dl}$
Conservation of energy with no non-conservative forces	$0 = W_{nc,AB} = \Delta(K+U)_{AB} = \Delta E_{AB}.$

Summary

8.1 Potential Energy of a System

- For a single-particle system, the difference of potential energy is the opposite of the work done by the forces acting on the particle as it moves from one position to another.
- Since only differences of potential energy are physically meaningful, the zero of the potential energy function can be chosen at a convenient location.
- The potential energies for Earth's constant gravity, near its surface, and for a Hooke's law force are linear and quadratic functions of position, respectively.

8.2 Conservative and Non-Conservative Forces

- A conservative force is one for which the work done is independent of path. Equivalently, a force is conservative if the work done over any closed path is zero.
- A non-conservative force is one for which the work done depends on the path.
- For a conservative force, the infinitesimal work is an exact differential. This implies conditions on the derivatives of the force's components.
- The component of a conservative force, in a particular direction, equals the negative of the derivative of the potential energy for that force, with respect to a displacement in that direction.

8.3 Conservation of Energy

- A conserved quantity is a physical property that stays constant regardless of the path taken.
- A form of the work-energy theorem says that the change in the mechanical energy of a particle equals the work done on it by non-conservative forces.
- If non-conservative forces do no work and there are no external forces, the mechanical energy of a particle stays constant. This is a statement of the conservation of mechanical energy and there is no change in the total mechanical energy.
- For one-dimensional particle motion, in which the mechanical energy is constant and the potential energy is known, the particle's position, as a function of time, can be found by evaluating an integral that is derived from the conservation of mechanical energy.

8.4 Potential Energy Diagrams and Stability

- Interpreting a one-dimensional potential energy diagram allows you to obtain qualitative, and some quantitative, information about the motion of a particle.
- At a turning point, the potential energy equals the mechanical energy and the kinetic energy is zero, indicating that the direction of the velocity reverses there.
- The negative of the slope of the potential energy curve, for a particle, equals the one-dimensional component of the conservative force on the particle. At an equilibrium point, the slope is zero and is a stable (unstable) equilibrium for a potential energy minimum (maximum).

8.5 Sources of Energy

- Energy can be transferred from one system to another and transformed or converted from one type into another. Some of the basic types of energy are kinetic, potential, thermal, and electromagnetic.
- Renewable energy sources are those that are replenished by ongoing natural processes, over human time scales. Examples are wind, water, geothermal, and solar power.
- Non-renewable energy sources are those that are depleted by consumption, over human time scales. Examples are fossil fuel and nuclear power.

Conceptual Questions

8.1 Potential Energy of a System

1. The kinetic energy of a system must always be positive or zero. Explain whether this is true for the potential energy of a system.

2. The force exerted by a diving board is conservative, provided the internal friction is negligible. Assuming friction is negligible, describe changes in the potential energy of a diving board as a swimmer drives from it, starting just before the swimmer steps on the board until just after his feet leave it.

3. Describe the gravitational potential energy transfers and transformations for a javelin, starting from the point at which an athlete picks up the javelin and ending when the javelin is stuck into the ground after being thrown.

4. A couple of soccer balls of equal mass are kicked off the ground at the same speed but at different angles. Soccer ball A is kicked off at an angle slightly above the horizontal, whereas ball B is kicked slightly below the vertical. How do each of the following compare for ball A and ball B? (a) The initial kinetic energy and (b) the change in gravitational potential energy from the ground to the highest point? If the energy in part (a) differs from part (b), explain why there is a difference between the two energies.

5. What is the dominant factor that affects the speed of an object that started from rest down a frictionless incline if the only work done on the object is from gravitational forces?


6. Two people observe a leaf falling from a tree. One person is standing on a ladder and the other is on the ground. If each person were to compare the energy of the leaf observed, would each person find the following to be the same or different for the leaf, from the point where it falls off the tree to when it hits the ground: (a) the kinetic energy of the leaf; (b) the change in gravitational potential energy; (c) the final gravitational potential energy?

8.2 Conservative and Non-Conservative Forces


7. What is the physical meaning of a non-conservative force?
8. A bottle rocket is shot straight up in the air with a speed 30 m/s. If the air resistance is ignored, the bottle would go up to a height of approximately 46 m. However, the rocket goes up to only 35 m before returning to the ground. What happened? Explain, giving only a qualitative response.
9. An external force acts on a particle during a trip from one point to another and back to that same point. This particle is only effected by conservative forces. Does this particle's kinetic energy and potential energy change as a result of this trip?

8.3 Conservation of Energy

10. When a body slides down an inclined plane, does the work of friction depend on the body's initial speed? Answer the same question for a body sliding down a curved surface.
11. Consider the following scenario. A car for which friction is *not* negligible accelerates from rest down a hill, running out of gasoline after a short distance (see below). The driver lets the car coast farther down the hill, then up and over a small crest. He then coasts down that hill into a gas station, where he brakes to a stop and fills the tank with gasoline. Identify the forms of energy the car has, and how they are changed and transferred in this series of events.

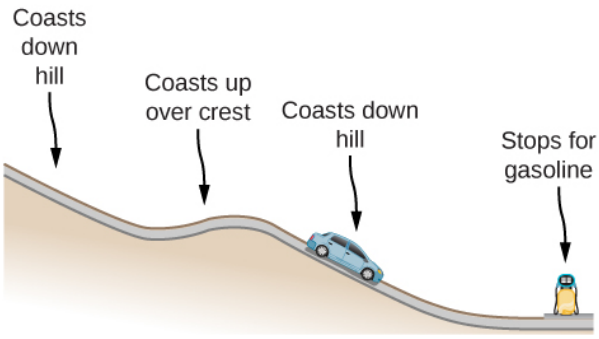

12. A dropped ball bounces to one-half its original height. Discuss the energy transformations that take place.
13. "$E = K + U$ constant is a special case of the work-energy theorem." Discuss this statement.
14. In a common physics demonstration, a bowling ball is suspended from the ceiling by a rope. The professor pulls the ball away from its equilibrium position and holds it adjacent to his nose, as shown below. He releases the ball so that it swings directly away from him. Does he get struck by the ball on its return swing? What is he trying to show in this demonstration?

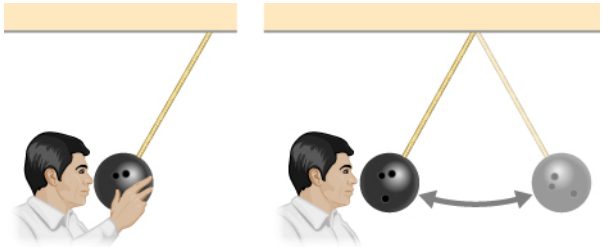

15. A child jumps up and down on a bed, reaching a higher height after each bounce. Explain how the child can increase his maximum gravitational potential energy with each bounce.
16. Can a non-conservative force increase the mechanical energy of the system?
17. Neglecting air resistance, how much would I have to raise the vertical height if I wanted to double the impact speed of a falling object?
18. A box is dropped onto a spring at its equilibrium position. The spring compresses with the box attached and comes to rest. Since the spring is in the vertical position, does the change in the gravitational potential energy of the box while the spring is compressing need to be considered in this problem?

Problems

8.1 Potential Energy of a System

19. Using values from Table 8.1, how many DNA molecules could be broken by the energy carried by a single electron in the beam of an old-fashioned TV tube? (These electrons were not dangerous in themselves, but they did create dangerous X-rays. Later-model tube TVs had shielding that absorbed X-rays before they

escaped and exposed viewers.)

20. If the energy in fusion bombs were used to supply the energy needs of the world, how many of the 9-megaton variety would be needed for a year's supply of energy (using data from Figure 8.4)?

21. A camera weighing 10 N falls from a small drone hovering 20 m overhead and enters free fall. What is the gravitational potential energy change of the camera from the drone to the ground if you take a reference point of (a) the ground being zero gravitational potential energy? (b) The drone being zero gravitational potential energy? What is the gravitational potential energy of the camera (c) before it falls from the drone and (d) after the camera lands on the ground if the reference point of zero gravitational potential energy is taken to be a second person looking out of a building 30 m from the ground?

22. Someone drops a 50 − g pebble off of a docked cruise ship, 70.0 m from the water line. A person on a dock 3.0 m from the water line holds out a net to catch the pebble. (a) How much work is done on the pebble by gravity during the drop? (b) What is the change in the gravitational potential energy during the drop? If the gravitational potential energy is zero at the water line, what is the gravitational potential energy (c) when the pebble is dropped? (d) When it reaches the net? What if the gravitational potential energy was 30.0 Joules at water level? (e) Find the answers to the same questions in (c) and (d).

23. A cat's crinkle ball toy of mass 15 g is thrown straight up with an initial speed of 3 m/s. Assume in this problem that air drag is negligible. (a) What is the kinetic energy of the ball as it leaves the hand? (b) How much work is done by the gravitational force during the ball's rise to its peak? (c) What is the change in the gravitational potential energy of the ball during the rise to its peak? (d) If the gravitational potential energy is taken to be zero at the point where it leaves your hand, what is the gravitational potential energy when it reaches the maximum height? (e) What if the gravitational potential energy is taken to be zero at the maximum height the ball reaches, what would the gravitational potential energy be when it leaves the hand? (f) What is the maximum height the ball reaches?

8.2 Conservative and Non-Conservative Forces

24. A force $F(x) = (3.0/x)$ N acts on a particle as it moves along the positive x-axis. (a) How much work does the force do on the particle as it moves from $x = 2.0$ m to $x = 5.0$ m? (b) Picking a convenient reference point of the potential energy to be zero at $x = \infty$, find the potential energy for this force.

25. A force $F(x) = \left(-5.0x^2 + 7.0x\right)$ N acts on a particle. How much work does the force do on the particle as it moves from $x = 2.0$ m to $x = 5.0$ m?


26. Find the force corresponding to the potential energy $U(x) = -a/x + b/x^2$.

27. The potential energy function for either one of the two atoms in a diatomic molecule is often approximated by $U(x) = a/x^{12} - b/x^6$ where x is the distance between the atoms. (a) At what distance of separation does the potential energy have a local minimum (not at $x = \infty$)? (b) What is the force on an atom at this separation? (c) How does the force vary with the separation distance?

28. A particle of mass 2.0 kg moves under the influence of the force $F(x) = \left(3/\sqrt{x}\right)$ N. If its speed at $x = 2.0$ m is $v = 6.0$ m/s, what is its speed at $x = 7.0$ m?

29. A particle of mass 2.0 kg moves under the influence of the force $F(x) = \left(-5x^2 + 7x\right)$ N. If its speed at $x = -4.0$ m is $v = 20.0$ m/s, what is its speed at $x = 4.0$ m?

30. A crate on rollers is being pushed without frictional loss of energy across the floor of a freight car (see the following figure). The car is moving to the right with a constant speed v_0. If the crate starts at rest relative to the freight car, then from the work-energy theorem, $Fd = mv^2/2$, where d, the distance the crate moves, and v, the speed of the crate, are both measured relative to the freight car. (a) To an observer at rest beside the tracks, what distance d' is the crate pushed when it moves the distance d in the car? (b) What are the crate's initial and final speeds v_0' and v' as measured by the observer beside the tracks? (c) Show that $Fd' = m(v')^2/2 - m(v'_0)^2/2$ and, consequently, that work is equal to the change in kinetic energy in both reference systems.

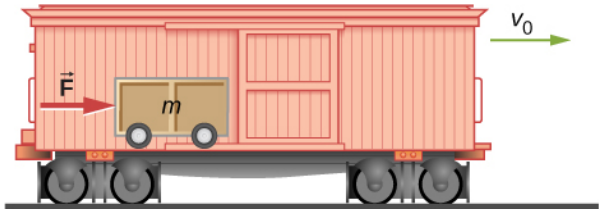

8.3 Conservation of Energy

31. A boy throws a ball of mass 0.25 kg straight upward with an initial speed of 20 m/s When the ball returns to the boy, its speed is 17 m/s How much much work does air resistance do on the ball during its flight?

32. A mouse of mass 200 g falls 100 m down a vertical mine shaft and lands at the bottom with a speed of 8.0 m/s. During its fall, how much work is done on the mouse by air resistance?

33. Using energy considerations and assuming negligible air resistance, show that a rock thrown from a bridge 20.0 m above water with an initial speed of 15.0 m/s strikes the water with a speed of 24.8 m/s independent of the direction thrown. (*Hint:* show that $K_i + U_i = K_f + U_f$)


34. A 1.0-kg ball at the end of a 2.0-m string swings in a vertical plane. At its lowest point the ball is moving with a speed of 10 m/s. (a) What is its speed at the top of its path? (b) What is the tension in the string when the ball is at the bottom and at the top of its path?

35. Ignoring details associated with friction, extra forces exerted by arm and leg muscles, and other factors, we can consider a pole vault as the conversion of an athlete's running kinetic energy to gravitational potential energy. If an athlete is to lift his body 4.8 m during a vault, what speed must he have when he plants his pole?

36. Tarzan grabs a vine hanging vertically from a tall tree when he is running at 9.0 m/s. (a) How high can he swing upward? (b) Does the length of the vine affect this height?

37. Assume that the force of a bow on an arrow behaves like the spring force. In aiming the arrow, an archer pulls the bow back 50 cm and holds it in position with a force of 150 N. If the mass of the arrow is 50 g and the "spring" is massless, what is the speed of the arrow immediately after it leaves the bow?

38. A 100 – kg man is skiing across level ground at a speed of 8.0 m/s when he comes to the small slope 1.8 m higher than ground level shown in the following figure. (a) If the skier coasts up the hill, what is his speed when he reaches the top plateau? Assume friction between the snow and skis is negligible. (b) What is his speed when he reaches the upper level if an 80 – N frictional force acts on the skis?

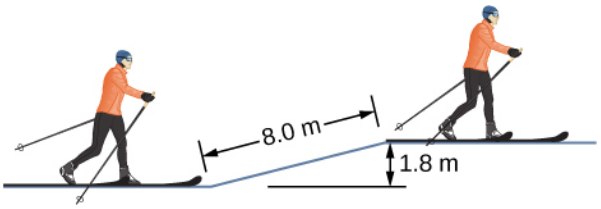


39. A sled of mass 70 kg starts from rest and slides down a 10° incline 80 m long. It then travels for 20 m horizontally before starting back up an 8° incline. It travels 80 m along this incline before coming to rest. What is the magnitude of the net work done on the sled by friction?


40. A girl on a skateboard (total mass of 40 kg) is moving at a speed of 10 m/s at the bottom of a long ramp. The ramp is inclined at 20° with respect to the horizontal. If she travels 14.2 m upward along the ramp before stopping, what is the net frictional force on her?

41. A baseball of mass 0.25 kg is hit at home plate with a speed of 40 m/s. When it lands in a seat in the left-field bleachers a horizontal distance 120 m from home plate, it is moving at 30 m/s. If the ball lands 20 m above the spot where it was hit, how much work is done on it by air resistance?

42. A small block of mass *m* slides without friction around the loop-the-loop apparatus shown below. (a) If the block starts from rest at *A*, what is its speed at *B*? (b) What is the force of the track on the block at *B*?

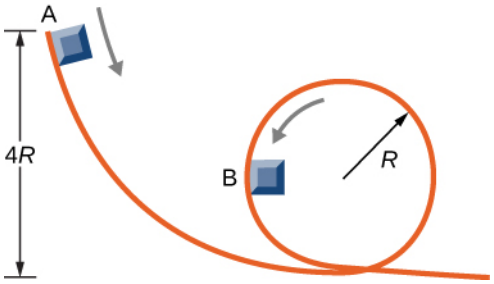

43. The massless spring of a spring gun has a force constant $k = 12$ N/cm. When the gun is aimed vertically, a 15-g projectile is shot to a height of 5.0 m above the end of the expanded spring. (See below.) How much was the spring compressed initially?

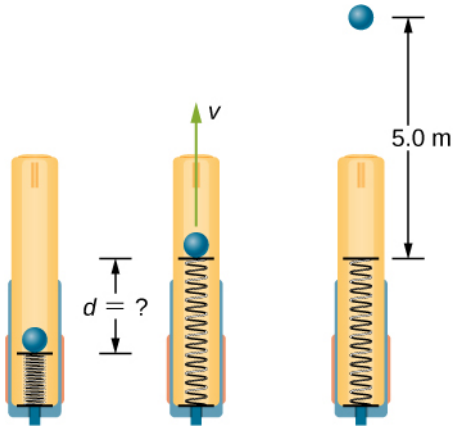

44. A small ball is tied to a string and set rotating with negligible friction in a vertical circle. If the ball moves over the top of the circle at its slowest possible speed (so that the tension in the string is negligible), what is the tension in the string at the bottom of the circle, assuming there is no additional energy added to the ball during rotation?

8.4 Potential Energy Diagrams and Stability


45. A mysterious constant force of 10 N acts horizontally on everything. The direction of the force is found to be always pointed toward a wall in a big hall. Find the potential energy of a particle due to this force when it is at a distance x from the wall, assuming the potential energy at the wall to be zero.

46. A single force $F(x) = -4.0x$ (in newtons) acts on a 1.0-kg body. When $x = 3.5$ m, the speed of the body is 4.0 m/s. What is its speed at $x = 2.0$ m?


47. A particle of mass 4.0 kg is constrained to move along the x-axis under a single force $F(x) = -cx^3$, where $c = 8.0\ \text{N/m}^3$. The particle's speed at A, where $x_A = 1.0$ m, is 6.0 m/s. What is its speed at B, where $x_B = -2.0$ m?

48. The force on a particle of mass 2.0 kg varies with position according to $F(x) = -3.0x^2$ (x in meters, $F(x)$ in newtons). The particle's velocity at $x = 2.0$ m is 5.0 m/s. Calculate the mechanical energy of the particle using (a) the origin as the reference point and (b) $x = 4.0$ m as the reference point. (c) Find the particle's velocity at $x = 1.0$ m. Do this part of the problem for each reference point.

49. A 4.0-kg particle moving along the x-axis is acted upon by the force whose functional form appears below. The velocity of the particle at $x = 0$ is $v = 6.0$ m/s. Find the particle's speed at $x =$ (a) 2.0 m, (b) 4.0 m, (c) 10.0 m, (d) Does the particle turn around at some point and head back toward the origin? (e) Repeat part (d) if $v = 2.0$ m/s at $x = 0$.

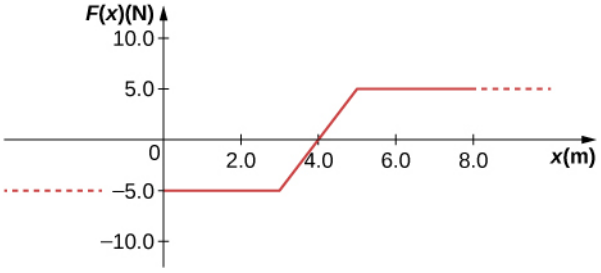

50. A particle of mass 0.50 kg moves along the x-axis with a potential energy whose dependence on x is shown below. (a) What is the force on the particle at $x = 2.0, 5.0, 8.0,$ and 12 m? (b) If the total mechanical energy E of the particle is −6.0 J, what are the minimum and maximum positions of the particle? (c) What are these positions if $E = 2.0$ J? (d) If $E = 16$ J, what are the speeds of the particle at the positions listed in part (a)?

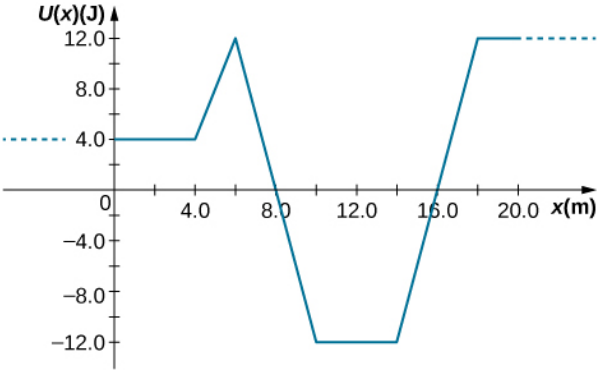

51. (a) Sketch a graph of the potential energy function $U(x) = kx^2/2 + Ae^{-\alpha x^2}$, where k, A, and α are constants. (b) What is the force corresponding to this potential energy? (c) Suppose a particle of mass m moving with this potential energy has a velocity v_a when its position is $x = a$. Show that the particle does not pass through the origin unless

$$A \leq \frac{mv_a{}^2 + ka^2}{2\left(1 - e^{-\alpha a^2}\right)}.$$

8.5 Sources of Energy

52. In the cartoon movie *Pocahontas* (https://openstax.org/l/21pocahontclip), Pocahontas runs to the edge of a cliff and jumps off, showcasing the fun side of her personality. (a) If she is running at 3.0 m/s before jumping off the cliff and she hits the water at the bottom of the cliff at 20.0 m/s, how high is the cliff?

Assume negligible air drag in this cartoon. (b) If she jumped off the same cliff from a standstill, how fast would she be falling right before she hit the water?

53. In the reality television show "Amazing Race" (https://openstax.org/l/21amazraceclip) , a contestant is firing 12-kg watermelons from a slingshot to hit targets down the field. The slingshot is pulled back 1.5 m and the watermelon is considered to be at ground level. The launch point is 0.3 m from the ground and the targets are 10 m horizontally away. Calculate the spring constant of the slingshot.

54. In the *Back to the Future* movies (https://openstax.org/l/21bactofutclip) , a DeLorean car of mass 1230 kg travels at 88 miles per hour to venture back to the future. (a) What is the kinetic energy of the DeLorean? (b) What spring constant would be needed to stop this DeLorean in a distance of 0.1m?

55. In the *Hunger Games* movie (https://openstax.org/l/21HungGamesclip) , Katniss Everdeen fires a 0.0200-kg arrow from ground level to pierce an apple up on a stage. The spring constant of the bow is 330 N/m and she pulls the arrow back a distance of 0.55 m. The apple on the stage is 5.00 m higher than the launching point of the arrow. At what speed does the arrow (a) leave the bow? (b) strike the apple?


56. In a "Top Fail" video (https://openstax.org/l/21topfailvideo) , two women run at each other and collide by hitting exercise balls together. If each woman has a mass of 50 kg, which includes the exercise ball, and one woman runs to the right at 2.0 m/s and the other is running toward her at 1.0 m/s, (a) how much total kinetic energy is there in the system? (b) If energy is conserved after the collision and each exercise ball has a mass of 2.0 kg, how fast would the balls fly off toward the camera?

57. In a Coyote/Road Runner cartoon clip (https://openstax.org/l/21coyroadcarcl) , a spring expands quickly and sends the coyote into a rock. If the spring extended 5 m and sent the coyote of mass 20 kg to a speed of 15 m/s, (a) what is the spring constant of this spring? (b) If the coyote were sent vertically into the air with the energy given to him by the spring, how high could he go if there were no non-conservative forces?

58. In an iconic movie scene, Forrest Gump (https://openstax.org/l/21ForrGumpvid) runs around the country. If he is running at a constant speed of 3 m/s, would it take him more or less energy to run uphill or downhill and why?

59. In the movie *Monty Python and the Holy Grail (https://openstax.org/l/21monpytmovcl)* a cow is catapulted from the top of a castle wall over to the people down below. The gravitational potential energy is set to zero at ground level. The cow is launched from a spring of spring constant 1.1×10^4 N/m that is expanded 0.5 m from equilibrium. If the castle is 9.1 m tall and the mass of the cow is 110 kg, (a) what is the gravitational potential energy of the cow at the top of the castle? (b) What is the elastic spring energy of the cow before the catapult is released? (c) What is the speed of the cow right before it lands on the ground?

60. A 60.0-kg skier with an initial speed of 12.0 m/s coasts up a 2.50-m high rise as shown. Find her final speed at the top, given that the coefficient of friction between her skis and the snow is 0.80.

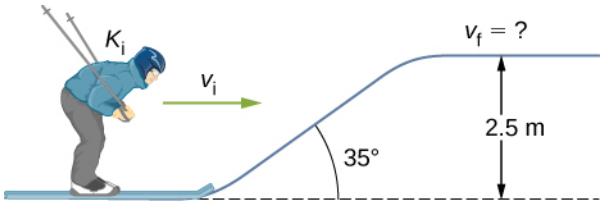


61. (a) How high a hill can a car coast up (engines disengaged) if work done by friction is negligible and its initial speed is 110 km/h? (b) If, in actuality, a 750-kg car with an initial speed of 110 km/h is observed to coast up a hill to a height 22.0 m above its starting point, how much thermal energy was generated by friction? (c) What is the average force of friction if the hill has a slope of 2.5° above the horizontal?

62. A 5.00×10^5 -kg subway train is brought to a stop from a speed of 0.500 m/s in 0.400 m by a large spring bumper at the end of its track. What is the spring constant k of the spring?

63. A pogo stick has a spring with a spring constant of 2.5×10^4 N/m, which can be compressed 12.0 cm. To what maximum height from the uncompressed spring can a child jump on the stick using only the energy in the spring, if the child and stick have a total mass of 40 kg?

64. A block of mass 500 g is attached to a spring of spring constant 80 N/m (see the following figure). The other end of the spring is attached to a support while the mass rests on a rough surface with a coefficient of friction of 0.20 that is inclined at angle

of 30°. The block is pushed along the surface till the spring compresses by 10 cm and is then released from rest. (a) How much potential energy was stored in the block-spring-support system when the block was just released? (b) Determine the speed of the block when it crosses the point when the spring is neither compressed nor stretched. (c) Determine the position of the block where it just comes to rest on its way up the incline.

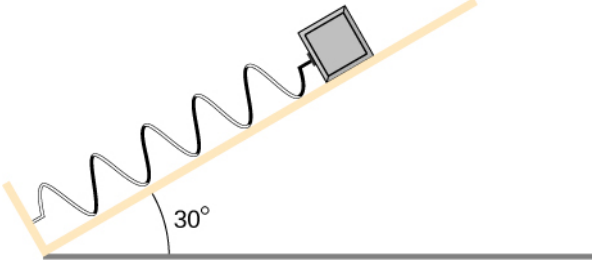


65. A block of mass 200 g is attached at the end of a massless spring at equilibrium length of spring constant 50 N/m. The other end of the spring is attached to the ceiling and the mass is released at a height considered to be where the gravitational potential energy is zero. (a) What is the net potential energy of the block at the instant the block is at the lowest point? (b) What is the net potential energy of the block at the midpoint of its descent? (c) What is the speed of the block at the midpoint of its descent?

66. A T-shirt cannon launches a shirt at 5.00 m/s from a platform height of 3.00 m from ground level. How fast will the shirt be traveling if it is caught by someone whose hands are (a) 1.00 m from ground level? (b) 4.00 m from ground level? Neglect air drag.

67. A child (32 kg) jumps up and down on a trampoline. The trampoline exerts a spring restoring force on the child with a constant of 5000 N/m. At the highest point of the bounce, the child is 1.0 m above the level surface of the trampoline. What is the compression distance of the trampoline? Neglect the bending of the legs or any transfer of energy of the child into the trampoline while jumping.

68. Shown below is a box of mass m_1 that sits on a frictionless incline at an angle above the horizontal $\theta = 30°$. This box is connected by a relatively massless string, over a frictionless pulley, and finally connected to a box at rest over the ledge, labeled m_2. If m_1 and m_2 are a height h above the ground and $m_2 >> m_1$: (a) What is the initial gravitational potential energy of the system? (b) What is the final kinetic energy of the system?

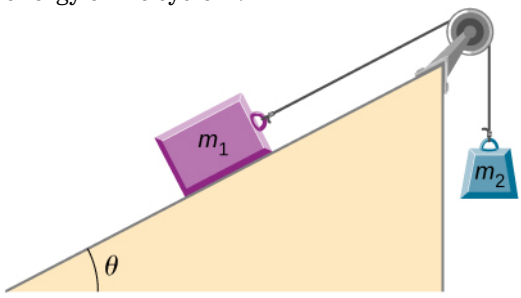


Additional Problems


69. A massless spring with force constant $k = 200$ N/m hangs from the ceiling. A 2.0-kg block is attached to the free end of the spring and released. If the block falls 17 cm before starting back upwards, how much work is done by friction during its descent?

70. A particle of mass 2.0 kg moves under the influence of the force $F(x) = \left(-5x^2 + 7x\right)$ N. Suppose a frictional force also acts on the particle. If the particle's speed when it starts at $x = -4.0$ m is 0.0 m/s and when it arrives at $x = 4.0$ m is 9.0 m/s, how much work is done on it by the frictional force between $x = -4.0$ m and $x = 4.0$ m?

71. Block 2 shown below slides along a frictionless table as block 1 falls. Both blocks are attached by a frictionless pulley. Find the speed of the blocks after they have each moved 2.0 m. Assume that they start at rest and that the pulley has negligible mass. Use $m_1 = 2.0$ kg and $m_2 = 4.0$ kg.

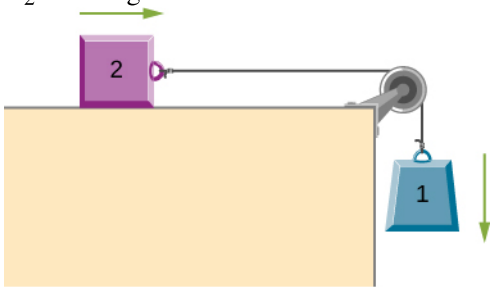


72. A body of mass m and negligible size starts from rest and slides down the surface of a frictionless solid sphere of radius R. (See below.) Prove that the body leaves the sphere when $\theta = \cos^{-1}(2/3)$.

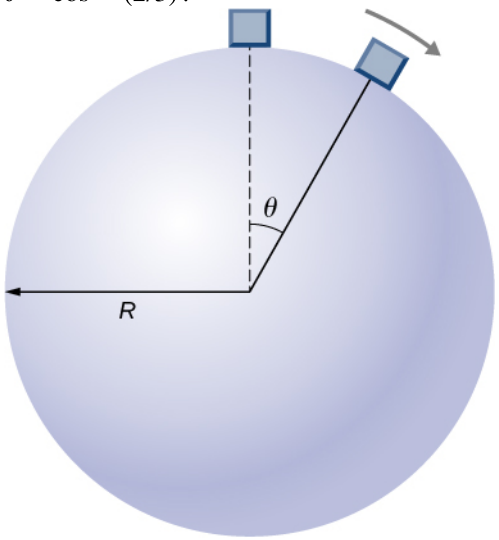


73. A mysterious force acts on all particles along a particular line and always points towards a particular point P on the line. The magnitude of the force on a particle increases as the cube of the distance from that point; that is $F \infty r^3$, if the distance from P to the position of the particle is r. Let b be the proportionality constant, and write the magnitude of the force as $F = br^3$. Find the potential energy of a particle subjected to this force when the particle is at a distance D from P, assuming the potential energy to be zero when the particle is at P.


74. An object of mass 10 kg is released at point A, slides to the bottom of the 30° incline, then collides with a horizontal massless spring, compressing it a maximum distance of 0.75 m. (See below.) The spring constant is 500 N/m, the height of the incline is 2.0 m, and the horizontal surface is frictionless. (a) What is the speed of the object at the bottom of the incline? (b) What is the work of friction on the object while it is on the incline? (c) The spring recoils and sends the object back toward the incline. What is the speed of the object when it reaches the base of the incline? (d) What vertical distance does it move back up the incline?

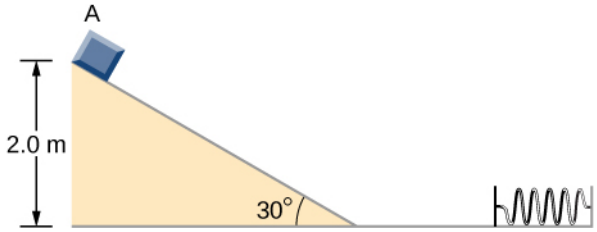


75. Shown below is a small ball of mass m attached to a string of length a. A small peg is located a distance h below the point where the string is supported. If the ball is released when the string is horizontal, show that h must be greater than $3a/5$ if the ball is to swing completely around the peg.

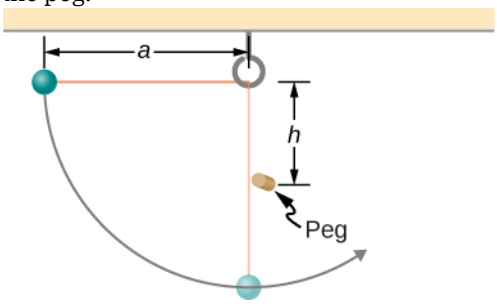

76. A block leaves a frictionless inclined surface horizontally after dropping off by a height h. Find the horizontal distance D where it will land on the floor, in terms of h, H, and g.

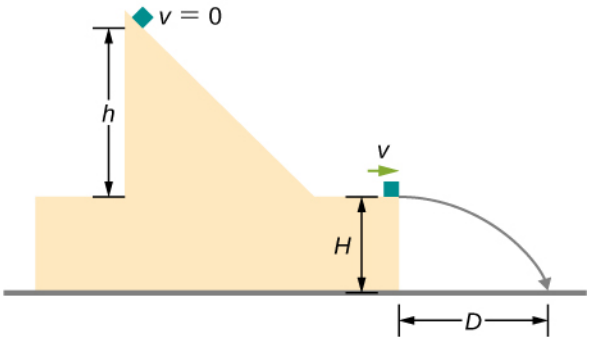

77. A block of mass m, after sliding down a frictionless incline, strikes another block of mass M that is attached to a spring of spring constant k (see below). The blocks stick together upon impact and travel together. (a) Find the compression of the spring in terms of m, M, h, g, and k when the combination comes to rest. Hint: The speed of the combined blocks $m + M$ (v_2) is based on the speed of block m just prior to the collision with the block M (v_1) based on the equation $v_2 = (m/m) + M(v_1)$. This will be discussed further in the chapter on Linear Momentum and Collisions. (b) The loss of kinetic energy as a result of the bonding of the two masses upon impact is stored in the so-called binding energy of the two masses. Calculate the binding energy.

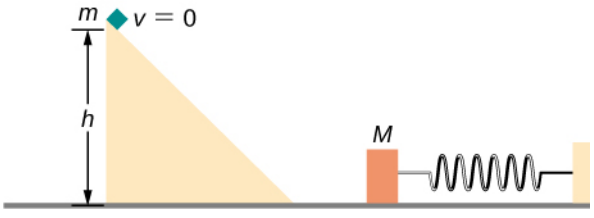

78. A block of mass 300 g is attached to a spring of spring constant 100 N/m. The other end of the spring is attached to a support while the block rests on a smooth horizontal table and can slide freely without any friction. The block is pushed horizontally till the spring compresses by 12 cm, and then the block is released from rest. (a) How much potential energy was stored in the block-spring support system when the block was just released? (b) Determine the speed of the block when it crosses the point when the spring is neither compressed nor stretched. (c) Determine the speed of the block when it has traveled a distance of 20 cm from where it was released.


79. Consider a block of mass 0.200 kg attached to a spring of spring constant 100 N/m. The block is placed on a frictionless table, and the other end of the spring is attached to the wall so that the spring is level with the table. The block is then pushed in so that the spring is compressed by 10.0 cm. Find the speed of the block as it crosses (a) the point when the spring is not stretched, (b) 5.00 cm to the left of point in (a), and (c) 5.00 cm to the right of point in (a).

80. A skier starts from rest and slides downhill. What will be the speed of the skier if he drops by 20 meters in vertical height? Ignore any air resistance (which will, in reality, be quite a lot), and any friction between the skis and the snow.

81. Repeat the preceding problem, but this time, suppose that the work done by air resistance cannot be ignored. Let the work done by the air resistance when the skier goes from *A* to *B* along the given hilly path be −2000 J. The work done by air resistance is negative since the air resistance acts in the opposite direction to the displacement. Supposing the mass of the skier is 50 kg, what is the speed of the skier at point *B*?

82. Two bodies are interacting by a conservative force. Show that the mechanical energy of an isolated system consisting of two bodies interacting with a conservative force is conserved. (*Hint*: Start by using Newton's third law and the definition of work to find the work done on each body by the conservative force.)

83. In an amusement park, a car rolls in a track as shown below. Find the speed of the car at *A*, *B*, and *C*. Note that the work done by the rolling friction is zero since the displacement of the point at which the rolling friction acts on the tires is momentarily at rest and therefore has a zero displacement.

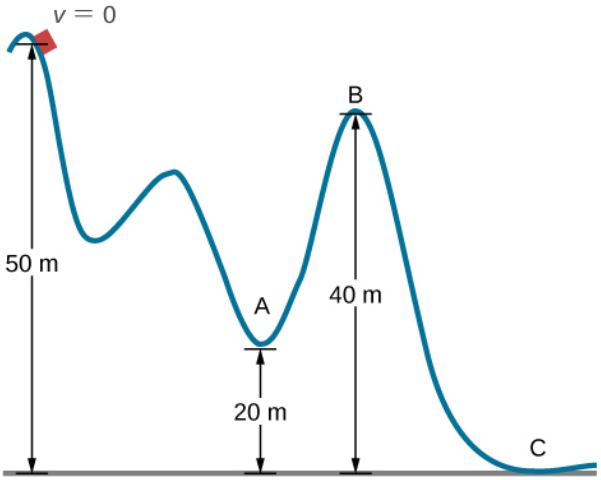

84. A 200-g steel ball is tied to a 2.00-m "massless" string and hung from the ceiling to make a pendulum, and then, the ball is brought to a position making a 30° angle with the vertical direction and released from rest. Ignoring the effects of the air resistance, find the speed of the ball when the string (a) is vertically down, (b) makes an angle of 20° with the vertical and (c) makes an angle of 10° with the vertical.

85. A 300 g hockey puck is shot across an ice-covered pond. Before the hockey puck was hit, the puck was at rest. After the hit, the puck has a speed of 40 m/s. The puck comes to rest after going a distance of 30 m. (a) Describe how the energy of the puck changes over time, giving the numerical values of any work or energy involved. (b) Find the magnitude of the net friction force.

86. A projectile of mass 2 kg is fired with a speed of 20 m/s at an angle of 30° with respect to the horizontal. (a) Calculate the initial total energy of the projectile given that the reference point of zero gravitational potential energy at the launch position. (b) Calculate the kinetic energy at the highest vertical position of the projectile. (c) Calculate the gravitational potential energy at the highest vertical position. (d) Calculate the maximum height that the projectile reaches. Compare this result by solving the same problem using your knowledge of projectile motion.

87. An artillery shell is fired at a target 200 m above the ground. When the shell is 100 m in the air, it has a speed of 100 m/s. What is its speed when it hits its target? Neglect air friction.

88. How much energy is lost to a dissipative drag force if a 60-kg person falls at a constant speed for 15 meters?

89. A box slides on a frictionless surface with a total energy of 50 J. It hits a spring and compresses the spring a distance of 25 cm from equilibrium. If the same box with the same initial energy slides on a rough surface, it only compresses the spring a distance of 15 cm, how much energy must have been lost by sliding on the rough surface?

CHAPTER 9
Linear Momentum and Collisions



Figure 9.1 The concepts of impulse, momentum, and center of mass are crucial for a major-league baseball player to successfully get a hit. If he misjudges these quantities, he might break his bat instead. (credit: modification of work by "Cathy T"/Flickr)

Chapter Outline

9.1 Linear Momentum

9.2 Impulse and Collisions

9.3 Conservation of Linear Momentum

9.4 Types of Collisions

9.5 Collisions in Multiple Dimensions

9.6 Center of Mass

9.7 Rocket Propulsion

INTRODUCTION The concepts of work, energy, and the work-energy theorem are valuable for two primary reasons: First, they are powerful computational tools, making it much easier to analyze complex physical systems than is possible using Newton's laws directly (for example, systems with nonconstant forces); and second, the observation that the total energy of a closed system is conserved means that the system can only

evolve in ways that are consistent with energy conservation. In other words, a system cannot evolve randomly; it can only change in ways that conserve energy.

In this chapter, we develop and define another conserved quantity, called *linear momentum*, and another relationship (the *impulse-momentum theorem*), which will put an additional constraint on how a system evolves in time. Conservation of momentum is useful for understanding collisions, such as that shown in the above image. It is just as powerful, just as important, and just as useful as conservation of energy and the work-energy theorem.

9.1 Linear Momentum

Learning Objectives

By the end of this section, you will be able to:

- Explain what momentum is, physically
- Calculate the momentum of a moving object

Our study of kinetic energy showed that a complete understanding of an object's motion must include both its mass and its velocity ($K = (1/2)mv^2$). However, as powerful as this concept is, it does not include any information about the direction of the moving object's velocity vector. We'll now define a physical quantity that includes direction.

Like kinetic energy, this quantity includes both mass and velocity; like kinetic energy, it is a way of characterizing the "quantity of motion" of an object. It is given the name **momentum** (from the Latin word *movimentum*, meaning "movement"), and it is represented by the symbol p.

Momentum

The momentum p of an object is the product of its mass and its velocity:

$$\vec{\mathbf{p}} = m\vec{\mathbf{v}}. \tag{9.1}$$



Figure 9.2 The velocity and momentum vectors for the ball are in the same direction. The mass of the ball is about 0.5 kg, so the

momentum vector is about half the length of the velocity vector because momentum is velocity time mass. (credit: modification of work by Ben Sutherland)

As shown in Figure 9.2, momentum is a vector quantity (since velocity is). This is one of the things that makes momentum useful and not a duplication of kinetic energy. It is perhaps most useful when determining whether an object's motion is difficult to change (Figure 9.3) or easy to change (Figure 9.4).



Figure 9.3 This supertanker transports a huge mass of oil; as a consequence, it takes a long time for a force to change its (comparatively small) velocity. (credit: modification of work by "the_tahoe_guy"/Flickr)

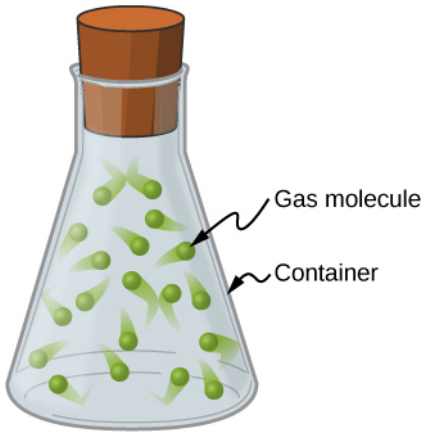


Figure 9.4 Gas molecules can have very large velocities, but these velocities change nearly instantaneously when they collide with the container walls or with each other. This is primarily because their masses are so tiny.

Unlike kinetic energy, momentum depends equally on an object's mass and velocity. For example, as you will learn when you study thermodynamics, the average speed of an air molecule at room temperature is approximately 500 m/s, with an average molecular mass of 6×10^{-25} kg; its momentum is thus

$$p_{\text{molecule}} = \left(6 \times 10^{-25}\ \text{kg}\right)\left(500\ \frac{\text{m}}{\text{s}}\right) = 3 \times 10^{-22}\ \frac{\text{kg} \cdot \text{m}}{\text{s}}.$$

For comparison, a typical automobile might have a speed of only 15 m/s, but a mass of 1400 kg, giving it a momentum of

$$p_{\text{car}} = (1400\ \text{kg})\left(15\ \frac{\text{m}}{\text{s}}\right) = 21{,}000\ \frac{\text{kg} \cdot \text{m}}{\text{s}}.$$

These momenta are different by 27 orders of magnitude, or a factor of a billion billion billion!

9.2 Impulse and Collisions

Learning Objectives

By the end of this section, you will be able to:

- Explain what an impulse is, physically
- Describe what an impulse does
- Relate impulses to collisions
- Apply the impulse-momentum theorem to solve problems

We have defined momentum to be the product of mass and velocity. Therefore, if an object's velocity should change (due to the application of a force on the object), then necessarily, its momentum changes as well. This indicates a connection between momentum and force. The purpose of this section is to explore and describe that connection.

Suppose you apply a force on a free object for some amount of time. Clearly, the larger the force, the larger the object's change of momentum will be. Alternatively, the more time you spend applying this force, again the larger the change of momentum will be, as depicted in Figure 9.5. The amount by which the object's motion changes is therefore proportional to the magnitude of the force, and also to the time interval over which the force is applied.

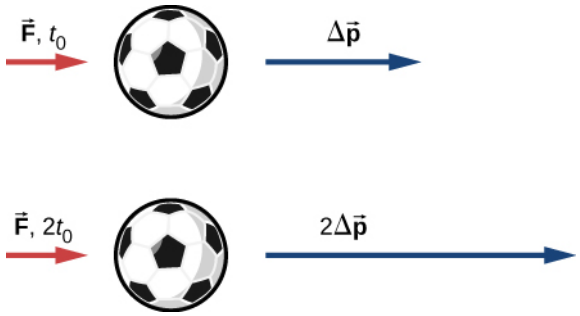


Figure 9.5 The change in momentum of an object is proportional to the length of time during which the force is applied. If a force is exerted on the lower ball for twice as long as on the upper ball, then the change in the momentum of the lower ball is twice that of the upper ball.

Mathematically, if a quantity is proportional to two (or more) things, then it is proportional to the product of those things. The product of a force and a time interval (over which that force acts) is called **impulse**, and is given the symbol $\vec{\mathbf{J}}$.

Impulse

Let $\vec{\mathbf{F}}(t)$ be the force applied to an object over some differential time interval dt (Figure 9.6). The resulting impulse on the object is defined as

$$d\vec{\mathbf{J}} \equiv \vec{\mathbf{F}}(t)dt. \qquad 9.2$$

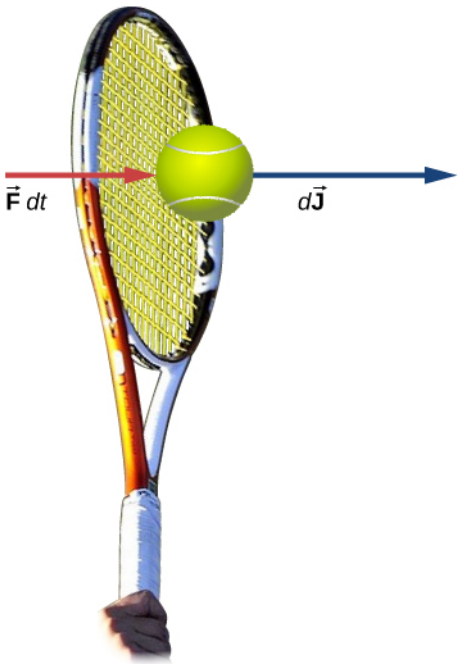


Figure 9.6 A force applied by a tennis racquet to a tennis ball over a time interval generates an impulse acting on the ball.

The total impulse over the interval $t_\mathrm{f} - t_\mathrm{i}$ is

$$\vec{\mathbf{J}} = \int_{t_\mathrm{i}}^{t_\mathrm{f}} d\vec{\mathbf{J}} \text{ or } \vec{\mathbf{J}} \equiv \int_{t_\mathrm{i}}^{t_\mathrm{f}} \vec{\mathbf{F}}(t)dt. \tag{9.3}$$

Equation 9.2 and Equation 9.3 together say that when a force is applied for an infinitesimal time interval dt, it causes an infinitesimal impulse $d\vec{\mathbf{J}}$, and the total impulse given to the object is defined to be the sum (integral) of all these infinitesimal impulses.

To calculate the impulse using Equation 9.3, we need to know the force function $F(t)$, which we often don't. However, a result from calculus is useful here: Recall that the average value of a function over some interval is calculated by

$$f(x)_\mathrm{ave} = \frac{1}{\Delta x}\int_{x_\mathrm{i}}^{x_\mathrm{f}} f(x)dx$$

where $\Delta x = x_\mathrm{f} - x_\mathrm{i}$. Applying this to the time-dependent force function, we obtain

$$\vec{\mathbf{F}}_\mathrm{ave} = \frac{1}{\Delta t}\int_{t_\mathrm{i}}^{t_\mathrm{f}} \vec{\mathbf{F}}(t)dt. \tag{9.4}$$

Therefore, from Equation 9.3,

$$\vec{\mathbf{J}} = \vec{\mathbf{F}}_\mathrm{ave}\,\Delta t. \tag{9.5}$$

The idea here is that you can calculate the impulse on the object even if you don't know the details of the force as a function of time; you only need the average force. In fact, though, the process is usually reversed: You determine the impulse (by measurement or calculation) and then calculate the average force that caused that impulse.

To calculate the impulse, a useful result follows from writing the force in Equation 9.3 as $\vec{\mathbf{F}}(t) = m\vec{\mathbf{a}}(t)$:

$$\vec{\mathbf{J}} = \int_{t_\mathrm{i}}^{t_\mathrm{f}} \vec{\mathbf{F}}(t)dt = m\int_{t_\mathrm{i}}^{t_\mathrm{f}} \vec{\mathbf{a}}(t)dt = m\left[\vec{\mathbf{v}}(t_\mathrm{f}) - \vec{\mathbf{v}}_\mathrm{i}\right].$$

For a constant force $\vec{\mathbf{F}}_{\text{ave}} = \vec{\mathbf{F}} = m\vec{\mathbf{a}}$, this simplifies to

$$\vec{\mathbf{J}} = m\vec{\mathbf{a}}\Delta t = m\vec{\mathbf{v}}_{\text{f}} - m\vec{\mathbf{v}}_{\text{i}} = m(\vec{\mathbf{v}}_{\text{f}} - \vec{\mathbf{v}}_{\text{i}}).$$

That is,

$$\vec{\mathbf{J}} = m\Delta\vec{\mathbf{v}}. \tag{9.6}$$

Note that the integral form, Equation 9.3, applies to constant forces as well; in that case, since the force is independent of time, it comes out of the integral, which can then be trivially evaluated.

EXAMPLE 9.1

The Arizona Meteor Crater

Approximately 50,000 years ago, a large (radius of 25 m) iron-nickel meteorite collided with Earth at an estimated speed of 1.28×10^4 m/s in what is now the northern Arizona desert, in the United States. The impact produced a crater that is still visible today (Figure 9.7); it is approximately 1200 m (three-quarters of a mile) in diameter, 170 m deep, and has a rim that rises 45 m above the surrounding desert plain. Iron-nickel meteorites typically have a density of $\rho = 7970\ \text{kg/m}^3$. Use impulse considerations to estimate the average force and the maximum force that the meteor applied to Earth during the impact.



Figure 9.7 The Arizona Meteor Crater in Flagstaff, Arizona (often referred to as the Barringer Crater after the person who first suggested its origin and whose family owns the land). (credit: modification of work by "Shane.torgerson"/Wikimedia Commons)


Strategy

It is conceptually easier to reverse the question and calculate the force that Earth applied on the meteor in order to stop it. Therefore, we'll calculate the force on the meteor and then use Newton's third law to argue that the force from the meteor on Earth was equal in magnitude and opposite in direction.

Using the given data about the meteor, and making reasonable guesses about the shape of the meteor and impact time, we first calculate the impulse using Equation 9.6. We then use the relationship between force and impulse Equation 9.5 to estimate the average force during impact. Next, we choose a reasonable force function for the impact event, calculate the average value of that function Equation 9.4, and set the resulting expression equal to the calculated average force. This enables us to solve for the maximum force.

Solution

Define upward to be the $+y$-direction. For simplicity, assume the meteor is traveling vertically downward prior to impact. In that case, its initial velocity is $\vec{\mathbf{v}}_{\mathrm{i}} = -v_{\mathrm{i}}\hat{\mathbf{j}}$, and the force Earth exerts on the meteor points upward, $\vec{\mathbf{F}}(t) = +F(t)\hat{\mathbf{j}}$. The situation at $t = 0$ is depicted below.

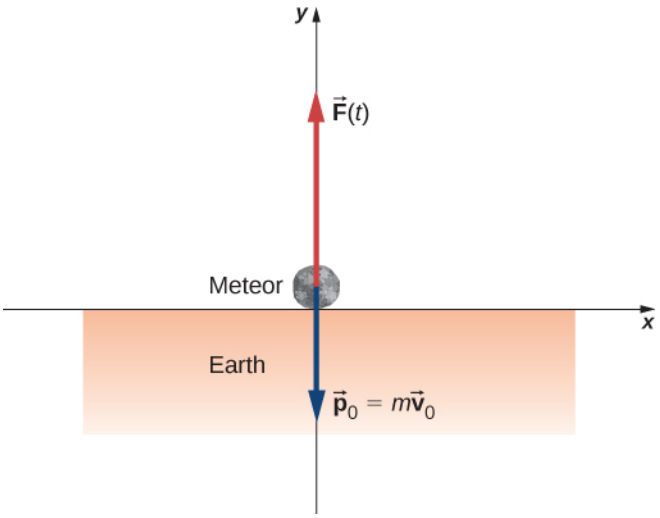

The average force during the impact is related to the impulse by

$$\vec{\mathbf{F}}_{\mathrm{ave}} = \frac{\vec{\mathbf{J}}}{\Delta t}.$$

From Equation 9.6, $\vec{\mathbf{J}} = m\Delta\vec{\mathbf{v}}$, so we have

$$\vec{\mathbf{F}}_{\mathrm{ave}} = \frac{m\Delta\vec{\mathbf{v}}}{\Delta t}.$$

The mass is equal to the product of the meteor's density and its volume:

$$m = \rho V.$$

If we assume (guess) that the meteor was roughly spherical, we have

$$V = \frac{4}{3}\pi R^3.$$

Thus we obtain

$$\vec{\mathbf{F}}_{\mathrm{ave}} = \frac{\rho V\Delta\vec{\mathbf{v}}}{\Delta t} = \frac{\rho\left(\frac{4}{3}\pi R^3\right)\left(\vec{\mathbf{v}}_{\mathrm{f}} - \vec{\mathbf{v}}_{\mathrm{i}}\right)}{\Delta t}.$$

The problem says the velocity at impact was -1.28×10^4 m/s$\hat{\mathbf{j}}$ (the final velocity is zero); also, we guess that the primary impact lasted about $t_{\max} = 2$ s. Substituting these values gives

$$\begin{aligned}\vec{\mathbf{F}}_{\mathrm{ave}} &= \frac{\left(7970\ \frac{\mathrm{kg}}{\mathrm{m}^3}\right)\left[\frac{4}{3}\pi(25\ \mathrm{m})^3\right]\left[0\ \frac{\mathrm{m}}{\mathrm{s}} - \left(-1.28 \times 10^4\ \frac{\mathrm{m}}{\mathrm{s}}\hat{\mathbf{j}}\right)\right]}{2\ \mathrm{s}} \\ &= +\left(3.33 \times 10^{12}\ \mathrm{N}\right)\hat{\mathbf{j}}\end{aligned}.$$

This is the average force applied during the collision. Notice that this force vector points in the same direction as the change of velocity vector $\Delta\vec{\mathbf{v}}$.

Next, we calculate the maximum force. The impulse is related to the force function by

$$\vec{\mathbf{J}} = \int_{t_\mathrm{i}}^{t\mathrm{max}} \vec{\mathbf{F}}(t)dt.$$

We need to make a reasonable choice for the force as a function of time. We define $t = 0$ to be the moment the meteor first touches the ground. Then we assume the force is a maximum at impact, and rapidly drops to zero. A function that does this is

$$F(t) = F_\mathrm{max}\, e^{-t^2/\left(2\tau^2\right)}.$$

(The parameter τ represents how rapidly the force decreases to zero.) The average force is

$$F_\mathrm{ave} = \frac{1}{\Delta t}\int_0^{t\mathrm{max}} F_\mathrm{max}\, e^{-t^2/\left(2\tau^2\right)}\, dt$$

where $\Delta t = t_\mathrm{max} - 0$ s. Since we already have a numeric value for F_ave, we can use the result of the integral to obtain F_max.

Choosing $\tau = \frac{1}{e}t_\mathrm{max}$ (this is a common choice, as you will see in later chapters), and guessing that $t_\mathrm{max} = 2$ s, this integral evaluates to

$$F_\mathrm{avg} = 0.458\, F_\mathrm{max}.$$

Thus, the maximum force has a magnitude of

$$\begin{aligned} 0.458 F_\mathrm{max} &= 3.33 \times 10^{12}\ \mathrm{N} \\ F_\mathrm{max} &= 7.27 \times 10^{12}\ \mathrm{N} \end{aligned}.$$

The complete force function, including the direction, is

$$\vec{\mathbf{F}}(t) = \left(7.27 \times 10^{12}\ \mathrm{N}\right) e^{-t^2/\left(8\mathrm{s}^2\right)}\hat{\mathbf{j}}.$$

This is the force Earth applied to the meteor; by Newton's third law, the force the meteor applied to Earth is

$$\vec{\mathbf{F}}(t) = -\left(7.27 \times 10^{12}\ \mathrm{N}\right) e^{-t^2/\left(8\mathrm{s}^2\right)}\hat{\mathbf{j}}$$

which is the answer to the original question.

Significance

The graph of this function contains important information. Let's graph (the magnitude of) both this function and the average force together (Figure 9.8).

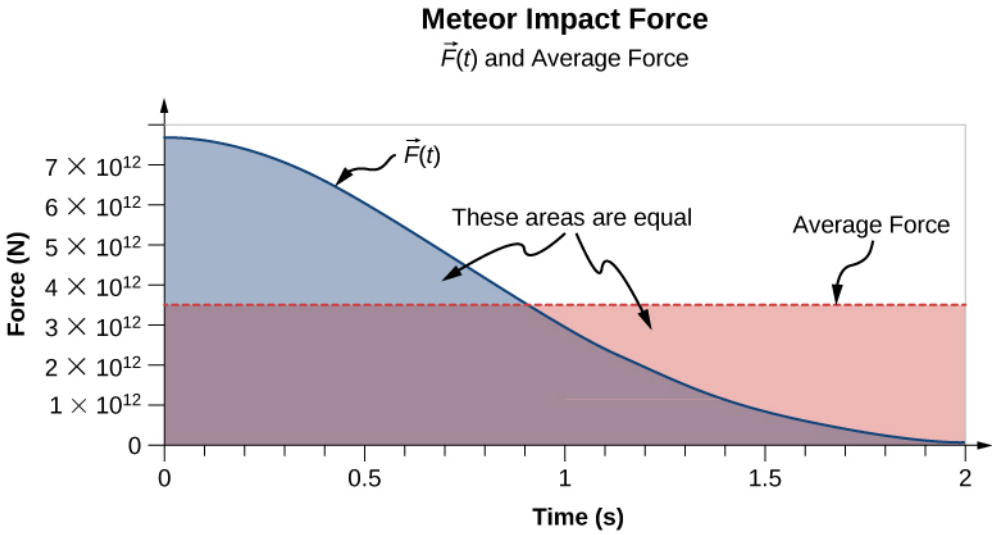


Figure 9.8 A graph of the average force (in red) and the force as a function of time (blue) of the meteor impact. The areas under the curves are equal to each other, and are numerically equal to the applied impulse.

Notice that the area under each plot has been filled in. For the plot of the (constant) force F_{ave}, the area is a rectangle, corresponding to $F_{\text{ave}}\Delta t = J$. As for the plot of $F(t)$, recall from calculus that the area under the plot of a function is numerically equal to the integral of that function, over the specified interval; so here, that is $\int_0^{t\text{max}} F(t)dt = J$. Thus, the areas are equal, and both represent the impulse that the meteor applied to Earth during the two-second impact. The average force on Earth sounds like a huge force, and it is. Nevertheless, Earth barely noticed it. The acceleration Earth obtained was just

$$\vec{\mathbf{a}} = \frac{-\vec{\mathbf{F}}_{\text{ave}}}{M_{\text{Earth}}} = \frac{-\left(3.33 \times 10^{12}\ \text{N}\right)\hat{\mathbf{j}}}{5.97 \times 10^{24}\ \text{kg}} = -\left(5.6 \times 10^{-13}\ \frac{\text{m}}{\text{s}^2}\right)\hat{\mathbf{j}}$$

which is completely immeasurable. That said, the impact created seismic waves that nowadays could be detected by modern monitoring equipment.

EXAMPLE 9.2

The Benefits of Impulse

A car traveling at 27 m/s collides with a building. The collision with the building causes the car to come to a stop in approximately 1 second. The driver, who weighs 860 N, is protected by a combination of a variable-tension seatbelt and an airbag (Figure 9.9). (In effect, the driver collides with the seatbelt and airbag and *not* with the building.) The airbag and seatbelt slow his velocity, such that he comes to a stop in approximately 2.5 s.

a. What average force does the driver experience during the collision?
b. Without the seatbelt and airbag, his collision time (with the steering wheel) would have been approximately 0.20 s. What force would he experience in this case?

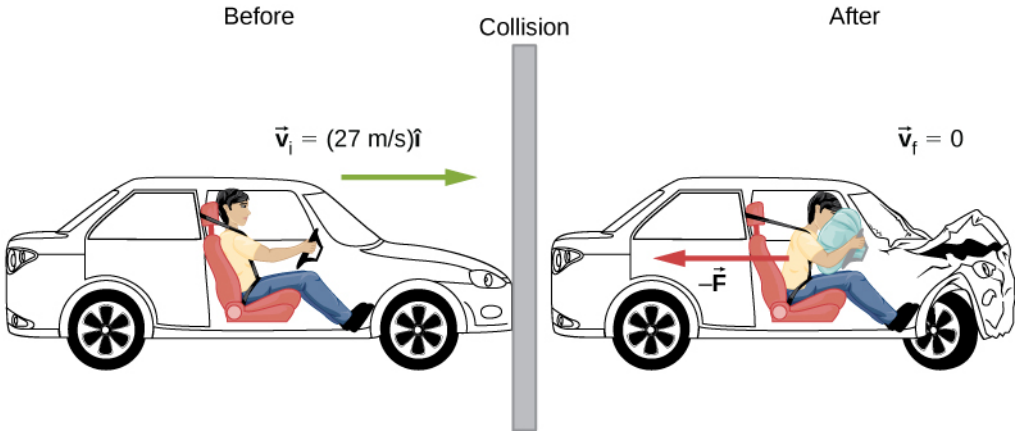


Figure 9.9 The motion of a car and its driver at the instant before and the instant after colliding with the wall. The restrained driver experiences a large backward force from the seatbelt and airbag, which causes his velocity to decrease to zero. (The forward force from the seatback is much smaller than the backward force, so we neglect it in the solution.)

Strategy

We are given the driver's weight, his initial and final velocities, and the time of collision; we are asked to calculate a force. Impulse seems the right way to tackle this; we can combine Equation 9.5 and Equation 9.6.

Solution

a. Define the $+x$-direction to be the direction the car is initially moving. We know

$$\vec{\mathbf{J}} = \vec{\mathbf{F}}\Delta t$$

and

$$\vec{\mathbf{J}} = m\Delta\vec{\mathbf{v}}.$$

Since J is equal to both those things, they must be equal to each other:

$$\vec{\mathbf{F}}\Delta t = m\Delta\vec{\mathbf{v}}.$$

We need to convert this weight to the equivalent mass, expressed in SI units:

$$\frac{860\ \text{N}}{9.8\ \text{m/s}^2} = 87.8\ \text{kg}.$$

Remembering that $\Delta\vec{\mathbf{v}} = \vec{\mathbf{v}}_f - \vec{\mathbf{v}}_i$, and noting that the final velocity is zero, we solve for the force:

$$\vec{\mathbf{F}} = m\frac{0 - v_i\hat{\mathbf{i}}}{\Delta t} = (87.8\ \text{kg})\left(\frac{-(27\ \text{m/s})\,\hat{\mathbf{i}}}{2.5\ \text{s}}\right) = -(948\ \text{N})\,\hat{\mathbf{i}}.$$

The negative sign implies that the force slows him down. For perspective, this is about 1.1 times his own weight.

b. Same calculation, just the different time interval:

$$\vec{\mathbf{F}} = (87.8\ \text{kg})\left(\frac{-(27\ \text{m/s})\,\hat{\mathbf{i}}}{0.20\ \text{s}}\right) = -(11{,}853\ \text{N})\,\hat{\mathbf{i}}$$

which is about 14 times his own weight. Big difference!

Significance

You see that the value of an airbag is how greatly it reduces the force on the vehicle occupants. For this reason, they have been required on all passenger vehicles in the United States since 1991, and have been commonplace throughout Europe and Asia since the mid-1990s. The change of momentum in a crash is the same, with or without an airbag; the force, however, is vastly different.

Effect of Impulse

Since an impulse is a force acting for some amount of time, it causes an object's motion to change. Recall

Equation 9.6:

$$\vec{\mathbf{J}} = m\Delta\vec{\mathbf{v}}.$$

Because $m\vec{\mathbf{v}}$ is the momentum of a system, $m\Delta\vec{\mathbf{v}}$ is the *change* of momentum $\Delta\vec{\mathbf{p}}$. This gives us the following relation, called the **impulse-momentum theorem** (or relation).

Impulse-Momentum Theorem

An impulse applied to a system changes the system's momentum, and that change of momentum is exactly equal to the impulse that was applied:

$$\vec{\mathbf{J}} = \Delta\vec{\mathbf{p}}. \tag{9.7}$$

The impulse-momentum theorem is depicted graphically in Figure 9.10.

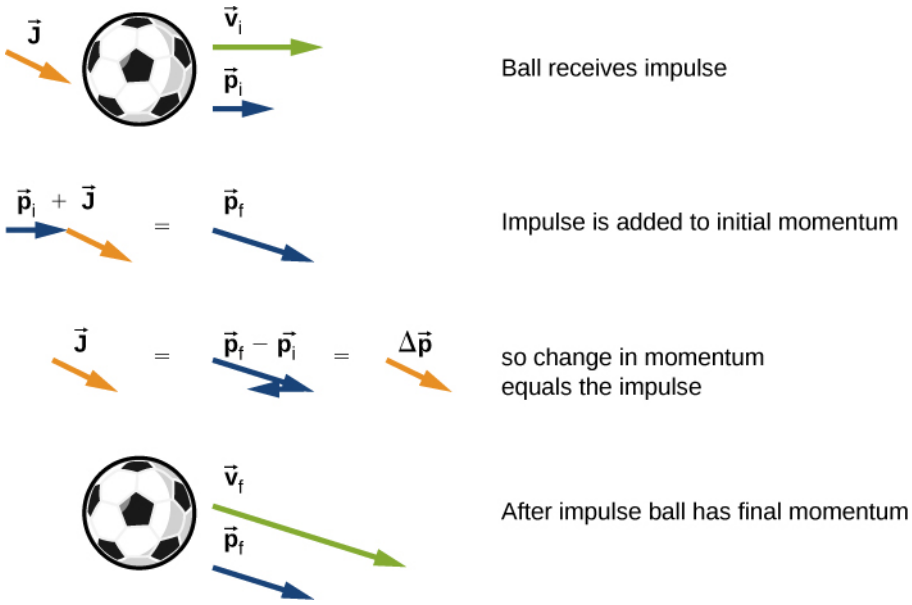


Figure 9.10 Illustration of impulse-momentum theorem. (a) A ball with initial velocity $\vec{\mathbf{v}}_0$ and momentum $\vec{\mathbf{p}}_0$ receives an impulse $\vec{\mathbf{J}}$. (b) This impulse is added vectorially to the initial momentum. (c) Thus, the impulse equals the change in momentum, $\vec{\mathbf{J}} = \Delta\vec{\mathbf{p}}$. (d) After the impulse, the ball moves off with its new momentum $\vec{\mathbf{p}}_f$.

There are two crucial concepts in the impulse-momentum theorem:

1. Impulse is a vector quantity; an impulse of, say, $-(10\ \text{N}\cdot\text{s})\,\hat{\mathbf{i}}$ is very different from an impulse of $+(10\ \text{N}\cdot\text{s})\,\hat{\mathbf{i}}$; they cause completely opposite changes of momentum.
2. An impulse does not cause momentum; rather, it causes a *change* in the momentum of an object. Thus, you must subtract the final momentum from the initial momentum, and—since momentum is also a vector quantity—you must take careful account of the signs of the momentum vectors.

The most common questions asked in relation to impulse are to calculate the applied force, or the change of velocity that occurs as a result of applying an impulse. The general approach is the same.

PROBLEM-SOLVING STRATEGY

Impulse-Momentum Theorem

1. Express the impulse as force times the relevant time interval.
2. Express the impulse as the change of momentum, usually $m\Delta v$.
3. Equate these and solve for the desired quantity.

EXAMPLE 9.3

Moving the *Enterprise*

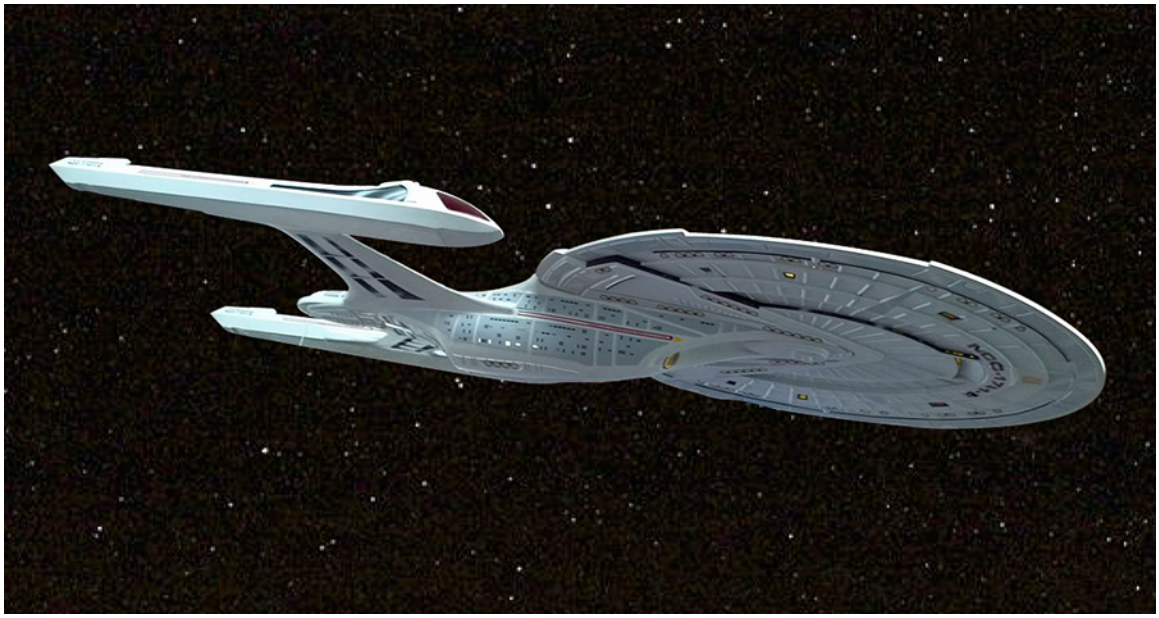


Figure 9.11 The fictional starship *Enterprise* from the Star Trek adventures operated on so-called "impulse engines" that combined matter with antimatter to produce energy.

When Captain Picard commands, "Take us out; ahead one-quarter impulse," the starship *Enterprise* (Figure 9.11) starts from rest to a final speed of $v_f = 1/4\left(3.0 \times 10^8 \text{ m/s}\right)$. Assuming this maneuver is completed in 60 s, what average force did the impulse engines apply to the ship?

Strategy

We are asked for a force; we know the initial and final speeds (and hence the change in speed), and we know the time interval over which this all happened. In particular, we know the amount of time that the force acted. This suggests using the impulse-momentum relation. To use that, though, we need the mass of the *Enterprise*. An internet search gives a best estimate of the mass of the *Enterprise* (in the 2009 movie) as 2×10^9 kg.

Solution

Because this problem involves only one direction (i.e., the direction of the force applied by the engines), we only need the scalar form of the impulse-momentum theorem Equation 9.7, which is

$$\Delta p = J$$

with

$$\Delta p = m\Delta v$$

and

$$J = F\Delta t.$$

Equating these expressions gives

$$F\Delta t = m\Delta v.$$

Solving for the magnitude of the force and inserting the given values leads to

$$F = \frac{m\Delta v}{\Delta t} = \frac{\left(2 \times 10^9 \text{ kg}\right)\left(7.5 \times 10^7 \text{ m/s}\right)}{60 \text{ s}} = 2.5 \times 10^{15} \text{ N}.$$

Significance

This is an unimaginably huge force. It goes almost without saying that such a force would kill everyone on board instantly, as well as destroying every piece of equipment. Fortunately, the *Enterprise* has "inertial dampeners." It is left as an exercise for the reader's imagination to determine how these work.

CHECK YOUR UNDERSTANDING 9.1

The U.S. Air Force uses "10*g*s" (an acceleration equal to $10 \times 9.8\ \text{m/s}^2$) as the maximum acceleration a human can withstand (but only for several seconds) and survive. How much time must the *Enterprise* spend accelerating if the humans on board are to experience an average of at most 10*g*s of acceleration? (Assume the inertial dampeners are offline.)

EXAMPLE 9.4

The iPhone Drop

Apple released its iPhone 6 Plus in November 2014. According to many reports, it was originally supposed to have a screen made from sapphire, but that was changed at the last minute for a hardened glass screen. Reportedly, this was because the sapphire screen cracked when the phone was dropped. What force did the iPhone 6 Plus experience as a result of being dropped?

Strategy

The force the phone experiences is due to the impulse applied to it by the floor when the phone collides with the floor. Our strategy then is to use the impulse-momentum relationship. We calculate the impulse, estimate the impact time, and use this to calculate the force.

We need to make a couple of reasonable estimates, as well as find technical data on the phone itself. First, let's suppose that the phone is most often dropped from about chest height on an average-height person. Second, assume that it is dropped from rest, that is, with an initial vertical velocity of zero. Finally, we assume that the phone bounces very little—the height of its bounce is assumed to be negligible.

Solution

Define upward to be the +*y*-direction. A typical height is approximately $h = 1.5\ \text{m}$ and, as stated, $\vec{\mathbf{v}}_\text{i} = (0\ \text{m/s})\,\hat{\mathbf{i}}$. The average force on the phone is related to the impulse the floor applies on it during the collision:

$$\vec{\mathbf{F}}_\text{ave} = \frac{\vec{\mathbf{J}}}{\Delta t}.$$

The impulse $\vec{\mathbf{J}}$ equals the change in momentum,

$$\vec{\mathbf{J}} = \Delta\vec{\mathbf{p}}$$

so

$$\vec{\mathbf{F}}_\text{ave} = \frac{\Delta\vec{\mathbf{p}}}{\Delta t}.$$

Next, the change of momentum is

$$\Delta\vec{\mathbf{p}} = m\Delta\vec{\mathbf{v}}.$$

We need to be careful with the velocities here; this is the change of velocity due to the collision with the floor. But the phone also has an initial drop velocity [$\vec{\mathbf{v}}_\text{i} = (0\ \text{m/s})\,\hat{\mathbf{j}}$], so we label our velocities. Let:

- $\vec{\mathbf{v}}_\text{i}$ = the initial velocity with which the phone was dropped (zero, in this example)
- $\vec{\mathbf{v}}_1$ = the velocity the phone had the instant just before it hit the floor
- $\vec{\mathbf{v}}_2$ = the final velocity of the phone as a result of hitting the floor

Figure 9.12 shows the velocities at each of these points in the phone's trajectory.

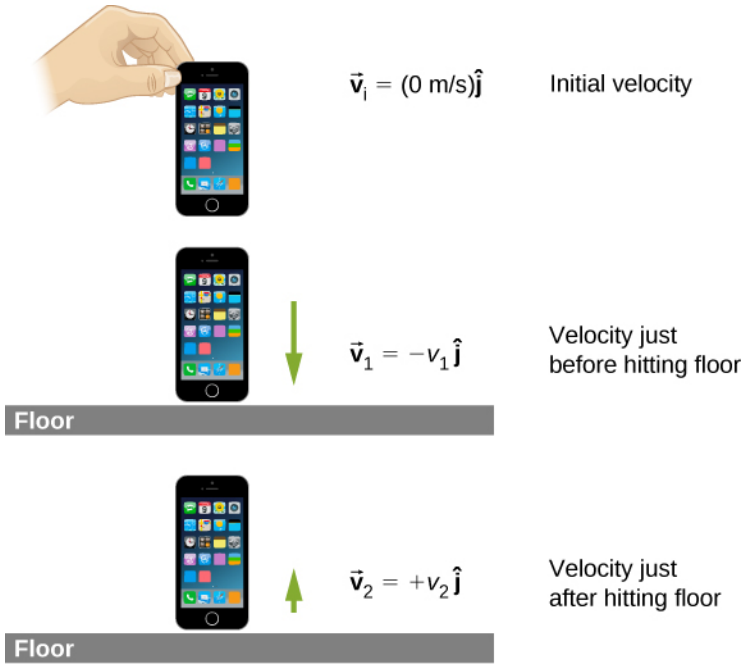


Figure 9.12 (a) The initial velocity of the phone is zero, just after the person drops it. (b) Just before the phone hits the floor, its velocity is $\vec{\mathbf{v}}_1$, which is unknown at the moment, except for its direction, which is downward $(-\hat{\mathbf{j}})$. (c) After bouncing off the floor, the phone has a velocity $\vec{\mathbf{v}}_2$, which is also unknown, except for its direction, which is upward $(+\hat{\mathbf{j}})$.

With these definitions, the change of momentum of the phone during the collision with the floor is

$$m\Delta\vec{\mathbf{v}} = m\left(\vec{\mathbf{v}}_2 - \vec{\mathbf{v}}_1\right).$$

Since we assume the phone doesn't bounce at all when it hits the floor (or at least, the bounce height is negligible), then $\vec{\mathbf{v}}_2$ is zero, so

$$\begin{aligned} m\Delta\vec{\mathbf{v}} &= m\left[0 - \left(-v_1\hat{\mathbf{j}}\right)\right] \\ m\Delta\vec{\mathbf{v}} &= +mv_1\hat{\mathbf{j}}. \end{aligned}$$

We can get the speed of the phone just before it hits the floor using either kinematics or conservation of energy. We'll use conservation of energy here; you should re-do this part of the problem using kinematics and prove that you get the same answer.

First, define the zero of potential energy to be located at the floor. Conservation of energy then gives us:

$$\begin{aligned} E_i &= E_1 \\ K_i + U_i &= K_1 + U_1 \\ \tfrac{1}{2}mv_i^2 + mgh_{\text{drop}} &= \tfrac{1}{2}mv_1^2 + mgh_{\text{floor}}. \end{aligned}$$

Defining $h_{\text{floor}} = 0$ and using $\vec{\mathbf{v}}_i = (0\ \text{m/s})\,\hat{\mathbf{j}}$ gives

$$\begin{aligned} \tfrac{1}{2}mv_1^2 &= mgh_{\text{drop}} \\ v_1 &= \pm\sqrt{2gh_{\text{drop}}}. \end{aligned}$$

Because v_1 is a vector magnitude, it must be positive. Thus, $m\Delta v = mv_1 = m\sqrt{2gh_{\text{drop}}}$. Inserting this result into the expression for force gives

$$\begin{aligned}\vec{\mathbf{F}} &= \frac{\Delta\vec{\mathbf{p}}}{\Delta t} \\ &= \frac{m\Delta\vec{\mathbf{v}}}{\Delta t} \\ &= \frac{+mv_1\hat{\mathbf{j}}}{\Delta t} \\ &= \frac{m\sqrt{2gh}}{\Delta t}\hat{\mathbf{j}}.\end{aligned}$$

Finally, we need to estimate the collision time. One common way to estimate a collision time is to calculate how long the object would take to travel its own length. The phone is moving at 5.4 m/s just before it hits the floor, and it is 0.14 m long, giving an estimated collision time of 0.026 s. Inserting the given numbers, we obtain

$$\vec{\mathbf{F}} = \frac{(0.172\text{ kg})\sqrt{2\left(9.8\text{ m/s}^2\right)(1.5\text{ m})}}{0.026\text{ s}}\hat{\mathbf{j}} = (36\text{ N})\,\hat{\mathbf{j}}.$$

Significance

The iPhone itself weighs just $(0.172\text{ kg})(9.81\text{ m/s}^2) = 1.68\text{ N}$; the force the floor applies to it is therefore over 20 times its weight.

CHECK YOUR UNDERSTANDING 9.2

What if we had assumed the phone *did* bounce on impact? Would this have increased the force on the iPhone, decreased it, or made no difference?

Momentum and Force

In Example 9.3, we obtained an important relationship:

$$\vec{\mathbf{F}}_{\text{ave}} = \frac{\Delta\vec{\mathbf{p}}}{\Delta t}. \tag{9.8}$$

In words, the average force applied to an object is equal to the change of the momentum that the force causes, divided by the time interval over which this change of momentum occurs. This relationship is very useful in situations where the collision time Δt is small, but measureable; typical values would be 1/10th of a second, or even one thousandth of a second. Car crashes, punting a football, or collisions of subatomic particles would meet this criterion.

For a *continuously* changing momentum—due to a continuously changing force—this becomes a powerful conceptual tool. In the limit $\Delta t \to dt$, Equation 9.2 becomes

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}}{dt}. \tag{9.9}$$

This says that the rate of change of the system's momentum (implying that momentum is a function of time) is exactly equal to the net applied force (also, in general, a function of time). This is, in fact, Newton's second law, written in terms of momentum rather than acceleration. This is the relationship Newton himself presented in his *Principia Mathematica* (although he called it "quantity of motion" rather than "momentum").

If the mass of the system remains constant, Equation 9.3 reduces to the more familiar form of Newton's second law. We can see this by substituting the definition of momentum:

$$\vec{\mathbf{F}} = \frac{d(m\vec{\mathbf{v}})}{dt} = m\frac{d\vec{\mathbf{v}}}{dt} = m\vec{\mathbf{a}}.$$

The assumption of constant mass allowed us to pull m out of the derivative. If the mass is not constant, we cannot use this form of the second law, but instead must start from Equation 9.3. Thus, one advantage to

expressing force in terms of changing momentum is that it allows for the mass of the system to change, as well as the velocity; this is a concept we'll explore when we study the motion of rockets.

Newton's Second Law of Motion in Terms of Momentum

The net external force on a system is equal to the rate of change of the momentum of that system caused by the force:

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}}{dt}.$$

Although Equation 9.3 allows for changing mass, as we will see in Rocket Propulsion, the relationship between momentum and force remains useful when the mass of the system is constant, as in the following example.

EXAMPLE 9.5

Calculating Force: Venus Williams' Tennis Serve

During the 2007 French Open, Venus Williams hit the fastest recorded serve in a premier women's match, reaching a speed of 58 m/s (209 km/h). What is the average force exerted on the 0.057-kg tennis ball by Venus Williams' racquet? Assume that the ball's speed just after impact is 58 m/s, as shown in Figure 9.13, that the initial horizontal component of the velocity before impact is negligible, and that the ball remained in contact with the racquet for 5.0 ms.

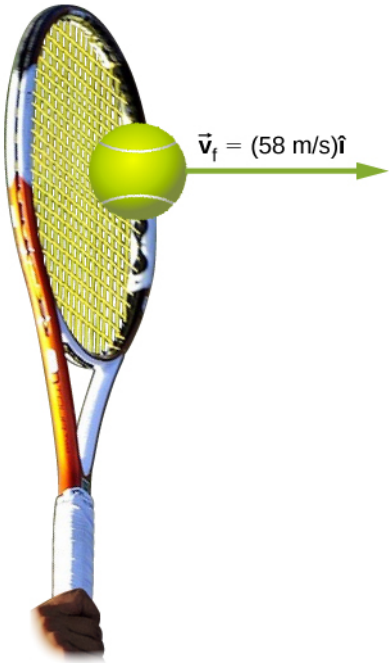


Figure 9.13 The final velocity of the tennis ball is $\vec{\mathbf{v}}_f = (58\ \text{m/s})\,\hat{\mathbf{i}}$.

Strategy

This problem involves only one dimension because the ball starts from having no horizontal velocity component before impact. Newton's second law stated in terms of momentum is then written as

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}}{dt}.$$

As noted above, when mass is constant, the change in momentum is given by

$$\Delta p = m\Delta v = m\,(v_{\mathrm{f}} - v_{\mathrm{i}})$$

where we have used scalars because this problem involves only one dimension. In this example, the velocity just after impact and the time interval are given; thus, once Δp is calculated, we can use $F = \frac{\Delta p}{\Delta t}$ to find the force.

Solution

To determine the change in momentum, insert the values for the initial and final velocities into the equation above:

$$\begin{aligned}\Delta p &= m\,(v_{\mathrm{f}} - v_{\mathrm{i}}) \\ &= (0.057\ \mathrm{kg})\,(58\ \mathrm{m/s} - 0\ \mathrm{m/s}) \\ &= 3.3\ \tfrac{\mathrm{kg \cdot m}}{\mathrm{s}}.\end{aligned}$$

Now the magnitude of the net external force can be determined by using

$$F = \frac{\Delta p}{\Delta t} = \frac{3.3\ \frac{\mathrm{kg \cdot m}}{\mathrm{s}}}{5.0 \times 10^{-3}\ \mathrm{s}} = 6.6 \times 10^{2}\ \mathrm{N}.$$

where we have retained only two significant figures in the final step.

Significance

This quantity was the average force exerted by Venus Williams' racquet on the tennis ball during its brief impact (note that the ball also experienced the 0.57-N force of gravity, but that force was not due to the racquet). This problem could also be solved by first finding the acceleration and then using $F = ma$, but one additional step would be required compared with the strategy used in this example.

9.3 Conservation of Linear Momentum

Learning Objectives

By the end of this section, you will be able to:

- Explain the meaning of "conservation of momentum"
- Correctly identify if a system is, or is not, closed
- Define a system whose momentum is conserved
- Mathematically express conservation of momentum for a given system
- Calculate an unknown quantity using conservation of momentum

Recall Newton's third law: When two objects of masses m_1 and m_2 interact (meaning that they apply forces on each other), the force that object 2 applies to object 1 is equal in magnitude and opposite in direction to the force that object 1 applies on object 2. Let:

- $\vec{\mathbf{F}}_{21}$ = the force on m_1 from m_2
- $\vec{\mathbf{F}}_{12}$ = the force on m_2 from m_1

Then, in symbols, Newton's third law says

$$\begin{aligned}\vec{\mathbf{F}}_{21} &= -\vec{\mathbf{F}}_{12} \\ m_1\vec{\mathbf{a}}_{\mathbf{1}} &= -m_2\vec{\mathbf{a}}_{\mathbf{2}}.\end{aligned} \qquad \textbf{9.10}$$

(Recall that these two forces do not cancel because they are applied to different objects. F_{21} causes m_1 to accelerate, and F_{12} causes m_2 to accelerate.)

Although the magnitudes of the forces on the objects are the same, the accelerations are not, simply because the masses (in general) are different. Therefore, the changes in velocity of each object are different:

$$\frac{d\vec{\mathbf{v}}_{\mathbf{1}}}{dt} \neq \frac{d\vec{\mathbf{v}}_{\mathbf{2}}}{dt}.$$

However, the products of the mass and the change of velocity *are* equal (in magnitude):

$$m_1 \frac{d\vec{\mathbf{v}}_1}{dt} = -m_2 \frac{d\vec{\mathbf{v}}_2}{dt}. \tag{9.11}$$

It's a good idea, at this point, to make sure you're clear on the physical meaning of the derivatives in Equation 9.3. Because of the interaction, each object ends up getting its velocity changed, by an amount *dv*. Furthermore, the interaction occurs over a time interval *dt*, which means that the change of velocities also occurs over *dt*. This time interval is the same for each object.

Let's assume, for the moment, that the masses of the objects do not change during the interaction. (We'll relax this restriction later.) In that case, we can pull the masses inside the derivatives:

$$\frac{d}{dt}\left(m_1 \vec{\mathbf{v}}_1\right) = -\frac{d}{dt}\left(m_2 \vec{\mathbf{v}}_2\right) \tag{9.12}$$

and thus

$$\frac{d\vec{\mathbf{p}}_1}{dt} = -\frac{d\vec{\mathbf{p}}_2}{dt}. \tag{9.13}$$

This says that *the rate at which momentum changes is the same for both objects.* The masses are different, and the changes of velocity are different, but the rate of change of the product of m and $\vec{\mathbf{v}}$ are the same.

Physically, this means that during the interaction of the two objects (m_1 and m_2), both objects have their momentum changed; but those changes are identical in magnitude, though opposite in sign. For example, the momentum of object 1 might increase, which means that the momentum of object 2 decreases by exactly the same amount.

In light of this, let's re-write Equation 9.12 in a more suggestive form:

$$\frac{d\vec{\mathbf{p}}_1}{dt} + \frac{d\vec{\mathbf{p}}_2}{dt} = 0. \tag{9.14}$$

This says that during the interaction, although object 1's momentum changes, and object 2's momentum also changes, these two changes cancel each other out, so that the total change of momentum of the two objects together is zero.

Since the total combined momentum of the two objects together never changes, then we could write

$$\frac{d}{dt}\left(\vec{\mathbf{p}}_1 + \vec{\mathbf{p}}_2\right) = 0 \tag{9.15}$$

from which it follows that

$$\vec{\mathbf{p}}_1 + \vec{\mathbf{p}}_2 = \text{constant}. \tag{9.16}$$

As shown in Figure 9.14, the total momentum of the system before and after the collision remains the same.

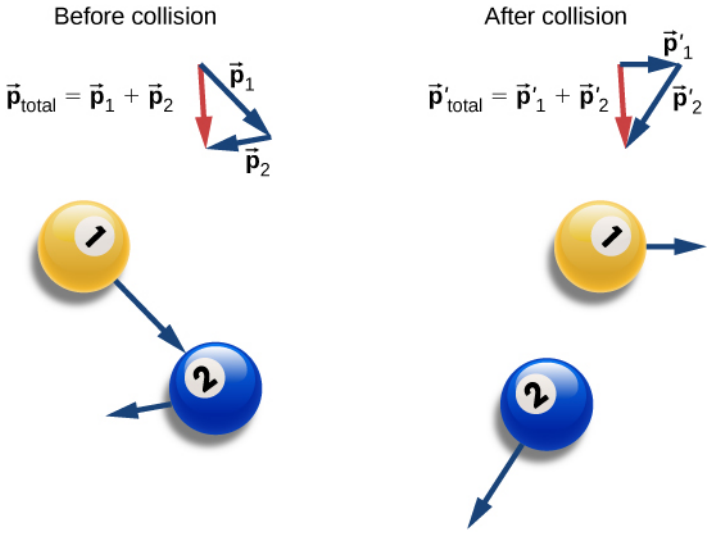


Figure 9.14 Before the collision, the two billiard balls travel with momenta $\vec{\mathbf{p}}_1$ and $\vec{\mathbf{p}}_2$. The total momentum of the system is the sum of these, as shown by the red vector labeled $\vec{\mathbf{p}}_{\text{total}}$ on the left. After the collision, the two billiard balls travel with different momenta $\vec{\mathbf{p}}'_1$ and $\vec{\mathbf{p}}'_2$. The total momentum, however, has not changed, as shown by the red vector arrow $\vec{\mathbf{p}}'_{\text{total}}$ on the right.

Generalizing this result to N objects, we obtain

$$\begin{aligned} \vec{\mathbf{p}}_1 + \vec{\mathbf{p}}_2 + \vec{\mathbf{p}}_3 + \cdots + \vec{\mathbf{p}}_N &= \text{constant} \\ \sum_{j=1}^{N} \vec{\mathbf{p}}_j &= \text{constant}. \end{aligned} \qquad 9.17$$

Equation 9.17 is the definition of the total (or net) momentum of a system of N interacting objects, along with the statement that the total momentum of a system of objects is constant in time—or better, is conserved.

Conservation Laws

If the value of a physical quantity is constant in time, we say that the quantity is conserved.

Requirements for Momentum Conservation

There is a complication, however. A system must meet two requirements for its momentum to be conserved:

1. *The mass of the system must remain constant during the interaction.*
   As the objects interact (apply forces on each other), they may *transfer* mass from one to another; but any mass one object gains is balanced by the loss of that mass from another. The total mass of the system of objects, therefore, remains unchanged as time passes:
   $$\left[\frac{dm}{dt}\right]_{\text{system}} = 0.$$
2. *The net external force on the system must be zero.*
   As the objects collide, or explode, and move around, they exert forces on each other. However, all of these forces are internal to the system, and thus each of these internal forces is balanced by another internal force that is equal in magnitude and opposite in sign. As a result, the change in momentum caused by each internal force is cancelled by another momentum change that is equal in magnitude and opposite in direction. Therefore, internal forces cannot change the total momentum of a system because the changes sum to zero. However, if there is some external force that acts on all of the objects (gravity, for example, or friction), then this force changes the momentum of the system as a whole; that is to say, the momentum of the system is changed by the external force. Thus, for the momentum of the system to be conserved, we must have

$$\vec{\mathbf{F}}_{\mathbf{ext}} = \vec{\mathbf{0}}.$$

A system of objects that meets these two requirements is said to be a **closed system** (also called an isolated system). Thus, the more compact way to express this is shown below.

Law of Conservation of Momentum

The total momentum of a closed system is conserved:

$$\sum_{j=1}^{N} \vec{\mathbf{p}}_{\mathbf{j}} = \text{constant}.$$

This statement is called the **Law of Conservation of Momentum**. Along with the conservation of energy, it is one of the foundations upon which all of physics stands. All our experimental evidence supports this statement: from the motions of galactic clusters to the quarks that make up the proton and the neutron, and at every scale in between. *In a closed system, the total momentum never changes.*

Note that there absolutely *can* be external forces acting on the system; but for the system's momentum to remain constant, these external forces have to cancel, so that the *net* external force is zero. Billiard balls on a table all have a weight force acting on them, but the weights are balanced (canceled) by the normal forces, so there is no *net* force.

The Meaning of 'System'

A **system** (mechanical) is the collection of objects in whose motion (kinematics and dynamics) you are interested. If you are analyzing the bounce of a ball on the ground, you are probably only interested in the motion of the ball, and not of Earth; thus, the ball is your system. If you are analyzing a car crash, the two cars together compose your system (Figure 9.15).

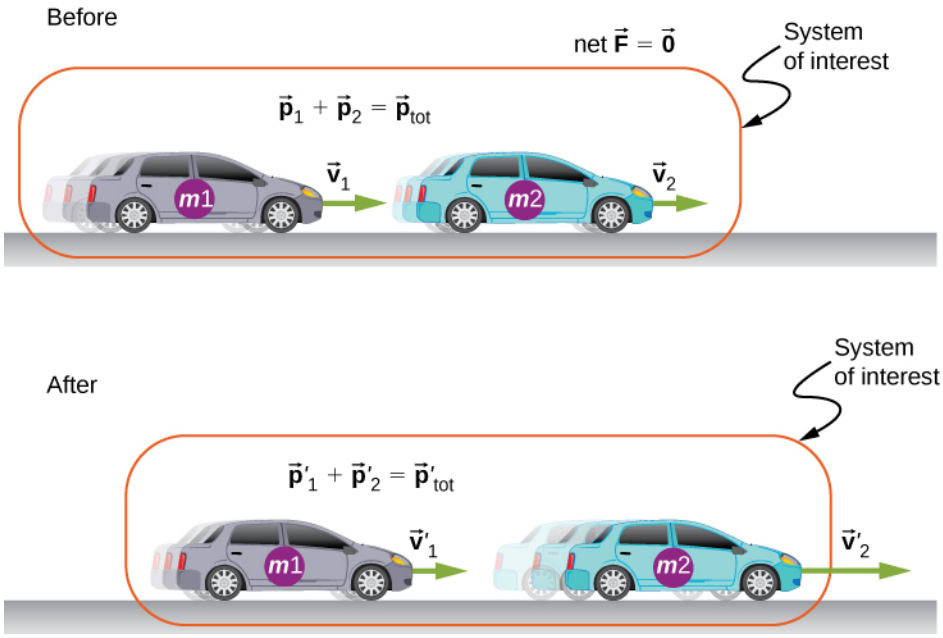


Figure 9.15 The two cars together form the system that is to be analyzed. It is important to remember that the contents (the mass) of the system do not change before, during, or after the objects in the system interact.

PROBLEM-SOLVING STRATEGY

Conservation of Momentum

Using conservation of momentum requires four basic steps. The first step is crucial:

1. Identify a closed system (total mass is constant, no net external force acts on the system).
2. Write down an expression representing the total momentum of the system before the "event" (explosion or collision).
3. Write down an expression representing the total momentum of the system after the "event."
4. Set these two expressions equal to each other, and solve this equation for the desired quantity.

EXAMPLE 9.6

Colliding Carts

Two carts in a physics lab roll on a level track, with negligible friction. These carts have small magnets at their ends, so that when they collide, they stick together (Figure 9.16). The first cart has a mass of 675 grams and is rolling at 0.75 m/s to the right; the second has a mass of 500 grams and is rolling at 1.33 m/s, also to the right. After the collision, what is the velocity of the two joined carts?

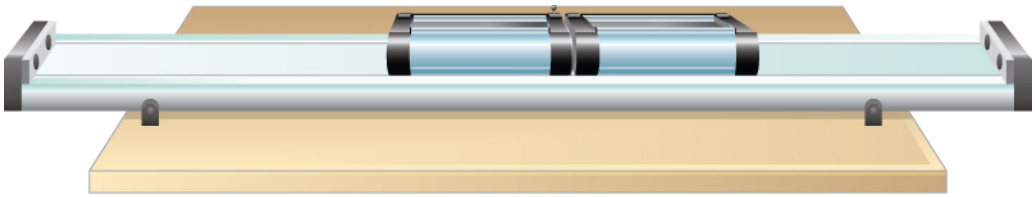


Figure 9.16 Two lab carts collide and stick together after the collision.

Strategy

We have a collision. We're given masses and initial velocities; we're asked for the final velocity. This all suggests using conservation of momentum as a method of solution. However, we can only use it if we have a closed system. So we need to be sure that the system we choose has no net external force on it, and that its mass is not changed by the collision.

Defining the system to be the two carts meets the requirements for a closed system: The combined mass of the two carts certainly doesn't change, and while the carts definitely exert forces on each other, those forces are internal to the system, so they do not change the momentum of the system as a whole. In the vertical direction, the weights of the carts are canceled by the normal forces on the carts from the track.

Solution

Conservation of momentum is

$$\vec{\mathbf{p}}_\mathbf{f} = \vec{\mathbf{p}}_\mathbf{i}.$$

Define the direction of their initial velocity vectors to be the $+x$-direction. The initial momentum is then

$$\vec{\mathbf{p}}_\mathbf{i} = m_1 v_1 \hat{\mathbf{i}} + m_2 v_2 \hat{\mathbf{i}}.$$

The final momentum of the now-linked carts is

$$\vec{\mathbf{p}}_\mathbf{f} = (m_1 + m_2)\vec{\mathbf{v}}_\mathbf{f}.$$

Equating:

$$\begin{aligned}(m_1 + m_2)\vec{\mathbf{v}}_\mathbf{f} &= m_1 v_1 \hat{\mathbf{i}} + m_2 v_2 \hat{\mathbf{i}} \\ \vec{\mathbf{v}}_\mathbf{f} &= \left(\frac{m_1 v_1 + m_2 v_2}{m_1 + m_2}\right)\hat{\mathbf{i}}.\end{aligned}$$

Substituting the given numbers:

$$\begin{aligned}\vec{\mathbf{v}}_{\mathbf{f}} &= \left[\frac{(0.675\text{ kg})(0.75\text{ m/s})+(0.5\text{ kg})(1.33\text{ m/s})}{1.175\text{ kg}}\right]\hat{\mathbf{i}} \\ &= (0.997\text{ m/s})\,\hat{\mathbf{i}}.\end{aligned}$$

Significance

The principles that apply here to two laboratory carts apply identically to all objects of whatever type or size. Even for photons, the concepts of momentum and conservation of momentum are still crucially important even at that scale. (Since they are massless, the momentum of a photon is defined very differently from the momentum of ordinary objects. You will learn about this when you study quantum physics.)

CHECK YOUR UNDERSTANDING 9.3

Suppose the second, smaller cart had been initially moving to the left. What would the sign of the final velocity have been in this case?

EXAMPLE 9.7

A Bouncing Superball

A superball of mass 0.25 kg is dropped from rest from a height of $h = 1.50$ m above the floor. It bounces with no loss of energy and returns to its initial height (Figure 9.17).

a. What is the superball's change of momentum during its bounce on the floor?
b. What was Earth's change of momentum due to the ball colliding with the floor?
c. What was Earth's change of velocity as a result of this collision?

(This example shows that you have to be careful about defining your system.)

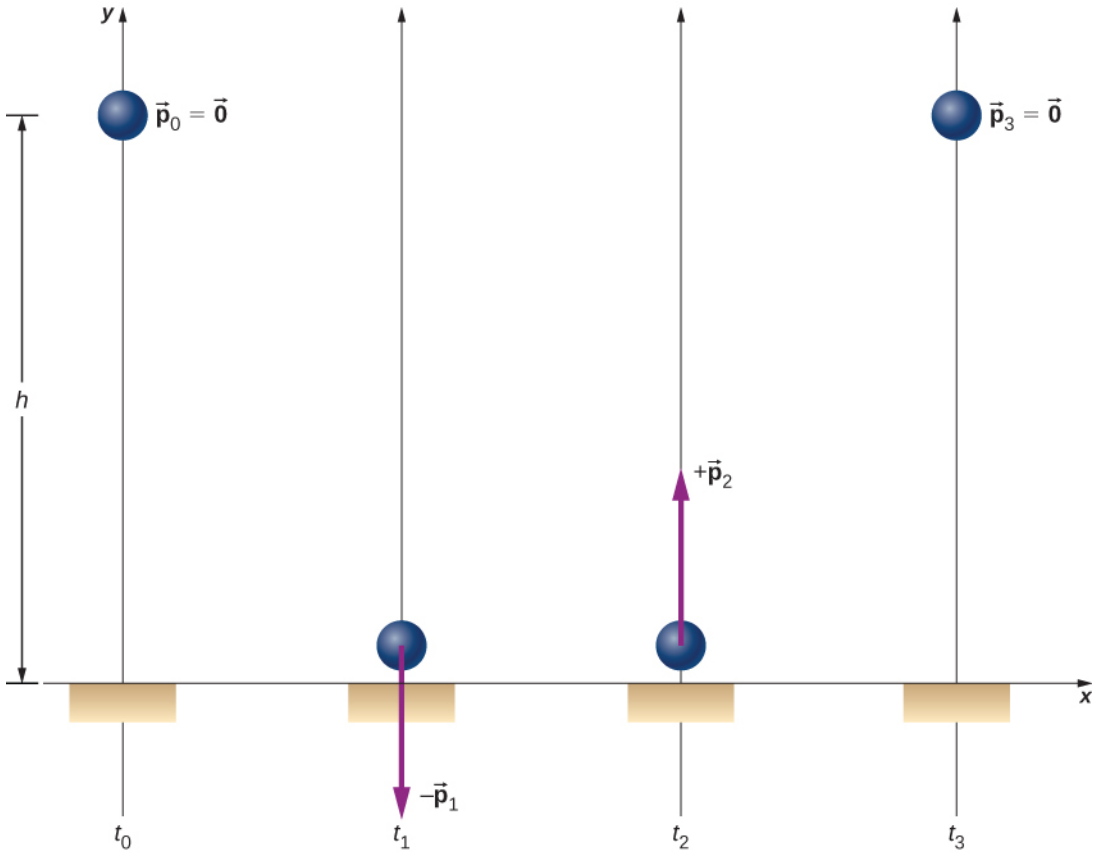


Figure 9.17 A superball is dropped to the floor (t_0), hits the floor (t_1), bounces (t_2), and returns to its initial height (t_3).

Strategy

Since we are asked only about the ball's change of momentum, we define our system to be the ball. But this is clearly not a closed system; gravity applies a downward force on the ball while it is falling, and the normal force from the floor applies a force during the bounce. Thus, we cannot use conservation of momentum as a strategy. Instead, we simply determine the ball's momentum just before it collides with the floor and just after, and calculate the difference. We have the ball's mass, so we need its velocities.

Solution

a. Since this is a one-dimensional problem, we use the scalar form of the equations. Let:
   - p_0 = the magnitude of the ball's momentum at time t_0, the moment it was released; since it was dropped from rest, this is zero.
   - p_1 = the magnitude of the ball's momentum at time t_1, the instant just before it hits the floor.
   - p_2 = the magnitude of the ball's momentum at time t_2, just after it loses contact with the floor after the bounce.

The ball's change of momentum is

$$\begin{aligned}\Delta\vec{\mathbf{p}} &= \vec{\mathbf{p}}_2 - \vec{\mathbf{p}}_1 \\ &= p_2\hat{\mathbf{j}} - \left(-p_1\hat{\mathbf{j}}\right) \\ &= (p_2 + p_1)\,\hat{\mathbf{j}}.\end{aligned}$$

Its velocity just before it hits the floor can be determined from either conservation of energy or kinematics. We use kinematics here; you should re-solve it using conservation of energy and confirm you get the same result.

We want the velocity just before it hits the ground (at time t_1). We know its initial velocity $v_0 = 0$ (at time t_0

), the height it falls, and its acceleration; we don't know the fall time. We could calculate that, but instead we use

$$\vec{\mathbf{v}}_1 = -\hat{\mathbf{j}}\sqrt{2gy} = -5.4\ \text{m/s}\hat{\mathbf{j}}.$$

Thus the ball has a momentum of

$$\begin{aligned}\vec{\mathbf{p}}_1 &= -(0.25\ \text{kg})\left(-5.4\ \text{m/s}\hat{\mathbf{j}}\right)\\ &= -(1.4\ \text{kg}\cdot\text{m/s})\,\hat{\mathbf{j}}.\end{aligned}$$

We don't have an easy way to calculate the momentum after the bounce. Instead, we reason from the symmetry of the situation.

Before the bounce, the ball starts with zero velocity and falls 1.50 m under the influence of gravity, achieving some amount of momentum just before it hits the ground. On the return trip (after the bounce), it starts with some amount of momentum, rises the same 1.50 m it fell, and ends with zero velocity. Thus, the motion after the bounce was the mirror image of the motion before the bounce. From this symmetry, it must be true that the ball's momentum after the bounce must be equal and opposite to its momentum before the bounce. (This is a subtle but crucial argument; make sure you understand it before you go on.) Therefore,

$$\vec{\mathbf{p}}_2 = -\vec{\mathbf{p}}_1 = +(1.4\ \text{kg}\cdot\text{m/s})\,\hat{\mathbf{j}}.$$

Thus, the ball's change of momentum during the bounce is

$$\begin{aligned}\Delta\vec{\mathbf{p}} &= \vec{\mathbf{p}}_2 - \vec{\mathbf{p}}_1\\ &= (1.4\ \text{kg}\cdot\text{m/s})\,\hat{\mathbf{j}} - (-1.4\ \text{kg}\cdot\text{m/s})\,\hat{\mathbf{j}}\\ &= +(2.8\ \text{kg}\cdot\text{m/s})\,\hat{\mathbf{j}}.\end{aligned}$$

b. What was Earth's change of momentum due to the ball colliding with the floor?
Your instinctive response may well have been either "zero; the Earth is just too massive for that tiny ball to have affected it" or possibly, "more than zero, but utterly negligible." But no—if we re-define our system to be the Superball + Earth, then this system is closed (neglecting the gravitational pulls of the Sun, the Moon, and the other planets in the solar system), and therefore the total change of momentum of this new system must be zero. Therefore, Earth's change of momentum is exactly the same magnitude:

$$\Delta\vec{\mathbf{p}}_{\text{Earth}} = -2.8\ \text{kg}\cdot\text{m/s}\hat{\mathbf{j}}.$$

c. What was Earth's change of velocity as a result of this collision?
This is where your instinctive feeling is probably correct:

$$\begin{aligned}\Delta\vec{\mathbf{v}}_{\text{Earth}} &= \frac{\Delta\vec{\mathbf{p}}_{\text{Earth}}}{M_{\text{Earth}}}\\ &= -\frac{2.8\ \text{kg}\cdot\text{m/s}}{5.97\times10^{24}\ \text{kg}}\hat{\mathbf{j}}\\ &= -\left(4.7\times10^{-25}\ \text{m/s}\right)\hat{\mathbf{j}}.\end{aligned}$$

This change of Earth's velocity *is* utterly negligible.

Significance

It is important to realize that the answer to part (c) is not a velocity; it is a change of velocity, which is a very different thing. Nevertheless, to give you a feel for just how small that change of velocity is, suppose you were moving with a velocity of 4.7×10^{-25} m/s. At this speed, it would take you about 7 million years to travel a distance equal to the diameter of a hydrogen atom.

CHECK YOUR UNDERSTANDING 9.4

Would the ball's change of momentum have been larger, smaller, or the same, if it had collided with the floor and stopped (without bouncing)?

Would the ball's change of momentum have been larger, smaller, or the same, if it had collided with the floor

and stopped (without bouncing)?

EXAMPLE 9.8

Ice Hockey 1

Two hockey pucks of identical mass are on a flat, horizontal ice hockey rink. The red puck is motionless; the blue puck is moving at 2.5 m/s to the left (Figure 9.18). It collides with the motionless red puck. The pucks have a mass of 15 g. After the collision, the red puck is moving at 2.5 m/s, to the left. What is the final velocity of the blue puck?

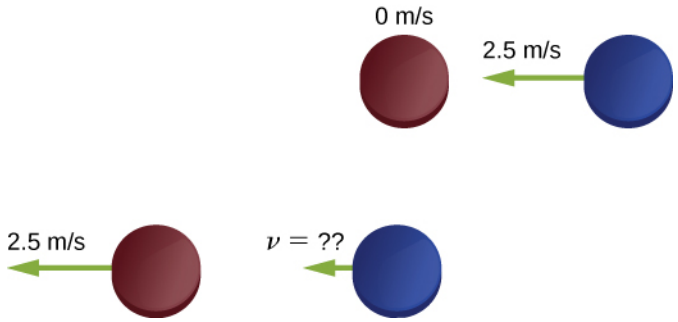


Figure 9.18 Two identical hockey pucks colliding. The top diagram shows the pucks the instant before the collision, and the bottom diagram show the pucks the instant after the collision. The net external force is zero.

Strategy

We're told that we have two colliding objects, we're told the masses and initial velocities, and one final velocity; we're asked for both final velocities. Conservation of momentum seems like a good strategy. Define the system to be the two pucks; there's no friction, so we have a closed system.

Before you look at the solution, what do you think the answer will be?

The blue puck final velocity will be:

- zero
- 2.5 m/s to the left
- 2.5 m/s to the right
- 1.25 m/s to the left
- 1.25 m/s to the right
- something else

Solution

Define the $+x$-direction to point to the right. Conservation of momentum then reads

$$\begin{aligned} \vec{\mathbf{p}}_{\mathrm{f}} &= \vec{\mathbf{p}}_{\mathrm{i}} \\ mv_{\mathrm{r_f}}\,\hat{\mathbf{i}} + mv_{\mathrm{b_f}}\,\hat{\mathbf{i}} &= mv_{\mathrm{r_i}}\,\hat{\mathbf{i}} - mv_{\mathrm{b_i}}\,\hat{\mathbf{i}}. \end{aligned}$$

Before the collision, the momentum of the system is entirely and only in the blue puck. Thus,

$$\begin{aligned} mv_{\mathrm{r_f}}\,\hat{\mathbf{i}} + mv_{\mathrm{b_f}}\,\hat{\mathbf{i}} &= -mv_{\mathrm{b_i}}\,\hat{\mathbf{i}} \\ v_{\mathrm{r_f}}\,\hat{\mathbf{i}} + v_{\mathrm{b_f}}\,\hat{\mathbf{i}} &= -v_{\mathrm{b_i}}\,\hat{\mathbf{i}}. \end{aligned}$$

(Remember that the masses of the pucks are equal.) Substituting numbers:

$$\begin{aligned} -(2.5\ \mathrm{m/s})\,\hat{\mathbf{i}} + \vec{\mathbf{v}}_{\mathrm{b_f}} &= -(2.5\ \mathrm{m/s})\,\hat{\mathbf{i}} \\ \vec{\mathbf{v}}_{\mathrm{b_f}} &= 0. \end{aligned}$$

Significance

Evidently, the two pucks simply exchanged momentum. The blue puck transferred all of its momentum to the red puck. In fact, this is what happens in similar collision where $m_1 = m_2$.

CHECK YOUR UNDERSTANDING 9.5

Even if there were some friction on the ice, it is still possible to use conservation of momentum to solve this problem, but you would need to impose an additional condition on the problem. What is that additional condition?

EXAMPLE 9.9

Landing of *Philae*

On November 12, 2014, the European Space Agency successfully landed a probe named *Philae* on Comet 67P/Churyumov/Gerasimenko (Figure 9.19). During the landing, however, the probe actually landed three times, because it bounced twice. Let's calculate how much the comet's speed changed as a result of the first bounce.

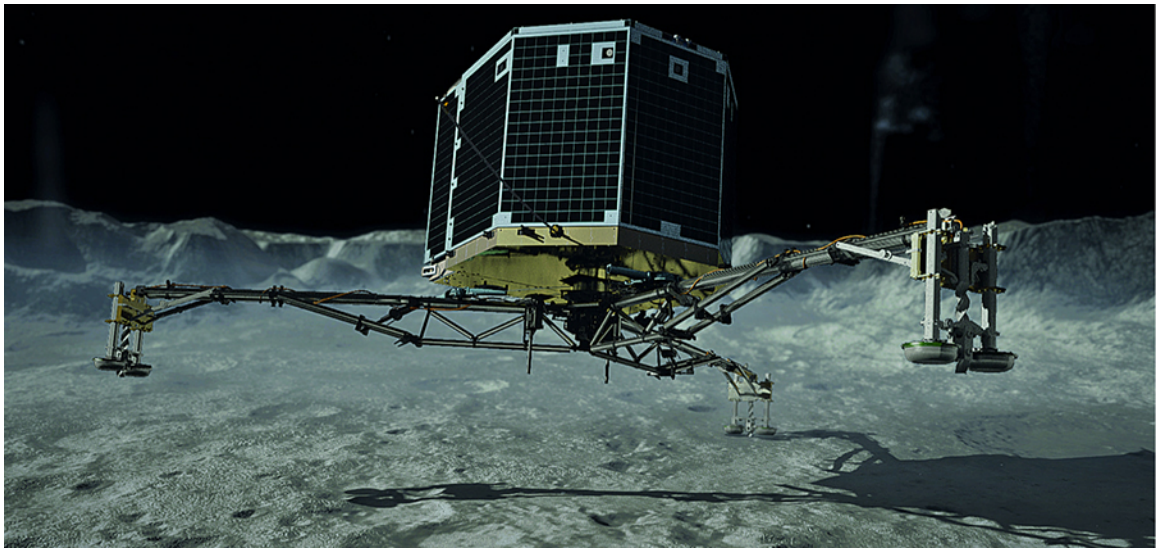


Figure 9.19 An artist's rendering of *Philae* landing on a comet. (credit: modification of work by "DLR German Aerospace Center"/Flickr)

Let's define upward to be the $+y$-direction, perpendicular to the surface of the comet, and $y = 0$ to be at the surface of the comet. Here's what we know:

- The mass of Comet 67P: $M_c = 1.0 \times 10^{13}$ kg
- The acceleration due to the comet's gravity: $\vec{\mathbf{a}} = -\left(5.0 \times 10^{-3} \text{ m/s}^2\right)\hat{\mathbf{j}}$
- *Philae's* mass: $M_p = 96$ kg
- Initial touchdown speed: $\vec{\mathbf{v}}_1 = -(1.0 \text{ m/s})\,\hat{\mathbf{j}}$
- Initial upward speed due to first bounce: $\vec{\mathbf{v}}_2 = (0.38 \text{ m/s})\,\hat{\mathbf{j}}$
- Landing impact time: $\Delta t = 1.3$ s

Strategy

We're asked for how much the comet's speed changed, but we don't know much about the comet, beyond its mass and the acceleration its gravity causes. However, we *are* told that the *Philae* lander collides with (lands on) the comet, and bounces off of it. A collision suggests momentum as a strategy for solving this problem.

If we define a system that consists of both *Philae* and Comet 67/P, then there is no net external force on this system, and thus the momentum of this system is conserved. (We'll neglect the gravitational force of the sun.)

Thus, if we calculate the change of momentum of the lander, we automatically have the change of momentum of the comet. Also, the comet's change of velocity is directly related to its change of momentum as a result of the lander "colliding" with it.

Solution

Let $\vec{\mathbf{p}}_1$ be *Philae's* momentum at the moment just before touchdown, and $\vec{\mathbf{p}}_2$ be its momentum just after the first bounce. Then its momentum just before landing was

$$\vec{\mathbf{p}}_1 = M_p\vec{\mathbf{v}}_1 = (96\text{ kg})\left(-1.0\text{ m/s}\hat{\mathbf{j}}\right) = -(96\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}}$$

and just after was

$$\vec{\mathbf{p}}_2 = M_p\vec{\mathbf{v}}_2 = (96\text{ kg})\left(+0.38\text{ m/s}\hat{\mathbf{j}}\right) = (36.5\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}}.$$

Therefore, the lander's change of momentum during the first bounce is

$$\begin{aligned}\Delta\vec{\mathbf{p}} &= \vec{\mathbf{p}}_2 - \vec{\mathbf{p}}_1 \\ &= (36.5\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}} - \left(-96.0\text{ kg}\cdot\text{m/s}\hat{\mathbf{j}}\right) = (133\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}}\end{aligned}$$

Notice how important it is to include the negative sign of the initial momentum.

Now for the comet. Since momentum of the system must be conserved, the *comet's* momentum changed by exactly the negative of this:

$$\Delta\vec{\mathbf{p}}_\mathbf{c} = -\Delta\vec{\mathbf{p}} = -(133\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}}.$$

Therefore, its change of velocity is

$$\Delta\vec{\mathbf{v}}_\mathbf{c} = \frac{\Delta\vec{\mathbf{p}}_\mathbf{c}}{M_c} = \frac{-(133\text{ kg}\cdot\text{m/s})\,\hat{\mathbf{j}}}{1.0\times10^{13}\text{ kg}} = -\left(1.33\times10^{-11}\text{ m/s}\right)\hat{\mathbf{j}}.$$

Significance

This is a very small change in velocity, about a thousandth of a billionth of a meter per second. Crucially, however, it is *not* zero.

CHECK YOUR UNDERSTANDING 9.6

The changes of momentum for *Philae* and for Comet 67/P were equal (in magnitude). Were the impulses experienced by *Philae* and the comet equal? How about the forces? How about the changes of kinetic energies?

9.4 Types of Collisions

Learning Objectives

By the end of this section, you will be able to:

- Identify the type of collision
- Correctly label a collision as elastic or inelastic
- Use kinetic energy along with momentum and impulse to analyze a collision

Although momentum is conserved in all interactions, not all interactions (collisions or explosions) are the same. The possibilities include:

- A single object can explode into multiple objects (explosions).
- Multiple objects can collide and stick together, forming a single object (inelastic).
- Multiple objects can collide and bounce off of each other, remaining as multiple objects (elastic). If they do bounce off each other, then they may recoil at the same speeds with which they approached each other before the collision, or they may move off more slowly.

It's useful, therefore, to categorize different types of interactions, according to how the interacting objects

move before and after the interaction.

Explosions

The first possibility is that a single object may break apart into two or more pieces. An example of this is a firecracker, or a bow and arrow, or a rocket rising through the air toward space. These can be difficult to analyze if the number of fragments after the collision is more than about three or four; but nevertheless, the total momentum of the system before and after the explosion is identical.

Note that if the object is initially motionless, then the system (which is just the object) has no momentum and no kinetic energy. After the explosion, the net momentum of all the pieces of the object must sum to zero (since the momentum of this closed system cannot change). However, the system *will* have a great deal of kinetic energy after the explosion, although it had none before. Thus, we see that, although the momentum of the system is conserved in an explosion, the kinetic energy of the system most definitely is not; it increases. This interaction—one object becoming many, with an increase of kinetic energy of the system—is called an **explosion**.

Where does the energy come from? Does conservation of energy still hold? Yes; some form of potential energy is converted to kinetic energy. In the case of gunpowder burning and pushing out a bullet, chemical potential energy is converted to kinetic energy of the bullet, and of the recoiling gun. For a bow and arrow, it is elastic potential energy in the bowstring.

Inelastic

The second possibility is the reverse: that two or more objects collide with each other and stick together, thus (after the collision) forming one single composite object. The total mass of this composite object is the sum of the masses of the original objects, and the new single object moves with a velocity dictated by the conservation of momentum. However, it turns out again that, although the total momentum of the system of objects remains constant, the kinetic energy doesn't; but this time, the kinetic energy decreases. This type of collision is called **inelastic**.

Any collision where the objects stick together will result in the maximum loss of kinetic energy (i.e., K_f will be a minimum).

Such a collision is called **perfectly inelastic**. In the extreme case, multiple objects collide, stick together, and remain motionless after the collision. Since the objects are all motionless after the collision, the final kinetic energy is also zero; therefore, the loss of kinetic energy is a maximum.

- If $0 < K_\text{f} < K_\text{i}$, the collision is inelastic.
- If K_f is the lowest energy, or the energy lost by both objects is the most, the collision is perfectly inelastic (objects stick together).
- If $K_\text{f} = K_\text{i}$, the collision is elastic.

Elastic

The extreme case on the other end is if two or more objects approach each other, collide, and bounce off each other, moving away from each other at the same relative speed at which they approached each other. In this case, the total kinetic energy of the system is conserved. Such an interaction is called **elastic**.

In any interaction of a closed system of objects, the total momentum of the system is conserved ($\vec{\mathbf{p}}_f = \vec{\mathbf{p}}_\text{i}$) but the kinetic energy may not be:

- If $0 < K_\text{f} < K_\text{i}$, the collision is inelastic.
- If $K_\text{f} = 0$, the collision is perfectly inelastic.
- If $K_\text{f} = K_\text{i}$, the collision is elastic.
- If $K_\text{f} > K_\text{i}$, the interaction is an explosion.

The point of all this is that, in analyzing a collision or explosion, you can use both momentum and kinetic energy.

PROBLEM-SOLVING STRATEGY

Collisions


A closed system always conserves momentum; it might also conserve kinetic energy, but very often it doesn't. Energy-momentum problems confined to a plane (as ours are) usually have two unknowns. Generally, this approach works well:

1. Define a closed system.
2. Write down the expression for conservation of momentum.
3. If kinetic energy is conserved, write down the expression for conservation of kinetic energy; if not, write down the expression for the change of kinetic energy.
4. You now have two equations in two unknowns, which you solve by standard methods.

EXAMPLE 9.10

Formation of a Deuteron

A proton (mass 1.67×10^{-27} kg) collides with a neutron (with essentially the same mass as the proton) to form a particle called a *deuteron*. What is the velocity of the deuteron if it is formed from a proton moving with velocity 7.0×10^6 m/s to the left and a neutron moving with velocity 4.0×10^6 m/s to the right?

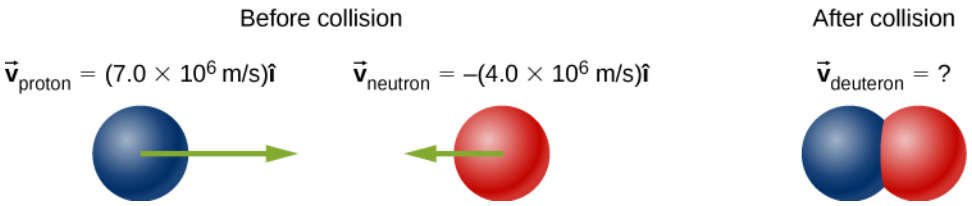

Strategy

Define the system to be the two particles. This is a collision, so we should first identify what kind. Since we are told the two particles form a single particle after the collision, this means that the collision is perfectly inelastic. Thus, kinetic energy is not conserved, but momentum is. Thus, we use conservation of momentum to determine the final velocity of the system.

Solution

Treat the two particles as having identical masses M. Use the subscripts p, n, and d for proton, neutron, and deuteron, respectively. This is a one-dimensional problem, so we have

$$Mv_\text{p} - Mv_\text{n} = 2Mv_\text{d}.$$

The masses divide out:

$$\begin{aligned} v_\text{p} - v_\text{n} &= 2v_\text{d} \\ 7.0 \times 10^6 \text{ m/s} - 4.0 \times 10^6 \text{ m/s} &= 2v_\text{d} \\ v_\text{d} &= 1.5 \times 10^6 \text{ m/s}. \end{aligned}$$

The velocity is thus $\vec{v}_\text{d} = \left(1.5 \times 10^6 \text{ m/s}\right)\hat{i}$.

Significance

This is essentially how particle colliders like the Large Hadron Collider work: They accelerate particles up to very high speeds (large momenta), but in opposite directions. This maximizes the creation of so-called "daughter particles."

EXAMPLE 9.11

Ice Hockey 2

(This is a variation of an earlier example.)

Two ice hockey pucks of different masses are on a flat, horizontal hockey rink. The red puck has a mass of 15 grams, and is motionless; the blue puck has a mass of 12 grams, and is moving at 2.5 m/s to the left. It collides with the motionless red puck (Figure 9.20). If the collision is perfectly elastic, what are the final velocities of the two pucks?

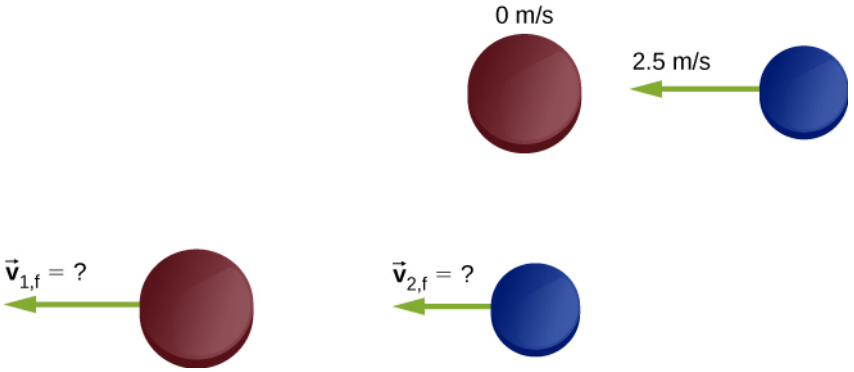


Figure 9.20 Two different hockey pucks colliding. The top diagram shows the pucks the instant before the collision, and the bottom diagram show the pucks the instant after the collision. The net external force is zero.

Strategy

We're told that we have two colliding objects, and we're told their masses and initial velocities; we're asked for both final velocities. Conservation of momentum seems like a good strategy; define the system to be the two pucks. There is no friction, so we have a closed system. We have two unknowns (the two final velocities), but only one equation. The comment about the collision being perfectly elastic is the clue; it suggests that kinetic energy is also conserved in this collision. That gives us our second equation.

The initial momentum and initial kinetic energy of the system resides entirely and only in the second puck (the blue one); the collision transfers some of this momentum and energy to the first puck.

Solution

Conservation of momentum, in this case, reads

$$\begin{aligned} p_{\text{i}} &= p_{\text{f}} \\ m_2 v_{2,\text{i}} &= m_1 v_{1,\text{f}} + m_2 v_{2,\text{f}}. \end{aligned}$$

Conservation of kinetic energy reads

$$\begin{aligned} K_{\text{i}} &= K_{\text{f}} \\ \tfrac{1}{2} m_2 v_{2,\text{i}}^2 &= \tfrac{1}{2} m_1 v_{1,\text{f}}^2 + \tfrac{1}{2} m_2 v_{2,\text{f}}^2. \end{aligned}$$

There are our two equations in two unknowns. The algebra is tedious but not terribly difficult; you definitely should work it through. The solution is

$$\begin{aligned} v_{1,\text{f}} &= \frac{(m_1 - m_2) v_{1,\text{i}} + 2 m_2 v_{2,\text{i}}}{m_1 + m_2} \\ v_{2\text{f}} &= \frac{(m_2 - m_1) v_{2,\text{i}} + 2 m_1 v_{1,\text{i}}}{m_1 + m_2}. \end{aligned}$$

Substituting the given numbers, we obtain

$$v_{1,\mathrm{f}} = 2.22\ \tfrac{\mathrm{m}}{\mathrm{s}}$$
$$v_{2,\mathrm{f}} = -0.28\ \tfrac{\mathrm{m}}{\mathrm{s}}.$$

Significance

Notice that after the collision, the blue puck is moving to the right; its direction of motion was reversed. The red puck is now moving to the left.

CHECK YOUR UNDERSTANDING 9.7

There is a second solution to the system of equations solved in this example (because the energy equation is quadratic): $v_{1,\mathrm{f}} = -2.5$ m/s, $v_{2,\mathrm{f}} = 0$. This solution is unacceptable on physical grounds; what's wrong with it?

EXAMPLE 9.12

Thor vs. Iron Man

The 2012 movie "The Avengers" has a scene where Iron Man and Thor fight. At the beginning of the fight, Thor throws his hammer at Iron Man, hitting him and throwing him slightly up into the air and against a small tree, which breaks. From the video, Iron Man is standing still when the hammer hits him. The distance between Thor and Iron Man is approximately 10 m, and the hammer takes about 1 s to reach Iron Man after Thor releases it. The tree is about 2 m behind Iron Man, which he hits in about 0.75 s. Also from the video, Iron Man's trajectory to the tree is very close to horizontal. Assuming Iron Man's total mass is 200 kg:

a. Estimate the mass of Thor's hammer
b. Estimate how much kinetic energy was lost in this collision

Strategy

After the collision, Thor's hammer is in contact with Iron Man for the entire time, so this is a perfectly inelastic collision. Thus, with the correct choice of a closed system, we expect momentum is conserved, but not kinetic energy. We use the given numbers to estimate the initial momentum, the initial kinetic energy, and the final kinetic energy. Because this is a one-dimensional problem, we can go directly to the scalar form of the equations.

Solution

a. First, we posit conservation of momentum. For that, we need a closed system. The choice here is the system (hammer + Iron Man), from the time of collision to the moment just before Iron Man and the hammer hit the tree. Let:
   - M_{H} = mass of the hammer
   - M_{I} = mass of Iron Man
   - v_{H} = velocity of the hammer before hitting Iron Man
   - v = combined velocity of Iron Man + hammer after the collision

   Again, Iron Man's initial velocity was zero. Conservation of momentum here reads:

   $$M_{\mathrm{H}} v_{\mathrm{H}} = (M_{\mathrm{H}} + M_{\mathrm{I}})\, v.$$

   We are asked to find the mass of the hammer, so we have

$$\begin{aligned} M_{\mathrm{H}} v_{\mathrm{H}} &= M_{\mathrm{H}} v + M_{\mathrm{I}} v \\ M_{\mathrm{H}} (v_{\mathrm{H}} - v) &= M_{\mathrm{I}} v \\ M_{\mathrm{H}} &= \frac{M_{\mathrm{I}} v}{v_{\mathrm{H}} - v} \\ &= \frac{(200\ \mathrm{kg})\left(\frac{2\ \mathrm{m}}{0.75\ \mathrm{s}}\right)}{10\ \frac{\mathrm{m}}{\mathrm{s}} - \left(\frac{2\ \mathrm{m}}{0.75\ \mathrm{s}}\right)} \\ &= 73\ \mathrm{kg}. \end{aligned}$$

Considering the uncertainties in our estimates, this should be expressed with just one significant figure; thus, $M_{\mathrm{H}} = 7 \times 10^1$ kg.

b. The initial kinetic energy of the system, like the initial momentum, is all in the hammer:

$$\begin{aligned} K_{\mathrm{i}} &= \tfrac{1}{2} M_{\mathrm{H}} v_{\mathrm{H}}^2 \\ &= \tfrac{1}{2}(70\ \mathrm{kg})\,(10\ \mathrm{m/s})^2 \\ &= 3500\ \mathrm{J}. \end{aligned}$$

After the collision,

$$\begin{aligned} K_{\mathrm{f}} &= \tfrac{1}{2}(M_{\mathrm{H}} + M_{\mathrm{I}})\, v^2 \\ &= \tfrac{1}{2}(70\ \mathrm{kg} + 200\ \mathrm{kg})\,(2.67\ \mathrm{m/s})^2 \\ &= 960\ \mathrm{J}. \end{aligned}$$

Thus, there was a loss of $3500\ \mathrm{J} - 960\ \mathrm{J} = 2540\ \mathrm{J}$.

Significance

From other scenes in the movie, Thor apparently can control the hammer's velocity with his mind. It is possible, therefore, that he mentally causes the hammer to maintain its initial velocity of 10 m/s while Iron Man is being driven backward toward the tree. If so, this would represent an external force on our system, so it would not be closed. Thor's mental control of his hammer is beyond the scope of this book, however.

EXAMPLE 9.13

Analyzing a Car Crash

At a stoplight, a large truck (3000 kg) collides with a motionless small car (1200 kg). The truck comes to an instantaneous stop; the car slides straight ahead, coming to a stop after sliding 10 meters. The measured coefficient of friction between the car's tires and the road was 0.62. How fast was the truck moving at the moment of impact?

Strategy

At first it may seem we don't have enough information to solve this problem. Although we know the initial speed of the car, we don't know the speed of the truck (indeed, that's what we're asked to find), so we don't know the initial momentum of the system. Similarly, we know the final speed of the truck, but not the speed of the car immediately after impact. The fact that the car eventually slid to a speed of zero doesn't help with the final momentum, since an external friction force caused that. Nor can we calculate an impulse, since we don't know the collision time, or the amount of time the car slid before stopping. A useful strategy is to impose a restriction on the analysis.

Suppose we define a system consisting of just the truck and the car. The momentum of this system isn't conserved, because of the friction between the car and the road. But if we *could* find the speed of the car the instant after impact—before friction had any measurable effect on the car—then we could consider the momentum of the system to be conserved, with that restriction.

Can we find the final speed of the car? Yes; we invoke the work-kinetic energy theorem.

Solution

First, define some variables. Let:

- M_c and M_T be the masses of the car and truck, respectively
- $v_{T,i}$ and$v_{T,f}$ be the velocities of the truck before and after the collision, respectively
- $v_{c,i}$ and$v_{c,f}$ Z be the velocities of the car before and after the collision, respectively
- K_i and K_f be the kinetic energies of the car immediately after the collision, and after the car has stopped sliding (so $K_f = 0$).
- d be the distance the car slides after the collision before eventually coming to a stop.

Since we actually want the initial speed of the truck, and since the truck is not part of the work-energy calculation, let's start with conservation of momentum. For the car + truck system, conservation of momentum reads

$$\begin{aligned} p_i &= p_f \\ M_c v_{c,i} + M_T v_{T,i} &= M_c v_{c,f} + M_T v_{T,f}. \end{aligned}$$

Since the car's initial velocity was zero, as was the truck's final velocity, this simplifies to

$$v_{T,i} = \frac{M_c}{M_T} v_{c,f}.$$

So now we need the car's speed immediately after impact. Recall that

$$W = \Delta K$$

where

$$\begin{aligned} \Delta K &= K_f - K_i \\ &= 0 - \tfrac{1}{2} M_c v_{c,f}^2. \end{aligned}$$

Also,

$$W = \vec{\mathbf{F}} \cdot \vec{\mathbf{d}} = Fd\cos\theta.$$

The work is done over the distance the car slides, which we've called d. Equating:

$$Fd\cos\theta = -\frac{1}{2} M_c v_{c,f}^2.$$

Friction is the force on the car that does the work to stop the sliding. With a level road, the friction force is

$$F = \mu_k M_c g.$$

Since the angle between the directions of the friction force vector and the displacement d is $180°$, and $\cos(180°) = -1$, we have

$$-(\mu_k M_c g)\, d = -\frac{1}{2} M_c v_{c,f}^2$$

(Notice that the car's mass divides out; evidently the mass of the car doesn't matter.)

Solving for the car's speed immediately after the collision gives

$$v_{c,f} = \sqrt{2\mu_k g d}.$$

Substituting the given numbers:

$$\begin{aligned} v_{c,f} &= \sqrt{2(0.62)\left(9.81\ \tfrac{\text{m}}{\text{s}^2}\right)(10\ \text{m})}. \\ &= 11.0\ \text{m/s}. \end{aligned}$$

Now we can calculate the initial speed of the truck:

$$v_{\mathrm{T,i}} = \left(\frac{1200\ \mathrm{kg}}{3000\ \mathrm{kg}}\right)\left(11.0\ \frac{\mathrm{m}}{\mathrm{s}}\right) = 4.4\ \mathrm{m/s}.$$

Significance

This is an example of the type of analysis done by investigators of major car accidents. A great deal of legal and financial consequences depend on an accurate analysis and calculation of momentum and energy.

CHECK YOUR UNDERSTANDING 9.8

Suppose there had been no friction (the collision happened on ice); that would make μ_{k} zero, and thus $v_{\mathrm{c,f}} = \sqrt{2\mu_{\mathrm{k}} gd} = 0$, which is obviously wrong. What is the mistake in this conclusion?

Subatomic Collisions and Momentum

Conservation of momentum is crucial to our understanding of atomic and subatomic particles because much of what we know about these particles comes from collision experiments.

At the beginning of the twentieth century, there was considerable interest in, and debate about, the structure of the atom. It was known that atoms contain two types of electrically charged particles: negatively charged electrons and positively charged protons. (The existence of an electrically neutral particle was suspected, but would not be confirmed until 1932.) The question was, how were these particles arranged in the atom? Were they distributed uniformly throughout the volume of the atom (as J.J. Thomson proposed), or arranged at the corners of regular polygons (which was Gilbert Lewis' model), or rings of negative charge that surround the positively charged nucleus—rather like the planetary rings surrounding Saturn (as suggested by Hantaro Nagaoka), or something else?

The New Zealand physicist Ernest Rutherford (along with the German physicist Hans Geiger and the British physicist Ernest Marsden) performed the crucial experiment in 1909. They bombarded a thin sheet of gold foil with a beam of high-energy (that is, high-speed) alpha-particles (the nucleus of a helium atom). The alpha-particles collided with the gold atoms, and their subsequent velocities were detected and analyzed, using conservation of momentum and conservation of energy.

If the charges of the gold atoms were distributed uniformly (per Thomson), then the alpha-particles should collide with them and nearly all would be deflected through many angles, all small; the Nagaoka model would produce a similar result. If the atoms were arranged as regular polygons (Lewis), the alpha-particles would deflect at a relatively small number of angles.

What *actually* happened is that nearly *none* of the alpha-particles were deflected. Those that were, were deflected at large angles, some close to 180°—those alpha-particles reversed direction completely (Figure 9.21). None of the existing atomic models could explain this. Eventually, Rutherford developed a model of the atom that was much closer to what we now have—again, using conservation of momentum and energy as his starting point.

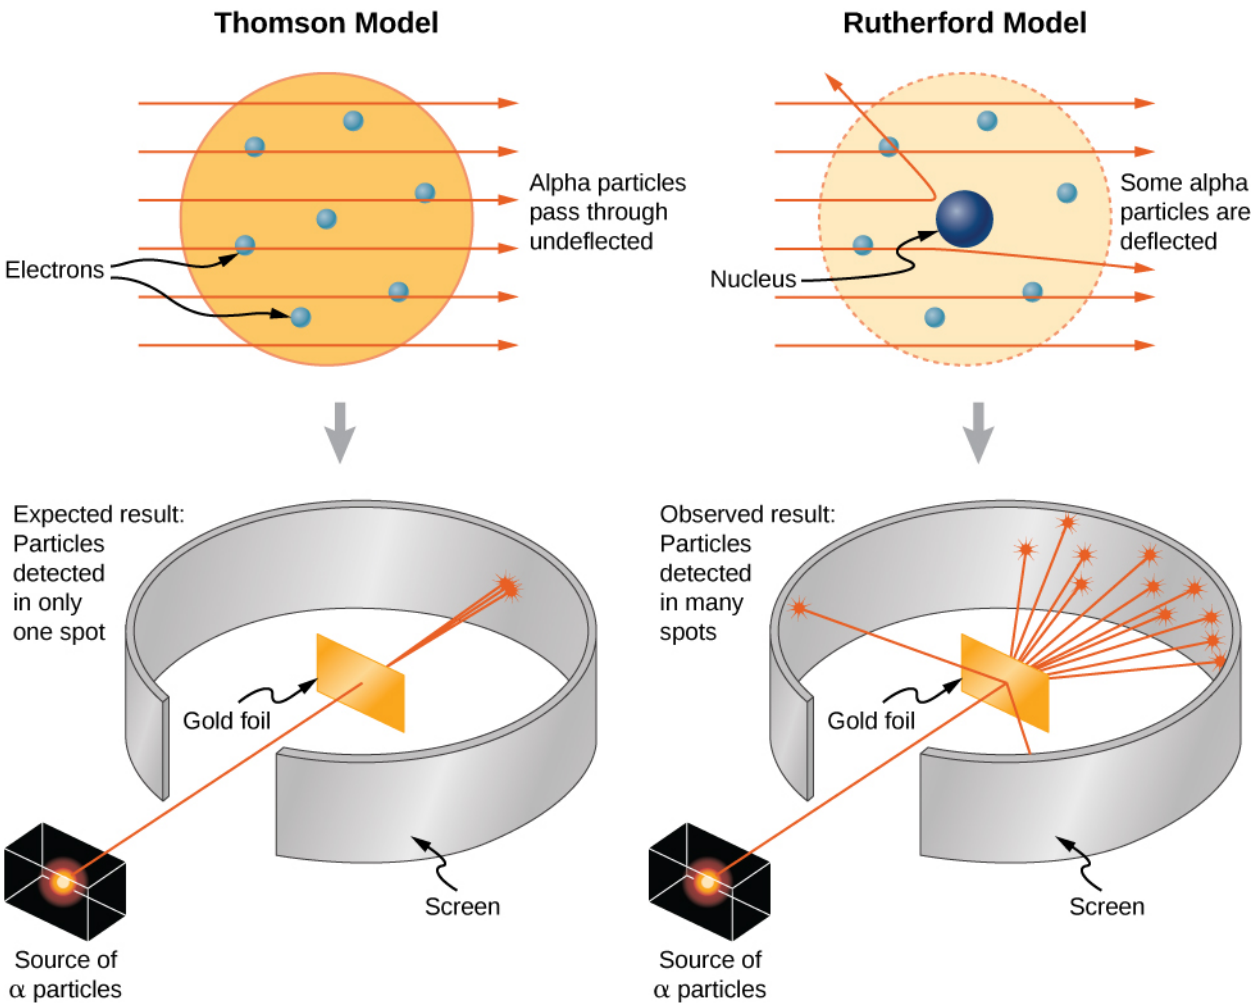


Figure 9.21 The Thomson and Rutherford models of the atom. The Thomson model predicted that nearly all of the incident alpha-particles would be scattered and at small angles. Rutherford and Geiger found that nearly none of the alpha particles were scattered, but those few that were deflected did so through very large angles. The results of Rutherford's experiments were inconsistent with the Thomson model. Rutherford used conservation of momentum and energy to develop a new, and better model of the atom—the nuclear model.

9.5 Collisions in Multiple Dimensions

Learning Objectives

By the end of this section, you will be able to:

- Express momentum as a two-dimensional vector
- Write equations for momentum conservation in component form
- Calculate momentum in two dimensions, as a vector quantity

It is far more common for collisions to occur in two dimensions; that is, the angle between the initial velocity vectors is neither zero nor 180°. Let's see what complications arise from this.

The first idea we need is that momentum is a vector; like all vectors, it can be expressed as a sum of perpendicular components (usually, though not always, an x-component and a y-component, and a z-component if necessary). Thus, when we write down the statement of conservation of momentum for a problem, our momentum vectors can be, and usually will be, expressed in component form.

The second idea we need comes from the fact that momentum is related to force:

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}}{dt}.$$

Expressing both the force and the momentum in component form,

$$F_x = \frac{dp_x}{dt}, \quad F_y = \frac{dp_y}{dt}, \quad F_z = \frac{dp_z}{dt}.$$

Remember, these equations are simply Newton's second law, in vector form and in component form. We know that Newton's second law is true in each direction, independently of the others. It follows therefore (via Newton's third law) that conservation of momentum is also true in each direction independently.

These two ideas motivate the solution to two-dimensional problems: We write down the expression for conservation of momentum twice: once in the x-direction and once in the y-direction.

$$\begin{aligned} p_{\mathrm{f},x} &= p_{1,\mathrm{i},x} + p_{2,\mathrm{i},x} \\ p_{\mathrm{f},y} &= p_{1,\mathrm{i},y} + p_{2,\mathrm{i},y} \end{aligned} \qquad 9.18$$

This procedure is shown graphically in Figure 9.22.

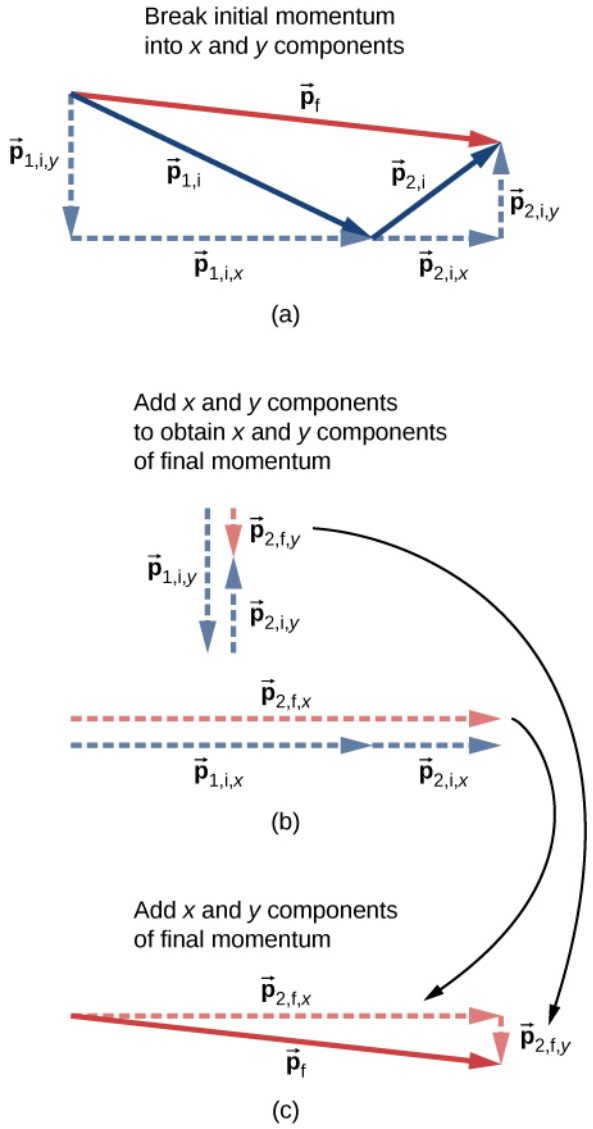


Figure 9.22 (a) For two-dimensional momentum problems, break the initial momentum vectors into their x- and y-components. (b) Add the x- and y-components together separately. This gives you the x- and y-components of the final momentum, which are shown as red dashed vectors. (c) Adding these components together gives the final momentum.

We solve each of these two component equations independently to obtain the x- and y-components of the

desired velocity vector:

$$\begin{aligned} v_{\mathrm{f},x} &= \frac{m_1 v_{1,\mathrm{i},x} + m_2 v_{2,\mathrm{i},x}}{m} \\ v_{\mathrm{f},y} &= \frac{m_1 v_{1,\mathrm{i},y} + m_2 v_{2,\mathrm{i},y}}{m}. \end{aligned}$$

(Here, m represents the total mass of the system.) Finally, combine these components using the Pythagorean theorem,

$$v_\mathrm{f} = \left|\vec{\mathbf{v}}_\mathbf{f}\right| = \sqrt{v_{\mathrm{f},x}^2 + v_{\mathrm{f},y}^2}.$$

PROBLEM-SOLVING STRATEGY

Conservation of Momentum in Two Dimensions

The method for solving a two-dimensional (or even three-dimensional) conservation of momentum problem is generally the same as the method for solving a one-dimensional problem, except that you have to conserve momentum in both (or all three) dimensions simultaneously:

1. Identify a closed system.
2. Write down the equation that represents conservation of momentum in the x-direction, and solve it for the desired quantity. If you are calculating a vector quantity (velocity, usually), this will give you the x-component of the vector.
3. Write down the equation that represents conservation of momentum in the y-direction, and solve. This will give you the y-component of your vector quantity.
4. Assuming you are calculating a vector quantity, use the Pythagorean theorem to calculate its magnitude, using the results of steps 3 and 4.

EXAMPLE 9.14

Traffic Collision

A small car of mass 1200 kg traveling east at 60 km/hr collides at an intersection with a truck of mass 3000 kg that is traveling due north at 40 km/hr (Figure 9.23). The two vehicles are locked together. What is the velocity of the combined wreckage?

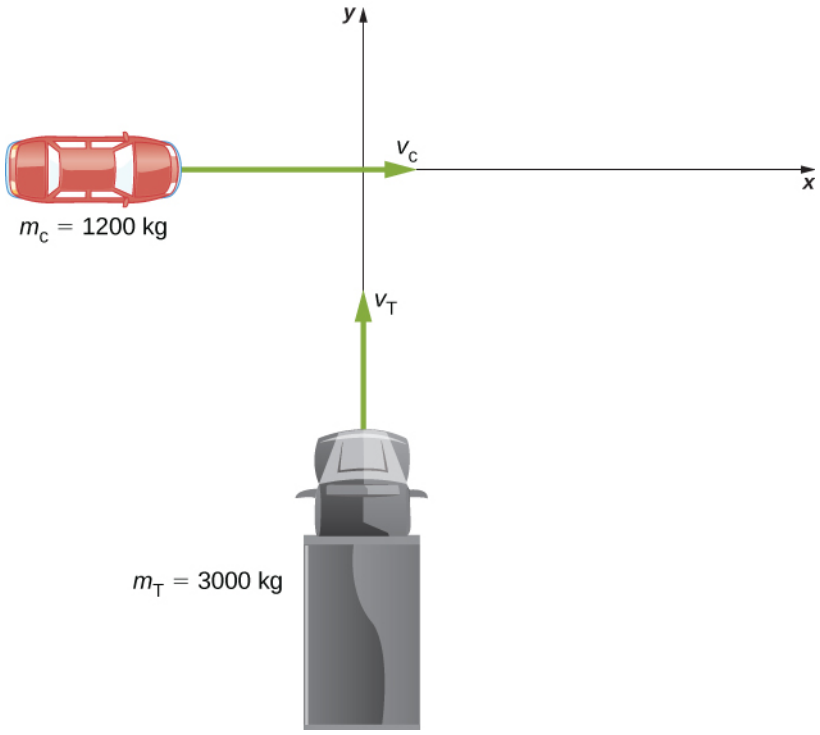


Figure 9.23 A large truck moving north is about to collide with a small car moving east. The final momentum vector has both *x*- and *y*-components.

Strategy

First off, we need a closed system. The natural system to choose is the (car + truck), but this system is not closed; friction from the road acts on both vehicles. We avoid this problem by restricting the question to finding the velocity at the instant just after the collision, so that friction has not yet had any effect on the system. With that restriction, momentum is conserved for this system.

Since there are two directions involved, we do conservation of momentum twice: once in the *x*-direction and once in the *y*-direction.

Solution

Before the collision the total momentum is

$$\vec{\mathbf{p}} = m_{\mathrm{c}}\vec{\mathbf{v}}_{\mathrm{c}} + m_{\mathrm{T}}\vec{\mathbf{v}}_{\mathrm{T}}.$$

After the collision, the wreckage has momentum

$$\vec{\mathbf{p}} = (m_{\mathrm{c}} + m_{\mathrm{T}})\,\vec{\mathbf{v}}_{w}.$$

Since the system is closed, momentum must be conserved, so we have

$$m_{\mathrm{c}}\vec{\mathbf{v}}_{\mathbf{c}} + m_{\mathrm{T}}\vec{\mathbf{v}}_{\mathrm{T}} = (m_{\mathrm{c}} + m_{\mathrm{T}})\,\vec{\mathbf{v}}_{w}.$$

We have to be careful; the two initial momenta are not parallel. We must add vectorially (Figure 9.24).




Figure 9.24 Graphical addition of momentum vectors. Notice that, although the car's velocity is larger than the truck's, its momentum is smaller.

If we define the $+x$-direction to point east and the $+y$-direction to point north, as in the figure, then (conveniently),

$$\begin{aligned}\vec{\mathbf{p}}_\mathrm{c} &= p_\mathrm{c}\hat{\mathbf{i}} = m_\mathrm{c}v_\mathrm{c}\hat{\mathbf{i}} \\ \vec{\mathbf{p}}_\mathrm{T} &= p_\mathrm{T}\hat{\mathbf{j}} = m_\mathrm{T}v_\mathrm{T}\hat{\mathbf{j}}.\end{aligned}$$

Therefore, in the x-direction:

$$\begin{aligned}m_\mathrm{c}v_\mathrm{c} &= (m_\mathrm{c}+m_\mathrm{T})\,v_{\mathrm{w},x} \\ v_{\mathrm{w},x} &= \left(\frac{m_\mathrm{c}}{m_\mathrm{c}+m_\mathrm{T}}\right)v_\mathrm{c}\end{aligned}$$

and in the y-direction:

$$\begin{aligned}m_\mathrm{T}v_\mathrm{T} &= (m_\mathrm{c}+m_\mathrm{T})\,v_{\mathrm{w},y} \\ v_{\mathrm{w},y} &= \left(\frac{m_\mathrm{T}}{m_\mathrm{c}+m_\mathrm{T}}\right)v_\mathrm{T}.\end{aligned}$$

Applying the Pythagorean theorem gives

$$\begin{aligned}|\vec{\mathbf{v}}_w| &= \sqrt{\left[\left(\frac{m_\mathrm{c}}{m_\mathrm{c}+m_t}\right)v_\mathrm{c}\right]^2+\left[\left(\frac{m_t}{m_\mathrm{c}+m_t}\right)v_t\right]^2} \\ &= \sqrt{\left[\left(\frac{1200\ \mathrm{kg}}{4200\ \mathrm{kg}}\right)\left(16.67\ \tfrac{\mathrm{m}}{\mathrm{s}}\right)\right]^2+\left[\left(\frac{3000\ \mathrm{kg}}{4200\ \mathrm{kg}}\right)\left(11.1\ \tfrac{\mathrm{m}}{\mathrm{s}}\right)\right]^2} \\ &= \sqrt{\left(4.76\ \tfrac{\mathrm{m}}{\mathrm{s}}\right)^2+\left(7.93\ \tfrac{\mathrm{m}}{\mathrm{s}}\right)^2} \\ &= 9.25\ \tfrac{\mathrm{m}}{\mathrm{s}} \approx 33.3\ \tfrac{\mathrm{km}}{\mathrm{hr}}.\end{aligned}$$

As for its direction, using the angle shown in the figure,

$$\theta = \tan^{-1}\left(\frac{v_{\mathrm{w},x}}{v_{\mathrm{w},y}}\right) = \tan^{-1}\left(\frac{7.93\ \mathrm{m/s}}{4.76\ \mathrm{m/s}}\right) = 59°.$$

This angle is east of north, or 31° counterclockwise from the $+x$-direction.

Significance

As a practical matter, accident investigators usually work in the "opposite direction"; they measure the distance of skid marks on the road (which gives the stopping distance) and use the work-energy theorem along with conservation of momentum to determine the speeds and directions of the cars prior to the collision. We saw that analysis in an earlier section.

CHECK YOUR UNDERSTANDING 9.9

Suppose the initial velocities were *not* at right angles to each other. How would this change both the physical

result and the mathematical analysis of the collision?

EXAMPLE 9.15

Exploding Scuba Tank

A common scuba tank is an aluminum cylinder that weighs 31.7 pounds empty (Figure 9.25). When full of compressed air, the internal pressure is between 2500 and 3000 psi (pounds per square inch). Suppose such a tank, which had been sitting motionless, suddenly explodes into three pieces. The first piece, weighing 10 pounds, shoots off horizontally at 235 miles per hour; the second piece (7 pounds) shoots off at 172 miles per hour, also in the horizontal plane, but at a 19° angle to the first piece. What is the mass and initial velocity of the third piece? (Do all work, and express your final answer, in SI units.)

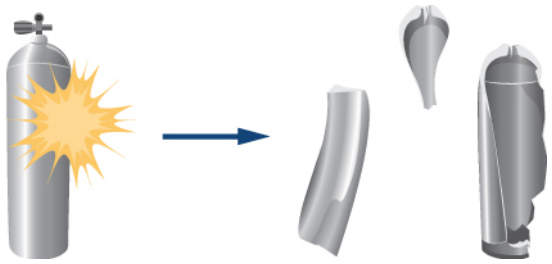


Figure 9.25 A scuba tank explodes into three pieces.

Strategy

To use conservation of momentum, we need a closed system. If we define the system to be the scuba tank, this is not a closed system, since gravity is an external force. However, the problem asks for just the initial velocity of the third piece, so we can neglect the effect of gravity and consider the tank by itself as a closed system. Notice that, for this system, the initial momentum vector is zero.


We choose a coordinate system where all the motion happens in the xy-plane. We then write down the equations for conservation of momentum in each direction, thus obtaining the x- and y-components of the momentum of the third piece, from which we obtain its magnitude (via the Pythagorean theorem) and its direction. Finally, dividing this momentum by the mass of the third piece gives us the velocity.

Solution

First, let's get all the conversions to SI units out of the way:

$$31.7\ \text{lb} \times \frac{1\ \text{kg}}{2.2\ \text{lb}} \rightarrow 14.4\ \text{kg}$$
$$10\ \text{lb} \rightarrow 4.5\ \text{kg}$$
$$235\ \frac{\text{miles}}{\text{hour}} \times \frac{1\ \text{hour}}{3600\ \text{s}} \times \frac{1609\ \text{m}}{\text{mile}} = 105\ \frac{\text{m}}{\text{s}}$$
$$7\ \text{lb} \rightarrow 3.2\ \text{kg}$$
$$172\ \frac{\text{mile}}{\text{hour}} = 77\ \frac{\text{m}}{\text{s}}$$
$$m_3 = 14.4\ \text{kg} - (4.5\ \text{kg} + 3.2\ \text{kg}) = 6.7\ \text{kg}.$$

Now apply conservation of momentum in each direction.

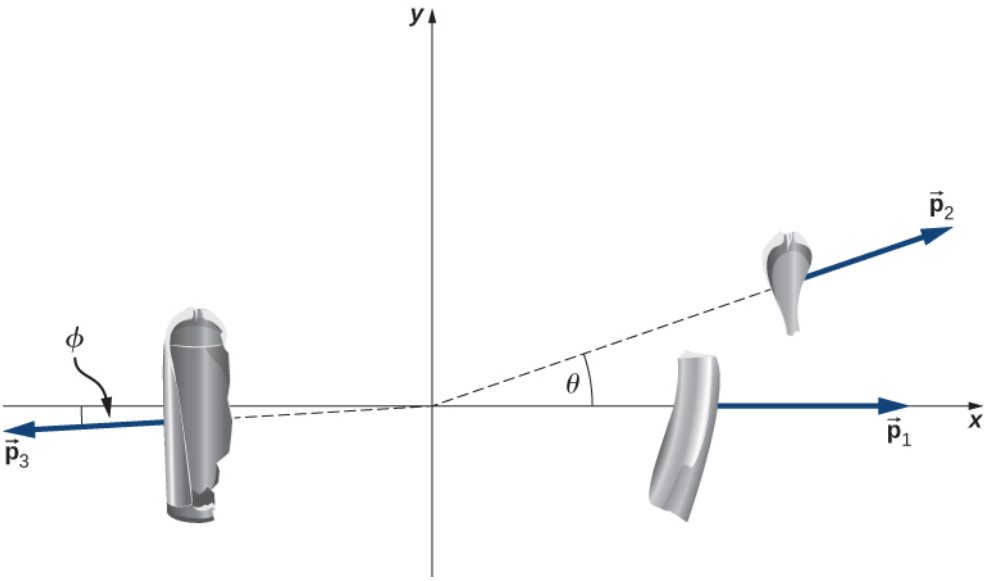

x-direction:

$$\begin{aligned} p_{f,x} &= p_{0,x} \\ p_{1,x} + p_{2,x} + p_{3,x} &= 0 \\ m_1 v_{1,x} + m_2 v_{2,x} + p_{3,x} &= 0 \\ p_{3,x} &= -m_1 v_{1,x} - m_2 v_{2,x} \end{aligned}$$

y-direction:

$$\begin{aligned} p_{f,y} &= p_{0,y} \\ p_{1,y} + p_{2,y} + p_{3,y} &= 0 \\ m_1 v_{1,y} + m_2 v_{2,y} + p_{3,y} &= 0 \\ p_{3,y} &= -m_1 v_{1,y} - m_2 v_{2,y} \end{aligned}$$

From our chosen coordinate system, we write the x-components as

$$\begin{aligned} p_{3,x} &= -m_1 v_1 - m_2 v_2 \cos\theta \\ &= -(4.5\,\text{kg})\left(105\,\tfrac{\text{m}}{\text{s}}\right) - (3.2\,\text{kg})\left(77\,\tfrac{\text{m}}{\text{s}}\right)\cos(19°) \\ &= -705\,\tfrac{\text{kg·m}}{\text{s}}. \end{aligned}$$

For the y-direction, we have

$$\begin{aligned} p_{3y} &= 0 - m_2 v_2 \sin\theta \\ &= -(3.2\,\text{kg})\left(77\,\tfrac{\text{m}}{\text{s}}\right)\sin(19°) \\ &= -80.2\,\tfrac{\text{kg·m}}{\text{s}}. \end{aligned}$$

This gives the magnitude of p_3:

$$\begin{aligned} p_3 &= \sqrt{p_{3,x}^2 + p_{3,y}^2} \\ &= \sqrt{\left(-705\,\tfrac{\text{kg·m}}{\text{s}}\right)^2 + \left(-80.2\,\tfrac{\text{kg·m}}{\text{s}}\right)} \\ &= 710\,\tfrac{\text{kg·m}}{\text{s}}. \end{aligned}$$

The velocity of the third piece is therefore

$$v_3 = \frac{p_3}{m_3} = \frac{710\ \frac{\text{kg·m}}{\text{s}}}{6.7\ \text{kg}} = 106\ \frac{\text{m}}{\text{s}}.$$

The direction of its velocity vector is the same as the direction of its momentum vector:

$$\phi = \tan^{-1}\left(\frac{p_{3,y}}{p_{3,x}}\right) = \tan^{-1}\left(\frac{80.2\ \frac{\text{kg·m}}{\text{s}}}{705\ \frac{\text{kg·m}}{\text{s}}}\right) = 6.49°.$$

Because ϕ is below the $-x$-axis, the actual angle is $183.5°$ from the $+x$-direction.

Significance

The enormous velocities here are typical; an exploding tank of any compressed gas can easily punch through the wall of a house and cause significant injury, or death. Fortunately, such explosions are extremely rare, on a percentage basis.

CHECK YOUR UNDERSTANDING 9.10

Notice that the mass of the air in the tank was neglected in the analysis and solution. How would the solution method changed if the air was included? How large a difference do you think it would make in the final answer?

9.6 Center of Mass

Learning Objectives

By the end of this section, you will be able to:

- Explain the meaning and usefulness of the concept of center of mass
- Calculate the center of mass of a given system
- Apply the center of mass concept in two and three dimensions
- Calculate the velocity and acceleration of the center of mass

We have been avoiding an important issue up to now: When we say that an object moves (more correctly, accelerates) in a way that obeys Newton's second law, we have been ignoring the fact that all objects are actually made of many constituent particles. A car has an engine, steering wheel, seats, passengers; a football is leather and rubber surrounding air; a brick is made of atoms. There are many different types of particles, and they are generally not distributed uniformly in the object. How do we include these facts into our calculations?

Then too, an extended object might change shape as it moves, such as a water balloon or a cat falling (Figure 9.26). This implies that the constituent particles are applying internal forces on each other, in addition to the external force that is acting on the object as a whole. We want to be able to handle this, as well.

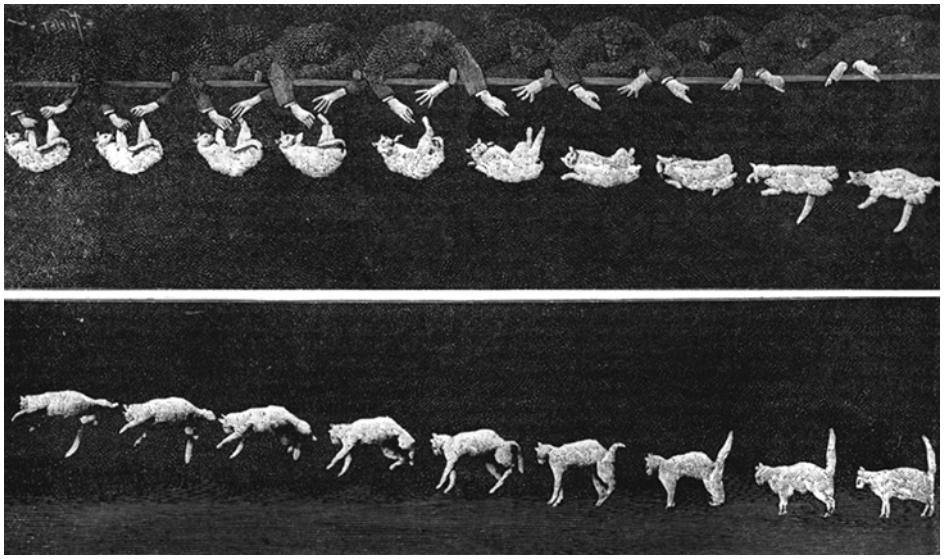


Figure 9.26 As the cat falls, its body performs complicated motions so it can land on its feet, but one point in the system moves with the simple uniform acceleration of gravity.

The problem before us, then, is to determine what part of an extended object is obeying Newton's second law when an external force is applied and to determine how the motion of the object as a whole is affected by both the internal and external forces.

Be warned: To treat this new situation correctly, we must be rigorous and completely general. We won't make any assumptions about the nature of the object, or of its constituent particles, or either the internal or external forces. Thus, the arguments will be complex.

Internal and External Forces

Suppose we have an extended object of mass M, made of N interacting particles. Let's label their masses as m_j, where $j = 1, 2, 3, \ldots, N$. Note that

$$M = \sum_{j=1}^{N} m_j. \tag{9.19}$$

If we apply some net **external force** $\vec{\mathbf{F}}_{\text{ext}}$ on the object, every particle experiences some "share" or some fraction of that external force. Let:

$$\vec{\mathbf{f}}_j^{\text{ext}} = \text{ the fraction of the external force that the } j\text{th particle experiences.}$$

Notice that these fractions of the total force are not necessarily equal; indeed, they virtually never are. (They *can* be, but they usually aren't.) In general, therefore,

$$\vec{\mathbf{f}}_1^{\text{ext}} \neq \vec{\mathbf{f}}_2^{\text{ext}} \neq \cdots \neq \vec{\mathbf{f}}_N^{\text{ext}}.$$

Next, we assume that each of the particles making up our object can interact (apply forces on) every other particle of the object. We won't try to guess what kind of forces they are; but since these forces are the result of particles of the object acting on other particles of the same object, we refer to them as **internal forces** $\vec{\mathbf{f}}_j^{\text{int}}$; thus:

$\vec{\mathbf{f}}_j^{\text{int}}$ = the net internal force that the jth particle experiences from all the other particles that make up the object.

Now, the *net* force, internal plus external, on the jth particle is the vector sum of these:

$$\vec{\mathbf{f}}_j = \vec{\mathbf{f}}_j^{\text{int}} + \vec{\mathbf{f}}_j^{\text{ext}}. \tag{9.20}$$

where again, this is for all N particles; $j = 1, 2, 3, \ldots, N$.

As a result of this fractional force, the momentum of each particle gets changed:

$$\begin{aligned} \vec{\mathbf{f}}_j &= \frac{d\vec{\mathbf{p}}_j}{dt} \\ \vec{\mathbf{f}}_j^{\text{int}} + \vec{\mathbf{f}}_j^{\text{ext}} &= \frac{d\vec{\mathbf{p}}_j}{dt}. \end{aligned} \tag{9.21}$$

The net force $\vec{\mathbf{F}}$ on the *object* is the vector sum of these forces:

$$\begin{aligned} \vec{\mathbf{F}}_{\text{net}} &= \sum_{j=1}^{N} \left(\vec{\mathbf{f}}_{\mathbf{j}}^{\mathbf{int}} + \vec{\mathbf{f}}_{\mathbf{j}}^{\mathbf{ext}} \right) \\ &= \sum_{j=1}^{N} \vec{\mathbf{f}}_{\mathbf{j}}^{\mathbf{int}} + \sum_{j=1}^{N} \vec{\mathbf{f}}_{\mathbf{j}}^{\mathbf{ext}}. \end{aligned} \tag{9.22}$$

This net force changes the momentum of the object as a whole, and the net change of momentum of the object must be the vector sum of all the individual changes of momentum of all of the particles:

$$\vec{\mathbf{F}}_{\text{net}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt}. \tag{9.23}$$

Combining Equation 9.22 and Equation 9.23 gives

$$\sum_{j=1}^{N} \vec{\mathbf{f}}_j^{\text{int}} + \sum_{j=1}^{N} \vec{\mathbf{f}}_j^{\text{ext}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt}. \tag{9.24}$$

Let's now think about these summations. First consider the internal forces term; remember that each $\vec{\mathbf{f}}_j^{\text{int}}$ is the force on the jth particle from the other particles in the object. But by Newton's third law, for every one of these forces, there must be another force that has the same magnitude, but the opposite sign (points in the opposite direction). These forces do not cancel; however, that's not what we're doing in the summation. Rather, we're simply *mathematically adding up* all the internal force vectors. That is, in general, the internal forces for any individual part of the object won't cancel, but when all the internal forces are added up, the internal forces must cancel in pairs. It follows, therefore, that the sum of all the internal forces must be zero:

$$\sum_{j=1}^{N} \vec{\mathbf{f}}_j^{\text{int}} = 0.$$

(This argument is subtle, but crucial; take plenty of time to completely understand it.)

For the external forces, this summation is simply the total external force that was applied to the whole object:

$$\sum_{j=1}^{N} \vec{\mathbf{f}}_j^{\text{ext}} = \vec{\mathbf{F}}_{\text{ext}}.$$

As a result,

$$\vec{\mathbf{F}}_{\text{ext}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt}. \tag{9.25}$$

This is an important result. Equation 9.25 tells us that the total change of momentum of the entire object (all N particles) is due only to the external forces; the internal forces do not change the momentum of the object as a whole. This is why you can't lift yourself in the air by standing in a basket and pulling up on the handles: For the system of you + basket, your upward pulling force is an internal force.

Force and Momentum

Remember that our actual goal is to determine the equation of motion for the entire object (the entire system of particles). To that end, let's define:

$\vec{\mathbf{p}}_{\text{CM}}$ = the total momentum of the system of N particles (the reason for the subscript will become clear shortly)

Then we have

$$\vec{\mathbf{p}}_{\text{CM}} \equiv \sum_{j=1}^{N} \vec{\mathbf{p}}_j,$$

and therefore Equation 9.25 can be written simply as

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}_{\text{CM}}}{dt}. \tag{9.26}$$

Since this change of momentum is caused by only the net external force, we have dropped the "ext" subscript.

This is Newton's second law, but now for the entire extended object. If this feels a bit anticlimactic, remember what is hiding inside it: $\vec{\mathbf{p}}_{\text{CM}}$ is the vector sum of the momentum of (in principle) hundreds of thousands of billions of billions of particles (6.02×10^{23}), all caused by one simple net external force—a force that you can calculate.

Center of Mass

Our next task is to determine what part of the extended object, if any, is obeying Equation 9.26.

It's tempting to take the next step; does the following equation mean anything?

$$\vec{\mathbf{F}} = M\vec{\mathbf{a}} \tag{9.27}$$

If it *does* mean something (acceleration of what, exactly?), then we could write

$$M\vec{\mathbf{a}} = \frac{d\vec{\mathbf{p}}_{\text{CM}}}{dt}$$

and thus

$$M\vec{\mathbf{a}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt} = \frac{d}{dt} \sum_{j=1}^{N} \vec{\mathbf{p}}_j.$$

which follows because the derivative of a sum is equal to the sum of the derivatives.

Now, $\vec{\mathbf{p}}_j$ is the momentum of the jth particle. Defining the positions of the constituent particles (relative to some coordinate system) as $\vec{\mathbf{r}}_{\mathbf{j}} = \left(x_j, y_j, z_j\right)$, we thus have

$$\vec{\mathbf{p}}_j = m_j\vec{\mathbf{v}}_j = m_j \frac{d\vec{\mathbf{r}}_j}{dt}.$$

Substituting back, we obtain

$$\begin{aligned} M\vec{\mathbf{a}} &= \frac{d}{dt} \sum_{j=1}^{N} m_j \frac{d\vec{\mathbf{r}}_j}{dt} \\ &= \frac{d^2}{dt^2} \sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j. \end{aligned}$$

Dividing both sides by M (the total mass of the extended object) gives us

$$\vec{\mathbf{a}} = \frac{d^2}{dt^2}\left(\frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j\right). \tag{9.28}$$

Thus, the point in the object that traces out the trajectory dictated by the applied force in Equation 9.27 is inside the parentheses in Equation 9.28.

Looking at this calculation, notice that (inside the parentheses) we are calculating the product of each particle's mass with its position, adding all N of these up, and dividing this sum by the total mass of particles we summed. This is reminiscent of an average; inspired by this, we'll (loosely) interpret it to be the weighted average position of the mass of the extended object. It's actually called the **center of mass** of the object. Notice that the position of the center of mass has units of meters; that suggests a definition:

$$\vec{\mathbf{r}}_{\text{CM}} \equiv \frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j. \tag{9.29}$$

So, the point that obeys Equation 9.26 (and therefore Equation 9.27 as well) is the center of mass of the object, which is located at the position vector $\vec{\mathbf{r}}_{\text{CM}}$.

It may surprise you to learn that there does not have to be any actual mass at the center of mass of an object. For example, a hollow steel sphere with a vacuum inside it is spherically symmetrical (meaning its mass is uniformly distributed about the center of the sphere); all of the sphere's mass is out on its surface, with no mass inside. But it can be shown that the center of mass of the sphere is at its geometric center, which seems reasonable. Thus, there is no mass at the position of the center of mass of the sphere. (Another example is a doughnut.) The procedure to find the center of mass is illustrated in Figure 9.27.

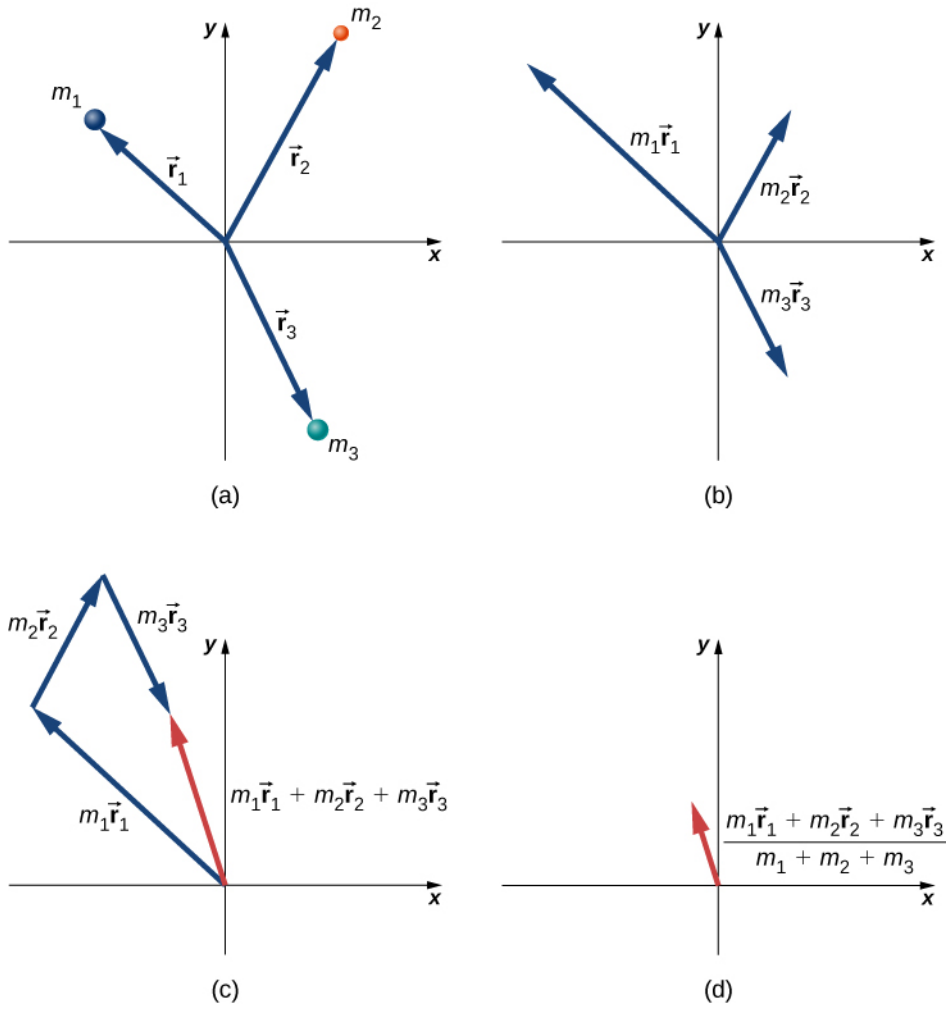


Figure 9.27 Finding the center of mass of a system of three different particles. (a) Position vectors are created for each object. (b) The position vectors are multiplied by the mass of the corresponding object. (c) The scaled vectors from part (b) are added together. (d) The final vector is divided by the total mass. This vector points to the center of mass of the system. Note that no mass is actually present at the center of mass of this system.

Since $\vec{\mathbf{r}}_j = x_j\hat{\mathbf{i}} + y_j\hat{\mathbf{j}} + z_j\hat{\mathbf{k}}$, it follows that:

$$r_{\text{CM},x} = \frac{1}{M}\sum_{j=1}^{N} m_j x_j \tag{9.30}$$

$$r_{\text{CM},y} = \frac{1}{M}\sum_{j=1}^{N} m_j y_j \tag{9.31}$$

$$r_{\text{CM},z} = \frac{1}{M}\sum_{j=1}^{N} m_j z_j \tag{9.32}$$

and thus

$$\vec{\mathbf{r}}_{\text{CM}} = r_{\text{CM},x}\hat{\mathbf{i}} + r_{\text{CM},y}\hat{\mathbf{j}} + r_{\text{CM},z}\hat{\mathbf{k}}$$

$$r_{\text{CM}} = \left|\vec{\mathbf{r}}_{\text{CM}}\right| = \left(r_{\text{CM},x}^2 + r_{\text{CM},y}^2 + r_{\text{CM},z}^2\right)^{1/2}.$$

Therefore, you can calculate the components of the center of mass vector individually.

Finally, to complete the kinematics, the instantaneous velocity of the center of mass is calculated exactly as you might suspect:

$$\vec{\mathbf{v}}_{\text{CM}} = \frac{d}{dt}\left(\frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j\right) = \frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{v}}_j \qquad 9.33$$

and this, like the position, has x-, y-, and z-components.

To calculate the center of mass in actual situations, we recommend the following procedure:

PROBLEM-SOLVING STRATEGY

Calculating the Center of Mass

The center of mass of an object is a position vector. Thus, to calculate it, do these steps:

1. Define your coordinate system. Typically, the origin is placed at the location of one of the particles. This is not required, however.
2. Determine the x, y, z-coordinates of each particle that makes up the object.
3. Determine the mass of each particle, and sum them to obtain the total mass of the object. Note that the mass of the object at the origin *must* be included in the total mass.
4. Calculate the x-, y-, and z-components of the center of mass vector, using Equation 9.30, Equation 9.31, and Equation 9.32.
5. If required, use the Pythagorean theorem to determine its magnitude.

Here are two examples that will give you a feel for what the center of mass is.

EXAMPLE 9.16

Center of Mass of the Earth-Moon System

Using data from text appendix, determine how far the center of mass of the Earth-moon system is from the center of Earth. Compare this distance to the radius of Earth, and comment on the result. Ignore the other objects in the solar system.

Strategy

We get the masses and separation distance of the Earth and moon, impose a coordinate system, and use Equation 9.29 with just $N = 2$ objects. We use a subscript "e" to refer to Earth, and subscript "m" to refer to the moon.

Solution

Define the origin of the coordinate system as the center of Earth. Then, with just two objects, Equation 9.29 becomes

$$R = \frac{m_{\text{e}} r_{\text{e}} + m_{\text{m}} r_{\text{m}}}{m_{\text{e}} + m_{\text{m}}}.$$

From Appendix D,


$$m_{\text{e}} = 5.97 \times 10^{24}\ \text{kg}$$
$$m_{\text{m}} = 7.36 \times 10^{22}\ \text{kg}$$
$$r_{\text{m}} = 3.82 \times 10^{8}\ \text{m}.$$

We defined the center of Earth as the origin, so $r_{\text{e}} = 0$ m. Inserting these into the equation for R gives

$$R = \frac{\left(5.97 \times 10^{24}\ \text{kg}\right)(0\ \text{m}) + \left(7.36 \times 10^{22}\ \text{kg}\right)\left(3.82 \times 10^{8}\ \text{m}\right)}{5.97 \times 10^{24}\ \text{kg} + 7.36 \times 10^{22}\ \text{kg}}$$
$$= 4.64 \times 10^{6}\ \text{m}.$$

Significance

The radius of Earth is 6.37×10^{6} m, so the center of mass of the Earth-moon system is $(6.37 - 4.64) \times 10^{6}\ \text{m} = 1.73 \times 10^{6}\ \text{m} = 1730$ km (roughly 1080 miles) *below* the surface of Earth. The location of the center of mass is shown (not to scale).

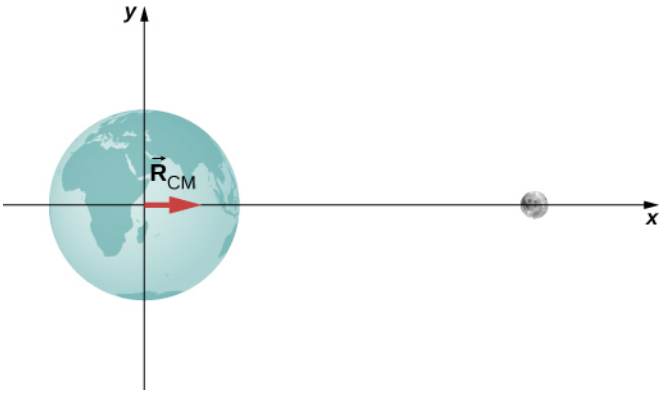

CHECK YOUR UNDERSTANDING 9.11

Suppose we included the sun in the system. Approximately where would the center of mass of the Earth-moon-sun system be located? (Feel free to actually calculate it.)

EXAMPLE 9.17

Center of Mass of a Salt Crystal

Figure 9.28 shows a single crystal of sodium chloride—ordinary table salt. The sodium and chloride ions form a single unit, NaCl. When multiple NaCl units group together, they form a cubic lattice. The smallest possible cube (called the *unit cell*) consists of four sodium ions and four chloride ions, alternating. The length of one edge of this cube (i.e., the bond length) is 2.36×10^{-10} m. Find the location of the center of mass of the unit cell. Specify it either by its coordinates $\left(r_{\text{CM},x}, r_{\text{CM},y}, r_{\text{CM},z}\right)$, or by r_{CM} and two angles.

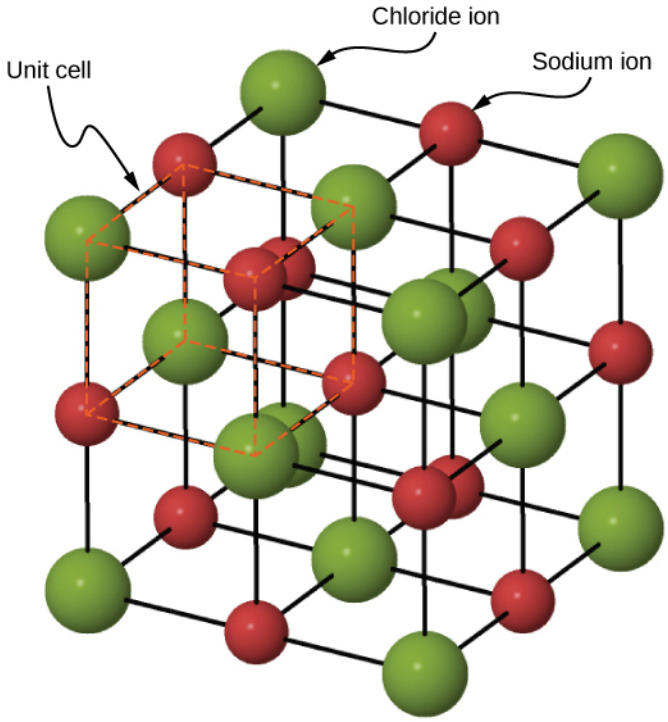


Figure 9.28 A drawing of a sodium chloride (NaCl) crystal.

Strategy

We can look up all the ion masses. If we impose a coordinate system on the unit cell, this will give us the positions of the ions. We can then apply Equation 9.30, Equation 9.31, and Equation 9.32 (along with the Pythagorean theorem).

Solution

Define the origin to be at the location of the chloride ion at the bottom left of the unit cell. Figure 9.29 shows the coordinate system.

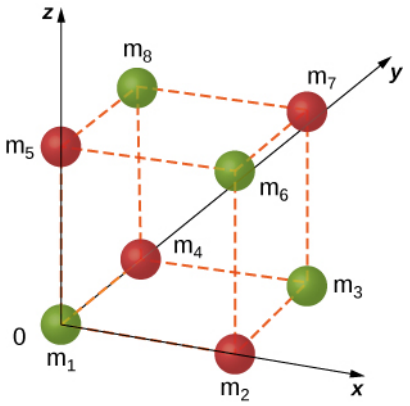


Figure 9.29 A single unit cell of a NaCl crystal.

There are eight ions in this crystal, so $N = 8$:

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\sum_{j=1}^{8} m_j \vec{\mathbf{r}}_j.$$

The mass of each of the chloride ions is

$$35.453\text{u} \times \frac{1.660 \times 10^{-27}\ \text{kg}}{\text{u}} = 5.885 \times 10^{-26}\ \text{kg}$$

so we have

$$m_1 = m_3 = m_6 = m_8 = 5.885 \times 10^{-26}\ \text{kg}.$$

For the sodium ions,

$$m_2 = m_4 = m_5 = m_7 = 3.816 \times 10^{-26}\ \text{kg}.$$

The total mass of the unit cell is therefore

$$M = (4)\left(5.885 \times 10^{-26}\ \text{kg}\right) + (4)\left(3.816 \times 10^{-26}\ \text{kg}\right) = 3.880 \times 10^{-25}\ \text{kg}.$$

From the geometry, the locations are

$$\begin{aligned}
\vec{\mathbf{r}}_1 &= 0\\
\vec{\mathbf{r}}_2 &= \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{i}}\\
\vec{\mathbf{r}}_3 &= r_{3x}\hat{\mathbf{i}} + r_{3y}\hat{\mathbf{j}} = \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{i}} + \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{j}}\\
\vec{\mathbf{r}}_4 &= \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{j}}\\
\vec{\mathbf{r}}_5 &= \left(2.36 \times 10^{-10}\ \text{m}\right)\vec{\mathbf{k}}\\
\vec{\mathbf{r}}_6 &= r_{6x}\hat{\mathbf{i}} + r_{6z}\hat{\mathbf{k}} = \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{i}} + \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{k}}\\
\vec{\mathbf{r}}_7 &= r_{7x}\hat{\mathbf{i}} + r_{7y}\hat{\mathbf{j}} + r_{7z}\hat{\mathbf{k}} = \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{i}} + \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{j}} + \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{k}}\\
\vec{\mathbf{r}}_8 &= r_{8y}\hat{\mathbf{j}} + r_{8z}\hat{\mathbf{k}} = \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{j}} + \left(2.36 \times 10^{-10}\ \text{m}\right)\hat{\mathbf{k}}.
\end{aligned}$$

Substituting:

$$\begin{aligned}
\left|\vec{\mathbf{r}}_{\text{CM},x}\right| &= \sqrt{r_{\text{CM},x}^2 + r_{\text{CM},y}^2 + r_{\text{CM},z}^2}\\
&= \tfrac{1}{M}\sum_{j=1}^{8} m_j (r_x)_j\\
&= \tfrac{1}{M}(m_1 r_{1x} + m_2 r_{2x} + m_3 r_{3x} + m_4 r_{4x} + m_5 r_{5x} + m_6 r_{6x} + m_7 r_{7x} + m_8 r_{8x})\\
&= \frac{1}{3.8804 \times 10^{-25}\ \text{kg}}\left[\left(5.885 \times 10^{-26}\ \text{kg}\right)(0\,\text{m}) + \left(3.816 \times 10^{-26}\ \text{kg}\right)\left(2.36 \times 10^{-10}\ \text{m}\right)\right.\\
&\quad + \left(5.885 \times 10^{-26}\ \text{kg}\right)\left(2.36 \times 10^{-10}\ \text{m}\right)\\
&\quad + \left(3.816 \times 10^{-26}\ \text{kg}\right)\left(2.36 \times 10^{-10}\ \text{m}\right) + 0 + 0\\
&\quad \left. + \left(3.816 \times 10^{-26}\ \text{kg}\right)\left(2.36 \times 10^{-10}\ \text{m}\right) + 0\right]\\
&= 1.18 \times 10^{-10}\ \text{m}.
\end{aligned}$$

Similar calculations give $r_{\text{CM},y} = r_{\text{CM},z} = 1.18 \times 10^{-10}$ m (you could argue that this must be true, by symmetry, but it's a good idea to check).

Significance

Although this is a great exercise to determine the center of mass given a Chloride ion at the origin, in fact the origin could be chosen at any location. Therefore, there is no meaningful application of the center of mass of a unit cell beyond as an exercise.

CHECK YOUR UNDERSTANDING 9.12

Suppose you have a macroscopic salt crystal (that is, a crystal that is large enough to be visible with your unaided eye). It is made up of a *huge* number of unit cells. Is the center of mass of this crystal necessarily at the

geometric center of the crystal?

Two crucial concepts come out of these examples:

1. As with all problems, you must define your coordinate system and origin. For center-of-mass calculations, it often makes sense to choose your origin to be located at one of the masses of your system. That choice automatically defines its distance in Equation 9.29 to be zero. However, you must still include the mass of the object at your origin in your calculation of M, the total mass Equation 9.19. In the Earth-moon system example, this means including the mass of Earth. If you hadn't, you'd have ended up with the center of mass of the system being at the center of the moon, which is clearly wrong.
2. In the second example (the salt crystal), notice that there is no mass at all at the location of the center of mass. This is an example of what we stated above, that there does not have to be any actual mass at the center of mass of an object.

Center of Mass of Continuous Objects

If the object in question has its mass distributed uniformly in space, rather than as a collection of discrete particles, then $m_j \rightarrow dm$, and the summation becomes an integral:

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\int \vec{\mathbf{r}}\, dm. \tag{9.34}$$

In this context, r is a characteristic dimension of the object (the radius of a sphere, the length of a long rod). To generate an integrand that can actually be calculated, you need to express the differential mass element dm as a function of the mass density of the continuous object, and the dimension r. An example will clarify this.

EXAMPLE 9.18

CM of a Uniform Thin Hoop

Find the center of mass of a uniform thin hoop (or ring) of mass M and radius r.

Strategy

First, the hoop's symmetry suggests the center of mass should be at its geometric center. If we define our coordinate system such that the origin is located at the center of the hoop, the integral should evaluate to zero.

We replace dm with an expression involving the density of the hoop and the radius of the hoop. We then have an expression we can actually integrate. Since the hoop is described as "thin," we treat it as a one-dimensional object, neglecting the thickness of the hoop. Therefore, its density is expressed as the number of kilograms of material per meter. Such a density is called a **linear mass density**, and is given the symbol λ; this is the Greek letter "lambda," which is the equivalent of the English letter "l" (for "linear").

Since the hoop is described as uniform, this means that the linear mass density λ is constant. Thus, to get our expression for the differential mass element dm, we multiply λ by a differential length of the hoop, substitute, and integrate (with appropriate limits for the definite integral).

Solution

First, define our coordinate system and the relevant variables (Figure 9.30).

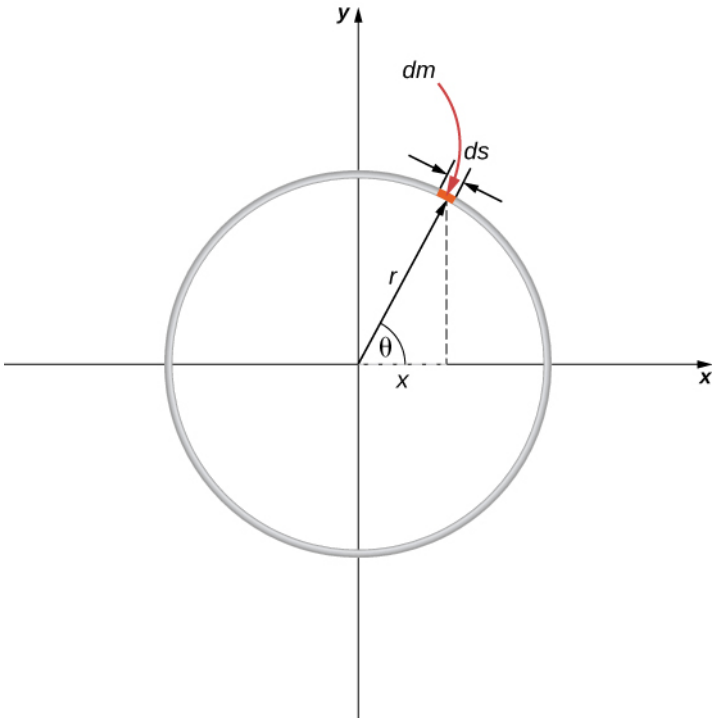


Figure 9.30 Finding the center of mass of a uniform hoop. We express the coordinates of a differential piece of the hoop, and then integrate around the hoop.

The center of mass is calculated with Equation 9.34:

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\int_a^b \vec{\mathbf{r}}\,dm.$$

We have to determine the limits of integration a and b. Expressing $\vec{\mathbf{r}}$ in component form gives us

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\int_a^b \left[(r\cos\theta)\,\hat{\mathbf{i}} + (r\sin\theta)\,\hat{\mathbf{j}}\right] dm.$$

In the diagram, we highlighted a piece of the hoop that is of differential length ds; it therefore has a differential mass $dm = \lambda ds$. Substituting:

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\int_a^b \left[(r\cos\theta)\,\hat{\mathbf{i}} + (r\sin\theta)\,\hat{\mathbf{j}}\right] \lambda ds.$$

However, the arc length ds subtends a differential angle $d\theta$, so we have

$$ds = r\,d\theta$$

and thus

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\int_a^b \left[(r\cos\theta)\,\hat{\mathbf{i}} + (r\sin\theta)\,\hat{\mathbf{j}}\right] \lambda r\,d\theta.$$

One more step: Since λ is the linear mass density, it is computed by dividing the total mass by the length of the hoop:

$$\lambda = \frac{M}{2\pi r}$$

giving us

$$\begin{aligned}\vec{\mathbf{r}}_{\text{CM}} &= \frac{1}{M}\int_a^b \left[(r\cos\theta)\,\hat{\mathbf{i}} + (r\sin\theta)\,\hat{\mathbf{j}}\right]\left(\frac{M}{2\pi r}\right) r\,d\theta \\ &= \frac{1}{2\pi}\int_a^b \left[(r\cos\theta)\,\hat{\mathbf{i}} + (r\sin\theta)\,\hat{\mathbf{j}}\right] d\theta.\end{aligned}$$

Notice that the variable of integration is now the angle θ. This tells us that the limits of integration (around the circular hoop) are $\theta = 0$ to $\theta = 2\pi$, so $a = 0$ and $b = 2\pi$. Also, for convenience, we separate the integral into the x- and y-components of $\vec{\mathbf{r}}_{\text{CM}}$. The final integral expression is

$$\begin{aligned}\vec{\mathbf{r}}_{\text{CM}} &= r_{\text{CM},x}\,\hat{\mathbf{i}} + r_{\text{CM},y}\,\hat{\mathbf{j}} \\ &= \left[\frac{1}{2\pi}\int_0^{2\pi} (r\cos\theta)\,d\theta\right]\hat{\mathbf{i}} + \left[\frac{1}{2\pi}\int_0^{2\pi} (r\sin\theta)\,d\theta\right]\hat{\mathbf{j}} \\ &= 0\hat{\mathbf{i}} + 0\hat{\mathbf{j}} = \vec{\mathbf{0}}\end{aligned}$$

as expected.

Center of Mass and Conservation of Momentum

How does all this connect to conservation of momentum?

Suppose you have N objects with masses $m_1, m_2, m_3, \ldots m_N$ and initial velocities $\vec{\mathbf{v}}_1, \vec{\mathbf{v}}_2, \vec{\mathbf{v}}_3, \ldots, \vec{\mathbf{v}}_N$. The center of mass of the objects is

$$\vec{\mathbf{r}}_{\text{CM}} = \frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j.$$

Its velocity is

$$\vec{\mathbf{v}}_{\text{CM}} = \frac{d\vec{\mathbf{r}}_{\text{CM}}}{dt} = \frac{1}{M}\sum_{j=1}^{N} m_j \frac{d\vec{\mathbf{r}}_j}{dt} \qquad 9.35$$

and thus the initial momentum of the center of mass is

$$\begin{aligned}\left[M\frac{d\vec{\mathbf{r}}_{\text{CM}}}{dt}\right]_{\text{i}} &= \sum_{j=1}^{N} m_j \frac{d\vec{\mathbf{r}}_{j,\text{i}}}{dt} \\ M\vec{\mathbf{v}}_{\text{CM,i}} &= \sum_{j=1}^{N} m_j \vec{\mathbf{v}}_{j,\text{i}}.\end{aligned}$$

After these masses move and interact with each other, the momentum of the center of mass is

$$M\vec{\mathbf{v}}_{\text{CM,f}} = \sum_{j=1}^{N} m_j \vec{\mathbf{v}}_{j,\text{f}}.$$

But conservation of momentum tells us that the right-hand side of both equations must be equal, which says

$$M\vec{\mathbf{v}}_{\text{CM,f}} = M\vec{\mathbf{v}}_{\text{CM,i}}. \qquad 9.36$$

This result implies that conservation of momentum is expressed in terms of the center of mass of the system. Notice that as an object moves through space with no net external force acting on it, an individual particle of the object may accelerate in various directions, with various magnitudes, depending on the net internal force acting on that object at any time. (Remember, it is only the vector sum of all the internal forces that vanishes, not the internal force on a single particle.) Thus, such a particle's momentum will not be constant—but the momentum of the entire extended object will be, in accord with Equation 9.36.

Equation 9.36 implies another important result: Since M represents the mass of the entire system of particles, it is necessarily constant. (If it isn't, we don't have a closed system, so we can't expect the system's momentum to be conserved.) As a result, Equation 9.36 implies that, for a closed system,

$$\vec{\mathbf{v}}_{\mathrm{CM,f}} = \vec{\mathbf{v}}_{\mathrm{CM,i}}. \qquad 9.37$$

That is to say, *in the absence of an external force, the velocity of the center of mass never changes.*

You might be tempted to shrug and say, "Well yes, that's just Newton's first law," but remember that Newton's first law discusses the constant velocity of a particle, whereas Equation 9.37 applies to the center of mass of a (possibly vast) collection of interacting particles, and that there may not be any particle at the center of mass at all! So, this really is a remarkable result.

EXAMPLE 9.19

Fireworks Display

When a fireworks rocket explodes, thousands of glowing fragments fly outward in all directions, and fall to Earth in an elegant and beautiful display (Figure 9.31). Describe what happens, in terms of conservation of momentum and center of mass.



Figure 9.31 These exploding fireworks are a vivid example of conservation of momentum and the motion of the center of mass.

The picture shows radial symmetry about the central points of the explosions; this suggests the idea of center of mass. We can also see the parabolic motion of the glowing particles; this brings to mind projectile motion ideas.

Solution

Initially, the fireworks rocket is launched and flies more or less straight upward; this is the cause of the more-or-less-straight, white trail going high into the sky below the explosion in the upper-right of the picture (the yellow explosion). This trail is not parabolic because the explosive shell, during its launch phase, is actually a rocket; the impulse applied to it by the ejection of the burning fuel applies a force on the shell during the rise-time interval. (This is a phenomenon we will study in the next section.) The shell has multiple forces on it; thus, it is not in free-fall prior to the explosion.

At the instant of the explosion, the thousands of glowing fragments fly outward in a radially symmetrical pattern. The symmetry of the explosion is the result of all the internal forces summing to zero $\left(\sum_j \vec{\mathbf{f}}_j^{\text{int}} = 0\right)$; for every internal force, there is another that is equal in magnitude and opposite in direction.

However, as we learned above, these internal forces cannot change the momentum of the center of mass of the (now exploded) shell. Since the rocket force has now vanished, the center of mass of the shell is now a projectile (the only force on it is gravity), so its trajectory does become parabolic. The two red explosions on the left show the path of their centers of mass at a slightly longer time after explosion compared to the yellow explosion on the upper right.

In fact, if you look carefully at all three explosions, you can see that the glowing trails are not truly radially symmetric; rather, they are somewhat denser on one side than the other. Specifically, the yellow explosion and the lower middle explosion are slightly denser on their right sides, and the upper-left explosion is denser on its left side. This is because of the momentum of their centers of mass; the differing trail densities are due to the momentum each piece of the shell had at the moment of its explosion. The fragment for the explosion on the upper left of the picture had a momentum that pointed upward and to the left; the middle fragment's momentum pointed upward and slightly to the right; and the right-side explosion clearly upward and to the right (as evidenced by the white rocket exhaust trail visible below the yellow explosion).

Finally, each fragment is a projectile on its own, thus tracing out thousands of glowing parabolas.

Significance

In the discussion above, we said, "...the center of mass of the shell is now a projectile (the only force on it is gravity)...." This is not quite accurate, for there may not be any mass at all at the center of mass; in which case, there could not be a force acting on it. This is actually just verbal shorthand for describing the fact that the gravitational forces on all the particles act so that the center of mass changes position exactly as if all the mass of the shell were always located at the position of the center of mass.

CHECK YOUR UNDERSTANDING 9.13

How would the firework display change in deep space, far away from any source of gravity?

You may sometimes hear someone describe an explosion by saying something like, "the fragments of the exploded object always move in a way that makes sure that the center of mass continues to move on its original trajectory." This makes it sound as if the process is somewhat magical: how can it be that, in *every* explosion, it *always* works out that the fragments move in just the right way so that the center of mass' motion is unchanged? Phrased this way, it would be hard to believe no explosion ever does anything differently.

The explanation of this apparently astonishing coincidence is: We defined the center of mass precisely so this is exactly what we would get. Recall that first we defined the momentum of the system:

$$\vec{\mathbf{p}}_{\text{CM}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt}.$$

We then concluded that the net external force on the system (if any) changed this momentum:

$$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}_{\text{CM}}}{dt}$$

and then—and here's the point—we defined an acceleration that would obey Newton's second law. That is, we demanded that we should be able to write

$$\vec{\mathbf{a}} = \frac{\vec{\mathbf{F}}}{M}$$

which requires that

$$\vec{\mathbf{a}} = \frac{d^2}{dt^2}\left(\frac{1}{M}\sum_{j=1}^{N} m_j \vec{\mathbf{r}}_j\right).$$

where the quantity inside the parentheses is the center of mass of our system. So, it's not astonishing that the center of mass obeys Newton's second law; we defined it so that it would.

9.7 Rocket Propulsion

Learning Objectives

By the end of this section, you will be able to:

- Describe the application of conservation of momentum when the mass changes with time, as well as the velocity
- Calculate the speed of a rocket in empty space, at some time, given initial conditions
- Calculate the speed of a rocket in Earth's gravity field, at some time, given initial conditions

Now we deal with the case where the mass of an object is changing. We analyze the motion of a rocket, which changes its velocity (and hence its momentum) by ejecting burned fuel gases, thus causing it to accelerate in the opposite direction of the velocity of the ejected fuel (see Figure 9.32). Specifically: A fully fueled rocket ship in deep space has a total mass m_0 (this mass includes the initial mass of the fuel). At some moment in time, the rocket has a velocity $\vec{\mathbf{v}}$ and mass m; this mass is a combination of the mass of the empty rocket and the mass of the remaining unburned fuel it contains. (We refer to m as the "instantaneous mass" and $\vec{\mathbf{v}}$ as the "instantaneous velocity.") The rocket accelerates by burning the fuel it carries and ejecting the burned exhaust gases. If the burn rate of the fuel is constant, and the velocity at which the exhaust is ejected is also constant, what is the change of velocity of the rocket as a result of burning all of its fuel?



Figure 9.32 The space shuttle had a number of reusable parts. Solid fuel boosters on either side were recovered and refueled after each flight, and the entire orbiter returned to Earth for use in subsequent flights. The large liquid fuel tank was expended. The space shuttle was a complex assemblage of technologies, employing both solid and liquid fuel, and pioneering ceramic tiles as reentry heat shields. As a result, it permitted multiple launches as opposed to single-use rockets. (credit: modification of work by NASA)

Physical Analysis

Here's a description of what happens, so that you get a feel for the physics involved.

- As the rocket engines operate, they are continuously ejecting burned fuel gases, which have both mass and velocity, and therefore some momentum. By conservation of momentum, the rocket's momentum changes by this same amount (with the opposite sign). We will assume the burned fuel is being ejected at a constant rate, which means the rate of change of the rocket's momentum is also constant. By Equation 9.9, this represents a constant force on the rocket.
- However, as time goes on, the mass of the rocket (which includes the mass of the remaining fuel) continuously decreases. Thus, even though the force on the rocket is constant, the resulting acceleration is not; it is continuously increasing.
- So, the total change of the rocket's velocity will depend on the amount of mass of fuel that is burned, and that dependence is not linear.

The problem has the mass and velocity of the rocket changing; also, the total mass of ejected gases is changing. If we define our system to be the rocket + fuel, then this is a closed system (since the rocket is in deep space, there are no external forces acting on this system); as a result, momentum is conserved for this system. Thus, we can apply conservation of momentum to answer the question (Figure 9.33).

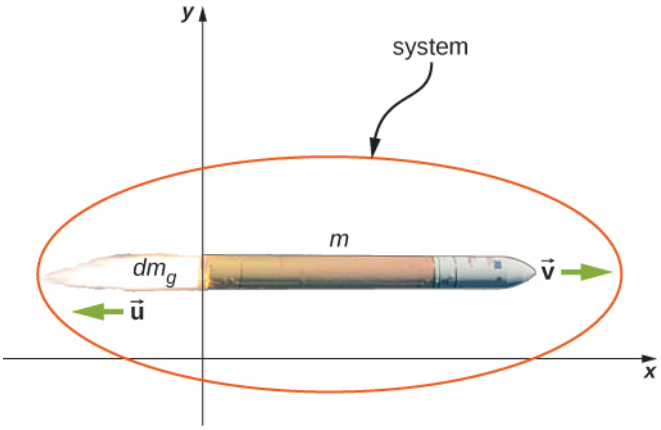


Figure 9.33 The rocket accelerates to the right due to the expulsion of some of its fuel mass to the left. Conservation of momentum enables us to determine the resulting change of velocity. The mass m is the instantaneous total mass of the rocket (i.e., mass of rocket body plus mass of fuel at that point in time). (credit: modification of work by NASA/Bill Ingalls)

At the same moment that the total instantaneous rocket mass is m (i.e., m is the mass of the rocket body plus the mass of the fuel at that point in time), we define the rocket's instantaneous velocity to be $\vec{\mathbf{v}} = v\hat{\mathbf{i}}$ (in the $+x$-direction); this velocity is measured relative to an inertial reference system (the Earth, for example). Thus, the initial momentum of the system is

$$\vec{\mathbf{p}}_{\mathrm{i}} = mv\hat{\mathbf{i}}.$$

The rocket's engines are burning fuel at a constant rate and ejecting the exhaust gases in the $-x$-direction. During an infinitesimal time interval dt, the engines eject a (positive) infinitesimal mass of gas dm_g at velocity $\vec{\mathbf{u}} = -u\hat{\mathbf{i}}$; note that although the rocket velocity $v\hat{\mathbf{i}}$ is measured with respect to Earth, the exhaust gas velocity is measured with respect to the (moving) rocket. Measured with respect to the Earth, therefore, the exhaust gas has velocity $(v-u)\hat{\mathbf{i}}$.

As a consequence of the ejection of the fuel gas, the rocket's mass decreases by dm_g, and its velocity increases by $dv\hat{\mathbf{i}}$. Therefore, including both the change for the rocket and the change for the exhaust gas, the final momentum of the system is

$$\begin{aligned}\vec{\mathbf{p}}_{\mathrm{f}} &= \vec{\mathbf{p}}_{\mathrm{rocket}} + \vec{\mathbf{p}}_{\mathrm{gas}} \\ &= \left(m - dm_g\right)(v + dv)\,\hat{\mathbf{i}} + dm_g(v-u)\hat{\mathbf{i}}.\end{aligned}$$

Since all vectors are in the x-direction, we drop the vector notation. Applying conservation of momentum, we obtain

$$\begin{aligned} p_{\mathrm{i}} &= p_{\mathrm{f}} \\ mv &= \left(m - dm_g\right)(v + dv) + dm_g(v - u) \\ mv &= mv + mdv - dm_g v - dm_g dv + dm_g v - dm_g u \\ mdv &= dm_g dv + dm_g u. \end{aligned}$$

Now, dm_g and dv are each very small; thus, their product $dm_g dv$ is very, very small, much smaller than the other two terms in this expression. We neglect this term, therefore, and obtain:

$$mdv = dm_g u.$$

Our next step is to remember that, since dm_g represents an increase in the mass of ejected gases, it must also represent a decrease of mass of the rocket:

$$dm_g = -dm.$$

Replacing this, we have

$$mdv = -dmu$$

or

$$dv = -u\frac{dm}{m}.$$

Integrating from the initial mass m_0 to the final mass m of the rocket gives us the result we are after:

$$\begin{aligned} \int_{v_{\mathrm{i}}}^{v} dv &= -u\int_{m_0}^{m}\frac{1}{m}dm \\ v - v_{\mathrm{i}} &= u\ln\left(\frac{m_0}{m}\right) \end{aligned}$$

and thus our final answer is

$$\Delta v = u\ln\left(\frac{m_0}{m}\right). \qquad 9.38$$

This result is called the **rocket equation**. It was originally derived by the Soviet physicist Konstantin Tsiolkovsky in 1897. It gives us the change of velocity that the rocket obtains from burning a mass of fuel that decreases the total rocket mass from m_0 down to m. As expected, the relationship between Δv and the change of mass of the rocket is nonlinear.

PROBLEM-SOLVING STRATEGY

Rocket Propulsion

In rocket problems, the most common questions are finding the change of velocity due to burning some amount of fuel for some amount of time; or to determine the acceleration that results from burning fuel.

1. To determine the change of velocity, use the rocket equation Equation 9.38.
2. To determine the acceleration, determine the force by using the impulse-momentum theorem, using the rocket equation to determine the change of velocity.

EXAMPLE 9.20

Thrust on a Spacecraft

A spacecraft is moving in gravity-free space along a straight path when its pilot decides to accelerate forward. He turns on the thrusters, and burned fuel is ejected at a constant rate of 2.0×10^2 kg/s, at a speed (relative to the rocket) of 2.5×10^2 m/s. The initial mass of the spacecraft and its unburned fuel is 2.0×10^4 kg, and the thrusters are on for 30 s.

a. What is the thrust (the force applied to the rocket by the ejected fuel) on the spacecraft?
b. What is the spacecraft's acceleration as a function of time?
c. What are the spacecraft's accelerations at $t = 0$, 15, 30, and 35 s?

Strategy

a. The force on the spacecraft is equal to the rate of change of the momentum of the fuel.
b. Knowing the force from part (a), we can use Newton's second law to calculate the consequent acceleration. The key here is that, although the force applied to the spacecraft is constant (the fuel is being ejected at a constant rate), the mass of the spacecraft isn't; thus, the acceleration caused by the force won't be constant. We expect to get a function $a(t)$, therefore.
c. We'll use the function we obtain in part (b), and just substitute the numbers given. Important: We expect that the acceleration will get larger as time goes on, since the mass being accelerated is continuously decreasing (fuel is being ejected from the rocket).

Solution

a. The momentum of the ejected fuel gas is

$$p = m_g v.$$

The ejection velocity $v = 2.5 \times 10^2$ m/s is constant, and therefore the force is

$$F = \frac{dp}{dt} = v\frac{dm_g}{dt} = -v\frac{dm}{dt}.$$

Now, $\frac{dm_g}{dt}$ is the rate of change of the mass of the fuel; the problem states that this is 2.0×10^2 kg/s. Substituting, we get

$$\begin{aligned} F &= v\frac{dm_g}{dt} \\ &= \left(2.5 \times 10^2 \ \tfrac{\text{m}}{\text{s}}\right)\left(2.0 \times 10^2 \ \tfrac{\text{kg}}{\text{s}}\right) \\ &= 5 \times 10^4 \text{ N}. \end{aligned}$$

b. Above, we defined m to be the combined mass of the empty rocket plus however much unburned fuel it contained: $m = m_R + m_g$. From Newton's second law,

$$a = \frac{F}{m} = \frac{F}{m_R + m_g}.$$

The force is constant and the empty rocket mass m_R is constant, but the fuel mass m_g is decreasing at a uniform rate; specifically:

$$m_g = m_g(t) = m_{g_0} - \left(\frac{dm_g}{dt}\right)t.$$

This gives us

$$a(t) = \frac{F}{m_{g_\text{i}} - \left(\frac{dm_g}{dt}\right)t} = \frac{F}{M - \left(\frac{dm_g}{dt}\right)t}.$$

Notice that, as expected, the acceleration is a function of time. Substituting the given numbers:

$$a(t) = \frac{5 \times 10^4 \text{ N}}{2.0 \times 10^4 \text{ kg} - \left(2.0 \times 10^2 \frac{\text{kg}}{\text{s}}\right) t}.$$

c. At $t = 0$ s:

$$a(0 \text{ s}) = \frac{5 \times 10^4 \text{ N}}{2.0 \times 10^4 \text{ kg} - \left(2.0 \times 10^2 \frac{\text{kg}}{\text{s}}\right)(0 \text{ s})} = 2.5 \frac{\text{m}}{\text{s}^2}.$$

At $t = 15$ s, $a(15 \text{ s}) = 2.9 \text{ m/s}^2$.
At $t = 30$ s, $a(30 \text{ s}) = 3.6 \text{ m/s}^2$.
Acceleration is increasing, as we expected.

Significance

Notice that the acceleration is not constant; as a result, any dynamical quantities must be calculated either using integrals, or (more easily) conservation of total energy.

CHECK YOUR UNDERSTANDING 9.14

What is the physical difference (or relationship) between $\frac{dm}{dt}$ and $\frac{dm_g}{dt}$ in this example?

Rocket in a Gravitational Field

Let's now analyze the velocity change of the rocket during the launch phase, from the surface of Earth. To keep the math manageable, we'll restrict our attention to distances for which the acceleration caused by gravity can be treated as a constant g.

The analysis is similar, except that now there is an external force of $\vec{\mathbf{F}} = -mg\hat{\mathbf{j}}$ acting on our system. This force applies an impulse $d\vec{\mathbf{J}} = \vec{\mathbf{F}}dt = -mgdt\hat{\mathbf{j}}$, which is equal to the change of momentum. This gives us

$$\begin{aligned} d\vec{\mathbf{p}} &= d\vec{\mathbf{J}} \\ \vec{\mathbf{p}}_\text{f} - \vec{\mathbf{p}}_\text{i} &= -mgdt\hat{\mathbf{j}} \\ \left[\left(m - dm_g\right)(v + dv) + dm_g(v - u) - mv\right]\hat{\mathbf{j}} &= -mgdt\hat{\mathbf{j}} \end{aligned}$$

and so

$$mdv - dm_g u = -mgdt$$

where we have again neglected the term $dm_g dv$ and dropped the vector notation. Next we replace dm_g with $-dm$:

$$\begin{aligned} mdv + dmu &= -mgdt \\ mdv &= -dmu - mgdt. \end{aligned}$$

Dividing through by m gives

$$dv = -u\frac{dm}{m} - gdt$$

and integrating, we have

$$\Delta v = u \ln\left(\frac{m_0}{m}\right) - g\Delta t. \qquad 9.39$$

Unsurprisingly, the rocket's velocity is affected by the (constant) acceleration of gravity.

Remember that Δt is the burn time of the fuel. Now, in the absence of gravity, Equation 9.38 implies that it makes no difference how much time it takes to burn the entire mass of fuel; the change of velocity does not

depend on Δt. However, in the presence of gravity, it matters a lot. The $-g\Delta t$ term in Equation 9.39 tells us that the *longer* the burn time is, the *smaller* the rocket's change of velocity will be. This is the reason that the launch of a rocket is so spectacular at the first moment of liftoff: It's essential to burn the fuel as quickly as possible, to get as large a Δv as possible.

CHAPTER REVIEW

Key Terms

center of mass weighted average position of the mass

closed system system for which the mass is constant and the net external force on the system is zero

elastic collision that conserves kinetic energy

explosion single object breaks up into multiple objects; kinetic energy is not conserved in explosions

external force force applied to an extended object that changes the momentum of the extended object as a whole

impulse effect of applying a force on a system for a time interval; this time interval is usually small, but does not have to be

impulse-momentum theorem change of momentum of a system is equal to the impulse applied to the system

inelastic collision that does not conserve kinetic energy

internal force force that the simple particles that make up an extended object exert on each other. Internal forces can be attractive or repulsive

Law of Conservation of Momentum total momentum of a closed system cannot change

linear mass density λ, expressed as the number of kilograms of material per meter

momentum measure of the quantity of motion that an object has; it takes into account both how fast the object is moving, and its mass; specifically, it is the product of mass and velocity; it is a vector quantity

perfectly inelastic collision after which all objects are motionless, the final kinetic energy is zero, and the loss of kinetic energy is a maximum

rocket equation derived by the Soviet physicist Konstantin Tsiolkovsky in 1897, it gives us the change of velocity that the rocket obtains from burning a mass of fuel that decreases the total rocket mass from m_i down to m

system object or collection of objects whose motion is currently under investigation; however, your system is defined at the start of the problem, you must keep that definition for the entire problem

Key Equations

Definition of momentum	$\vec{\mathbf{p}} = m\vec{\mathbf{v}}$
Impulse	$\vec{J} \equiv \int_{t_\text{i}}^{t_\text{f}} \vec{F}(t)dt$ or $\vec{\mathbf{J}} = \vec{\mathbf{F}}_\text{ave}\,\Delta t$
Impulse-momentum theorem	$\vec{\mathbf{J}} = \Delta\vec{\mathbf{p}}$
Average force from momentum	$\vec{\mathbf{F}} = \frac{\Delta\vec{\mathbf{p}}}{\Delta t}$
Instantaneous force from momentum (Newton's second law)	$\vec{\mathbf{F}}(t) = \frac{d\vec{\mathbf{p}}}{dt}$
Conservation of momentum	$\frac{d\vec{\mathbf{p}}_\mathbf{1}}{dt} + \frac{d\vec{\mathbf{p}}_\mathbf{2}}{dt} = 0$ or $\vec{\mathbf{p}}_\mathbf{1} + \vec{\mathbf{p}}_\mathbf{2} = \text{constant}$
Generalized conservation of momentum	$\sum_{j=1}^{N} \vec{\mathbf{p}}_\mathbf{j} = \text{constant}$
Conservation of momentum in two dimensions	$p_{\text{f},x} = p_{1,\text{i},x} + p_{2,\text{i},x}$ $p_{\text{f},y} = p_{1,\text{i},y} + p_{2,\text{i},y}$

External forces	$\vec{\mathbf{F}}_{\text{ext}} = \sum_{j=1}^{N} \frac{d\vec{\mathbf{p}}_j}{dt}$
Newton's second law for an extended object	$\vec{\mathbf{F}} = \frac{d\vec{\mathbf{p}}_{\text{CM}}}{dt}$
Acceleration of the center of mass	$\vec{\mathbf{a}}_{\text{CM}} = \frac{d^2}{dt^2}\left(\frac{1}{M}\sum_{j=1}^{N} m_j\vec{\mathbf{r}}_j\right) = \frac{1}{M}\sum_{j=1}^{N} m_j\vec{\mathbf{a}}_j$
Position of the center of mass for a system of particles	$\vec{\mathbf{r}}_{\text{CM}} \equiv \frac{1}{M}\sum_{j=1}^{N} m_j\vec{\mathbf{r}}_j$
Velocity of the center of mass	$\vec{\mathbf{v}}_{\text{CM}} = \frac{d}{dt}\left(\frac{1}{M}\sum_{j=1}^{N} m_j\vec{\mathbf{r}}_j\right) = \frac{1}{M}\sum_{j=1}^{N} m_j\vec{\mathbf{v}}_j$
Position of the center of mass of a continuous object	$\vec{\mathbf{r}}_{\text{CM}} \equiv \frac{1}{M}\int \vec{\mathbf{r}}\, dm$
Rocket equation	$\Delta v = u \ln\left(\frac{m_{\text{i}}}{m}\right)$

Summary

9.1 Linear Momentum

- The motion of an object depends on its mass as well as its velocity. Momentum is a concept that describes this. It is a useful and powerful concept, both computationally and theoretically. The SI unit for momentum is kg· m/s.

9.2 Impulse and Collisions

- When a force is applied on an object for some amount of time, the object experiences an impulse.
- This impulse is equal to the object's change of momentum.
- Newton's second law in terms of momentum states that the net force applied to a system equals the rate of change of the momentum that the force causes.

9.3 Conservation of Linear Momentum

- The law of conservation of momentum says that the momentum of a closed system is constant in time (conserved).
- A closed (or isolated) system is defined to be one for which the mass remains constant, and the net external force is zero.
- The total momentum of a system is conserved *only* when the system is closed.

9.4 Types of Collisions

- An elastic collision is one that conserves kinetic energy.
- An inelastic collision does not conserve kinetic energy.
- Momentum is conserved regardless of whether or not kinetic energy is conserved.
- Analysis of kinetic energy changes and conservation of momentum together allow the final velocities to be calculated in terms of initial velocities and masses in one-dimensional, two-body collisions.

9.5 Collisions in Multiple Dimensions

- The approach to two-dimensional collisions is to choose a convenient coordinate system and break the motion into components along perpendicular axes.
- Momentum is conserved in both directions simultaneously and independently.
- The Pythagorean theorem gives the magnitude of the momentum vector using the x- and y-components, calculated using conservation of momentum in each direction.

9.6 Center of Mass

- An extended object (made up of many objects) has a defined position vector called the center of mass.
- The center of mass can be thought of, loosely, as the average location of the total mass of the object.
- The center of mass of an object traces out the trajectory dictated by Newton's second law, due to the net external force.
- The internal forces within an extended object cannot alter the momentum of the extended object as a whole.

9.7 Rocket Propulsion

- A rocket is an example of conservation of momentum where the mass of the system is not constant, since the rocket ejects fuel to provide thrust.
- The rocket equation gives us the change of velocity that the rocket obtains from burning a mass of fuel that decreases the total rocket mass.

Conceptual Questions

9.1 Linear Momentum

1. An object that has a small mass and an object that has a large mass have the same momentum. Which object has the largest kinetic energy?

2. An object that has a small mass and an object that has a large mass have the same kinetic energy. Which mass has the largest momentum?

9.2 Impulse and Collisions

3. Is it possible for a small force to produce a larger impulse on a given object than a large force? Explain.

4. Why is a 10-m fall onto concrete far more dangerous than a 10-m fall onto water?

5. What external force is responsible for changing the momentum of a car moving along a horizontal road?

6. A piece of putty and a tennis ball with the same mass are thrown against a wall with the same velocity. Which object experiences a greater force from the wall or are the forces equal? Explain.

9.3 Conservation of Linear Momentum

7. Under what circumstances is momentum conserved?

8. Can momentum be conserved for a system if there are external forces acting on the system? If so, under what conditions? If not, why not?

9. Explain in terms of momentum and Newton's laws how a car's air resistance is due in part to the fact that it pushes air in its direction of motion.

10. Can objects in a system have momentum while the momentum of the system is zero? Explain your answer.

11. A sprinter accelerates out of the starting blocks. Can you consider him as a closed system? Explain.

12. A rocket in deep space (zero gravity) accelerates by firing hot gas out of its thrusters. Does the rocket constitute a closed system? Explain.

9.4 Types of Collisions

13. Two objects of equal mass are moving with equal and opposite velocities when they collide. Can all the kinetic energy be lost in the collision?

14. Describe a system for which momentum is conserved but mechanical energy is not. Now the reverse: Describe a system for which kinetic energy is conserved but momentum is not.

9.5 Collisions in Multiple Dimensions

15. Momentum for a system can be conserved in one direction while not being conserved in another. What is the angle between the directions? Give an example.

9.6 Center of Mass

16. Suppose a fireworks shell explodes, breaking into three large pieces for which air resistance is negligible. How does the explosion affect the motion of the center of mass? How would it be affected if the pieces experienced significantly more air resistance than the intact shell?

9.7 Rocket Propulsion


17. It is possible for the velocity of a rocket to be greater than the exhaust velocity of the gases it ejects. When that is the case, the gas velocity and gas momentum are in the same direction as that of the rocket. How is the rocket still able to

obtain thrust by ejecting the gases?

Problems

9.1 Linear Momentum

18. An elephant and a hunter are having a confrontation.

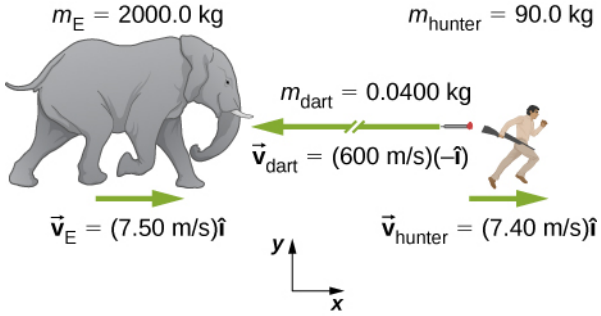


a. Calculate the momentum of the 2000.0-kg elephant charging the hunter at a speed of 7.50 m/s.
b. Calculate the ratio of the elephant's momentum to the momentum of a 0.0400-kg tranquilizer dart fired at a speed of 600 m/s.
c. What is the momentum of the 90.0-kg hunter running at 7.40 m/s after missing the elephant?

19. A skater of mass 40 kg is carrying a box of mass 5 kg. The skater has a speed of 5 m/s with respect to the floor and is gliding without any friction on a smooth surface.
a. Find the momentum of the box with respect to the floor.
b. Find the momentum of the box with respect to the floor after she puts the box down on the frictionless skating surface.

20. A car of mass 2000 kg is moving with a constant velocity of 10 m/s due east. What is the momentum of the car?

21. The mass of Earth is 5.97×10^{24} kg and its orbital radius is an average of 1.50×10^{11} m. Calculate the magnitude of its linear momentum at the location in the diagram.

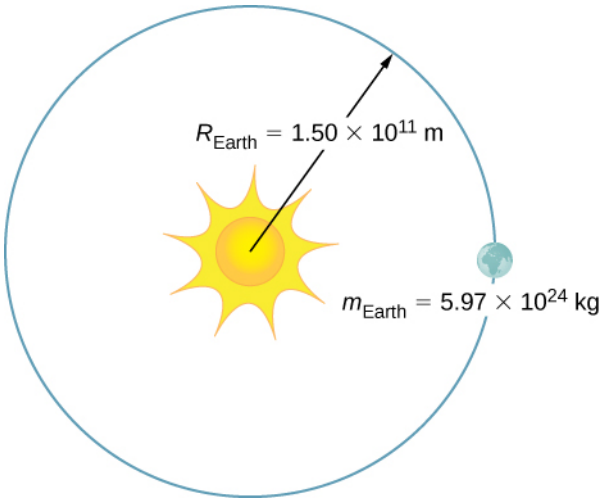


22. If a rainstorm drops 1 cm of rain over an area of 10 km^2 in the period of 1 hour, what is the momentum of the rain that falls in one second? Assume the terminal velocity of a raindrop is 10 m/s.

23. What is the average momentum of an avalanche that moves a 40-cm-thick layer of snow over an area of 100 m by 500 m over a distance of 1 km down a hill in 5.5 s? Assume a density of 350 kg/m^3 for the snow.

24. What is the average momentum of a 70.0-kg sprinter who runs the 100-m dash in 9.65 s?

9.2 Impulse and Collisions

25. A 75.0-kg person is riding in a car moving at 20.0 m/s when the car runs into a bridge abutment (see the following figure).

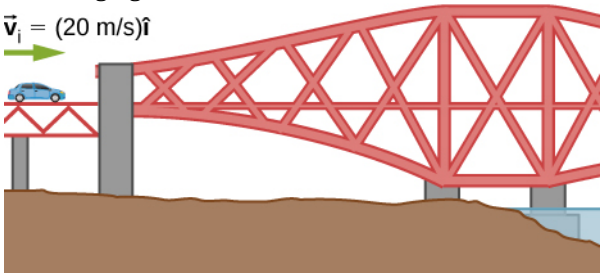


a. Calculate the average force on the person if he is stopped by a padded dashboard that compresses an average of 1.00 cm.
b. Calculate the average force on the person if he is stopped by an air bag that compresses an average of 15.0 cm.

26. One hazard of space travel is debris left by previous missions. There are several thousand

objects orbiting Earth that are large enough to be detected by radar, but there are far greater numbers of very small objects, such as flakes of paint. Calculate the force exerted by a 0.100-mg chip of paint that strikes a spacecraft window at a relative speed of 4.00×10^3 m/s, given the collision lasts 6.00×10^{-8} s.

27. A cruise ship with a mass of 1.00×10^7 kg strikes a pier at a speed of 0.750 m/s. It comes to rest after traveling 6.00 m, damaging the ship, the pier, and the tugboat captain's finances. Calculate the average force exerted on the pier using the concept of impulse. (*Hint*: First calculate the time it took to bring the ship to rest, assuming a constant force.)

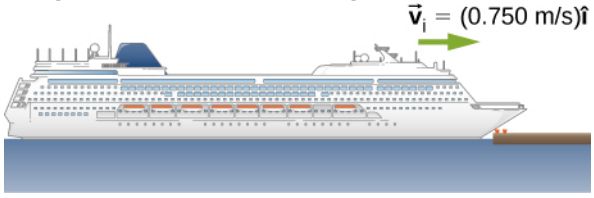

28. Calculate the final speed of a 110-kg rugby player who is initially running at 8.00 m/s but collides head-on with a padded goalpost and experiences a backward force of 1.76×10^4 N for 5.50×10^{-2} s.


29. Water from a fire hose is directed horizontally against a wall at a rate of 50.0 kg/s and a speed of 42.0 m/s. Calculate the force exerted on the wall, assuming the water's horizontal momentum is reduced to zero.

30. A 0.450-kg hammer is moving horizontally at 7.00 m/s when it strikes a nail and comes to rest after driving the nail 1.00 cm into a board. Assume constant acceleration of the hammer-nail pair.

a. Calculate the duration of the impact.
b. What was the average force exerted on the nail?


31. What is the momentum (as a function of time) of a 5.0-kg particle moving with a velocity $\vec{\mathbf{v}}(t) = \left(2.0\hat{\mathbf{i}} + 4.0t\hat{\mathbf{j}}\right)$ m/s? What is the net force acting on this particle?

32. The *x*-component of a force on a 46-g golf ball by a 7-iron versus time is plotted in the following figure:

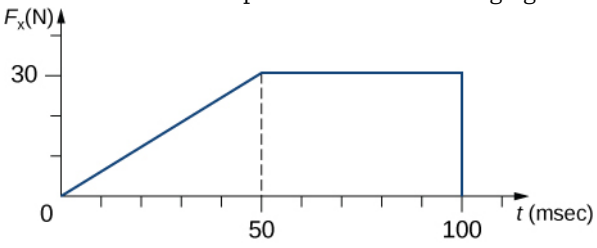


a. Find the *x*-component of the impulse during the intervals
   i. [0, 50 ms], and
   ii. [50 ms, 100 ms]
b. Find the change in the *x*-component of the momentum during the intervals
   iii. [0, 50 ms], and
   iv. [50 ms, 100 ms]

33. A hockey puck of mass 150 g is sliding due east on a frictionless table with a speed of 10 m/s. Suddenly, a constant force of magnitude 5 N and direction due north is applied to the puck for 1.5 s. Find the north and east components of the momentum at the end of the 1.5-s interval.



34. A ball of mass 250 g is thrown with an initial velocity of 25 m/s at an angle of 30° with the horizontal direction. Ignore air resistance. What is the momentum of the ball after 0.2 s? (Do this problem by finding the components of the momentum first, and then constructing the magnitude and direction of the momentum vector from the components.)

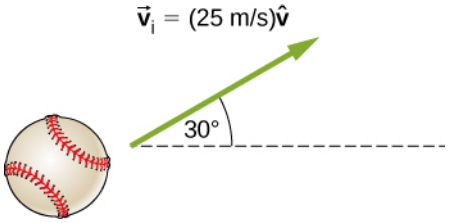


9.3 Conservation of Linear Momentum

35. Train cars are coupled together by being bumped into one another. Suppose two loaded train cars are moving toward one another, the first having a mass of 1.50×10^5 kg and a velocity of $(0.30 \text{ m/s})\hat{\mathbf{i}}$, and the second having a mass of 1.10×10^5 kg and a velocity of $-(0.12 \text{ m/s})\hat{\mathbf{i}}$. What is their final velocity?




36. Two identical pucks collide elastically on an air hockey table. Puck 1 was originally at rest; puck 2 has an incoming speed of 6.00 m/s and scatters at an angle of 30° with respect to its incoming

direction. What is the velocity (magnitude and direction) of puck 1 after the collision?



37. The figure below shows a bullet of mass 200 g traveling horizontally towards the east with speed 400 m/s, which strikes a block of mass 1.5 kg that is initially at rest on a frictionless table.

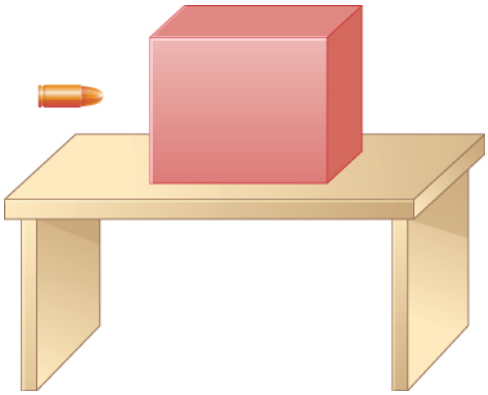

After striking the block, the bullet is embedded in the block and the block and the bullet move together as one unit.

a. What is the magnitude and direction of the velocity of the block/bullet combination immediately after the impact?
b. What is the magnitude and direction of the impulse by the block on the bullet?
c. What is the magnitude and direction of the impulse from the bullet on the block?
d. If it took 3 ms for the bullet to change the speed from 400 m/s to the final speed after impact, what is the average force between the block and the bullet during this time?

38. A 20-kg child is coasting at 3.3 m/s over flat ground in a 4.0-kg wagon. The child drops a 1.0-kg ball out the back of the wagon. What is the final speed of the child and wagon?

39. A 4.5 kg puffer fish expands to 40% of its mass by taking in water. When the puffer fish is threatened, it releases the water toward the threat to move quickly forward. What is the ratio of the speed of the puffer fish forward to the speed of the expelled water backwards?

40. Explain why a cannon recoils when it fires a shell.

41. Two figure skaters are coasting in the same direction, with the leading skater moving at 5.5 m/s and the trailing skating moving at 6.2 m/s. When the trailing skater catches up with the leading skater, he picks her up without applying any horizontal forces on his skates. If the trailing skater is 50% heavier than the 50-kg leading skater, what is their speed after he picks her up?

42. A 2000-kg railway freight car coasts at 4.4 m/s underneath a grain terminal, which dumps grain directly down into the freight car. If the speed of the loaded freight car must not go below 3.0 m/s, what is the maximum mass of grain that it can accept?

9.4 Types of Collisions

43. A 5.50-kg bowling ball moving at 9.00 m/s collides with a 0.850-kg bowling pin, which is scattered at an angle of 15.8° to the initial direction of the bowling ball and with a speed of 15.0 m/s.

a. Calculate the final velocity (magnitude and direction) of the bowling ball.
b. Is the collision elastic?

44. Ernest Rutherford (the first New Zealander to be awarded the Nobel Prize in Chemistry) demonstrated that nuclei were very small and dense by scattering helium-4 nuclei from gold-197 nuclei. The energy of the incoming helium nucleus was 8.00×10^{-13} J, and the masses of the helium and gold nuclei were 6.68×10^{-27} kg and 3.29×10^{-25} kg, respectively (note that their mass ratio is 4 to 197).

a. If a helium nucleus scatters to an angle of 120° during an elastic collision with a gold nucleus, calculate the helium nucleus's final speed and the final velocity (magnitude and direction) of the gold nucleus.



b. What is the final kinetic energy of the helium nucleus?

45. A 90.0-kg ice hockey player hits a 0.150-kg puck, giving the puck a velocity of 45.0 m/s. If both are initially at rest and if the ice is

frictionless, how far does the player recoil in the time it takes the puck to reach the goal 15.0 m away?

46. A 100-g firecracker is launched vertically into the air and explodes into two pieces at the peak of its trajectory. If a 72-g piece is projected horizontally to the left at 20 m/s, what is the speed and direction of the other piece?

47. In an elastic collision, a 400-kg bumper car collides directly from behind with a second, identical bumper car that is traveling in the same direction. The initial speed of the leading bumper car is 5.60 m/s and that of the trailing car is 6.00 m/s. Assuming that the mass of the drivers is much, much less than that of the bumper cars, what are their final speeds?

48. Repeat the preceding problem if the mass of the leading bumper car is 30.0% greater than that of the trailing bumper car.

49. An alpha particle (^{4}He) undergoes an elastic collision with a stationary uranium nucleus (^{235}U). What percent of the kinetic energy of the alpha particle is transferred to the uranium nucleus? Assume the collision is one-dimensional.

50. You are standing on a very slippery icy surface and throw a 1-kg football horizontally at a speed of 6.7 m/s. What is your velocity when you release the football? Assume your mass is 65 kg.

51. A 35-kg child rides a relatively massless sled down a hill and then coasts along the flat section at the bottom, where a second 35-kg child jumps on the sled as it passes by her. If the speed of the sled is 3.5 m/s before the second child jumps on, what is its speed after she jumps on?

52. A boy sleds down a hill and onto a frictionless ice-covered lake at 10.0 m/s. In the middle of the lake is a 1000-kg boulder. When the sled crashes into the boulder, he is propelled backwards from the boulder. The collision is an elastic collision. If the boy's mass is 40.0 kg and the sled's mass is 2.50 kg, what is the speed of the sled and the boulder after the collision?

9.5 Collisions in Multiple Dimensions

53. A 0.90-kg falcon is diving at 28.0 m/s at a downward angle of 35°. It catches a 0.325-kg pigeon from behind in midair. What is their combined velocity after impact if the pigeon's initial velocity was 7.00 m/s directed horizontally? Note that $\hat{\mathbf{v}}_{1,i}$ is a unit vector pointing in the direction in which the falcon is initially flying.


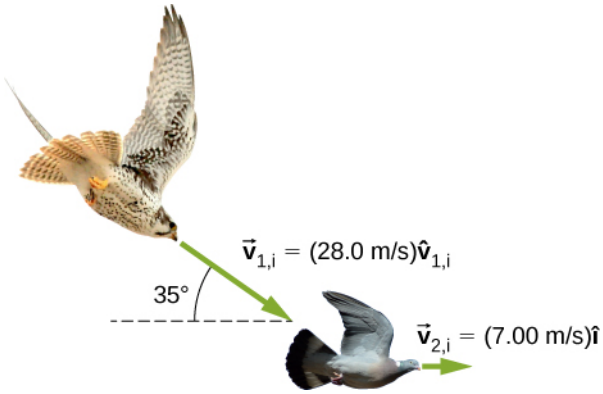


Figure 9.34 (credit "falcon": modification of work by "USFWS Mountain-Prairie"/Flickr; credit "pigeon": modification of work by Jacob Spinks)

54. A billiard ball, labeled 1, moving horizontally strikes another billiard ball, labeled 2, at rest. Before impact, ball 1 was moving at a speed of 3.00 m/s, and after impact it is moving at 0.50 m/s at 50° from the original direction. If the two balls have equal masses of 300 g, what is the velocity of the ball 2 after the impact?

55. A projectile of mass 2.0 kg is fired in the air at an angle of 40.0° to the horizon at a speed of 50.0 m/s. At the highest point in its flight, the projectile breaks into three parts of mass 1.0 kg, 0.7 kg, and 0.3 kg. The 1.0-kg part falls straight down after breakup with an initial speed of 10.0 m/s, the 0.7-kg part moves in the original forward direction, and the 0.3-kg part goes straight up.

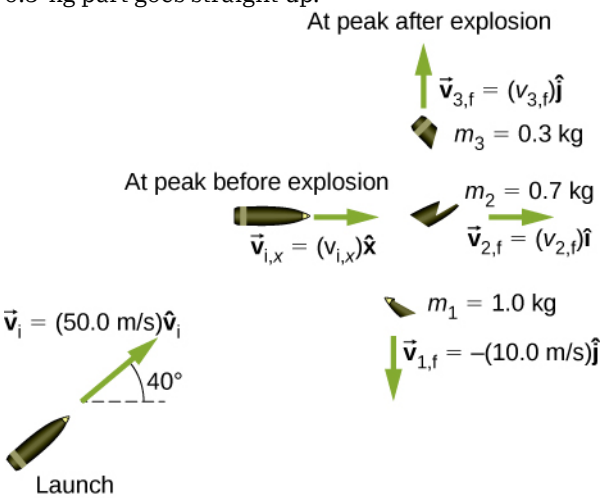

a. Find the speeds of the 0.3-kg and 0.7-kg pieces immediately after the break-up.
b. How high from the break-up point does the 0.3-kg piece go before coming to rest?
c. Where does the 0.7-kg piece land relative to where it was fired from?

56. Two asteroids collide and stick together. The

first asteroid has mass of 15×10^3 kg and is initially moving at 770 m/s. The second asteroid has mass of 20×10^3 kg and is moving at 1020 m/s. Their initial velocities made an angle of 20° with respect to each other. What is the final speed and direction with respect to the velocity of the first asteroid?

57. A 200-kg rocket in deep space moves with a velocity of $(121 \text{ m/s})\,\hat{\mathbf{i}} + (38.0 \text{ m/s})\,\hat{\mathbf{j}}$. Suddenly, it explodes into three pieces, with the first (78 kg) moving at $-(321 \text{ m/s})\,\hat{\mathbf{i}} + (228 \text{ m/s})\,\hat{\mathbf{j}}$ and the second (56 kg) moving at $(16.0 \text{ m/s})\,\hat{\mathbf{i}} - (88.0 \text{ m/s})\,\hat{\mathbf{j}}$. Find the velocity of the third piece.

58. A proton traveling at 3.0×10^6 m/s scatters elastically from an initially stationary alpha particle and is deflected at an angle of 85° with respect to its initial velocity. Given that the alpha particle has four times the mass of the proton, what percent of its initial kinetic energy does the proton retain after the collision?

59. Three 70-kg deer are standing on a flat 200-kg rock that is on an ice-covered pond. A gunshot goes off and the deer scatter, with deer A running at $(15 \text{ m/s})\,\hat{\mathbf{i}} + (5.0 \text{ m/s})\,\hat{\mathbf{j}}$, deer B running at $(-12 \text{ m/s})\,\hat{\mathbf{i}} + (8.0 \text{ m/s})\,\hat{\mathbf{j}}$, and deer C running at $(1.2 \text{ m/s})\,\hat{\mathbf{i}} - (18.0 \text{ m/s})\,\hat{\mathbf{j}}$. What is the velocity of the rock on which they were standing?


60. A family is skating. The father (75 kg) skates at 8.2 m/s and collides and sticks to the mother (50 kg), who was initially moving at 3.3 m/s and at 45° with respect to the father's velocity. The pair then collides with their daughter (30 kg), who was stationary, and the three slide off together. What is their final velocity?

61. An oxygen atom (mass 16 u) moving at 733 m/s at 15.0° with respect to the $\hat{\mathbf{i}}$ direction collides and sticks to an oxygen molecule (mass 32 u) moving at 528 m/s at 128° with respect to the $\hat{\mathbf{i}}$ direction. The two stick together to form ozone. What is the final velocity of the ozone molecule?

62. Two cars of the same mass approach an extremely icy four-way perpendicular intersection. Car A travels northward at 30 m/s and car B is travelling eastward. They collide and stick together, traveling at 28° north of east. What was the initial velocity of car B?

9.6 Center of Mass

63. Three point masses are placed at the corners of a triangle as shown in the figure below.



Find the center of mass of the three-mass system.

64. Two particles of masses m_1 and m_2 separated by a horizontal distance D are released from the same height h at the same time. Find the vertical position of the center of mass of these two particles at a time before the two particles strike the ground. Assume no air resistance.

65. Two particles of masses m_1 and m_2 separated by a horizontal distance D are let go from the same height h at different times. Particle 1 starts at $t = 0$, and particle 2 is let go at $t = T$. Find the vertical position of the center of mass at a time before the first particle strikes the ground. Assume no air resistance.

66. Two particles of masses m_1 and m_2 move uniformly in different circles of radii R_1 and R_2 about origin in the x, y-plane. The x- and y-coordinates of the center of mass and that of particle 1 are given as follows (where length is in meters and t in seconds):

$x_1(t) = 4\cos(2t), y_1(t) = 4\sin(2t)$

and:

$x_{\text{CM}}(t) = 3\cos(2t), y_{\text{CM}}(t) = 3\sin(2t)$.

a. Find the radius of the circle in which particle 1 moves.
b. Find the x- and y-coordinates of particle 2 and the radius of the circle this particle moves.

67. Two particles of masses m_1 and m_2 move uniformly in different circles of radii R_1 and R_2 about the origin in the x, y-plane. The coordinates of the two particles in meters are given as follows ($z = 0$ for both). Here t is in seconds:

$$\begin{aligned} x_1(t) &= 4\cos(2t) \\ y_1(t) &= 4\sin(2t) \\ x_2(t) &= 2\cos\left(3t - \tfrac{\pi}{2}\right) \\ y_2(t) &= 2\sin\left(3t - \tfrac{\pi}{2}\right) \end{aligned}$$

a. Find the radii of the circles of motion of both particles.
b. Find the x- and y-coordinates of the center of mass.
c. Decide if the center of mass moves in a

circle by plotting its trajectory.


68. Find the center of mass of a one-meter long rod, made of 50 cm of iron (density $8\ \frac{\text{g}}{\text{cm}^3}$) and 50 cm of aluminum (density $2.7\ \frac{\text{g}}{\text{cm}^3}$).

69. Find the center of mass of a rod of length L whose mass density changes from one end to the other quadratically. That is, if the rod is laid out along the x-axis with one end at the origin and the other end at $x = L$, the density is given by $\rho(x) = \rho_0 + (\rho_1 - \rho_0)\left(\frac{x}{L}\right)^2$, where ρ_0 and ρ_1 are constant values.

70. Find the center of mass of a rectangular block of length a and width b that has a nonuniform density such that when the rectangle is placed in the x,y-plane with one corner at the origin and the block placed in the first quadrant with the two edges along the x- and y-axes, the density is given by $\rho(x, y) = \rho_0 x$, where ρ_0 is a constant.

71. Find the center of mass of a rectangular material of length a and width b made up of a material of nonuniform density. The density is such that when the rectangle is placed in the xy-plane, the density is given by $\rho(x, y) = \rho_0 xy$.

72. A cube of side a is cut out of another cube of side b as shown in the figure below.

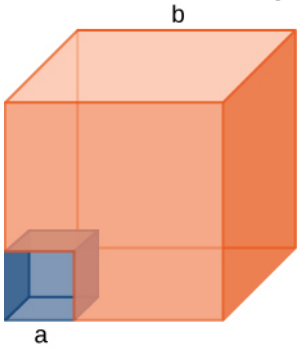


Find the location of the center of mass of the structure. (*Hint:* Think of the missing part as a negative mass overlapping a positive mass.)

73. Find the center of mass of a cone of uniform density that has a radius R at the base, height h, and mass M. Let the origin be at the center of the base of the cone and have $+z$ going through the cone vertex.

74. Find the center of mass of a thin wire of mass m and length L bent in a semicircular shape. Let the origin be at the center of the semicircle and have the wire arc from the $+x$ axis, cross the $+y$ axis, and terminate at the $-x$ axis.

75. Find the center of mass of a uniform thin semicircular plate of radius R. Let the origin be at the center of the semicircle, the plate arc from the $+x$ axis to the $-$x axis, and the z axis be perpendicular to the plate.

76. Find the center of mass of a sphere of mass M and radius R and a cylinder of mass m, radius r, and height h arranged as shown below.

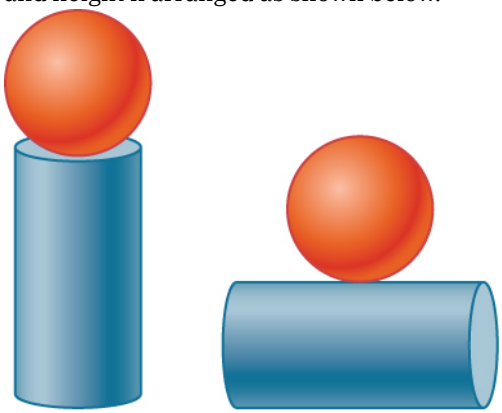

Express your answers in a coordinate system that has the origin at the center of the cylinder.

9.7 Rocket Propulsion

77. (a) A 5.00-kg squid initially at rest ejects 0.250 kg of fluid with a velocity of 10.0 m/s. What is the recoil velocity of the squid if the ejection is done in 0.100 s and there is a 5.00-N frictional force opposing the squid's movement?
(b) How much energy is lost to work done against friction?

78. A rocket takes off from Earth and reaches a speed of 100 m/s in 10.0 s. If the exhaust speed is 1500 m/s and the mass of fuel burned is 100 kg, what was the initial mass of the rocket?

79. Repeat the preceding problem but for a rocket that takes off from a space station, where there is no gravity other than the negligible gravity due to the space station.

80. How much fuel would be needed for a 1000-kg rocket (this is its mass with no fuel) to take off from Earth and reach 1000 m/s in 30 s? The exhaust speed is 1000 m/s.

81. What exhaust speed is required to accelerate a rocket in deep space from 800 m/s to 1000 m/s in 5.0 s if the total rocket mass is 1200 kg and the rocket only has 50 kg of fuel left?

82. **Unreasonable Results** Squids have been reported to jump from the ocean and travel 30.0 m (measured horizontally) before re-entering the water.
(a) Calculate the initial speed of the squid if it leaves the water at an angle of 20.0°, assuming

negligible lift from the air and negligible air resistance.
(b) The squid propels itself by squirting water. What fraction of its mass would it have to eject in order to achieve the speed found in the previous part? The water is ejected at 12.0 m/s; gravitational force and friction are neglected.
(c) What is unreasonable about the results?
(d) Which premise is unreasonable, or which premises are inconsistent?

Additional Problems

83. Two 70-kg canoers paddle in a single, 50-kg canoe. Their paddling moves the canoe at 1.2 m/s with respect to the water, and the river they're in flows at 4 m/s with respect to the land. What is their momentum with respect to the land?

84. Which has a larger magnitude of momentum: a 3000-kg elephant moving at 40 km/h or a 60-kg cheetah moving at 112 km/h?

85. A driver applies the brakes and reduces the speed of her car by 20%, without changing the direction in which the car is moving. By how much does the car's momentum change?

86. You friend claims that momentum is mass multiplied by velocity, so things with more mass have more momentum. Do you agree? Explain.

87. Dropping a glass on a cement floor is more likely to break the glass than if it is dropped from the same height on a grass lawn. Explain in terms of the impulse.

88. Your 1500-kg sports car accelerates from 0 to 30 m/s in 10 s. What average force is exerted on it during this acceleration?

89. A ball of mass m is dropped. What is the formula for the impulse exerted on the ball from the instant it is dropped to an arbitrary time τ later? Ignore air resistance.

90. Repeat the preceding problem, but including a drag force due to air of $f_{\text{drag}} = -b\vec{v}$.

91. A 5.0-g egg falls from a 90-cm-high counter onto the floor and breaks. What impulse is exerted by the floor on the egg?

92. A car crashes into a large tree that does not move. The car goes from 30 m/s to 0 in 1.3 m.
(a) What impulse is applied to the driver by the seatbelt, assuming he follows the same motion as the car? (b) What is the average force applied to the driver by the seatbelt?

93. Two hockey players approach each other head on, each traveling at the same speed v_{i}. They collide and get tangled together, falling down and moving off at a speed $v_{\text{i}}/5$. What is the ratio of their masses?

94. You are coasting on your 10-kg bicycle at 15 m/s and a 5.0-g bug splatters on your helmet. The bug was initially moving at 2.0 m/s in the same direction as you. If your mass is 60 kg, (a) what is the initial momentum of you plus your bicycle? (b) What is the initial momentum of the bug? (c) What is your change in velocity due to the collision with the bug? (d) What would the change in velocity have been if the bug were traveling in the opposite direction?

95. A load of gravel is dumped straight down into a 30 000-kg freight car coasting at 2.2 m/s on a straight section of a railroad. If the freight car's speed after receiving the gravel is 1.5 m/s, what mass of gravel did it receive?

96. Two carts on a straight track collide head on. The first cart was moving at 3.6 m/s in the positive x direction and the second was moving at 2.4 m/s in the opposite direction. After the collision, the second car continues moving in its initial direction of motion at 0.24 m/s. If the mass of the second car is 5.0 times that of the first, what is the final velocity of the first car?

97. A 100-kg astronaut finds himself separated from his spaceship by 10 m and moving away from the spaceship at 0.1 m/s. To get back to the spaceship, he throws a 10-kg tool bag away from the spaceship at 5.0 m/s. How long will he take to return to the spaceship?

98. Derive the equations giving the final speeds for two objects that collide elastically, with the mass of the objects being m_1 and m_2 and the initial speeds being $v_{1,\text{i}}$ and $v_{2,\text{i}} = 0$ (i.e., second object is initially stationary).

99. Repeat the preceding problem for the case when the initial speed of the second object is nonzero.

100. A child sleds down a hill and collides at 5.6 m/s into a stationary sled that is identical to his. The child is launched forward at the same speed, leaving behind the two sleds that lock together and slide forward more slowly. What is the speed of the two sleds after this collision?

101. For the preceding problem, find the final speed of each sled for the case of an elastic collision.

102. A 90-kg football player jumps vertically into the air to catch a 0.50-kg football that is thrown essentially horizontally at him at 17 m/s. What is his horizontal speed after catching the ball?

103. Three skydivers are plummeting earthward. They are initially holding onto each other, but then push apart. Two skydivers of mass 70 and 80 kg gain horizontal velocities of 1.2 m/s north and 1.4 m/s southeast, respectively. What is the horizontal velocity of the third skydiver, whose mass is 55 kg?

104. Two billiard balls are at rest and touching each other on a pool table. The cue ball travels at 3.8 m/s along the line of symmetry between these balls and strikes them simultaneously. If the collision is elastic, what is the velocity of the three balls after the collision?

105. A billiard ball traveling at $(2.2\text{ m/s})\,\hat{\mathbf{i}} - (0.4\text{ m/s})\,\hat{\mathbf{j}}$ collides with a wall that is aligned in the $\hat{\mathbf{j}}$ direction. Assuming the collision is elastic, what is the final velocity of the ball?

106. Two identical billiard balls collide. The first one is initially traveling at $(2.2\text{ m/s})\,\hat{\mathbf{i}} - (0.4\text{ m/s})\,\hat{\mathbf{j}}$ and the second one at $-(1.4\text{ m/s})\,\hat{\mathbf{i}} + (2.4\text{ m/s})\,\hat{\mathbf{j}}$. Suppose they collide when the center of ball 1 is at the origin and the center of ball 2 is at the point $(2R, 0)$ where R is the radius of the balls. What is the final velocity of each ball?

107. Repeat the preceding problem if the balls collide when the center of ball 1 is at the origin and the center of ball 2 is at the point $(0, 2R)$.

108. Repeat the preceding problem if the balls collide when the center of ball 1 is at the origin and the center of ball 2 is at the point $\left(\sqrt{3}R/2,\, R/2\right)$

109. Where is the center of mass of a semicircular wire of radius R that is centered on the origin, begins and ends on the x axis, and lies in the x,y plane?

110. Where is the center of mass of a slice of pizza that was cut into eight equal slices? Assume the origin is at the apex of the slice and measure angles with respect to an edge of the slice. The radius of the pizza is R.


111. If 1% of the Earth's mass were transferred to the Moon, how far would the center of mass of the Earth-Moon-population system move? The mass of the Earth is $5.97 \times 10^{24}\text{kg}$ and that of the Moon is $7.34 \times 10^{22}\text{kg}$. The radius of the Moon's orbit is about $3.84 \times 10^{5}\text{m}$.

112. You friend wonders how a rocket continues to climb into the sky once it is sufficiently high above the surface of Earth so that its expelled gasses no longer push on the surface. How do you respond?

113. To increase the acceleration of a rocket, should you throw rocks out of the front window of the rocket or out of the back window?

Challenge Problems

114. A 65-kg person jumps from the first floor window of a burning building and lands almost vertically on the ground with a horizontal velocity of 3 m/s and vertical velocity of −9 m/s. Upon impact with the ground he is brought to rest in a short time. The force experienced by his feet depends on whether he keeps his knees stiff or bends them. Find the force on his feet in each case.

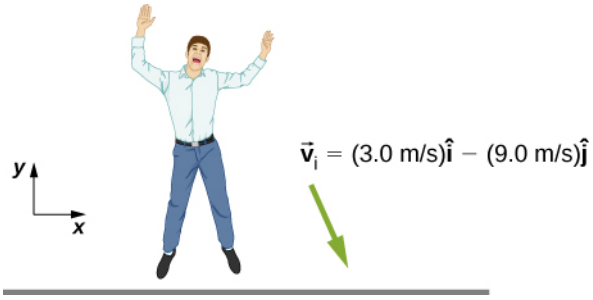


a. First find the impulse on the person from the impact on the ground. Calculate both its magnitude and direction.
b. Find the average force on the feet if the person keeps his leg stiff and straight and his center of mass drops by only 1 cm vertically and 1 cm horizontally during the impact.
c. Find the average force on the feet if the person bends his legs throughout the impact so that his center of mass drops by 50 cm vertically and 5 cm horizontally during the impact.
d. Compare the results of part (b) and (c), and draw conclusions about which way is better.


You will need to find the time the impact lasts by making reasonable assumptions about the acceleration opposite to the motion. Although the force is not constant during the impact, working with constant average force for this problem is acceptable.

115. Two projectiles of mass m_1 and m_2 are fired at the same speed but in opposite directions from two launch sites separated by a distance D. They both reach the same spot in their highest point and strike there. As a result of the impact they stick together and move as a single body afterwards. Find the place they will land.

116. Two identical objects (such as billiard balls) have a one-dimensional collision in which one is initially motionless. After the collision, the moving object is stationary and the other moves with the same speed as the other originally had. Show that both momentum and kinetic energy are conserved.


117. A ramp of mass M is at rest on a horizontal surface. A small cart of mass m is placed at the top of the ramp and released.

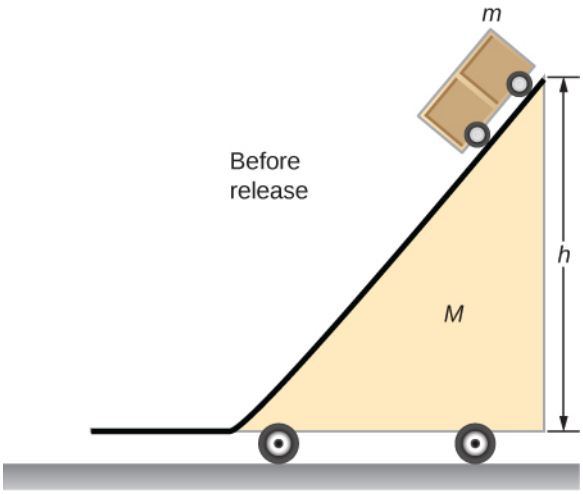

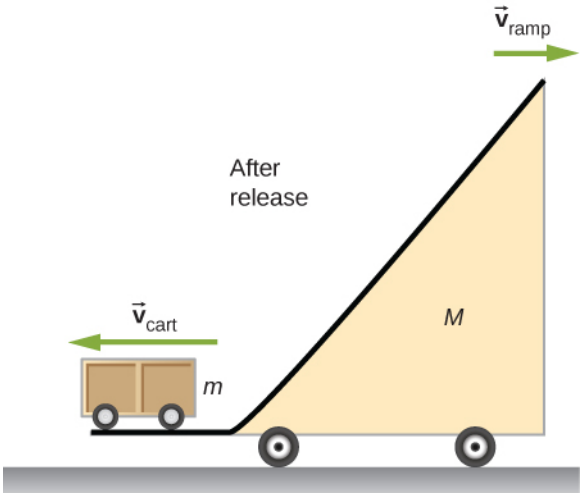

What are the velocities of the ramp and the cart relative to the ground at the instant the cart leaves the ramp?

118. Find the center of mass of the structure given in the figure below. Assume a uniform thickness of 20 cm, and a uniform density of 1 g/cm^3.

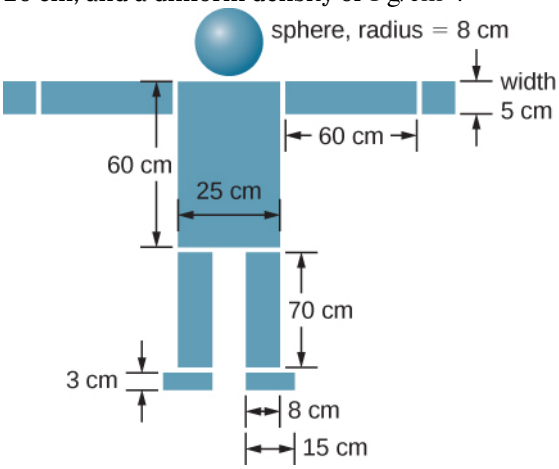

CHAPTER 10
Fixed-Axis Rotation



Figure 10.1 Brazos wind farm in west Texas. During 2019, wind farms in the United States had an average power output of 34 gigawatts, which is enough to power 28 million homes. (credit: modification of work by U.S. Department of Energy)

Chapter Outline

10.1 Rotational Variables

10.2 Rotation with Constant Angular Acceleration

10.3 Relating Angular and Translational Quantities

10.4 Moment of Inertia and Rotational Kinetic Energy

10.5 Calculating Moments of Inertia

10.6 Torque

10.7 Newton's Second Law for Rotation

10.8 Work and Power for Rotational Motion

INTRODUCTION In previous chapters, we described motion (kinematics) and how to change motion (dynamics), and we defined important concepts such as energy for objects that can be considered as point masses. Point masses, by definition, have no shape and so can only undergo translational motion. However, we know from everyday life that rotational motion is also very important and that many objects that move have

both translation and rotation. The wind turbines in our chapter opening image are a prime example of how rotational motion impacts our daily lives, as the market for clean energy sources continues to grow.

We begin to address rotational motion in this chapter, starting with fixed-axis rotation. Fixed-axis rotation describes the rotation around a fixed axis of a rigid body; that is, an object that does not deform as it moves. We will show how to apply all the ideas we've developed up to this point about translational motion to an object rotating around a fixed axis. In the next chapter, we extend these ideas to more complex rotational motion, including objects that both rotate and translate, and objects that do not have a fixed rotational axis.

10.1 Rotational Variables

Learning Objectives

By the end of this section, you will be able to:

- Describe the physical meaning of rotational variables as applied to fixed-axis rotation
- Explain how angular velocity is related to tangential speed
- Calculate the instantaneous angular velocity given the angular position function
- Find the angular velocity and angular acceleration in a rotating system
- Calculate the average angular acceleration when the angular velocity is changing
- Calculate the instantaneous angular acceleration given the angular velocity function

So far in this text, we have mainly studied translational motion, including the variables that describe it: displacement, velocity, and acceleration. Now we expand our description of motion to rotation—specifically, rotational motion about a fixed axis. We will find that rotational motion is described by a set of related variables similar to those we used in translational motion.

Angular Velocity

Uniform circular motion (discussed previously in Motion in Two and Three Dimensions) is motion in a circle at constant speed. Although this is the simplest case of rotational motion, it is very useful for many situations, and we use it here to introduce rotational variables.

In Figure 10.2, we show a particle moving in a circle. The coordinate system is fixed and serves as a frame of reference to define the particle's position. Its position vector from the origin of the circle to the particle sweeps out the angle θ, which increases in the counterclockwise direction as the particle moves along its circular path. The angle θ is called the **angular position** of the particle. As the particle moves in its circular path, it also traces an arc length s.

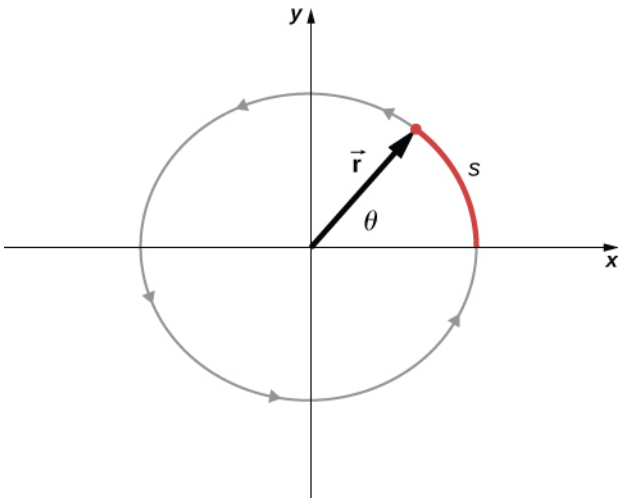


Figure 10.2 A particle follows a circular path. As it moves counterclockwise, it sweeps out a positive angle θ with respect to the x-axis and traces out an arc length s.

The angle is related to the radius of the circle and the arc length by

$$\theta = \frac{s}{r}. \tag{10.1}$$

The angle θ, the angular position of the particle along its path, has units of radians (rad). There are 2π radians in $360°$. Note that the radian measure is a ratio of length measurements, and therefore is a dimensionless quantity. As the particle moves along its circular path, its angular position changes and it undergoes angular displacements $\Delta\theta$.

We can assign vectors to the quantities in Equation 10.1. The angle $\vec{\boldsymbol{\theta}}$ is a vector out of the page in Figure 10.2. The angular position vector $\vec{\mathbf{r}}$ and the arc length $\vec{\mathbf{s}}$ both lie in the plane of the page. These three vectors are related to each other by

$$\vec{\mathbf{s}} = \vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}. \tag{10.2}$$

That is, the arc length is the cross product of the angle vector and the position vector, as shown in Figure 10.3.

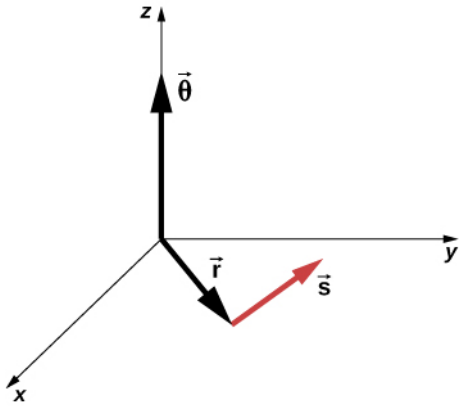


Figure 10.3 The angle vector points along the *z*-axis and the position vector and arc length vector both lie in the *xy*-plane. We see that $\vec{\mathbf{s}} = \vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}$. All three vectors are perpendicular to each other.

The magnitude of the **angular velocity**, denoted by ω, is the time rate of change of the angle θ as the particle moves in its circular path. The **instantaneous angular velocity** is defined as the limit in which $\Delta t \to 0$ in the average angular velocity $\bar{\omega} = \frac{\Delta\theta}{\Delta t}$:

$$\omega = \lim_{\Delta t \to 0} \frac{\Delta\theta}{\Delta t} = \frac{d\theta}{dt}, \tag{10.3}$$

where θ is the angle of rotation (Figure 10.2). The units of angular velocity are radians per second (rad/s). Angular velocity can also be referred to as the rotation rate in radians per second. In many situations, we are given the rotation rate in revolutions/s or cycles/s. To find the angular velocity, we must multiply revolutions/s by 2π, since there are 2π radians in one complete revolution. Since the direction of a positive angle in a circle is counterclockwise, we take counterclockwise rotations as being positive and clockwise rotations as negative.

We can see how angular velocity is related to the tangential speed of the particle by differentiating Equation 10.1 with respect to time. We rewrite Equation 10.1 as

$$s = r\theta.$$

Taking the derivative with respect to time and noting that the radius r is a constant, we have

$$\frac{ds}{dt} = \frac{d}{dt}(r\theta) = \theta\frac{dr}{dt} + r\frac{d\theta}{dt} = r\frac{d\theta}{dt}$$

where $\theta\frac{dr}{dt} = 0$. Here $\frac{ds}{dt}$ is just the tangential speed v_t of the particle in Figure 10.2. Thus, by using Equation 10.3, we arrive at

$$v_t = r\omega. \tag{10.4}$$

That is, the tangential speed of the particle is its angular velocity times the radius of the circle. From Equation 10.4, we see that the tangential speed of the particle increases with its distance from the axis of rotation for a constant angular velocity. This effect is shown in Figure 10.4. Two particles are placed at different radii on a rotating disk with a constant angular velocity. As the disk rotates, the tangential speed increases linearly with the radius from the axis of rotation. In Figure 10.4, we see that $v_1 = r_1\omega_1$ and $v_2 = r_2\omega_2$. But the disk has a constant angular velocity, so $\omega_1 = \omega_2$. This means $\frac{v_1}{r_1} = \frac{v_2}{r_2}$ or $v_2 = \left(\frac{r_2}{r_1}\right)v_1$. Thus, since $r_2 > r_1$, $v_2 > v_1$.

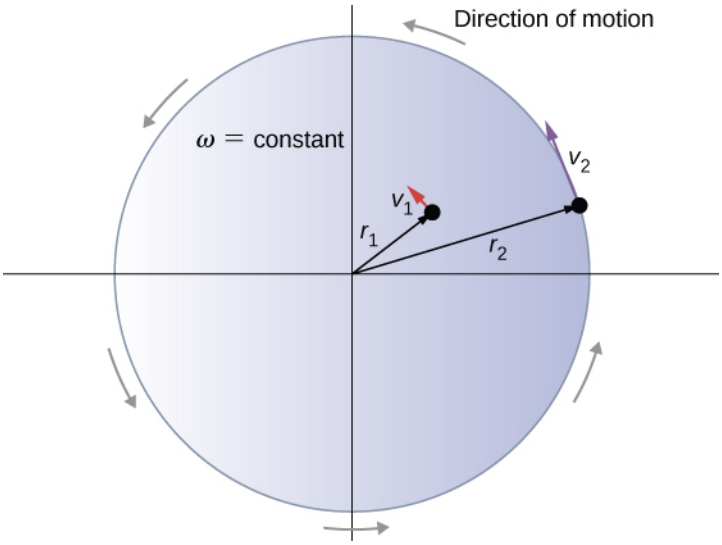


Figure 10.4 Two particles on a rotating disk have different tangential speeds, depending on their distance to the axis of rotation.

Up until now, we have discussed the magnitude of the angular velocity $\omega = d\theta/dt$, which is a scalar quantity—the change in angular position with respect to time. The vector $\vec{\boldsymbol{\omega}}$ is the vector associated with the angular velocity and points along the axis of rotation. This is useful because when a rigid body is rotating, we want to know both the axis of rotation and the direction that the body is rotating about the axis, clockwise or counterclockwise. The angular velocity $\vec{\boldsymbol{\omega}}$ gives us this information. The angular velocity $\vec{\boldsymbol{\omega}}$ has a direction determined by what is called the right-hand rule. The right-hand rule is such that if the fingers of your right hand wrap counterclockwise from the x-axis (the direction in which θ increases) toward the y-axis, your thumb points in the direction of the positive z-axis (Figure 10.5). An angular velocity $\vec{\boldsymbol{\omega}}$ that points along the positive z-axis therefore corresponds to a counterclockwise rotation, whereas an angular velocity $\vec{\boldsymbol{\omega}}$ that points along the negative z-axis corresponds to a clockwise rotation.

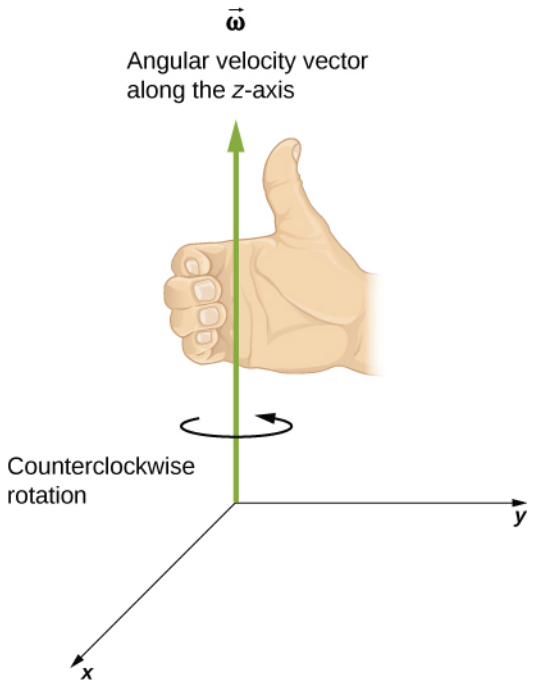


Figure 10.5 For counterclockwise rotation in the coordinate system shown, the angular velocity points in the positive z-direction by the right-hand-rule.

Similar to Equation 10.2, one can state a cross product relation to the vector of the tangential velocity as stated in Equation 10.4. Therefore, we have

$$\vec{\mathbf{v}} = \vec{\boldsymbol{\omega}} \times \vec{\mathbf{r}}. \tag{10.5}$$

That is, the tangential velocity is the cross product of the angular velocity and the position vector, as shown in Figure 10.6. From part (a) of this figure, we see that with the angular velocity in the positive z-direction, the rotation in the xy-plane is counterclockwise. In part (b), the angular velocity is in the negative z-direction, giving a clockwise rotation in the xy-plane.

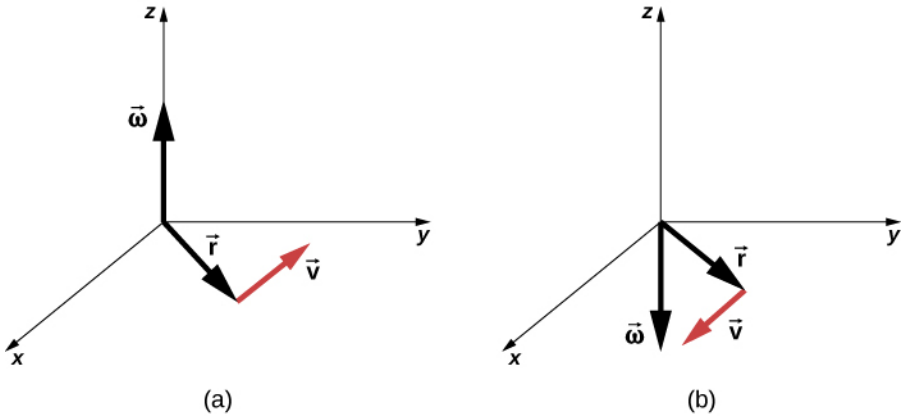


Figure 10.6 The vectors shown are the angular velocity, position, and tangential velocity. (a) The angular velocity points in the positive z-direction, giving a counterclockwise rotation in the xy-plane. (b) The angular velocity points in the negative z-direction, giving a clockwise rotation.

EXAMPLE 10.1

Rotation of a Flywheel

A flywheel rotates such that it sweeps out an angle at the rate of $\theta = \omega t = (45.0\ \text{rad/s})t$ radians. The wheel

rotates counterclockwise when viewed in the plane of the page. (a) What is the angular velocity of the flywheel? (b) What direction is the angular velocity? (c) How many radians does the flywheel rotate through in 30 s? (d) What is the tangential speed of a point on the flywheel 10 cm from the axis of rotation?

Strategy

The functional form of the angular position of the flywheel is given in the problem as $\theta(t) = \omega t$, so by taking the derivative with respect to time, we can find the angular velocity. We use the right-hand rule to find the angular velocity. To find the angular displacement of the flywheel during 30 s, we seek the angular displacement $\Delta\theta$, where the change in angular position is between 0 and 30 s. To find the tangential speed of a point at a distance from the axis of rotation, we multiply its distance times the angular velocity of the flywheel.

Solution

a. $\omega = \frac{d\theta}{dt} = 45$ rad/s. We see that the angular velocity is a constant.
b. By the right-hand rule, we curl the fingers in the direction of rotation, which is counterclockwise in the plane of the page, and the thumb points in the direction of the angular velocity, which is out of the page.
c. $\Delta\theta = \theta(30\text{ s}) - \theta(0\text{ s}) = 45.0(30.0\text{ s}) - 45.0(0\text{ s}) = 1350.0\text{ rad}$.
d. $v_t = r\omega = (0.1\text{ m})(45.0\text{ rad/s}) = 4.5\text{ m/s}$.

Significance

In 30 s, the flywheel has rotated through quite a number of revolutions, about 215 if we divide the angular displacement by 2π. A massive flywheel can be used to store energy in this way, if the losses due to friction are minimal. Recent research has considered superconducting bearings on which the flywheel rests, with zero energy loss due to friction.

Angular Acceleration

We have just discussed angular velocity for uniform circular motion, but not all motion is uniform. Envision an ice skater spinning with his arms outstretched—when he pulls his arms inward, his angular velocity increases. Or think about a computer's hard disk slowing to a halt as the angular velocity decreases. We will explore these situations later, but we can already see a need to define an **angular acceleration** for describing situations where ω changes. The faster the change in ω, the greater the angular acceleration. We define the **instantaneous angular acceleration** α as the derivative of angular velocity with respect to time:

$$\alpha = \lim_{\Delta t \to 0} \frac{\Delta\omega}{\Delta t} = \frac{d\omega}{dt} = \frac{d^2\theta}{dt^2}, \tag{10.6}$$

where we have taken the limit of the average angular acceleration, $\overline{\alpha} = \frac{\Delta\omega}{\Delta t}$ as $\Delta t \to 0$.

The units of angular acceleration are (rad/s)/s, or rad/s^2.

In the same way as we defined the vector associated with angular velocity $\vec{\boldsymbol{\omega}}$, we can define $\vec{\boldsymbol{\alpha}}$, the vector associated with angular acceleration (Figure 10.7). If the angular velocity is along the positive z-axis, as in Figure 10.5, and $\frac{d\omega}{dt}$ is positive, then the angular acceleration $\vec{\boldsymbol{\alpha}}$ is positive and points along the $+z$- axis. Similarly, if the angular velocity $\vec{\boldsymbol{\omega}}$ is along the positive z-axis and $\frac{d\omega}{dt}$ is negative, then the angular acceleration is negative and points along the $-z-$ axis.

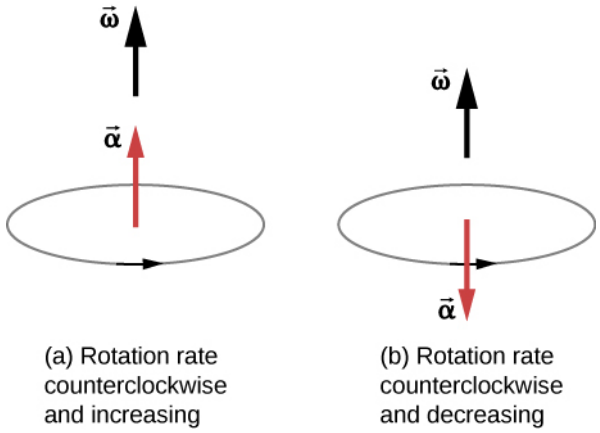


Figure 10.7 The rotation is counterclockwise in both (a) and (b) with the angular velocity in the same direction. (a) The angular acceleration is in the same direction as the angular velocity, which increases the rotation rate. (b) The angular acceleration is in the opposite direction to the angular velocity, which decreases the rotation rate.

We can express the tangential acceleration vector as a cross product of the angular acceleration and the position vector. This expression can be found by taking the time derivative of $\vec{\mathbf{v}} = \vec{\boldsymbol{\omega}} \times \vec{\mathbf{r}}$ and is left as an exercise:

$$\vec{\mathbf{a}} = \vec{\boldsymbol{\alpha}} \times \vec{\mathbf{r}}. \tag{10.7}$$

The vector relationships for the angular acceleration and tangential acceleration are shown in Figure 10.8.

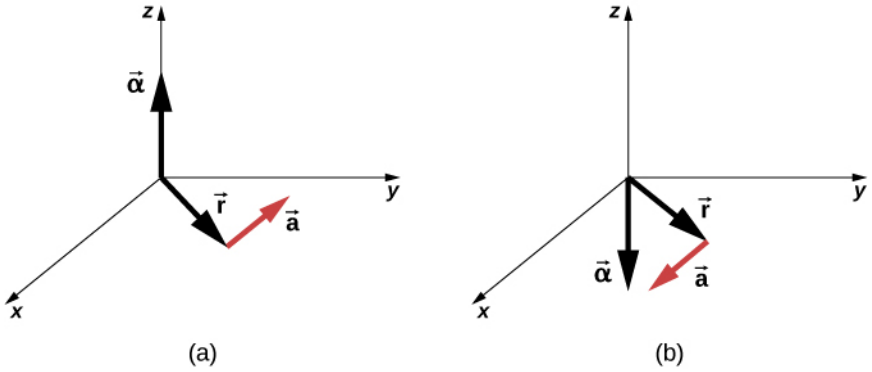


Figure 10.8 (a) The angular acceleration is the positive *z*-direction and produces a tangential acceleration in a counterclockwise sense. (b) The angular acceleration is in the negative *z*-direction and produces a tangential acceleration in the clockwise sense.

We can relate the tangential acceleration of a point on a rotating body at a distance from the axis of rotation in the same way that we related the tangential speed to the angular velocity. If we differentiate Equation 10.4 with respect to time, noting that the radius r is constant, we obtain

$$a_{\mathrm{t}} = r\alpha. \tag{10.8}$$

Thus, the tangential acceleration a_t is the radius times the angular acceleration. Equation 10.4 and Equation 10.8 are important for the discussion of rolling motion (see Angular Momentum).

Let's apply these ideas to the analysis of a few simple fixed-axis rotation scenarios. Before doing so, we present a problem-solving strategy that can be applied to rotational kinematics: the description of rotational motion.

PROBLEM-SOLVING STRATEGY

Rotational Kinematics

1. Examine the situation to determine that rotational kinematics (rotational motion) is involved.

2. Identify exactly what needs to be determined in the problem (identify the unknowns). A sketch of the situation is useful.
3. Make a complete list of what is given or can be inferred from the problem as stated (identify the knowns).
4. Solve the appropriate equation or equations for the quantity to be determined (the unknown). It can be useful to think in terms of a translational analog, because by now you are familiar with the equations of translational motion.
5. Substitute the known values along with their units into the appropriate equation and obtain numerical solutions complete with units. Be sure to use units of radians for angles.
6. Check your answer to see if it is reasonable: Does your answer make sense?

Now let's apply this problem-solving strategy to a few specific examples.

EXAMPLE 10.2

A Spinning Bicycle Wheel

A bicycle mechanic mounts a bicycle on the repair stand and starts the rear wheel spinning from rest to a final angular velocity of 250 rpm in 5.00 s. (a) Calculate the average angular acceleration in rad/s^2. (b) If she now hits the brakes, causing an angular acceleration of –87.3 rad/s^2, how long does it take the wheel to stop?

Strategy

The average angular acceleration can be found directly from its definition $\overline{\alpha} = \frac{\Delta\omega}{\Delta t}$ because the final angular velocity and time are given. We see that $\Delta\omega = \omega_{\text{final}} - \omega_{\text{initial}} = 250$ rev/min and Δt is 5.00 s. For part (b), we know the angular acceleration and the initial angular velocity. We can find the stopping time by using the definition of average angular acceleration and solving for Δt, yielding

$$\Delta t = \frac{\Delta\omega}{\alpha}.$$

Solution

a. Entering known information into the definition of angular acceleration, we get

$$\overline{\alpha} = \frac{\Delta\omega}{\Delta t} = \frac{250\text{ rpm}}{5.00\text{ s}}.$$

Because $\Delta\omega$ is in revolutions per minute (rpm) and we want the standard units of rad/s^2 for angular acceleration, we need to convert from rpm to rad/s:

$$\Delta\omega = 250\frac{\text{rev}}{\text{min}} \cdot \frac{2\pi\text{ rad}}{\text{rev}} \cdot \frac{1\text{ min}}{60\text{ s}} = 26.2\frac{\text{rad}}{\text{s}}.$$

Entering this quantity into the expression for α, we get

$$\alpha = \frac{\Delta\omega}{\Delta t} = \frac{26.2\text{ rad/s}}{5.00\text{ s}} = 5.24\text{ rad/s}^2.$$

b. Here the angular velocity decreases from 26.2 rad/s (250 rpm) to zero, so that $\Delta\omega$ is –26.2 rad/s, and α is given to be –87.3 rad/s^2. Thus,

$$\Delta t = \frac{-26.2\text{ rad/s}}{-87.3\text{ rad/s}^2} = 0.300\text{ s}.$$

Significance

Note that the angular acceleration as the mechanic spins the wheel is small and positive; it takes 5 s to produce an appreciable angular velocity. When she hits the brake, the angular acceleration is large and negative. The angular velocity quickly goes to zero.

CHECK YOUR UNDERSTANDING 10.1

The fan blades on a turbofan jet engine (shown below) accelerate from rest up to a rotation rate of 40.0 rev/s in 20 s. The increase in angular velocity of the fan is constant in time. (The GE90-110B1 turbofan engine mounted on a Boeing 777, as shown, is currently the largest turbofan engine in the world, capable of thrusts of 330–510 kN.)

(a) What is the average angular acceleration?

(b) What is the instantaneous angular acceleration at any time during the first 20 s?



Figure 10.9 (credit: "Bubinator"/ Wikimedia Commons)

EXAMPLE 10.3

Wind Turbine

A wind turbine (Figure 10.10) in a wind farm is being shut down for maintenance. It takes 30 s for the turbine to go from its operating angular velocity to a complete stop in which the angular velocity function is $\omega(t) = [(t\text{s}^{-1} - 30.0)^2/100.0]\text{rad/s}$. If the turbine is rotating counterclockwise looking into the page, (a) what are the directions of the angular velocity and acceleration vectors? (b) What is the average angular acceleration? (c) What is the instantaneous angular acceleration at $t = 0.0, 15.0, 30.0$ s?

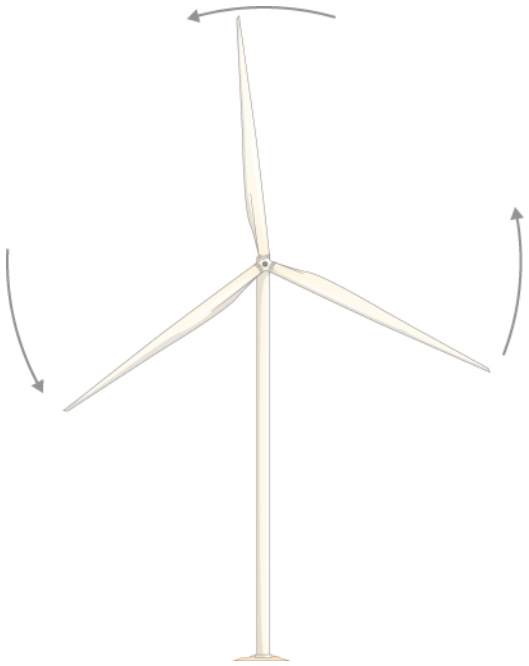


Figure 10.10 A wind turbine that is rotating counterclockwise, as seen head on.

Strategy

a. We are given the rotational sense of the turbine, which is counterclockwise in the plane of the page. Using the right hand rule (Figure 10.5), we can establish the directions of the angular velocity and acceleration vectors.
b. We calculate the initial and final angular velocities to get the average angular acceleration. We establish the sign of the angular acceleration from the results in (a).
c. We are given the functional form of the angular velocity, so we can find the functional form of the angular acceleration function by taking its derivative with respect to time.

Solution

a. Since the turbine is rotating counterclockwise, angular velocity $\vec{\boldsymbol{\omega}}$ points out of the page. But since the angular velocity is decreasing, the angular acceleration $\vec{\boldsymbol{\alpha}}$ points into the page, in the opposite sense to the angular velocity.
b. The initial angular velocity of the turbine, setting $t = 0,$ is $\omega = 9.0\ \text{rad/s}$. The final angular velocity is zero, so the average angular acceleration is

$$\overline{\alpha} = \frac{\Delta\omega}{\Delta t} = \frac{\omega - \omega_0}{t - t_0} = \frac{0 - 9.0\ \text{rad/s}}{30.0 - 0\ \text{s}} = -0.3\ \text{rad/s}^2.$$

c. Taking the derivative of the angular velocity with respect to time gives $\alpha = \frac{d\omega}{dt} = (t - 30.0)/50.0\ \text{rad/s}^2$

$$\alpha(0.0\ \text{s}) = -0.6\ \text{rad/s}^2, \alpha(15.0\ \text{s}) = -0.3\ \text{rad/s}^2, \text{ and } \alpha(30.0\ \text{s}) = 0\ \text{rad/s}.$$

Significance

We found from the calculations in (a) and (b) that the angular acceleration α and the average angular acceleration $\overline{\alpha}$ are negative. The turbine has an angular acceleration in the opposite sense to its angular velocity.

We now have a basic vocabulary for discussing fixed-axis rotational kinematics and relationships between rotational variables. We discuss more definitions and connections in the next section.

10.2 Rotation with Constant Angular Acceleration

Learning Objectives

By the end of this section, you will be able to:

- Derive the kinematic equations for rotational motion with constant angular acceleration
- Select from the kinematic equations for rotational motion with constant angular acceleration the appropriate equations to solve for unknowns in the analysis of systems undergoing fixed-axis rotation
- Use solutions found with the kinematic equations to verify the graphical analysis of fixed-axis rotation with constant angular acceleration

In the preceding section, we defined the rotational variables of angular displacement, angular velocity, and angular acceleration. In this section, we work with these definitions to derive relationships among these variables and use these relationships to analyze rotational motion for a rigid body about a fixed axis under a constant angular acceleration. This analysis forms the basis for rotational kinematics. If the angular acceleration is constant, the equations of rotational kinematics simplify, similar to the equations of linear kinematics discussed in Motion along a Straight Line and Motion in Two and Three Dimensions. We can then use this simplified set of equations to describe many applications in physics and engineering where the angular acceleration of the system is constant. Rotational kinematics is also a prerequisite to the discussion of rotational dynamics later in this chapter.

Kinematics of Rotational Motion

Using our intuition, we can begin to see how the rotational quantities θ, ω, α, and t are related to one another. For example, we saw in the preceding section that if a flywheel has an angular acceleration in the same direction as its angular velocity vector, its angular velocity increases with time and its angular displacement also increases. On the contrary, if the angular acceleration is opposite to the angular velocity vector, its angular velocity decreases with time. We can describe these physical situations and many others with a consistent set of rotational kinematic equations under a constant angular acceleration. The method to investigate rotational motion in this way is called **kinematics of rotational motion**.

To begin, we note that if the system is rotating under a constant acceleration, then the average angular velocity follows a simple relation because the angular velocity is increasing linearly with time. The average angular velocity is just half the sum of the initial and final values:

$$\bar{\omega} = \frac{\omega_0 + \omega_f}{2}. \tag{10.9}$$

From the definition of the average angular velocity, we can find an equation that relates the angular position, average angular velocity, and time:

$$\bar{\omega} = \frac{\Delta\theta}{\Delta t}.$$

Solving for θ, we have

$$\theta_f = \theta_0 + \bar{\omega}t, \tag{10.10}$$

where we have set $t_0 = 0$. This equation can be very useful if we know the average angular velocity of the system. Then we could find the angular displacement over a given time period. Next, we find an equation relating ω, α, and t. To determine this equation, we start with the definition of angular acceleration:

$$\alpha = \frac{d\omega}{dt}.$$

We rearrange this to get $\alpha dt = d\omega$ and then we integrate both sides of this equation from initial values to final values, that is, from t_0 to t and ω_0 to ω_f. In uniform rotational motion, the angular acceleration is constant so it can be pulled out of the integral, yielding two definite integrals:

$$\alpha \int_{t_0}^{t} dt' = \int_{\omega_0}^{\omega_f} d\omega.$$

Setting $t_0 = 0$, we have

$$\alpha t = \omega_f - \omega_0.$$

We rearrange this to obtain

$$\omega_f = \omega_0 + \alpha t, \tag{10.11}$$

where ω_0 is the initial angular velocity. Equation 10.11 is the rotational counterpart to the linear kinematics equation $v_f = v_0 + at$. With Equation 10.11, we can find the angular velocity of an object at any specified time t given the initial angular velocity and the angular acceleration.

Let's now do a similar treatment starting with the equation $\omega = \frac{d\theta}{dt}$. We rearrange it to obtain $\omega dt = d\theta$ and integrate both sides from initial to final values again, noting that the angular acceleration is constant and does not have a time dependence. However, this time, the angular velocity is not constant (in general), so we substitute in what we derived above:

$$\int_{t_0}^{t_f} (\omega_0 + \alpha t')dt' = \int_{\theta_0}^{\theta_f} d\theta;$$

$$\int_{t_0}^{t} \omega_0 dt + \int_{t_0}^{t} \alpha t' dt' = \int_{\theta_0}^{\theta_f} d\theta = \left[\omega_0 t' + \alpha\left(\frac{(t')^2}{2}\right)\right]_{t_0}^{t} = \omega_0 t + \alpha\left(\frac{t^2}{2}\right) = \theta_f - \theta_0,$$

where we have set $t_0 = 0$. Now we rearrange to obtain

$$\theta_f = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2. \tag{10.12}$$

Equation 10.12 is the rotational counterpart to the linear kinematics equation found in Motion Along a Straight Line for position as a function of time. This equation gives us the angular position of a rotating rigid body at any time t given the initial conditions (initial angular position and initial angular velocity) and the angular acceleration.

We can find an equation that is independent of time by solving for t in Equation 10.11 and substituting into Equation 10.12. Equation 10.12 becomes

$$\begin{aligned}
\theta_f &= \theta_0 + \omega_0\left(\tfrac{\omega_f - \omega_0}{\alpha}\right) + \tfrac{1}{2}\alpha\left(\tfrac{\omega_f - \omega_0}{\alpha}\right)^2 \\
&= \theta_0 + \tfrac{\omega_0\omega_f}{\alpha} - \tfrac{\omega_0^2}{\alpha} + \tfrac{1}{2}\tfrac{\omega_f^2}{\alpha} - \tfrac{\omega_0\omega_f}{\alpha} + \tfrac{1}{2}\tfrac{\omega_0^2}{\alpha} \\
&= \theta_0 + \tfrac{1}{2}\tfrac{\omega_f^2}{\alpha} - \tfrac{1}{2}\tfrac{\omega_0^2}{\alpha}, \\
\theta_f - \theta_0 &= \tfrac{\omega_f^2 - \omega_0^2}{2\alpha}
\end{aligned}$$

or

$$\omega_f^2 = \omega_0^2 + 2\alpha(\Delta\theta). \tag{10.13}$$

Equation 10.10 through Equation 10.13 describe fixed-axis rotation for constant acceleration and are summarized in Table 10.1.

Angular displacement from average angular velocity	$\theta_f = \theta_0 + \bar{\omega}t$
Angular velocity from angular acceleration	$\omega_f = \omega_0 + \alpha t$
Angular displacement from angular velocity and angular acceleration	$\theta_f = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2$
Angular velocity from angular displacement and angular acceleration	$\omega_f^2 = {\omega_0}^2 + 2\alpha(\Delta\theta)$

Table 10.1 Kinematic Equations

Applying the Equations for Rotational Motion

Now we can apply the key kinematic relations for rotational motion to some simple examples to get a feel for how the equations can be applied to everyday situations.

EXAMPLE 10.4

Calculating the Acceleration of a Fishing Reel

A deep-sea fisherman hooks a big fish that swims away from the boat, pulling the fishing line from his fishing reel. The whole system is initially at rest, and the fishing line unwinds from the reel at a radius of 4.50 cm from its axis of rotation. The reel is given an angular acceleration of 110 rad/s^2 for 2.00 s (Figure 10.11).

(a) What is the final angular velocity of the reel after 2 s?

(b) How many revolutions does the reel make?

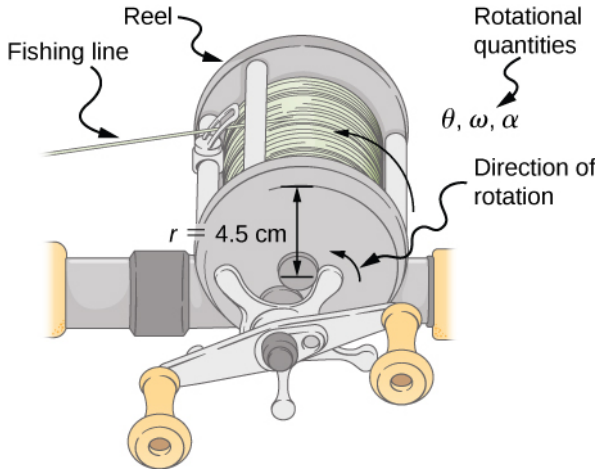


Figure 10.11 Fishing line coming off a rotating reel moves linearly.

Strategy

Identify the knowns and compare with the kinematic equations for constant acceleration. Look for the appropriate equation that can be solved for the unknown, using the knowns given in the problem description.

Solution

a. We are given α and t and want to determine ω. The most straightforward equation to use is $\omega_f = \omega_0 + \alpha t$, since all terms are known besides the unknown variable we are looking for. We are given that $\omega_0 = 0$ (it starts from rest), so

$$\omega_f = 0 + (110\ \text{rad/s}^2)(2.00\ \text{s}) = 220\ \text{rad/s}.$$

b. We are asked to find the number of revolutions. Because $1\ \text{rev} = 2\pi\ \text{rad}$, we can find the number of revolutions by finding θ in radians. We are given α and t, and we know ω_0 is zero, so we can obtain θ by

using

$$\begin{aligned}\theta_f &= \theta_i + \omega_i t + \tfrac{1}{2}\alpha t^2 \\ &= 0 + 0 + (0.500)\left(110\ \text{rad/s}^2\right)(2.00\ \text{s})^2 = 220\ \text{rad}.\end{aligned}$$

Converting radians to revolutions gives

$$\text{Number of rev} = (220\ \text{rad})\frac{1\ \text{rev}}{2\pi\ \text{rad}} = 35.0\ \text{rev}.$$

Significance

This example illustrates that relationships among rotational quantities are highly analogous to those among linear quantities. The answers to the questions are realistic. After unwinding for two seconds, the reel is found to spin at 220 rad/s, which is 2100 rpm. (No wonder reels sometimes make high-pitched sounds.)

In the preceding example, we considered a fishing reel with a positive angular acceleration. Now let us consider what happens with a negative angular acceleration.

EXAMPLE 10.5

Calculating the Duration When the Fishing Reel Slows Down and Stops

Now the fisherman applies a brake to the spinning reel, achieving an angular acceleration of $-300\ \text{rad/s}^2$. How long does it take the reel to come to a stop?

Strategy

We are asked to find the time t for the reel to come to a stop. The initial and final conditions are different from those in the previous problem, which involved the same fishing reel. Now we see that the initial angular velocity is $\omega_0 = 220\ \text{rad/s}$ and the final angular velocity ω is zero. The angular acceleration is given as $\alpha = -300\ \text{rad/s}^2$. Examining the available equations, we see all quantities but t are known in $\omega_f = \omega_0 + \alpha t$, making it easiest to use this equation.

Solution

The equation states

$$\omega_f = \omega_0 + \alpha t.$$

We solve the equation algebraically for t and then substitute the known values as usual, yielding

$$t = \frac{\omega_f - \omega_0}{\alpha} = \frac{0 - 220.0\ \text{rad/s}}{-300.0\ \text{rad/s}^2} = 0.733\ \text{s}.$$

Significance

Note that care must be taken with the signs that indicate the directions of various quantities. Also, note that the time to stop the reel is fairly small because the acceleration is rather large. Fishing lines sometimes snap because of the accelerations involved, and fishermen often let the fish swim for a while before applying brakes on the reel. A tired fish is slower, requiring a smaller acceleration.

CHECK YOUR UNDERSTANDING 10.2

A centrifuge used in DNA extraction spins at a maximum rate of 7000 rpm, producing a “g-force” on the sample that is 6000 times the force of gravity. If the centrifuge takes 10 seconds to come to rest from the maximum spin rate: (a) What is the angular acceleration of the centrifuge? (b) What is the angular displacement of the centrifuge during this time?

EXAMPLE 10.6

Angular Acceleration of a Propeller

Figure 10.12 shows a graph of the angular velocity of a propeller on an aircraft as a function of time. Its angular velocity starts at 30 rad/s and drops linearly to 0 rad/s over the course of 5 seconds. (a) Find the angular acceleration of the object and verify the result using the kinematic equations. (b) Find the angle through which the propeller rotates during these 5 seconds and verify your result using the kinematic equations.

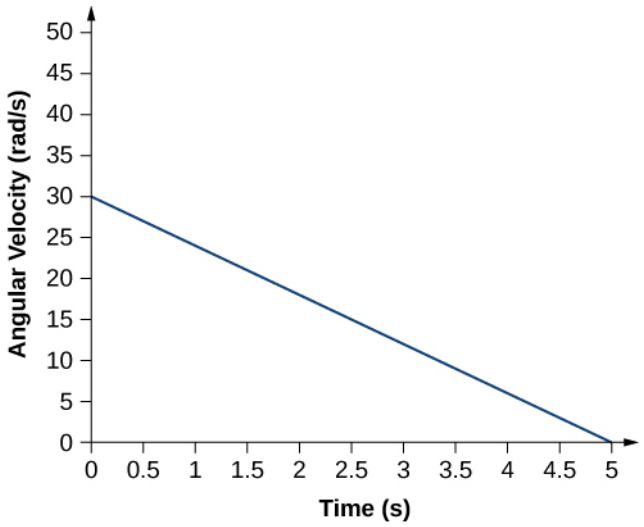


Figure 10.12 A graph of the angular velocity of a propeller versus time.

Strategy

a. Since the angular velocity varies linearly with time, we know that the angular acceleration is constant and does not depend on the time variable. The angular acceleration is the slope of the angular velocity vs. time graph, $\alpha = \frac{d\omega}{dt}$. To calculate the slope, we read directly from Figure 10.12, and see that $\omega_0 = 30$ rad/s at $t = 0$ s and $\omega_f = 0$ rad/s at $t = 5$ s. Then, we can verify the result using $\omega = \omega_0 + \alpha t$.

b. We use the equation $\omega = \frac{d\theta}{dt}$; since the time derivative of the angle is the angular velocity, we can find the angular displacement by integrating the angular velocity, which from the figure means taking the area under the angular velocity graph. In other words:

$$\int_{\theta_0}^{\theta_f} d\theta = \theta_f - \theta_0 = \int_{t_0}^{t_f} \omega(t)dt.$$

Then we use the kinematic equations for constant acceleration to verify the result.

Solution

a. Calculating the slope, we get

$$\alpha = \frac{\omega - \omega_0}{t - t_0} = \frac{(0 - 30.0)\text{ rad/s}}{(5.0 - 0)\text{ s}} = -6.0\text{ rad/s}^2.$$

We see that this is exactly Equation 10.11 with a little rearranging of terms.

b. We can find the area under the curve by calculating the area of the right triangle, as shown in Figure 10.13.

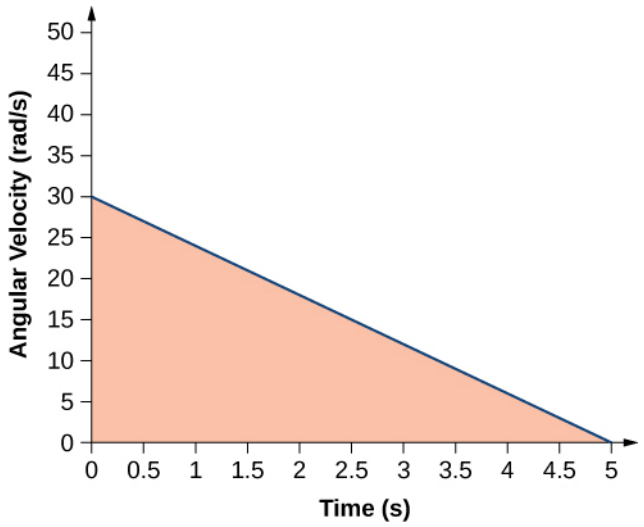


Figure 10.13 The area under the curve is the area of the right triangle.

$$\begin{aligned}\Delta\theta &= \text{area (triangle)};\\ \Delta\theta &= \tfrac{1}{2}(30\text{ rad/s})(5\text{ s}) = 75\text{ rad}.\end{aligned}$$

We verify the solution using Equation 10.12:

$$\theta_{\text{f}} = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2.$$

Setting $\theta_0 = 0$, we have

$$\theta_f = (30.0\text{ rad/s})(5.0\text{ s}) + \frac{1}{2}(-6.0\text{ rad/s}^2)(5.0\text{ rad/s})^2 = 150.0 - 75.0 = 75.0\text{ rad}.$$

This verifies the solution found from finding the area under the curve.

Significance

We see from part (b) that there are alternative approaches to analyzing fixed-axis rotation with constant acceleration. We started with a graphical approach and verified the solution using the rotational kinematic equations. Since $\alpha = \frac{d\omega}{dt}$, we could do the same graphical analysis on an angular acceleration-vs.-time curve. The area under an α-vs.-t curve gives us the change in angular velocity. Since the angular acceleration is constant in this section, this is a straightforward exercise.

10.3 Relating Angular and Translational Quantities

Learning Objectives

By the end of this section, you will be able to:

- Given the linear kinematic equation, write the corresponding rotational kinematic equation
- Calculate the linear distances, velocities, and accelerations of points on a rotating system given the angular velocities and accelerations

In this section, we relate each of the rotational variables to the translational variables defined in Motion Along a Straight Line and Motion in Two and Three Dimensions. This will complete our ability to describe rigid-body rotations.

Angular vs. Linear Variables

In Rotational Variables, we introduced angular variables. If we compare the rotational definitions with the definitions of linear kinematic variables from Motion Along a Straight Line and Motion in Two and Three Dimensions, we find that there is a mapping of the linear variables to the rotational ones. Linear position, velocity, and acceleration have their rotational counterparts, as we can see when we write them side by side:

	Linear	Rotational
Position	x	θ
Velocity	$v = \frac{dx}{dt}$	$\omega = \frac{d\theta}{dt}$
Acceleration	$a = \frac{dv}{dt}$	$\alpha = \frac{d\omega}{dt}$

Let's compare the linear and rotational variables individually. The linear variable of position has physical units of meters, whereas the angular position variable has dimensionless units of radians, as can be seen from the definition of $\theta = \frac{s}{r}$, which is the ratio of two lengths. The linear velocity has units of m/s, and its counterpart, the angular velocity, has units of rad/s. In Rotational Variables, we saw in the case of circular motion that the linear tangential speed of a particle at a radius r from the axis of rotation is related to the angular velocity by the relation $v_t = r\omega$. This could also apply to points on a rigid body rotating about a fixed axis. Here, we consider only circular motion. In circular motion, both uniform and nonuniform, there exists a centripetal acceleration (Motion in Two and Three Dimensions). The centripetal acceleration vector points inward from the particle executing circular motion toward the axis of rotation. The derivation of the magnitude of the centripetal acceleration is given in Motion in Two and Three Dimensions. From that derivation, the magnitude of the centripetal acceleration was found to be

$$a_c = \frac{v_t^2}{r}, \tag{10.14}$$

where r is the radius of the circle.

Thus, in uniform circular motion when the angular velocity is constant and the angular acceleration is zero, we have a linear acceleration—that is, centripetal acceleration—since the tangential speed in Equation 10.14 is a constant. If nonuniform circular motion is present, the rotating system has an angular acceleration, and we have both a linear centripetal acceleration that is changing (because v_t is changing) as well as a linear tangential acceleration. These relationships are shown in Figure 10.14, where we show the centripetal and tangential accelerations for uniform and nonuniform circular motion.

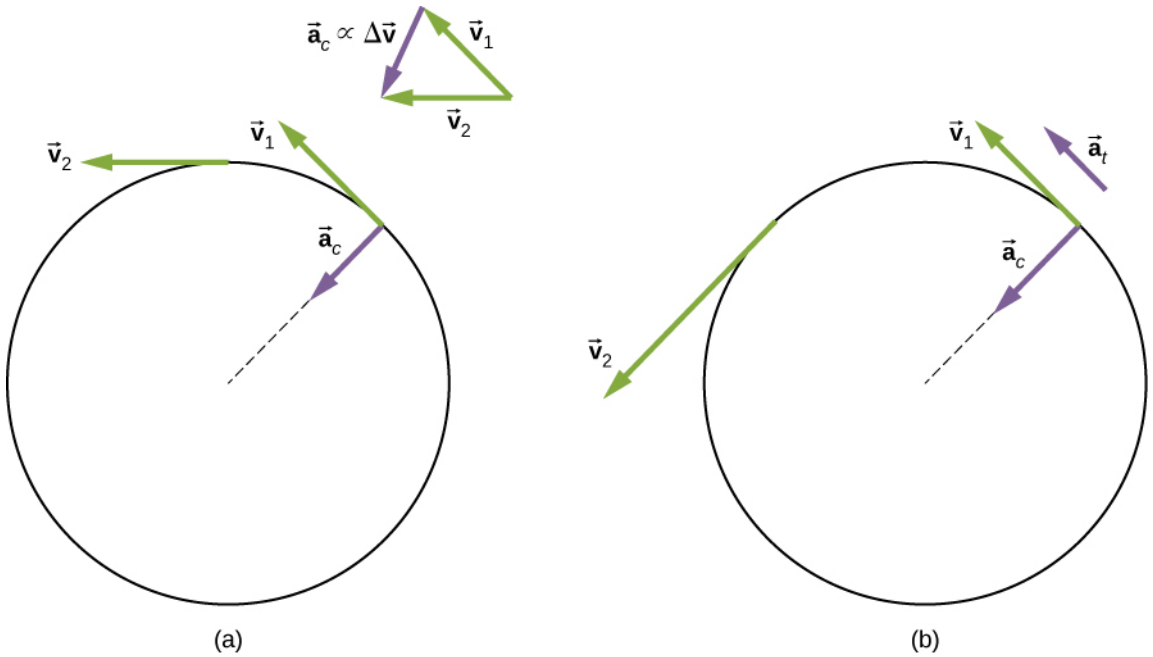


Figure 10.14 (a) Uniform circular motion: The centripetal acceleration a_c has its vector inward toward the axis of rotation. There is no

tangential acceleration. (b) Nonuniform circular motion: An angular acceleration produces an inward centripetal acceleration that is changing in magnitude, plus a tangential acceleration a_t.

The centripetal acceleration is due to the change in the direction of tangential velocity, whereas the tangential acceleration is due to any change in the magnitude of the tangential velocity. The tangential and centripetal acceleration vectors $\vec{\mathbf{a}}_t$ and $\vec{\mathbf{a}}_c$ are always perpendicular to each other, as seen in Figure 10.14. To complete this description, we can assign a **total linear acceleration** vector to a point on a rotating rigid body or a particle executing circular motion at a radius r from a fixed axis. The total linear acceleration vector $\vec{\mathbf{a}}$ is the vector sum of the centripetal and tangential accelerations,

$$\vec{\mathbf{a}} = \vec{\mathbf{a}}_c + \vec{\mathbf{a}}_t. \tag{10.15}$$

The total linear acceleration vector in the case of nonuniform circular motion points at an angle between the centripetal and tangential acceleration vectors, as shown in Figure 10.15. Since $\vec{\mathbf{a}}_c \perp \vec{\mathbf{a}}_t$, the magnitude of the total linear acceleration is

$$|\vec{\mathbf{a}}| = \sqrt{a_c^2 + a_t^2}.$$

Note that if the angular acceleration is zero, the total linear acceleration is equal to the centripetal acceleration.

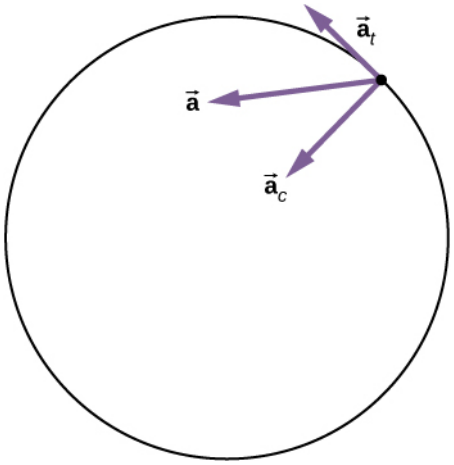


Figure 10.15 A particle is executing circular motion and has an angular acceleration. The total linear acceleration of the particle is the vector sum of the centripetal acceleration and tangential acceleration vectors. The total linear acceleration vector is at an angle in between the centripetal and tangential accelerations.

Relationships between Rotational and Translational Motion

We can look at two relationships between rotational and translational motion.

1. Generally speaking, the linear kinematic equations have their rotational counterparts. Table 10.2 lists the four linear kinematic equations and the corresponding rotational counterpart. The two sets of equations look similar to each other, but describe two different physical situations, that is, rotation and translation.

Rotational	Translational
$\theta_f = \theta_0 + \bar{\omega}t$	$x = x_0 + \bar{v}t$
$\omega_f = \omega_0 + \alpha t$	$v_f = v_0 + at$
$\theta_f = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2$	$x_f = x_0 + v_0 t + \frac{1}{2}at^2$
$\omega_f^2 = \omega_0^2 + 2\alpha(\Delta\theta)$	$v_f^2 = v_0^2 + 2a(\Delta x)$

Table 10.2 Rotational and Translational Kinematic Equations

2. The second correspondence has to do with relating linear and rotational variables in the special case of circular motion. This is shown in Table 10.3, where in the third column, we have listed the connecting equation that relates the linear variable to the rotational variable. The rotational variables of angular velocity and acceleration have subscripts that indicate their definition in circular motion.

Rotational	Translational	Relationship (r = radius)
θ	s	$\theta = \frac{s}{r}$
ω	v_t	$\omega = \frac{v_t}{r}$
α	a_t	$\alpha = \frac{a_t}{r}$
	a_c	$a_c = \frac{v_t^2}{r}$

Table 10.3 Rotational and Translational Quantities: Circular Motion

EXAMPLE 10.7

Linear Acceleration of a Centrifuge

A centrifuge has a radius of 20 cm and accelerates from a maximum rotation rate of 10,000 rpm to rest in 30 seconds under a constant angular acceleration. It is rotating counterclockwise. What is the magnitude of the total acceleration of a point at the tip of the centrifuge at $t = 29.0$s? What is the direction of the total acceleration vector?

Strategy

With the information given, we can calculate the angular acceleration, which then will allow us to find the tangential acceleration. We can find the centripetal acceleration at $t = 0$ by calculating the tangential speed at this time. With the magnitudes of the accelerations, we can calculate the total linear acceleration. From the description of the rotation in the problem, we can sketch the direction of the total acceleration vector.

Solution

The angular acceleration is

$$\alpha = \frac{\omega - \omega_0}{t} = \frac{0 - (1.0 \times 10^4)2\pi/60.0\text{ s(rad/s)}}{30.0\text{ s}} = -34.9\text{ rad/s}^2.$$

Therefore, the tangential acceleration is

$$a_t = r\alpha = 0.2\text{ m}(-34.9\text{ rad/s}^2) = -7.0\text{ m/s}^2.$$

The angular velocity at $t = 29.0$ s is

$$\begin{aligned}\omega &= \omega_0 + \alpha t = 1.0 \times 10^4 \left(\tfrac{2\pi}{60.0\text{ s}}\right) + \left(-34.9\text{ rad/s}^2\right)(29.0\text{ s}) \\ &= 1047.2\text{ rad/s} - 1012.71 = 35.1\text{ rad/s}.\end{aligned}$$

Thus, the tangential speed at $t = 29.0$ s is

$$v_\text{t} = r\omega = 0.2\text{ m}(35.1\text{ rad/s}) = 7.0\text{ m/s}.$$

We can now calculate the centripetal acceleration at $t = 29.0$ s:

$$a_\text{c} = \frac{v^2}{r} = \frac{(7.0\text{ m/s})^2}{0.2\text{ m}} = 245.0\text{ m/s}^2.$$

Since the two acceleration vectors are perpendicular to each other, the magnitude of the total linear acceleration is

$$|\vec{\mathbf{a}}| = \sqrt{a_\text{c}^2 + a_\text{t}^2} = \sqrt{(245.0)^2 + (-7.0)^2} = 245.1\text{ m/s}^2.$$

Since the centrifuge has a negative angular acceleration, it is slowing down. The total acceleration vector is as shown in Figure 10.16. The angle with respect to the centripetal acceleration vector is

$$\theta = \tan^{-1}\frac{-7.0}{245.0} = -1.6°.$$

The negative sign means that the total acceleration vector is angled toward the clockwise direction.

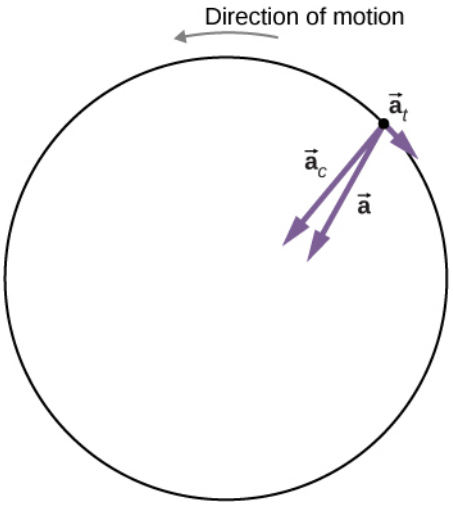


Figure 10.16 The centripetal, tangential, and total acceleration vectors. The centrifuge is slowing down, so the tangential acceleration is clockwise, opposite the direction of rotation (counterclockwise).

Significance

From Figure 10.16, we see that the tangential acceleration vector is opposite the direction of rotation. The magnitude of the tangential acceleration is much smaller than the centripetal acceleration, so the total linear acceleration vector will make a very small angle with respect to the centripetal acceleration vector.

CHECK YOUR UNDERSTANDING 10.3

A boy jumps on a merry-go-round with a radius of 5 m that is at rest. It starts accelerating at a constant rate up to an angular velocity of 5 rad/s in 20 seconds. What is the distance travelled by the boy?

INTERACTIVE

Check out this PhET simulation (https://openstax.org/l/21rotatingdisk) to change the parameters of a rotating disk (the initial angle, angular velocity, and angular acceleration), and place bugs at different radial distances from the axis. The simulation then lets you explore how circular motion relates to the bugs' *xy*-position, velocity, and acceleration using vectors or graphs.

10.4 Moment of Inertia and Rotational Kinetic Energy

Learning Objectives

By the end of this section, you will be able to:

- Describe the differences between rotational and translational kinetic energy
- Define the physical concept of moment of inertia in terms of the mass distribution from the rotational axis
- Explain how the moment of inertia of rigid bodies affects their rotational kinetic energy
- Use conservation of mechanical energy to analyze systems undergoing both rotation and translation
- Calculate the angular velocity of a rotating system when there are energy losses due to nonconservative forces

So far in this chapter, we have been working with rotational kinematics: the description of motion for a rotating rigid body with a fixed axis of rotation. In this section, we define two new quantities that are helpful for analyzing properties of rotating objects: moment of inertia and rotational kinetic energy. With these properties defined, we will have two important tools we need for analyzing rotational dynamics.

Rotational Kinetic Energy

Any moving object has kinetic energy. We know how to calculate this for a body undergoing translational motion, but how about for a rigid body undergoing rotation? This might seem complicated because each point on the rigid body has a different velocity. However, we can make use of angular velocity—which is the same for the entire rigid body—to express the kinetic energy for a rotating object. Figure 10.17 shows an example of a very energetic rotating body: an electric grindstone propelled by a motor. Sparks are flying, and noise and vibration are generated as the grindstone does its work. This system has considerable energy, some of it in the form of heat, light, sound, and vibration. However, most of this energy is in the form of **rotational kinetic energy**.

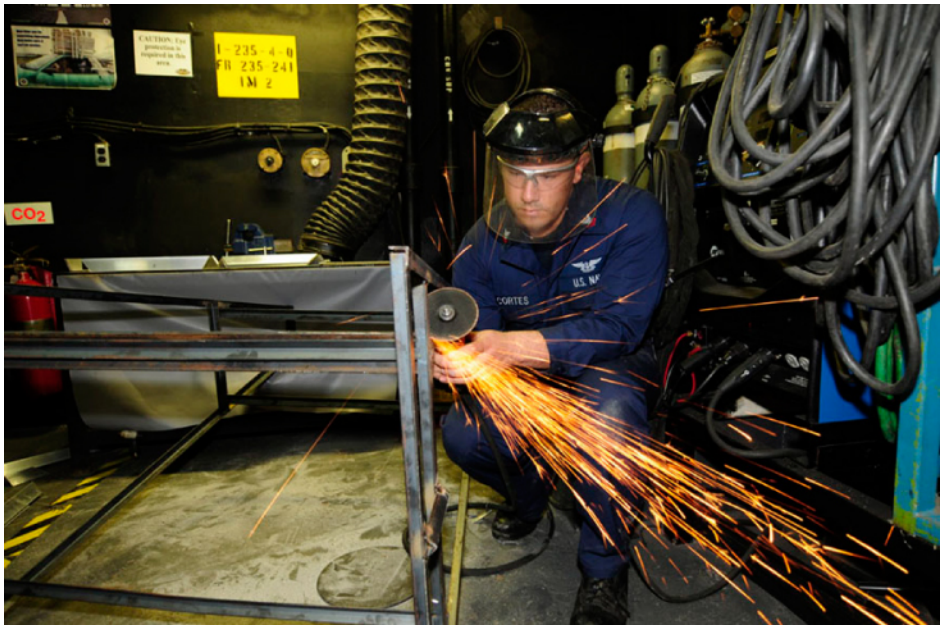


Figure 10.17 The rotational kinetic energy of the grindstone is converted to heat, light, sound, and vibration. (credit: Zachary David Bell, US Navy)

Energy in rotational motion is not a new form of energy; rather, it is the energy associated with rotational motion, the same as kinetic energy in translational motion. However, because kinetic energy is given by $K = \frac{1}{2}mv^2$, and velocity is a quantity that is different for every point on a rotating body about an axis, it makes sense to find a way to write kinetic energy in terms of the variable ω, which is the same for all points on a rigid rotating body. For a single particle rotating around a fixed axis, this is straightforward to calculate. We can relate the angular velocity to the magnitude of the translational velocity using the relation $v_t = \omega r$, where r is the distance of the particle from the axis of rotation and v_t is its tangential speed. Substituting into the equation for kinetic energy, we find

$$K = \frac{1}{2}mv_t^2 = \frac{1}{2}m(\omega r)^2 = \frac{1}{2}(mr^2)\omega^2.$$

In the case of a rigid rotating body, we can divide up any body into a large number of smaller masses, each with a mass m_j and distance to the axis of rotation r_j, such that the total mass of the body is equal to the sum of the individual masses: $M = \sum_j m_j$. Each smaller mass has tangential speed v_j, where we have dropped the subscript t for the moment. The total kinetic energy of the rigid rotating body is

$$K = \sum_j \frac{1}{2}m_j v_j^2 = \sum_j \frac{1}{2}m_j(r_j\omega_j)^2$$

and since $\omega_j = \omega$ for all masses,

$$K = \frac{1}{2}\left(\sum_j m_j r_j^2\right)\omega^2. \qquad 10.16$$

The units of Equation 10.16 are joules (J). The equation in this form is complete, but awkward; we need to find a way to generalize it.

Moment of Inertia

If we compare Equation 10.16 to the way we wrote kinetic energy in Work and Kinetic Energy, $\left(\frac{1}{2}mv^2\right)$, this suggests we have a new rotational variable to add to our list of our relations between rotational and translational variables. The quantity $\sum_j m_j r_j^2$ is the counterpart for mass in the equation for rotational kinetic energy. This is an important new term for rotational motion. This quantity is called the **moment of inertia** I, with units of $\text{kg} \cdot \text{m}^2$:

$$I = \sum_j m_j r_j^2. \qquad 10.17$$

For now, we leave the expression in summation form, representing the moment of inertia of a system of point particles rotating about a fixed axis. We note that the moment of inertia of a single point particle about a fixed axis is simply mr^2, with r being the distance from the point particle to the axis of rotation. In the next section, we explore the integral form of this equation, which can be used to calculate the moment of inertia of some regular-shaped rigid bodies.

The moment of inertia is the quantitative measure of rotational inertia, just as in translational motion, and mass is the quantitative measure of linear inertia—that is, the more massive an object is, the more inertia it has, and the greater is its resistance to change in linear velocity. Similarly, the greater the moment of inertia of a rigid body or system of particles, the greater is its resistance to change in angular velocity about a fixed axis of rotation. It is interesting to see how the moment of inertia varies with r, the distance to the axis of rotation of the mass particles in Equation 10.17. Rigid bodies and systems of particles with more mass concentrated at a greater distance from the axis of rotation have greater moments of inertia than bodies and systems of the same mass, but concentrated near the axis of rotation. In this way, we can see that a hollow cylinder has more

rotational inertia than a solid cylinder of the same mass when rotating about an axis through the center. Substituting Equation 10.17 into Equation 10.16, the expression for the kinetic energy of a rotating rigid body becomes

$$K = \frac{1}{2} I\omega^2. \tag{10.18}$$

We see from this equation that the kinetic energy of a rotating rigid body is directly proportional to the moment of inertia and the square of the angular velocity. This is exploited in flywheel energy-storage devices, which are designed to store large amounts of rotational kinetic energy. Many carmakers are now testing flywheel energy storage devices in their automobiles, such as the flywheel, or kinetic energy recovery system, shown in Figure 10.18.



Figure 10.18 A KERS (kinetic energy recovery system) flywheel used in cars. (credit: "cmonville"/Flickr)

The rotational and translational quantities for kinetic energy and inertia are summarized in Table 10.4. The relationship column is not included because a constant doesn't exist by which we could multiply the rotational quantity to get the translational quantity, as can be done for the variables in Table 10.3.

Rotational	Translational
$I = \sum_j m_j r_j^2$	m
$K = \frac{1}{2} I\omega^2$	$K = \frac{1}{2} mv^2$

Table 10.4 Rotational and Translational Kinetic Energies and Inertia

EXAMPLE 10.8

Moment of Inertia of a System of Particles

Six small washers are spaced 10 cm apart on a rod of negligible mass and 0.5 m in length. The mass of each washer is 20 g. The rod rotates about an axis located at 25 cm, as shown in Figure 10.19. (a) What is the moment of inertia of the system? (b) If the two washers closest to the axis are removed, what is the moment of

inertia of the remaining four washers? (c) If the system with six washers rotates at 5 rev/s, what is its rotational kinetic energy?

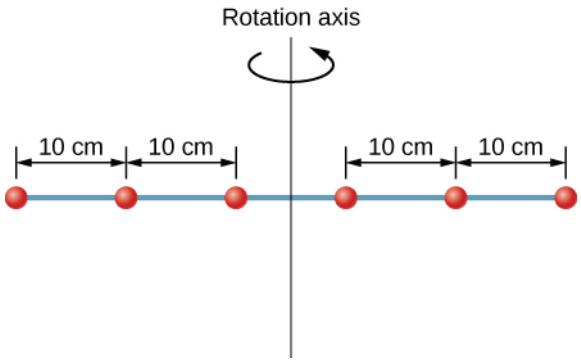


Figure 10.19 Six washers are spaced 10 cm apart on a rod of negligible mass and rotating about a vertical axis.

Strategy

a. We use the definition for moment of inertia for a system of particles and perform the summation to evaluate this quantity. The masses are all the same so we can pull that quantity in front of the summation symbol.
b. We do a similar calculation.
c. We insert the result from (a) into the expression for rotational kinetic energy.

Solution

a. $I = \sum_j m_j r_j^2 = (0.02\,\text{kg})(2 \times (0.25\,\text{m})^2 + 2 \times (0.15\,\text{m})^2 + 2 \times (0.05\,\text{m})^2) = 0.0035\,\text{kg} \cdot \text{m}^2.$

b. $I = \sum_j m_j r_j^2 = (0.02\,\text{kg})(2 \times (0.25\,\text{m})^2 + 2 \times (0.15\,\text{m})^2) = 0.0034\,\text{kg} \cdot \text{m}^2.$

c. $K = \frac{1}{2} I\omega^2 = \frac{1}{2}(0.0035\,\text{kg} \cdot \text{m}^2)(5.0 \times 2\pi\,\text{rad/s})^2 = 1.73\,\text{J}.$

Significance

We can see the individual contributions to the moment of inertia. The masses close to the axis of rotation have a very small contribution. When we removed them, it had a very small effect on the moment of inertia.

In the next section, we generalize the summation equation for point particles and develop a method to calculate moments of inertia for rigid bodies. For now, though, Figure 10.20 gives values of rotational inertia for common object shapes around specified axes.

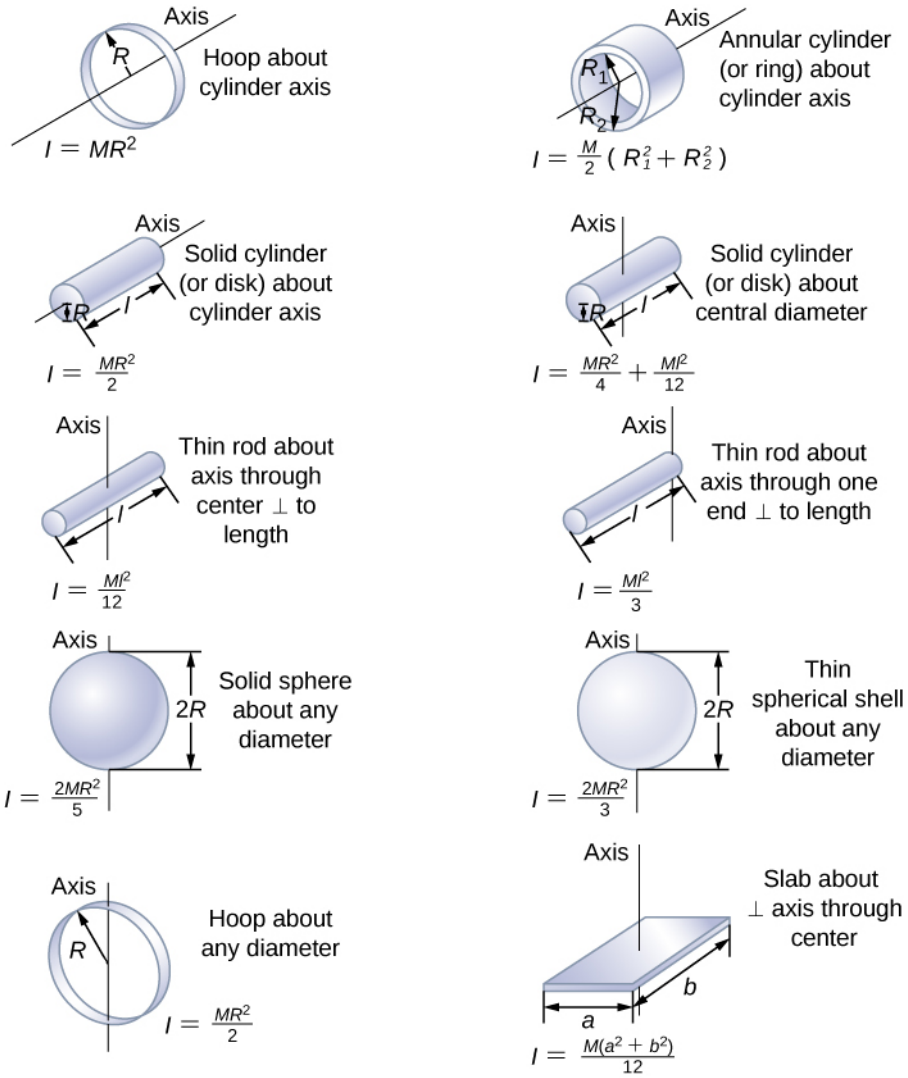


Figure 10.20 Values of rotational inertia for common shapes of objects.

Applying Rotational Kinetic Energy

Now let's apply the ideas of rotational kinetic energy and the moment of inertia table to get a feeling for the energy associated with a few rotating objects. The following examples will also help get you comfortable using these equations. First, let's look at a general problem-solving strategy for rotational energy.

PROBLEM-SOLVING STRATEGY

Rotational Energy

1. Determine that energy or work is involved in the rotation.
2. Determine the system of interest. A sketch usually helps.
3. Analyze the situation to determine the types of work and energy involved.
4. If there are no losses of energy due to friction and other nonconservative forces, mechanical energy is conserved, that is, $K_\mathrm{i} + U_\mathrm{i} = K_\mathrm{f} + U_\mathrm{f}$.
5. If nonconservative forces are present, mechanical energy is not conserved, and other forms of energy, such as heat and light, may enter or leave the system. Determine what they are and calculate them as necessary.
6. Eliminate terms wherever possible to simplify the algebra.
7. Evaluate the numerical solution to see if it makes sense in the physical situation presented in the wording

of the problem.

EXAMPLE 10.9

Calculating Helicopter Energies

A typical small rescue helicopter has four blades: Each is 4.00 m long and has a mass of 50.0 kg (Figure 10.21). The blades can be approximated as thin rods that rotate about one end of an axis perpendicular to their length. The helicopter has a total loaded mass of 1000 kg. (a) Calculate the rotational kinetic energy in the blades when they rotate at 300 rpm. (b) Calculate the translational kinetic energy of the helicopter when it flies at 20.0 m/s, and compare it with the rotational energy in the blades.

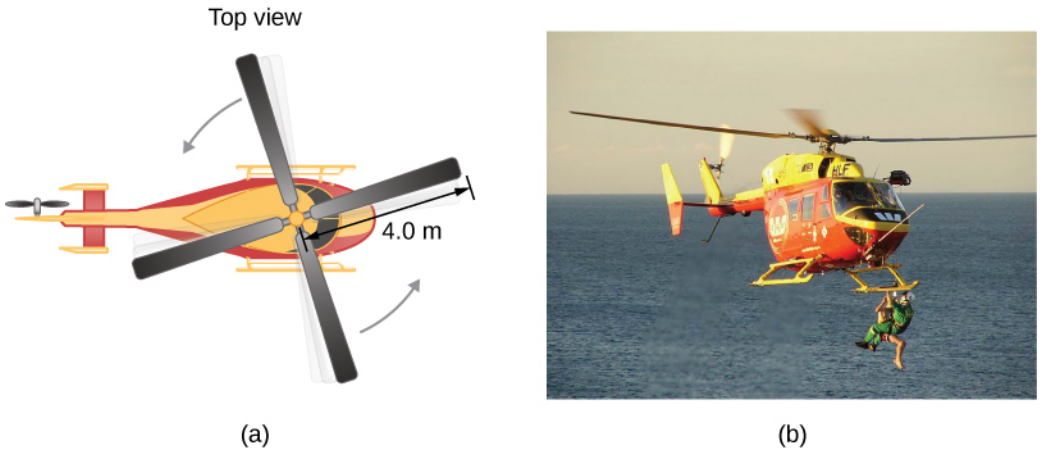


Figure 10.21 (a) Sketch of a four-blade helicopter. (b) A water rescue operation featuring a helicopter from the Auckland Westpac Rescue Helicopter Service. (credit b: modification of work by "111 Emergency"/Flickr)

Strategy

Rotational and translational kinetic energies can be calculated from their definitions. The wording of the problem gives all the necessary constants to evaluate the expressions for the rotational and translational kinetic energies.

Solution

a. The rotational kinetic energy is

$$K = \frac{1}{2} I\omega^2.$$

We must convert the angular velocity to radians per second and calculate the moment of inertia before we can find K. The angular velocity ω is

$$\omega = \frac{300 \text{ rev}}{1.00 \text{ min}} \frac{2\pi \text{ rad}}{1 \text{ rev}} \frac{1.00 \text{ min}}{60.0 \text{ s}} = 31.4 \frac{\text{rad}}{\text{s}}.$$

The moment of inertia of one blade is that of a thin rod rotated about its end, listed in Figure 10.20. The total I is four times this moment of inertia because there are four blades. Thus,

$$I = 4\frac{Ml^2}{3} = 4 \times \frac{(50.0 \text{ kg})(4.00 \text{ m})^2}{3} = 1067.0 \text{ kg} \cdot \text{m}^2.$$

Entering ω and I into the expression for rotational kinetic energy gives

$$K = 0.5(1067 \text{ kg} \cdot \text{m}^2)(31.4 \text{ rad/s})^2 = 5.26 \times 10^5 \text{ J}.$$

b. Entering the given values into the equation for translational kinetic energy, we obtain

$$K = \frac{1}{2}mv^2 = (0.5)(1000.0 \text{ kg})(20.0 \text{ m/s})^2 = 2.00 \times 10^5 \text{ J}.$$

To compare kinetic energies, we take the ratio of translational kinetic energy to rotational kinetic energy. This ratio is

$$\frac{2.00 \times 10^5 \text{ J}}{5.26 \times 10^5 \text{ J}} = 0.380.$$

Significance

The ratio of translational energy to rotational kinetic energy is only 0.380. This ratio tells us that most of the kinetic energy of the helicopter is in its spinning blades.

EXAMPLE 10.10

Energy in a Boomerang

A person hurls a boomerang into the air with a velocity of 30.0 m/s at an angle of 40.0° with respect to the horizontal (Figure 10.22). It has a mass of 1.0 kg and is rotating at 10.0 rev/s. The moment of inertia of the boomerang is given as $I = \frac{1}{12}mL^2$ where $L = 0.7$ m. (a) What is the total energy of the boomerang when it leaves the hand? (b) How high does the boomerang go from the elevation of the hand, neglecting air resistance?

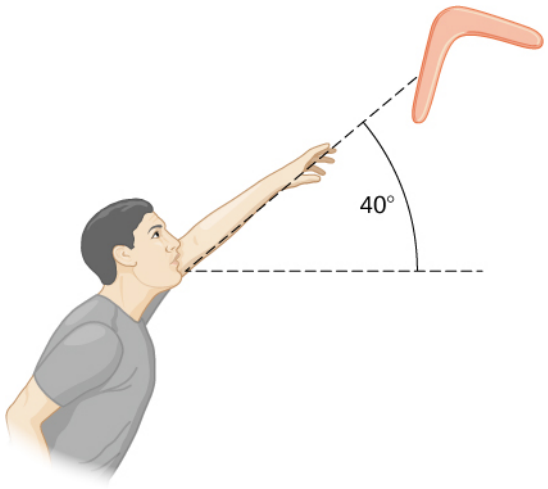


Figure 10.22 A boomerang is hurled into the air at an initial angle of 40°.

Strategy

We use the definitions of rotational and linear kinetic energy to find the total energy of the system. The problem states to neglect air resistance, so we don't have to worry about energy loss. In part (b), we use conservation of mechanical energy to find the maximum height of the boomerang.

Solution

a. Moment of inertia: $I = \frac{1}{12}mL^2 = \frac{1}{12}(1.0\,\text{kg})(0.7\text{m})^2 = 0.041\,\text{kg}\cdot\text{m}^2$.
Angular velocity: $\omega = (10.0\,\text{rev/s})(2\pi) = 62.83\,\text{rad/s}$.
The rotational kinetic energy is therefore

$$K_\text{R} = \frac{1}{2}(0.041\,\text{kg}\cdot\text{m}^2)(62.83\,\text{rad/s})^2 = 80.93\,\text{J}.$$

The translational kinetic energy is

$$K_\text{T} = \frac{1}{2}mv^2 = \frac{1}{2}(1.0\,\text{kg})(30.0\,\text{m/s})^2 = 450.0\,\text{J}.$$

Thus, the total energy in the boomerang is

$$K_\text{Total} = K_\text{R} + K_\text{T} = 80.93 + 450.0 = 530.93\,\text{J}.$$

b. We use conservation of mechanical energy. Since the boomerang is launched at an angle, we need to write the total energies of the system in terms of its linear kinetic energies using the velocity in the x- and y-directions. The total energy when the boomerang leaves the hand is

$$E_{\text{Before}} = \frac{1}{2}mv_x^2 + \frac{1}{2}mv_y^2 + \frac{1}{2}I\omega^2.$$

The total energy at maximum height is

$$E_{\text{Final}} = \frac{1}{2}mv_x^2 + \frac{1}{2}I\omega^2 + mgh.$$

By conservation of mechanical energy, $E_{\text{Before}} = E_{\text{Final}}$ so we have, after canceling like terms,

$$\frac{1}{2}mv_y^2 = mgh.$$

Since $v_y = 30.0\ \text{m/s}(\sin 40°) = 19.28\ \text{m/s}$, we find

$$h = \frac{(19.28\ \text{m/s})^2}{2(9.8\ \text{m/s}^2)} = 18.97\ \text{m}.$$

Significance

In part (b), the solution demonstrates how energy conservation is an alternative method to solve a problem that normally would be solved using kinematics. In the absence of air resistance, the rotational kinetic energy was not a factor in the solution for the maximum height.

CHECK YOUR UNDERSTANDING 10.4

A nuclear submarine propeller has a moment of inertia of $800.0\ \text{kg} \cdot \text{m}^2$. If the submerged propeller has a rotation rate of 4.0 rev/s when the engine is cut, what is the rotation rate of the propeller after 5.0 s when water resistance has taken 50,000 J out of the system?

10.5 Calculating Moments of Inertia

Learning Objectives

By the end of this section, you will be able to:

- Calculate the moment of inertia for uniformly shaped, rigid bodies
- Apply the parallel axis theorem to find the moment of inertia about any axis parallel to one already known
- Calculate the moment of inertia for compound objects

In the preceding section, we defined the moment of inertia but did not show how to calculate it. In this section, we show how to calculate the moment of inertia for several standard types of objects, as well as how to use known moments of inertia to find the moment of inertia for a shifted axis or for a compound object. This section is very useful for seeing how to apply a general equation to complex objects (a skill that is critical for more advanced physics and engineering courses).

Moment of Inertia

We defined the moment of inertia I of an object to be $I = \sum_i m_i r_i^2$ for all the point masses that make up the object. Because r is the distance to the axis of rotation from each piece of mass that makes up the object, the moment of inertia for any object depends on the chosen axis. To see this, let's take a simple example of two masses at the end of a massless (negligibly small mass) rod (Figure 10.23) and calculate the moment of inertia about two different axes. In this case, the summation over the masses is simple because the two masses at the end of the barbell can be approximated as point masses, and the sum therefore has only two terms.

In the case with the axis in the center of the barbell, each of the two masses m is a distance R away from the axis, giving a moment of inertia of

$$I_1 = mR^2 + mR^2 = 2mR^2.$$

In the case with the axis at the end of the barbell—passing through one of the masses—the moment of inertia is

$$I_2 = m(0)^2 + m(2R)^2 = 4mR^2.$$

From this result, we can conclude that it is twice as hard to rotate the barbell about the end than about its center.

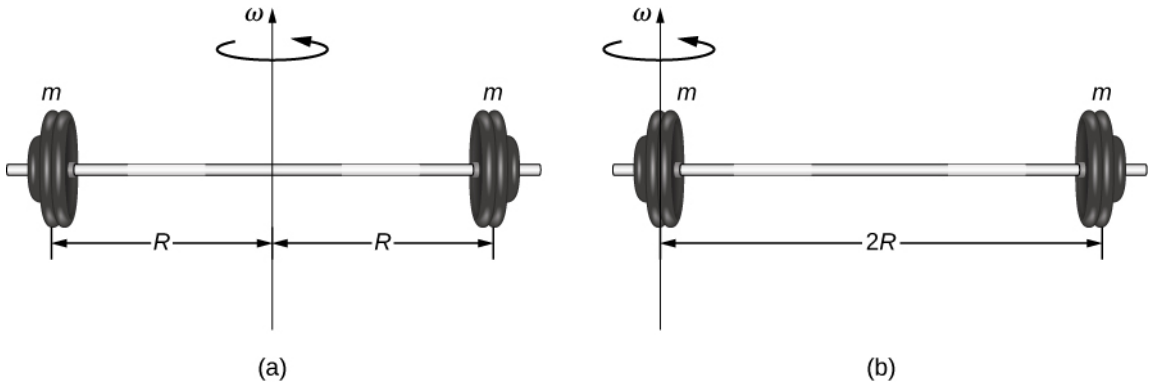


Figure 10.23 (a) A barbell with an axis of rotation through its center; (b) a barbell with an axis of rotation through one end.

In this example, we had two point masses and the sum was simple to calculate. However, to deal with objects that are not point-like, we need to think carefully about each of the terms in the equation. The equation asks us to sum over each 'piece of mass' a certain distance from the axis of rotation. But what exactly does each 'piece of mass' mean? Recall that in our derivation of this equation, each piece of mass had the same magnitude of velocity, which means the whole piece had to have a single distance r to the axis of rotation. However, this is not possible unless we take an infinitesimally small piece of mass dm, as shown in Figure 10.24.

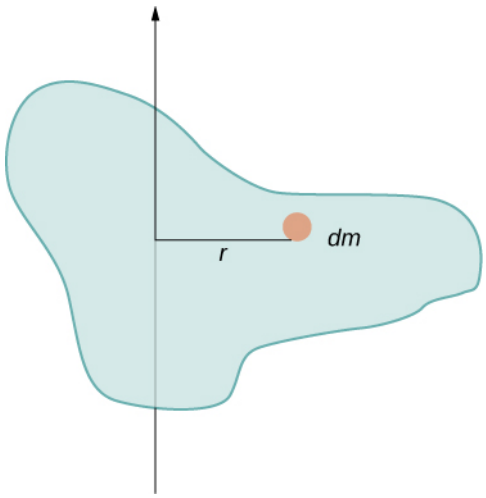


Figure 10.24 Using an infinitesimally small piece of mass to calculate the contribution to the total moment of inertia.

The need to use an infinitesimally small piece of mass dm suggests that we can write the moment of inertia by evaluating an integral over infinitesimal masses rather than doing a discrete sum over finite masses:

$$I = \sum_i m_i r_i^2 \text{ becomes } I = \int r^2 dm. \qquad 10.19$$

This, in fact, is the form we need to generalize the equation for complex shapes. It is best to work out specific examples in detail to get a feel for how to calculate the moment of inertia for specific shapes. This is the focus of most of the rest of this section.

A uniform thin rod with an axis through the center

Consider a uniform (density and shape) thin rod of mass M and length L as shown in Figure 10.25. We want a

thin rod so that we can assume the cross-sectional area of the rod is small and the rod can be thought of as a string of masses along a one-dimensional straight line. In this example, the axis of rotation is perpendicular to the rod and passes through the midpoint for simplicity. Our task is to calculate the moment of inertia about this axis. We orient the axes so that the z-axis is the axis of rotation and the x-axis passes through the length of the rod, as shown in the figure. This is a convenient choice because we can then integrate along the x-axis.

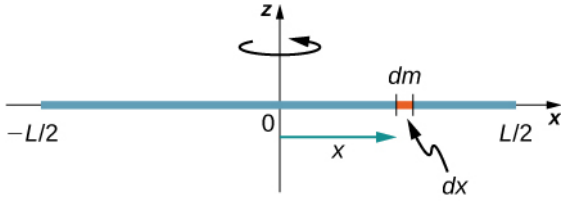


Figure 10.25 Calculation of the moment of inertia I for a uniform thin rod about an axis through the center of the rod.

We define dm to be a small element of mass making up the rod. The moment of inertia integral is an integral over the mass distribution. However, we know how to integrate over space, not over mass. We therefore need to find a way to relate mass to spatial variables. We do this using the **linear mass density** λ of the object, which is the mass per unit length. Since the mass density of this object is uniform, we can write

$$\lambda = \frac{m}{l} \text{ or } m = \lambda l.$$

If we take the differential of each side of this equation, we find

$$dm = d(\lambda l) = \lambda(dl)$$

since λ is constant. We chose to orient the rod along the x-axis for convenience—this is where that choice becomes very helpful. Note that a piece of the rod dl lies completely along the x-axis and has a length dx; in fact, $dl = dx$ in this situation. We can therefore write $dm = \lambda(dx)$, giving us an integration variable that we know how to deal with. The distance of each piece of mass dm from the axis is given by the variable x, as shown in the figure. Putting this all together, we obtain

$$I = \int r^2\, dm = \int x^2\, dm = \int x^2 \lambda dx.$$

The last step is to be careful about our limits of integration. The rod extends from $x = -L/2$ to $x = L/2$, since the axis is in the middle of the rod at $x = 0$. This gives us

$$\begin{aligned} I &= \int_{-L/2}^{L/2} x^2 \lambda dx = \lambda \frac{x^3}{3}\Big|_{-L/2}^{L/2} = \lambda\left(\tfrac{1}{3}\right)\left[\left(\tfrac{L}{2}\right)^3 - \left(\tfrac{-L}{2}\right)^3\right] \\ &= \lambda\left(\tfrac{1}{3}\right)\tfrac{L^3}{8}(2) = \tfrac{M}{L}\left(\tfrac{1}{3}\right)\tfrac{L^3}{8}(2) = \tfrac{1}{12}ML^2. \end{aligned}$$

Next, we calculate the moment of inertia for the same uniform thin rod but with a different axis choice so we can compare the results. We would expect the moment of inertia to be smaller about an axis through the center of mass than the endpoint axis, just as it was for the barbell example at the start of this section. This happens because more mass is distributed farther from the axis of rotation.

A uniform thin rod with axis at the end

Now consider the same uniform thin rod of mass M and length L, but this time we move the axis of rotation to the end of the rod. We wish to find the moment of inertia about this new axis (Figure 10.26). The quantity dm is again defined to be a small element of mass making up the rod. Just as before, we obtain

$$I = \int r^2\, dm = \int x^2\, dm = \int x^2 \lambda dx.$$

However, this time we have different limits of integration. The rod extends from $x = 0$ to $x = L$, since the axis is at the end of the rod at $x = 0$. Therefore we find

$$I = \int_0^L x^2 \lambda dx = \lambda \frac{x^3}{3}\Big|_0^L = \lambda\left(\tfrac{1}{3}\right)[(L)^3 - (0)^3]$$
$$= \lambda\left(\tfrac{1}{3}\right)L^3 = \frac{M}{L}\left(\tfrac{1}{3}\right)L^3 = \tfrac{1}{3}ML^2.$$

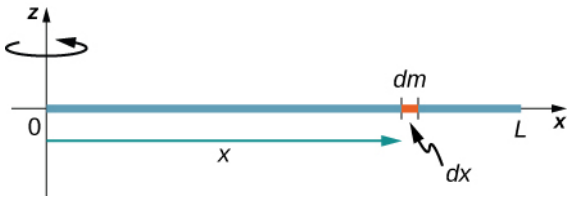


Figure 10.26 Calculation of the moment of inertia I for a uniform thin rod about an axis through the end of the rod.

Note the rotational inertia of the rod about its endpoint is larger than the rotational inertia about its center (consistent with the barbell example) by a factor of four.

The Parallel-Axis Theorem

The similarity between the process of finding the moment of inertia of a rod about an axis through its middle and about an axis through its end is striking, and suggests that there might be a simpler method for determining the moment of inertia for a rod about any axis parallel to the axis through the center of mass. Such an axis is called a **parallel axis**. There is a theorem for this, called the **parallel-axis theorem**, which we state here but do not derive in this text.

Parallel-Axis Theorem

Let m be the mass of an object and let d be the distance from an axis through the object's center of mass to a new axis. Then we have

$$I_{\text{parallel-axis}} = I_{\text{center of mass}} + md^2. \qquad 10.20$$


Let's apply this to the rod examples solved above:

$$I_{\text{end}} = I_{\text{center of mass}} + md^2 = \frac{1}{12}mL^2 + m\left(\frac{L}{2}\right)^2 = \left(\frac{1}{12} + \frac{1}{4}\right)mL^2 = \frac{1}{3}mL^2.$$

This result agrees with our more lengthy calculation from above. This is a useful equation that we apply in some of the examples and problems.

CHECK YOUR UNDERSTANDING 10.5

What is the moment of inertia of a cylinder of radius R and mass m about an axis through a point on the surface, as shown below?

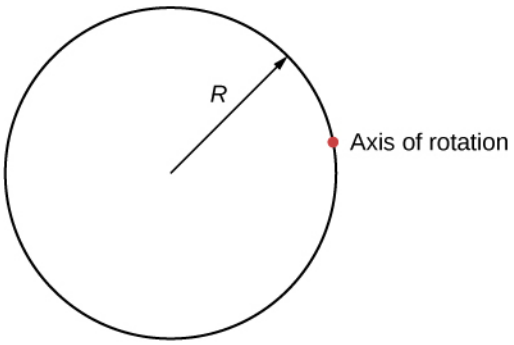

A uniform thin disk about an axis through the center

Integrating to find the moment of inertia of a two-dimensional object is a little bit trickier, but one shape is commonly done at this level of study—a uniform thin disk about an axis through its center (Figure 10.27).

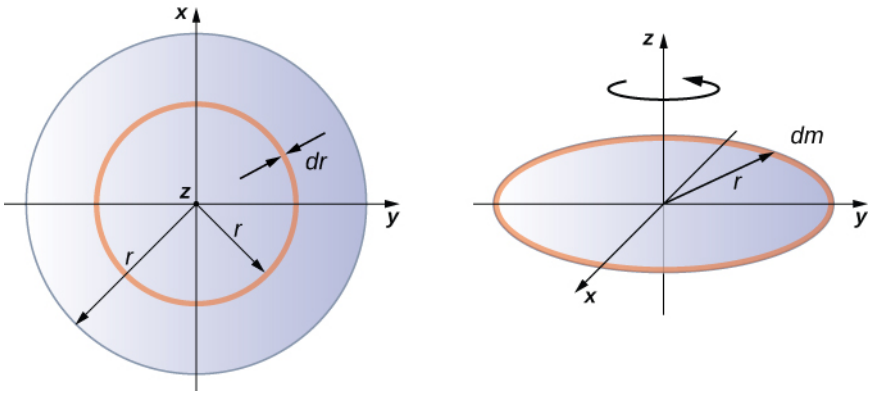


Figure 10.27 Calculating the moment of inertia for a thin disk about an axis through its center.

Since the disk is thin, we can take the mass as distributed entirely in the *xy*-plane. We again start with the relationship for the **surface mass density**, which is the mass per unit surface area. Since it is uniform, the surface mass density σ is constant:

$$\sigma = \frac{m}{A} \quad \text{or} \quad \sigma A = m, \text{ so } dm = \sigma(dA).$$

Now we use a simplification for the area. The area can be thought of as made up of a series of thin rings, where each ring is a mass increment dm of radius r equidistanct from the axis, as shown in part (b) of the figure. The infinitesimal area of each ring dA is therefore given by the length of each ring ($2\pi r$) times the infinitesimmal width of each ring dr:

$$A = \pi r^2, dA = d(\pi r^2) = \pi dr^2 = 2\pi r dr.$$

The full area of the disk is then made up from adding all the thin rings with a radius range from 0 to R. This radius range then becomes our limits of integration for dr, that is, we integrate from $r = 0$ to $r = R$. Putting this all together, we have

$$\begin{aligned} I &= \int_0^R r^2 \sigma(2\pi r) dr = 2\pi\sigma \int_0^R r^3 dr = 2\pi\sigma \frac{r^4}{4}\Big|_0^R = 2\pi\sigma\left(\frac{R^4}{4} - 0\right) \\ &= 2\pi\frac{m}{A}\left(\frac{R^4}{4}\right) = 2\pi\frac{m}{\pi R^2}\left(\frac{R^4}{4}\right) = \frac{1}{2}mR^2. \end{aligned}$$

Note that this agrees with the value given in Figure 10.20.

Calculating the moment of inertia for compound objects

Now consider a compound object such as that in Figure 10.28, which depicts a thin disk at the end of a thin rod. This cannot be easily integrated to find the moment of inertia because it is not a uniformly shaped object. However, if we go back to the initial definition of moment of inertia as a summation, we can reason that a compound object's moment of inertia can be found from the sum of each part of the object:

$$I_{\text{total}} = \sum_i I_i. \qquad 10.21$$

It is important to note that the moments of inertia of the objects in Equation 10.21 are *about a common axis*. In the case of this object, that would be a rod of length L rotating about its end, and a thin disk of radius R rotating about an axis shifted off of the center by a distance $L + R$, where R is the radius of the disk. Let's define the mass of the rod to be m_{r} and the mass of the disk to be m_{d}.




Figure 10.28 Compound object consisting of a disk at the end of a rod. The axis of rotation is located at *A*.

The moment of inertia of the rod is simply $\frac{1}{3}m_{\mathrm{r}}L^2$, but we have to use the parallel-axis theorem to find the moment of inertia of the disk about the axis shown. The moment of inertia of the disk about its center is $\frac{1}{2}m_{\mathrm{d}}R^2$ and we apply the parallel-axis theorem $I_{\text{parallel-axis}} = I_{\text{center of mass}} + md^2$ to find

$$I_{\text{parallel-axis}} = \frac{1}{2}m_{\mathrm{d}}R^2 + m_{\mathrm{d}}(L+R)^2.$$

Adding the moment of inertia of the rod plus the moment of inertia of the disk with a shifted axis of rotation, we find the moment of inertia for the compound object to be

$$I_{\text{total}} = \frac{1}{3}m_{\mathrm{r}}L^2 + \frac{1}{2}m_{\mathrm{d}}R^2 + m_{\mathrm{d}}(L+R)^2.$$

Applying moment of inertia calculations to solve problems

Now let's examine some practical applications of moment of inertia calculations.

EXAMPLE 10.11

Person on a Merry-Go-Round

A 25-kg child stands at a distance $r = 1.0$ m from the axis of a rotating merry-go-round (Figure 10.29). The merry-go-round can be approximated as a uniform solid disk with a mass of 500 kg and a radius of 2.0 m. Find the moment of inertia of this system.

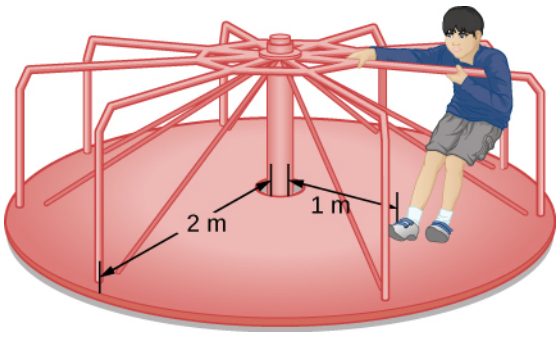


Figure 10.29 Calculating the moment of inertia for a child on a merry-go-round.

Strategy

This problem involves the calculation of a moment of inertia. We are given the mass and distance to the axis of rotation of the child as well as the mass and radius of the merry-go-round. Since the mass and size of the child are much smaller than the merry-go-round, we can approximate the child as a point mass. The notation we use is $m_{\mathrm{c}} = 25\,\mathrm{kg}, r_{\mathrm{c}} = 1.0\,\mathrm{m}, m_{\mathrm{m}} = 500\,\mathrm{kg}, r_{\mathrm{m}} = 2.0\,\mathrm{m}$.

Our goal is to find $I_{\text{total}} = \sum_i I_i$.

Solution

For the child, $I_c = m_c r^2$, and for the merry-go-round, $I_m = \frac{1}{2} m_m r^2$. Therefore

$$I_{\text{total}} = 25(1)^2 + \frac{1}{2}(500)(2)^2 = 25 + 1000 = 1025\ \text{kg} \cdot \text{m}^2.$$


Significance

The value should be close to the moment of inertia of the merry-go-round by itself because it has much more mass distributed away from the axis than the child does.

EXAMPLE 10.12

Rod and Solid Sphere

Find the moment of inertia of the rod and solid sphere combination about the two axes as shown below. The rod has length 0.5 m and mass 2.0 kg. The radius of the sphere is 20.0 cm and has mass 1.0 kg.

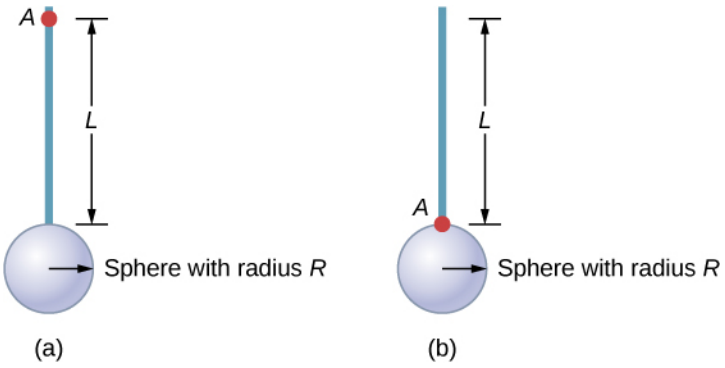

Strategy

Since we have a compound object in both cases, we can use the parallel-axis theorem to find the moment of inertia about each axis. In (a), the center of mass of the sphere is located at a distance $L + R$ from the axis of rotation. In (b), the center of mass of the sphere is located a distance R from the axis of rotation. In both cases, the moment of inertia of the rod is about an axis at one end. Refer to Table 10.4 for the moments of inertia for the individual objects.

a. $I_{\text{total}} = \sum_i I_i = I_{\text{Rod}} + I_{\text{Sphere}}$;

$I_{\text{Sphere}} = I_{\text{center of mass}} + m_{\text{Sphere}}(L + R)^2 = \frac{2}{5} m_{\text{Sphere}} R^2 + m_{\text{Sphere}}(L + R)^2$;

$I_{\text{total}} = I_{\text{Rod}} + I_{\text{Sphere}} = \frac{1}{3} m_{\text{Rod}} L^2 + \frac{2}{5} m_{\text{Sphere}} R^2 + m_{\text{Sphere}}(L + R)^2$;

$I_{\text{total}} = \frac{1}{3}(2.0\ \text{kg})(0.5\ \text{m})^2 + \frac{2}{5}(1.0\ \text{kg})(0.2\ \text{m})^2 + (1.0\ \text{kg})(0.5\ \text{m} + 0.2\ \text{m})^2$;

$I_{\text{total}} = (0.167 + 0.016 + 0.490)\ \text{kg} \cdot \text{m}^2 = 0.673\ \text{kg} \cdot \text{m}^2$.

b. $I_{\text{Sphere}} = \frac{2}{5} m_{\text{Sphere}} R^2 + m_{\text{Sphere}} R^2$;

$I_{\text{total}} = I_{\text{Rod}} + I_{\text{Sphere}} = \frac{1}{3} m_{\text{Rod}} L^2 + \frac{2}{5} m_{\text{Sphere}} R^2 + m_{\text{Sphere}} R^2$;

$I_{\text{total}} = \frac{1}{3}(2.0\ \text{kg})(0.5\ \text{m})^2 + \frac{2}{5}(1.0\ \text{kg})(0.2\ \text{m})^2 + (1.0\ \text{kg})(0.2\ \text{m})^2$;

$I_{\text{total}} = (0.167 + 0.016 + 0.04)\ \text{kg} \cdot \text{m}^2 = 0.223\ \text{kg} \cdot \text{m}^2$.

Significance

Using the parallel-axis theorem eases the computation of the moment of inertia of compound objects. We see that the moment of inertia is greater in (a) than (b). This is because the axis of rotation is closer to the center of mass of the system in (b). The simple analogy is that of a rod. The moment of inertia about one end is $\frac{1}{3} mL^2$, but the moment of inertia through the center of mass along its length is $\frac{1}{12} mL^2$.

EXAMPLE 10.13

Angular Velocity of a Pendulum

A pendulum in the shape of a rod (Figure 10.30) is released from rest at an angle of 30°. It has a length 30 cm and mass 300 g. What is its angular velocity at its lowest point?

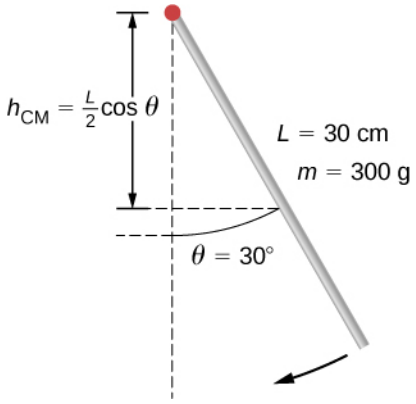


Figure 10.30 A pendulum in the form of a rod is released from rest at an angle of 30°.

Strategy

Use conservation of energy to solve the problem. At the point of release, the pendulum has gravitational potential energy, which is determined from the height of the center of mass above its lowest point in the swing. At the bottom of the swing, all of the gravitational potential energy is converted into rotational kinetic energy.

Solution

The change in potential energy is equal to the change in rotational kinetic energy, $\Delta U + \Delta K = 0$.

At the top of the swing: $U = mgh_{\text{cm}} = mg\frac{L}{2}(\cos\theta)$. At the bottom of the swing, $U = mg\frac{L}{2}$.

At the top of the swing, the rotational kinetic energy is $K = 0$. At the bottom of the swing, $K = \frac{1}{2}I\omega^2$. Therefore:

$$\Delta U + \Delta K = 0 \Rightarrow (mg\frac{L}{2}(1-\cos\theta) - 0) + (0 - \frac{1}{2}I\omega^2) = 0$$

or

$$\frac{1}{2}I\omega^2 = mg\frac{L}{2}(1-\cos\theta).$$

Solving for ω, we have

$$\omega = \sqrt{mg\frac{L}{I}(1-\cos\theta)} = \sqrt{mg\frac{L}{1/3mL^2}(1-\cos\theta)} = \sqrt{g\frac{3}{L}(1-\cos\theta)}.$$

Inserting numerical values, we have

$$\omega = \sqrt{9.8\ \text{m/s}^2\ \frac{3}{0.3\ \text{m}}(1-\cos 30)} = 3.6\ \text{rad/s}.$$

Significance

Note that the angular velocity of the pendulum does not depend on its mass.

10.6 Torque

Learning Objectives

By the end of this section, you will be able to:

- Describe how the magnitude of a torque depends on the magnitude of the lever arm and the angle the force vector makes with the lever arm
- Determine the sign (positive or negative) of a torque using the right-hand rule
- Calculate individual torques about a common axis and sum them to find the net torque

An important quantity for describing the dynamics of a rotating rigid body is torque. We see the application of torque in many ways in our world. We all have an intuition about torque, as when we use a large wrench to unscrew a stubborn bolt. Torque is at work in unseen ways, as when we press on the accelerator in a car, causing the engine to put additional torque on the drive train. Or every time we move our bodies from a standing position, we apply a torque to our limbs. In this section, we define torque and make an argument for the equation for calculating torque for a rigid body with fixed-axis rotation.

Defining Torque

So far we have defined many variables that are rotational equivalents to their translational counterparts. Let's consider what the counterpart to force must be. Since forces change the translational motion of objects, the rotational counterpart must be related to changing the rotational motion of an object about an axis. We call this rotational counterpart **torque**.

In everyday life, we rotate objects about an axis all the time, so intuitively we already know much about torque. Consider, for example, how we rotate a door to open it. First, we know that a door opens slowly if we push too close to its hinges; it is more efficient to rotate a door open if we push far from the hinges. Second, we know that we should push perpendicular to the plane of the door; if we push parallel to the plane of the door, we are not able to rotate it. Third, the larger the force, the more effective it is in opening the door; the harder you push, the more rapidly the door opens. The first point implies that the farther the force is applied from the axis of rotation, the greater the angular acceleration; the second implies that the effectiveness depends on the angle at which the force is applied; the third implies that the magnitude of the force must also be part of the equation. Note that for rotation in a plane, torque has two possible directions. Torque is either clockwise or counterclockwise relative to the chosen pivot point. Figure 10.31 shows counterclockwise rotations.

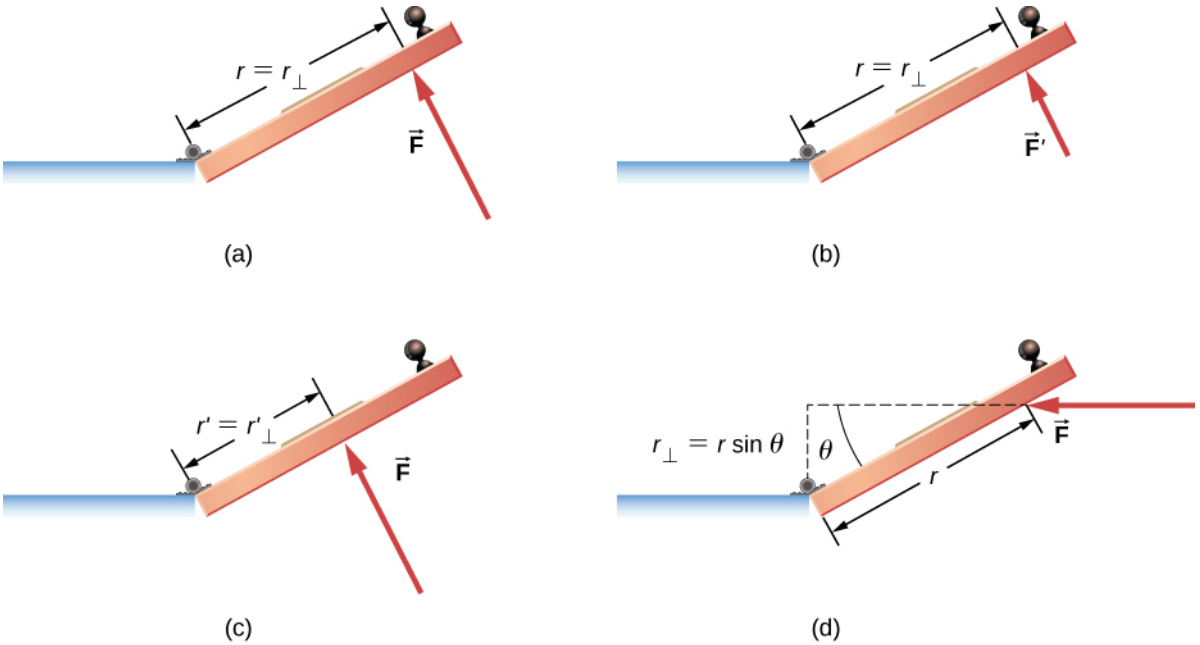


Figure 10.31 Torque is the turning or twisting effectiveness of a force, illustrated here for door rotation on its hinges (as viewed from overhead). Torque has both magnitude and direction. (a) A counterclockwise torque is produced by a force $\vec{\mathbf{F}}$ acting at a distance r from the

hinges (the pivot point). (b) A smaller counterclockwise torque is produced when a smaller force $\vec{\mathbf{F}}'$ acts at the same distance r from the hinges. (c) The same force as in (a) produces a smaller counterclockwise torque when applied at a smaller distance from the hinges. (d) A smaller counterclockwise torque is produced by the same magnitude force as (a) acting at the same distance as (a) but at an angle θ that is less than $90°$.

Now let's consider how to define torques in the general three-dimensional case.

Torque

When a force $\vec{\mathbf{F}}$ is applied to a point P whose position is $\vec{\mathbf{r}}$ relative to O (Figure 10.32), the torque $\vec{\tau}$ around O is

$$\vec{\boldsymbol{\tau}} = \vec{\mathbf{r}} \times \vec{\mathbf{F}}. \tag{10.22}$$

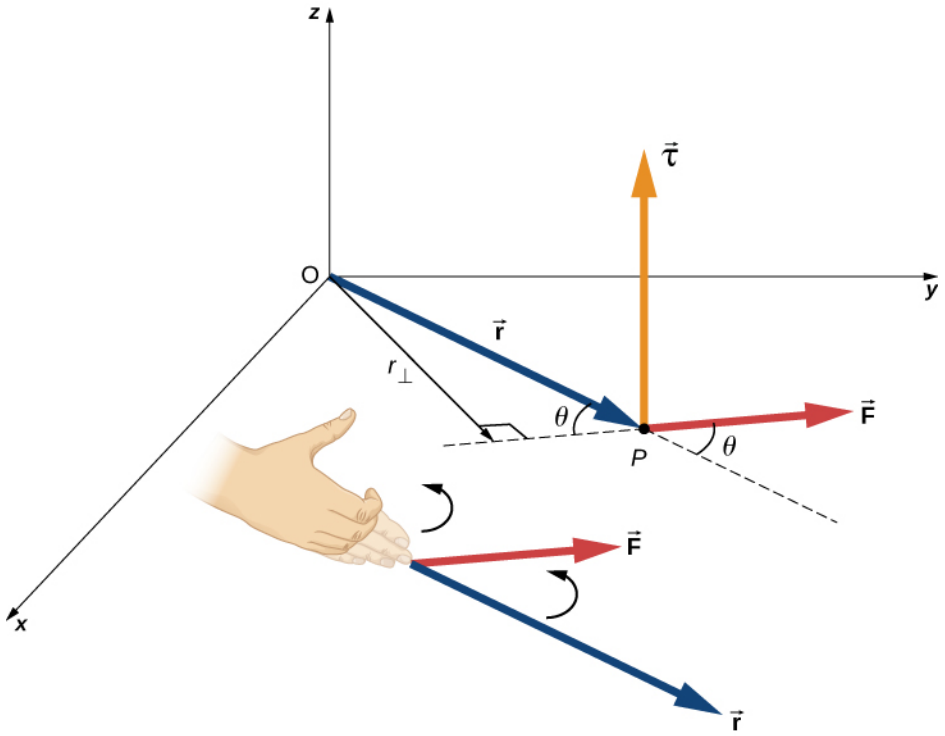


Figure 10.32 The torque is perpendicular to the plane defined by $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ and its direction is determined by the right-hand rule.

From the definition of the cross product, the torque $\vec{\boldsymbol{\tau}}$ is perpendicular to the plane containing $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ and has magnitude

$$|\vec{\boldsymbol{\tau}}| = |\vec{\mathbf{r}} \times \vec{\mathbf{F}}| = rF\sin\theta,$$

where θ is the angle between the vectors $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$. The SI unit of torque is newtons times meters, usually written as $\mathrm{N \cdot m}$. The quantity $r_\perp = r\sin\theta$ is the perpendicular distance from O to the line determined by the vector $\vec{\mathbf{F}}$ and is called the **lever arm**. Note that the greater the lever arm, the greater the magnitude of the torque. In terms of the lever arm, the magnitude of the torque is

$$|\vec{\boldsymbol{\tau}}| = r_\perp F. \tag{10.23}$$

The cross product $\vec{\mathbf{r}} \times \vec{\mathbf{F}}$ also tells us the sign of the torque. In Figure 10.32, the cross product $\vec{\mathbf{r}} \times \vec{\mathbf{F}}$ is along the positive z-axis, which by convention is a positive torque. If $\vec{\mathbf{r}} \times \vec{\mathbf{F}}$ is along the negative z-axis, this produces a negative torque.

If we consider a disk that is free to rotate about an axis through the center, as shown in Figure 10.33, we can see how the angle between the radius $\vec{\mathbf{r}}$ and the force $\vec{\mathbf{F}}$ affects the magnitude of the torque. If the angle is zero, the torque is zero; if the angle is $90°$, the torque is maximum. The torque in Figure 10.33 is positive because the direction of the torque by the right-hand rule is out of the page along the positive z-axis. The disk rotates counterclockwise due to the torque, in the same direction as a positive angular acceleration.

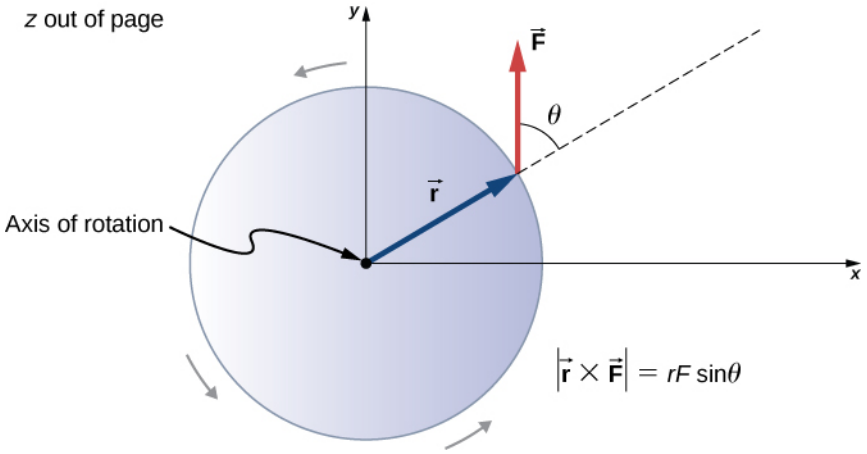


Figure 10.33 A disk is free to rotate about its axis through the center. The magnitude of the torque on the disk is $rF\sin\theta$.When $\theta = 0°$, the torque is zero and the disk does not rotate. When $\theta = 90°$, the torque is maximum and the disk rotates with maximum angular acceleration.

Any number of torques can be calculated about a given axis. The individual torques add to produce a net torque about the axis. When the appropriate sign (positive or negative) is assigned to the magnitudes of individual torques about a specified axis, the net torque about the axis is the sum of the individual torques:

$$\vec{\tau}_{\text{net}} = \sum_i |\vec{\tau}_i| . \qquad 10.24$$

Calculating Net Torque for Rigid Bodies on a Fixed Axis

In the following examples, we calculate the torque both abstractly and as applied to a rigid body.

We first introduce a problem-solving strategy.

PROBLEM-SOLVING STRATEGY

Finding Net Torque

1. Choose a coordinate system with the pivot point or axis of rotation as the origin of the selected coordinate system.
2. Determine the angle between the lever arm $\vec{\mathbf{r}}$ and the force vector.
3. Take the cross product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ to determine if the torque is positive or negative about the pivot point or axis.
4. Evaluate the magnitude of the torque using $r_\perp F$.
5. Assign the appropriate sign, positive or negative, to the magnitude.
6. Sum the torques to find the net torque.

EXAMPLE 10.14

Calculating Torque

Four forces are shown in Figure 10.34 at particular locations and orientations with respect to a given

xy-coordinate system. Find the torque due to each force about the origin, then use your results to find the net torque about the origin.

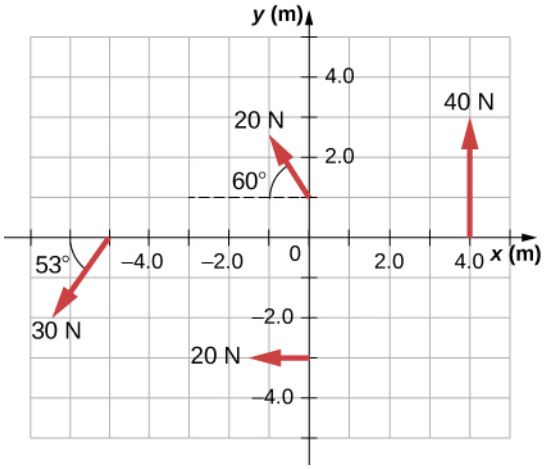


Figure 10.34 Four forces producing torques.

Strategy

This problem requires calculating torque. All known quantities––forces with directions and lever arms––are given in the figure. The goal is to find each individual torque and the net torque by summing the individual torques. Be careful to assign the correct sign to each torque by using the cross product of $\vec{\mathbf{r}}$ and the force vector $\vec{\mathbf{F}}$.

Solution

Use $|\vec{\boldsymbol{\tau}}| = r_{\perp} F = rF\sin\theta$ to find the magnitude and $\vec{\boldsymbol{\tau}} = \vec{\mathbf{r}} \times \vec{\mathbf{F}}$ to determine the sign of the torque.

The torque from force 40 N in the first quadrant is given by $(4)(40)\sin 90° = 160\ \text{N} \cdot \text{m}$.

The cross product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ is out of the page, positive.

The torque from force 20 N in the third quadrant is given by$-(3)(20)\sin 90° = -60\ \text{N} \cdot \text{m}$.

The cross product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ is into the page, so it is negative.

The torque from force 30 N in the third quadrant is given by $(5)(30)\sin 53° = 120\ \text{N} \cdot \text{m}$.

The cross product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ is out of the page, positive.

The torque from force 20 N in the second quadrant is given by $(1)(20)\sin 30° = 10\ \text{N} \cdot \text{m}$.

The cross product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$ is out of the page.

The net torque is therefore $\tau_{\text{net}} = \sum_i |\boldsymbol{\tau}_i| = 160 - 60 + 120 + 10 = 230\ \text{N} \cdot \text{m}$.

Significance

Note that each force that acts in the counterclockwise direction has a positive torque, whereas each force that acts in the clockwise direction has a negative torque. The torque is greater when the distance, force, or perpendicular components are greater.

EXAMPLE 10.15

Calculating Torque on a rigid body

Figure 10.35 shows several forces acting at different locations and angles on a flywheel. We have $|\vec{\mathbf{F}}_1| = 20\,\text{N}$, $|\vec{\mathbf{F}}_2| = 30\,\text{N}$, $|\vec{\mathbf{F}}_3| = 30\,\text{N}$, and $r = 0.5\,\text{m}$. Find the net torque on the flywheel about an axis through the center.

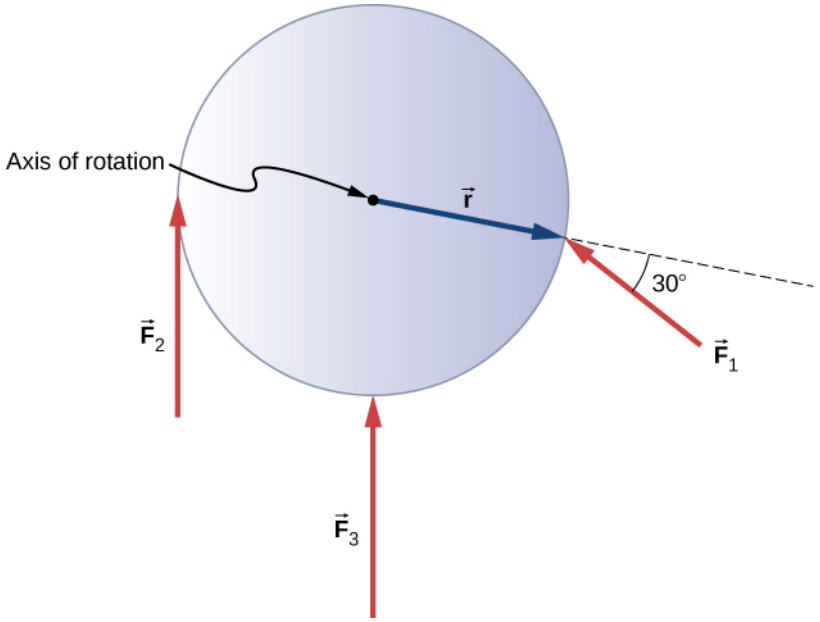


Figure 10.35 Three forces acting on a flywheel.

Strategy

We calculate each torque individually, using the cross product, and determine the sign of the torque. Then we sum the torques to find the net torque.

Solution

We start with $\vec{\mathbf{F}}_1$. If we look at Figure 10.35, we see that $\vec{\mathbf{F}}_1$ makes an angle of $90° + 60°$ with the radius vector $\vec{\mathbf{r}}$. Taking the cross product, we see that it is out of the page and so is positive. We also see this from calculating its magnitude:

$$|\vec{\boldsymbol{\tau}}_1| = rF_1 \sin 150° = 0.5\,\text{m}(20\,\text{N})(0.5) = 5.0\,\text{N}\cdot\text{m}.$$

Next we look at $\vec{\mathbf{F}}_2$. The angle between $\vec{\mathbf{F}}_2$ and $\vec{\mathbf{r}}$ is $90°$ and the cross product is into the page so the torque is negative. Its value is

$$|\vec{\boldsymbol{\tau}}_2| = -rF_2 \sin 90° = -0.5\,\text{m}(30\,\text{N}) = -15.0\,\text{N}\cdot\text{m}.$$

When we evaluate the torque due to $\vec{\mathbf{F}}_3$, we see that the angle it makes with $\vec{\mathbf{r}}$ is zero so $\vec{\mathbf{r}} \times \vec{\mathbf{F}}_3 = 0$. Therefore, $\vec{\mathbf{F}}_3$ does not produce any torque on the flywheel.

We evaluate the sum of the torques:

$$\tau_{\text{net}} = \sum_i |\boldsymbol{\tau}_i| = 5 - 15 = -10\,\text{N}\cdot\text{m}.$$

Significance

The axis of rotation is at the center of mass of the flywheel. Since the flywheel is on a fixed axis, it is not free to translate. If it were on a frictionless surface and not fixed in place, $\vec{\mathbf{F}}_3$ would cause the flywheel to translate, as well as $\vec{\mathbf{F}}_1$. Its motion would be a combination of translation and rotation.

CHECK YOUR UNDERSTANDING 10.6

A large ocean-going ship runs aground near the coastline, similar to the fate of the *Costa Concordia*, and lies at an angle as shown below. Salvage crews must apply a torque to right the ship in order to float the vessel for transport. A force of 5.0×10^5 N acting at point *A* must be applied to right the ship. What is the torque about the point of contact of the ship with the ground (Figure 10.36)?

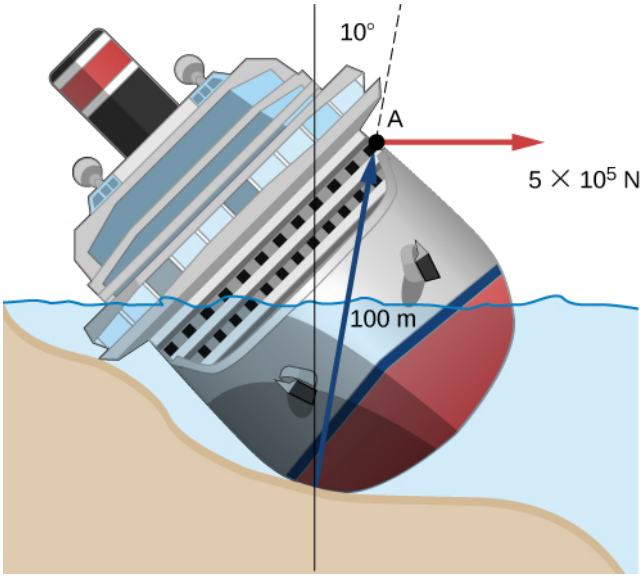


Figure 10.36 A ship runs aground and tilts, requiring torque to be applied to return the vessel to an upright position.

10.7 Newton's Second Law for Rotation

Learning Objectives

By the end of this section, you will be able to:

- Calculate the torques on rotating systems about a fixed axis to find the angular acceleration
- Explain how changes in the moment of inertia of a rotating system affect angular acceleration with a fixed applied torque

In this section, we put together all the pieces learned so far in this chapter to analyze the dynamics of rotating rigid bodies. We have analyzed motion with kinematics and rotational kinetic energy but have not yet connected these ideas with force and/or torque. In this section, we introduce the rotational equivalent to Newton's second law of motion and apply it to rigid bodies with fixed-axis rotation.

Newton's Second Law for Rotation

We have thus far found many counterparts to the translational terms used throughout this text, most recently, torque, the rotational analog to force. This raises the question: Is there an analogous equation to Newton's second law, $\Sigma\vec{\mathbf{F}} = m\vec{\mathbf{a}}$, which involves torque and rotational motion? To investigate this, we start with Newton's second law for a single particle rotating around an axis and executing circular motion. Let's exert a force $\vec{\mathbf{F}}$ on a point mass m that is at a distance r from a pivot point (Figure 10.37). The particle is constrained to move in a circular path with fixed radius and the force is tangent to the circle. We apply Newton's second law to determine the magnitude of the acceleration $a = F/m$ in the direction of $\vec{\mathbf{F}}$. Recall that the magnitude of the tangential acceleration is proportional to the magnitude of the angular acceleration by $a = r\alpha$. Substituting this expression into Newton's second law, we obtain

$$F = mr\alpha.$$

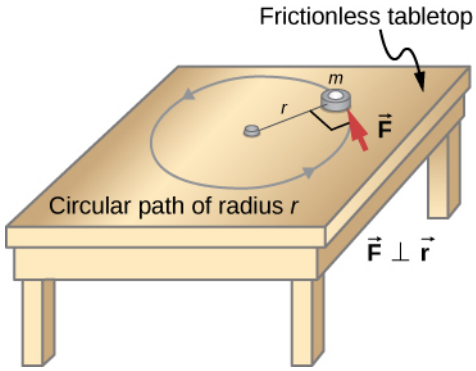


Figure 10.37 An object is supported by a horizontal frictionless table and is attached to a pivot point by a cord that supplies centripetal force. A force $\vec{\mathbf{F}}$ is applied to the object perpendicular to the radius r, causing it to accelerate about the pivot point. The force is perpendicular to r.

Multiply both sides of this equation by r,

$$rF = mr^2\alpha.$$

Note that the left side of this equation is the torque about the axis of rotation, where r is the lever arm and F is the force, perpendicular to r. Recall that the moment of inertia for a point particle is $I = mr^2$. The torque applied perpendicularly to the point mass in Figure 10.37 is therefore

$$\tau = I\alpha.$$

The torque on the particle is equal to the moment of inertia about the rotation axis times the angular acceleration. We can generalize this equation to a rigid body rotating about a fixed axis.

Newton's Second Law for Rotation

If more than one torque acts on a rigid body about a fixed axis, then the sum of the torques equals the moment of inertia times the angular acceleration:

$$\sum_i \tau_i = I\alpha. \qquad 10.25$$

The term $I\alpha$ is a scalar quantity and can be positive or negative (counterclockwise or clockwise) depending upon the sign of the net torque. Remember the convention that counterclockwise angular acceleration is positive. Thus, if a rigid body is rotating clockwise and experiences a positive torque (counterclockwise), the angular acceleration is positive.

Equation 10.25 is **Newton's second law for rotation** and tells us how to relate torque, moment of inertia, and rotational kinematics. This is called the equation for **rotational dynamics**. With this equation, we can solve a whole class of problems involving force and rotation. It makes sense that the relationship for how much force it takes to rotate a body would include the moment of inertia, since that is the quantity that tells us how easy or hard it is to change the rotational motion of an object.

Deriving Newton's Second Law for Rotation in Vector Form

As before, when we found the angular acceleration, we may also find the torque vector. The second law $\Sigma\vec{\mathbf{F}} = m\vec{\mathbf{a}}$ tells us the relationship between net force and how to change the translational motion of an object. We have a vector rotational equivalent of this equation, which can be found by using Equation 10.7 and Figure 10.8. Equation 10.7 relates the angular acceleration to the position and tangential acceleration vectors:

$$\vec{\mathbf{a}} = \vec{\boldsymbol{\alpha}} \times \vec{\mathbf{r}}.$$

We form the cross product of this equation with $\vec{\mathbf{r}}$ and use a cross product identity (note that $\vec{\mathbf{r}} \cdot \vec{\boldsymbol{\alpha}} = 0$):

$$\vec{\mathbf{r}} \times \vec{\mathbf{a}} = \vec{\mathbf{r}} \times (\vec{\boldsymbol{\alpha}} \times \vec{\mathbf{r}}) = \vec{\boldsymbol{\alpha}}(\vec{\mathbf{r}} \cdot \vec{\mathbf{r}}) - \vec{\mathbf{r}}(\vec{\mathbf{r}} \cdot \vec{\boldsymbol{\alpha}}) = \vec{\boldsymbol{\alpha}}(\vec{\mathbf{r}} \cdot \vec{\mathbf{r}}) = \vec{\boldsymbol{\alpha}} r^2.$$

We now form the cross product of Newton's second law with the position vector $\vec{\mathbf{r}}$,

$$\Sigma(\vec{\mathbf{r}} \times \vec{\mathbf{F}}) = \vec{\mathbf{r}} \times (m\vec{\mathbf{a}}) = m\vec{\mathbf{r}} \times \vec{\mathbf{a}} = mr^2\vec{\boldsymbol{\alpha}}.$$

Identifying the first term on the left as the sum of the torques, and mr^2 as the moment of inertia, we arrive at Newton's second law of rotation in vector form:

$$\Sigma\vec{\boldsymbol{\tau}} = I\vec{\boldsymbol{\alpha}}. \qquad 10.26$$

This equation is exactly Equation 10.25 but with the torque and angular acceleration as vectors. An important point is that the torque vector is in the same direction as the angular acceleration.

Applying the Rotational Dynamics Equation

Before we apply the rotational dynamics equation to some everyday situations, let's review a general problem-solving strategy for use with this category of problems.

PROBLEM-SOLVING STRATEGY

Rotational Dynamics

1. Examine the situation to determine that torque and mass are involved in the rotation. Draw a careful sketch of the situation.
2. Determine the system of interest.
3. Draw a free-body diagram. That is, draw and label all external forces acting on the system of interest.
4. Identify the pivot point. If the object is in equilibrium, it must be in equilibrium for all possible pivot points––chose the one that simplifies your work the most.
5. Apply $\sum_i \tau_i = I\alpha$, the rotational equivalent of Newton's second law, to solve the problem. Care must be taken to use the correct moment of inertia and to consider the torque about the point of rotation.
6. As always, check the solution to see if it is reasonable.

EXAMPLE 10.16

Calculating the Effect of Mass Distribution on a Merry-Go-Round

Consider the father pushing a playground merry-go-round in Figure 10.38. He exerts a force of 250 N at the edge of the 50.0-kg merry-go-round, which has a 1.50-m radius. Calculate the angular acceleration produced (a) when no one is on the merry-go-round and (b) when an 18.0-kg child sits 1.25 m away from the center. Consider the merry-go-round itself to be a uniform disk with negligible friction.

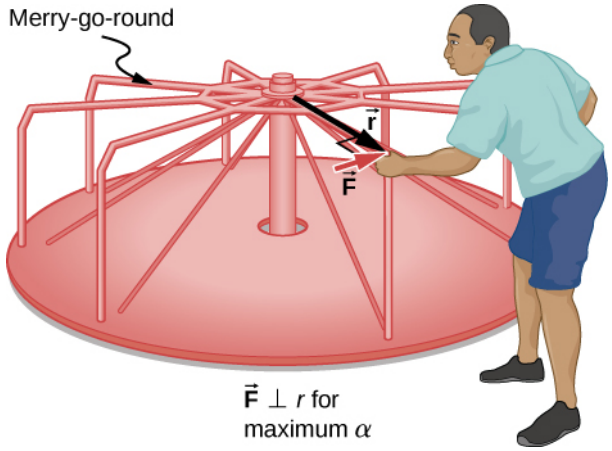


Figure 10.38 A father pushes a playground merry-go-round at its edge and perpendicular to its radius to achieve maximum torque.

Strategy

The net torque is given directly by the expression $\sum_i \tau_i = I\alpha$, To solve for α, we must first calculate the net torque τ (which is the same in both cases) and moment of inertia I (which is greater in the second case).

Solution

a. The moment of inertia of a solid disk about this axis is given in Figure 10.20 to be

$$\frac{1}{2}MR^2.$$

We have $M = 50.0\,\text{kg}$ and $R = 1.50\,\text{m}$, so

$$I = (0.500)(50.0\,\text{kg})(1.50\,\text{m})^2 = 56.25\,\text{kg-m}^2.$$

To find the net torque, we note that the applied force is perpendicular to the radius and friction is negligible, so that

$$\tau = rF\sin\theta = (1.50\,\text{m})(250.0\,\text{N}) = 375.0\,\text{N-m}.$$

Now, after we substitute the known values, we find the angular acceleration to be

$$\alpha = \frac{\tau}{I} = \frac{375.0\,\text{N-m}}{56.25\,\text{kg-m}^2} = 6.67\frac{\text{rad}}{\text{s}^2}.$$

b. We expect the angular acceleration for the system to be less in this part because the moment of inertia is greater when the child is on the merry-go-round. To find the total moment of inertia I, we first find the child's moment of inertia I_c by approximating the child as a point mass at a distance of 1.25 m from the axis. Then

$$I_\text{c} = mR^2 = (18.0\,\text{kg})(1.25\,\text{m})^2 = 28.13\,\text{kg-m}^2.$$

The total moment of inertia is the sum of the moments of inertia of the merry-go-round and the child (about the same axis):

$$I = 28.13\,\text{kg-m}^2 + 56.25\,\text{kg-m}^2 = 84.38\,\text{kg-m}^2.$$

Substituting known values into the equation for α gives

$$\alpha = \frac{\tau}{I} = \frac{375.0\,\text{N-m}}{84.38\,\text{kg-m}^2} = 4.44\frac{\text{rad}}{\text{s}^2}.$$

Significance

The angular acceleration is less when the child is on the merry-go-round than when the merry-go-round is empty, as expected. The angular accelerations found are quite large, partly due to the fact that friction was considered to be negligible. If, for example, the father kept pushing perpendicularly for 2.00 s, he would give the merry-go-round an angular velocity of 13.3 rad/s when it is empty but only 8.89 rad/s when the child is on it. In terms of revolutions per second, these angular velocities are 2.12 rev/s and 1.41 rev/s, respectively. The

father would end up running at about 50 km/h in the first case.

CHECK YOUR UNDERSTANDING 10.7

The fan blades on a jet engine have a moment of inertia $30.0\ \text{kg-m}^2$. In 10 s, they rotate counterclockwise from rest up to a rotation rate of 20 rev/s. (a) What torque must be applied to the blades to achieve this angular acceleration? (b) What is the torque required to bring the fan blades rotating at 20 rev/s to a rest in 20 s?

10.8 Work and Power for Rotational Motion

Learning Objectives

By the end of this section, you will be able to:

- Use the work-energy theorem to analyze rotation to find the work done on a system when it is rotated about a fixed axis for a finite angular displacement
- Solve for the angular velocity of a rotating rigid body using the work-energy theorem
- Find the power delivered to a rotating rigid body given the applied torque and angular velocity
- Summarize the rotational variables and equations and relate them to their translational counterparts

Thus far in the chapter, we have extensively addressed kinematics and dynamics for rotating rigid bodies around a fixed axis. In this final section, we define work and power within the context of rotation about a fixed axis, which has applications to both physics and engineering. The discussion of work and power makes our treatment of rotational motion almost complete, with the exception of rolling motion and angular momentum, which are discussed in Angular Momentum. We begin this section with a treatment of the work-energy theorem for rotation.

Work for Rotational Motion

Now that we have determined how to calculate kinetic energy for rotating rigid bodies, we can proceed with a discussion of the work done on a rigid body rotating about a fixed axis. Figure 10.39 shows a rigid body that has rotated through an angle $d\theta$ from A to B while under the influence of a force $\vec{\mathbf{F}}$. The external force $\vec{\mathbf{F}}$ is applied to point P, whose position is $\vec{\mathbf{r}}$, and the rigid body is constrained to rotate about a fixed axis that is perpendicular to the page and passes through O. The rotational axis is fixed, so the vector $\vec{\mathbf{r}}$ moves in a circle of radius r, and the vector $d\vec{\mathbf{s}}$ is perpendicular to $\vec{\mathbf{r}}$.

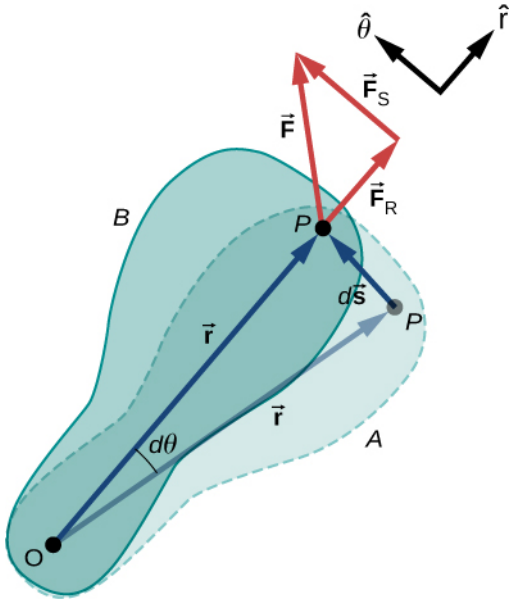


Figure 10.39 A rigid body rotates through an angle $d\theta$ from A to B by the action of an external force $\vec{\mathbf{F}}$ applied to point P.

From Equation 10.2, we have

$$\vec{\mathbf{s}} = \vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}.$$

Thus,

$$d\vec{\mathbf{s}} = d(\vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}) = d\vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}} + d\vec{\mathbf{r}} \times \vec{\boldsymbol{\theta}} = d\vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}.$$

Note that $d\vec{\mathbf{r}}$ is zero because $\vec{\mathbf{r}}$ is fixed on the rigid body from the origin O to point P. Using the definition of work, we obtain

$$W = \int \sum \vec{\mathbf{F}} \cdot d\vec{\mathbf{s}} = \int \sum \vec{\mathbf{F}} \cdot (d\vec{\boldsymbol{\theta}} \times \vec{\mathbf{r}}) = \int d\vec{\boldsymbol{\theta}} \cdot (\vec{\mathbf{r}} \times \sum \vec{\mathbf{F}})$$

where we used the identity $\vec{\mathbf{a}} \cdot (\vec{\mathbf{b}} \times \vec{\mathbf{c}}) = \vec{\mathbf{b}} \cdot (\vec{\mathbf{c}} \times \vec{\mathbf{a}})$. Noting that $(\vec{\mathbf{r}} \times \sum \vec{F}) = \sum \vec{\boldsymbol{\tau}}$, we arrive at the expression for the **rotational work** done on a rigid body:

$$W = \int \sum \vec{\boldsymbol{\tau}} \cdot d\vec{\boldsymbol{\theta}}. \tag{10.27}$$

The total work done on a rigid body is the sum of the torques integrated over the angle through which the body rotates. The incremental work is

$$dW = \left(\sum_i \tau_i \right) d\theta \tag{10.28}$$

where we have taken the dot product in Equation 10.27, leaving only torques along the axis of rotation. In a rigid body, all particles rotate through the same angle; thus the work of every external force is equal to the torque times the common incremental angle $d\theta$. The quantity $\left(\sum_i \tau_i \right)$ is the net torque on the body due to external forces.

Similarly, we found the kinetic energy of a rigid body rotating around a fixed axis by summing the kinetic energy of each particle that makes up the rigid body. Since the work-energy theorem $W_i = \Delta K_i$ is valid for each particle, it is valid for the sum of the particles and the entire body.

Work-Energy Theorem for Rotation

The work-energy theorem for a rigid body rotating around a fixed axis is

$$W_{AB} = K_B - K_A \tag{10.29}$$

where

$$K = \frac{1}{2} I \omega^2$$

and the rotational work done by a net force rotating a body from point A to point B is

$$W_{AB} = \int_{\theta_A}^{\theta_B} \left(\sum_i \tau_i \right) d\theta. \tag{10.30}$$

We give a strategy for using this equation when analyzing rotational motion.

PROBLEM-SOLVING STRATEGY

Work-Energy Theorem for Rotational Motion

1. Identify the forces on the body and draw a free-body diagram. Calculate the torque for each force.
2. Calculate the work done during the body's rotation by every torque.
3. Apply the work-energy theorem by equating the net work done on the body to the change in rotational kinetic energy.

Let's look at two examples and use the work-energy theorem to analyze rotational motion.

EXAMPLE 10.17

Rotational Work and Energy

A $12.0\ \text{N} \cdot \text{m}$ torque is applied to a flywheel that rotates about a fixed axis and has a moment of inertia of $30.0\ \text{kg} \cdot \text{m}^2$. If the flywheel is initially at rest, what is its angular velocity after it has turned through eight revolutions?

Strategy

We apply the work-energy theorem. We know from the problem description what the torque is and the angular displacement of the flywheel. Then we can solve for the final angular velocity.

Solution

The flywheel turns through eight revolutions, which is 16π radians. The work done by the torque, which is constant and therefore can come outside the integral in Equation 10.30, is

$$W_{AB} = \tau(\theta_B - \theta_A).$$

We apply the work-energy theorem:

$$W_{AB} = \tau(\theta_B - \theta_A) = \frac{1}{2}I\omega_B^2 - \frac{1}{2}I\omega_A^2.$$

With $\tau = 12.0\ \text{N} \cdot \text{m}, \theta_B - \theta_A = 16.0\pi\ \text{rad}, I = 30.0\ \text{kg} \cdot \text{m}^2,$ and $\omega_A = 0$, we have

$$12.0\ \text{N-m}(16.0\pi\ \text{rad}) = \frac{1}{2}(30.0\ \text{kg} \cdot \text{m}^2)(\omega_B^2) - 0.$$

Therefore,

$$\omega_B = 6.3\ \text{rad/s}.$$

This is the angular velocity of the flywheel after eight revolutions.

Significance

The work-energy theorem provides an efficient way to analyze rotational motion, connecting torque with rotational kinetic energy.

EXAMPLE 10.18

Rotational Work: A Pulley

A string wrapped around the pulley in Figure 10.40 is pulled with a constant downward force $\vec{\mathbf{F}}$ of magnitude 50 N. The radius R and moment of inertia I of the pulley are 0.10 m and $2.5 \times 10^{-3}\ \text{kg-m}^2$, respectively. If the string does not slip, what is the angular velocity of the pulley after 1.0 m of string has unwound? Assume the pulley starts from rest.

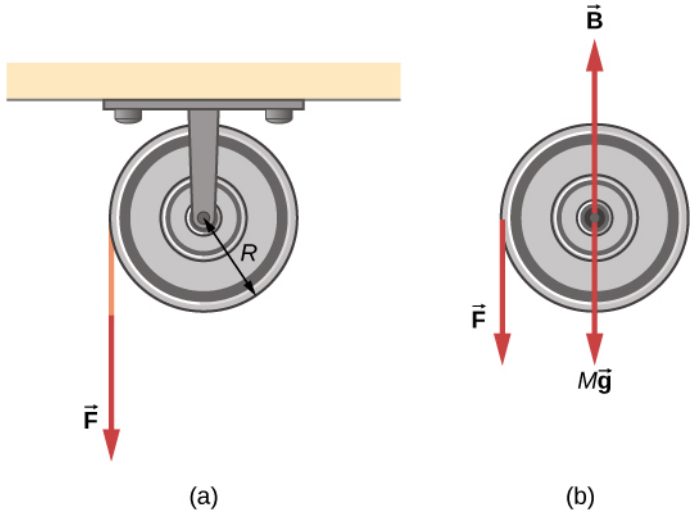


Figure 10.40 (a) A string is wrapped around a pulley of radius *R*. (b) The free-body diagram.

Strategy

Looking at the free-body diagram, we see that neither $\vec{\mathbf{B}}$, the force on the bearings of the pulley, nor $M\vec{\mathbf{g}}$, the weight of the pulley, exerts a torque around the rotational axis, and therefore does no work on the pulley. As the pulley rotates through an angle θ, $\vec{\mathbf{F}}$ acts through a distance d such that $d = R\theta$.

Solution

Since the torque due to $\vec{\mathbf{F}}$ has magnitude $\tau = RF$, we have

$$W = \tau\theta = (FR)\theta = Fd.$$

If the force on the string acts through a distance of 1.0 m, we have, from the work-energy theorem,

$$\begin{aligned} W_{AB} &= K_B - K_A \\ Fd &= \tfrac{1}{2}I\omega^2 - 0 \\ (50.0\,\text{N})(1.0\,\text{m}) &= \tfrac{1}{2}(2.5 \times 10^{-3}\,\text{kg-m}^2)\omega^2. \end{aligned}$$

Solving for ω, we obtain

$$\omega = 200.0\,\text{rad/s}.$$

Power for Rotational Motion

Power always comes up in the discussion of applications in engineering and physics. Power for rotational motion is equally as important as power in linear motion and can be derived in a similar way as in linear motion when the force is a constant. The linear power when the force is a constant is $P = \vec{\mathbf{F}} \cdot \vec{\mathbf{v}}$. If the net torque is constant over the angular displacement, Equation 10.25 simplifies and the net torque can be taken out of the integral. In the following discussion, we assume the net torque is constant. We can apply the definition of power derived in Power to rotational motion. From Work and Kinetic Energy, the instantaneous power (or just power) is defined as the rate of doing work,

$$P = \frac{dW}{dt}.$$

If we have a constant net torque, Equation 10.25 becomes $W = \tau\theta$ and the power is

$$P = \frac{dW}{dt} = \frac{d}{dt}(\tau\theta) = \tau\frac{d\theta}{dt}$$

or

$$P = \tau\omega. \quad 10.31$$

EXAMPLE 10.19

Torque on a Boat Propeller

A boat engine operating at 9.0×10^4 W is running at 300 rev/min. What is the torque on the propeller shaft?

Strategy

We are given the rotation rate in rev/min and the power consumption, so we can easily calculate the torque.

Solution

$$300.0 \text{ rev/min} = 31.4 \text{ rad/s};$$

$$\tau = \frac{P}{\omega} = \frac{9.0 \times 10^4 \text{N} \cdot \text{m/s}}{31.4 \text{ rad/s}} = 2864.8 \text{ N} \cdot \text{m}.$$

Significance

It is important to note the radian is a dimensionless unit because its definition is the ratio of two lengths. It therefore does not appear in the solution.

CHECK YOUR UNDERSTANDING 10.8

A constant torque of 500 kN · m is applied to a wind turbine to keep it rotating at 6 rad/s. What is the power required to keep the turbine rotating?

Rotational and Translational Relationships Summarized

The rotational quantities and their linear analog are summarized in three tables. Table 10.5 summarizes the rotational variables for circular motion about a fixed axis with their linear analogs and the connecting equation, except for the centripetal acceleration, which stands by itself. Table 10.6 summarizes the rotational and translational kinematic equations. Table 10.7 summarizes the rotational dynamics equations with their linear analogs.

Rotational	Translational	Relationship
θ	x	$\theta = \frac{s}{r}$
ω	v_t	$\omega = \frac{v_t}{r}$
α	a_t	$\alpha = \frac{a_\text{t}}{r}$
	a_c	$a_\text{c} = \frac{v_\text{t}^2}{r}$

Table 10.5 Rotational and Translational Variables: Summary

Rotational	Translational
$\theta_\text{f} = \theta_0 + \bar{\omega}t$	$x = x_0 + \bar{v}t$
$\omega_\text{f} = \omega_0 + \alpha t$	$v_\text{f} = v_0 + at$

Rotational	Translational
$\theta_{\mathrm{f}} = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2$	$x_{\mathrm{f}} = x_0 + v_0 t + \frac{1}{2} a t^2$
$\omega_{\mathrm{f}}^2 = \omega^2{}_0 + 2\alpha(\Delta\theta)$	$v_{\mathrm{f}}^2 = v^2{}_0 + 2a(\Delta x)$

Table 10.6 Rotational and Translational Kinematic Equations: Summary

Rotational	Translational
$I = \sum_i m_i r_i^2$	m
$K = \frac{1}{2} I\omega^2$	$K = \frac{1}{2} m v^2$
$\sum_i \tau_i = I\alpha$	$\sum_i \vec{\mathbf{F}}_i = m\vec{\mathbf{a}}$
$W_{AB} = \int_{\theta_A}^{\theta_B} \left(\sum_i \tau_i \right) d\theta$	$W = \int \vec{\mathbf{F}} \cdot d\vec{\mathbf{s}}$
$P = \tau\omega$	$P = \vec{\mathbf{F}} \cdot \vec{\mathbf{v}}$

Table 10.7 Rotational and Translational Equations: Dynamics

CHAPTER REVIEW

Key Terms

angular acceleration time rate of change of angular velocity

angular position angle a body has rotated through in a fixed coordinate system

angular velocity time rate of change of angular position

instantaneous angular acceleration derivative of angular velocity with respect to time

instantaneous angular velocity derivative of angular position with respect to time

kinematics of rotational motion describes the relationships among rotation angle, angular velocity, angular acceleration, and time

lever arm perpendicular distance from the line that the force vector lies on to a given axis

linear mass density the mass per unit length λ of a one dimensional object

moment of inertia rotational mass of rigid bodies that relates to how easy or hard it will be to change the angular velocity of the rotating rigid body

Newton's second law for rotation sum of the torques on a rotating system equals its moment of inertia times its angular acceleration

parallel axis axis of rotation that is parallel to an axis about which the moment of inertia of an object is known

parallel-axis theorem if the moment of inertia is known for a given axis, it can be found for any axis parallel to it

rotational dynamics analysis of rotational motion using the net torque and moment of inertia to find the angular acceleration

rotational kinetic energy kinetic energy due to the rotation of an object; this is part of its total kinetic energy

rotational work work done on a rigid body due to the sum of the torques integrated over the angle through with the body rotates

surface mass density mass per unit area σ of a two dimensional object

torque cross product of a force and a lever arm to a given axis

total linear acceleration vector sum of the centripetal acceleration vector and the tangential acceleration vector

Key Equations

Angular position	$\theta = \frac{s}{r}$
Angular velocity	$\omega = \lim_{\Delta t \to 0} \frac{\Delta \theta}{\Delta t} = \frac{d\theta}{dt}$
Tangential speed	$v_{\text{t}} = r\omega$
Angular acceleration	$\alpha = \lim_{\Delta t \to 0} \frac{\Delta \omega}{\Delta t} = \frac{d\omega}{dt} = \frac{d^2\theta}{dt^2}$
Tangential acceleration	$a_{\text{t}} = r\alpha$
Average angular velocity	$\bar{\omega} = \frac{\omega_0 + \omega_{\text{f}}}{2}$
Angular displacement	$\theta_{\text{f}} = \theta_0 + \bar{\omega} t$
Angular velocity from constant angular acceleration	$\omega_{\text{f}} = \omega_0 + \alpha t$
Angular velocity from displacement and constant angular acceleration	$\theta_{\text{f}} = \theta_0 + \omega_0 t + \frac{1}{2}\alpha t^2$
Change in angular velocity	$\omega_{\text{f}}^2 = \omega_0^2 + 2\alpha(\Delta\theta)$

Total acceleration	$\vec{\mathbf{a}} = \vec{\mathbf{a}}_{\mathrm{c}} + \vec{\mathbf{a}}_{\mathrm{t}}$
Rotational kinetic energy	$K = \frac{1}{2}\left(\sum_j m_j r_j^2\right)\omega^2$
Moment of inertia	$I = \sum_j m_j r_j^2$
Rotational kinetic energy in terms of the moment of inertia of a rigid body	$K = \frac{1}{2} I\omega^2$
Moment of inertia of a continuous object	$I = \int r^2\, dm$
Parallel-axis theorem	$I_{\text{parallel-axis}} = I_{\text{center of mass}} + md^2$
Moment of inertia of a compound object	$I_{\text{total}} = \sum_i I_i$
Torque vector	$\vec{\boldsymbol{\tau}} = \vec{\mathbf{r}} \times \vec{\mathbf{F}}$
Magnitude of torque	$\left\lvert\vec{\boldsymbol{\tau}}\right\rvert = r_\perp F$
Total torque	$\vec{\tau}_{\text{net}} = \sum_i \lvert\vec{\tau}_i\rvert$
Newton's second law for rotation	$\sum_i \tau_i = I\alpha$
Incremental work done by a torque	$dW = \left(\sum_i \tau_i\right) d\theta$
Work-energy theorem	$W_{AB} = K_B - K_A$
Rotational work done by net force	$W_{AB} = \int_{\theta_A}^{\theta_B} \left(\sum_i \tau_i\right) d\theta$
Rotational power	$P = \tau\omega$

Summary

10.1 Rotational Variables

- The angular position θ of a rotating body is the angle the body has rotated through in a fixed coordinate system, which serves as a frame of reference.
- The angular velocity of a rotating body about a fixed axis is defined as ω(rad/s), the rotational rate of the body in radians per second. The instantaneous angular velocity of a rotating body $\omega = \lim_{\Delta t \to 0} \frac{\Delta\theta}{\Delta t} = \frac{d\theta}{dt}$ is the derivative with respect to time of the angular position θ, found by taking the limit $\Delta t \to 0$ in the average

angular velocity $\bar{\omega} = \frac{\Delta\theta}{\Delta t}$. The angular velocity relates v_t to the tangential speed of a point on the rotating body through the relation $v_t = r\omega$, where r is the radius to the point and v_t is the tangential speed at the given point.

- The angular velocity $\vec{\boldsymbol{\omega}}$ is found using the right-hand rule. If the fingers curl in the direction of rotation about a fixed axis, the thumb points in the direction of $\vec{\boldsymbol{\omega}}$ (see Figure 10.5).
- If the system's angular velocity is not constant, then the system has an angular acceleration. The average angular acceleration over a given time interval is the change in angular velocity over this time interval, $\bar{\alpha} = \frac{\Delta\omega}{\Delta t}$. The instantaneous angular acceleration is the time derivative of angular velocity, $\alpha = \lim_{\Delta t \to 0} \frac{\Delta\omega}{\Delta t} = \frac{d\omega}{dt}$. The angular acceleration $\vec{\boldsymbol{\alpha}}$ is found by locating the angular velocity. If a rotation rate of a rotating body is decreasing, the angular acceleration is in the opposite direction to $\vec{\boldsymbol{\omega}}$. If the rotation rate is increasing, the angular acceleration is in the same direction as $\vec{\boldsymbol{\omega}}$.
- The tangential acceleration of a point at a radius from the axis of rotation is the angular acceleration times the radius to the point.

10.2 Rotation with Constant Angular Acceleration

- The kinematics of rotational motion describes the relationships among rotation angle (angular position), angular velocity, angular acceleration, and time.
- For a constant angular acceleration, the angular velocity varies linearly. Therefore, the average angular velocity is 1/2 the initial plus final angular velocity over a given time period:

$$\bar{\omega} = \frac{\omega_0 + \omega_f}{2}.$$

- We used a graphical analysis to find solutions to fixed-axis rotation with constant angular acceleration. From the relation $\omega = \frac{d\theta}{dt}$, we found that the area under an angular velocity-vs.-time curve gives the angular displacement, $\theta_f - \theta_0 = \Delta\theta = \int_{t_0}^{t} \omega(t)dt$. The results of the graphical analysis were verified using the kinematic equations for constant angular acceleration. Similarly, since $\alpha = \frac{d\omega}{dt}$, the area under an angular acceleration-vs.-time graph gives the change in angular velocity:

$$\omega_f - \omega_0 = \Delta\omega = \int_{t_0}^{t} \alpha(t)dt.$$

10.3 Relating Angular and Translational Quantities

- The linear kinematic equations have their rotational counterparts such that there is a mapping $x \to \theta, \quad v \to \omega, \quad a \to \alpha$.
- A system undergoing uniform circular motion has a constant angular velocity, but points at a distance r from the rotation axis have a linear centripetal acceleration.
- A system undergoing nonuniform circular motion has an angular acceleration and therefore has both a linear centripetal and linear tangential acceleration at a point a distance r from the axis of rotation.
- The total linear acceleration is the vector sum of the centripetal acceleration vector and the tangential acceleration vector. Since the centripetal and tangential acceleration vectors are perpendicular to each other for circular motion, the magnitude of the total linear acceleration is $|\vec{\mathbf{a}}| = \sqrt{a_c^2 + a_t^2}$.

10.4 Moment of Inertia and Rotational Kinetic Energy

- The rotational kinetic energy is the kinetic energy of rotation of a rotating rigid body or system of particles, and is given by $K = \frac{1}{2} I\omega^2$, where I is the moment of inertia, or "rotational mass" of the rigid body or system of particles.
- The moment of inertia for a system of point particles rotating about a fixed axis is $I = \sum_j m_j r_j^2$, where m_j is the mass of the point particle and r_j is the distance of the point particle to the rotation axis. Because of the r^2 term, the moment of inertia increases as the square of the distance to the fixed rotational axis. The moment of inertia is the rotational counterpart to the mass in linear motion.
- In systems that are both rotating and translating, conservation of mechanical energy can be used if there are no nonconservative forces at work. The total mechanical energy is then conserved and is the sum of the rotational and translational kinetic energies, and the gravitational potential energy.

10.5 Calculating Moments of Inertia

- Moments of inertia can be found by summing or integrating over every 'piece of mass' that makes up an object, multiplied by the square of the distance of each 'piece of mass' to the axis. In integral form the moment of inertia is $I = \int r^2 \, dm$.
- Moment of inertia is larger when an object's mass is farther from the axis of rotation.
- It is possible to find the moment of inertia of an object about a new axis of rotation once it is known for a parallel axis. This is called the parallel axis theorem given by $I_{\text{parallel-axis}} = I_{\text{center of mass}} + md^2$, where d is the distance from the initial axis to the parallel axis.
- Moment of inertia for a compound object is simply the sum of the moments of inertia for each individual object that makes up the compound object.

10.6 Torque

- The magnitude of a torque about a fixed axis is calculated by finding the lever arm to the point where the force is applied and using the relation $|\vec{\boldsymbol{\tau}}| = r_\perp F$, where $r_\perp$ is the perpendicular distance from the axis to the line upon which the force vector lies.
- The sign of the torque is found using the right hand rule. If the page is the plane containing $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$, then $\vec{\mathbf{r}} \times \vec{\mathbf{F}}$ is out of the page for positive torques and into the page for negative torques.
- The net torque can be found from summing the individual torques about a given axis.

10.7 Newton's Second Law for Rotation

- Newton's second law for rotation, $\sum_i \tau_i = I\alpha$, says that the sum of the torques on a rotating system about a fixed axis equals the product of the moment of inertia and the angular acceleration. This is the rotational analog to Newton's second law of linear motion.
- In the vector form of Newton's second law for rotation, the torque vector $\vec{\boldsymbol{\tau}}$ is in the same direction as the angular acceleration $\vec{\boldsymbol{\alpha}}$. If the angular acceleration of a rotating system is positive, the torque on the system is also positive, and if the angular acceleration is negative, the torque is negative.

10.8 Work and Power for Rotational Motion

- The incremental work dW in rotating a rigid body about a fixed axis is the sum of the torques about the axis times the incremental angle $d\theta$.
- The total work done to rotate a rigid body through an angle θ about a fixed axis is the sum of the torques integrated over the angular displacement. If the torque is a constant as a function of θ, then $W_{AB} = \tau(\theta_B - \theta_A)$.
- The work-energy theorem relates the rotational work done to the change in rotational kinetic energy: $W_{AB} = K_B - K_A$ where $K = \frac{1}{2} I\omega^2$.
- The power delivered to a system that is rotating about a fixed axis is the torque times the angular velocity, $P = \tau\omega$.

Conceptual Questions

10.1 Rotational Variables

1. A clock is mounted on the wall. As you look at it, what is the direction of the angular velocity vector of the second hand?

2. What is the value of the angular acceleration of the second hand of the clock on the wall?

3. A baseball bat is swung. Do all points on the bat have the same angular velocity? The same tangential speed?

4. The blades of a blender on a counter are rotating clockwise as you look into it from the top. If the blender is put to a greater speed what direction is the angular acceleration of the blades?

10.2 Rotation with Constant Angular Acceleration

5. If a rigid body has a constant angular acceleration, what is the functional form of the angular velocity in terms of the time variable?

6. If a rigid body has a constant angular acceleration, what is the functional form of the angular position?

7. If the angular acceleration of a rigid body is zero, what is the functional form of the angular velocity?

8. A massless tether with a masses tied to both ends rotates about a fixed axis through the center. Can the total acceleration of the tether/mass combination be zero if the angular velocity is

constant?

10.3 Relating Angular and Translational Quantities

9. Explain why centripetal acceleration changes the direction of velocity in circular motion but not its magnitude.

10. In circular motion, a tangential acceleration can change the magnitude of the velocity but not its direction. Explain your answer.

11. Suppose a piece of food is on the edge of a rotating microwave oven plate. Does it experience nonzero tangential acceleration, centripetal acceleration, or both when: (a) the plate starts to spin faster? (b) The plate rotates at constant angular velocity? (c) The plate slows to a halt?

10.4 Moment of Inertia and Rotational Kinetic Energy

12. What if another planet the same size as Earth were put into orbit around the Sun along with Earth. Would the moment of inertia of the system increase, decrease, or stay the same?

13. A solid sphere is rotating about an axis through its center at a constant rotation rate. Another hollow sphere of the same mass and radius is rotating about its axis through the center at the same rotation rate. Which sphere has a greater rotational kinetic energy?

10.5 Calculating Moments of Inertia

14. If a child walks toward the center of a merry-go-round, does the moment of inertia increase or decrease?

15. A discus thrower rotates with a discus in his hand before letting it go. (a) How does his moment of inertia change after releasing the discus? (b) What would be a good approximation to use in calculating the moment of inertia of the discus thrower and discus?

16. Does increasing the number of blades on a propeller increase or decrease its moment of inertia, and why?

17. The moment of inertia of a long rod spun around an axis through one end perpendicular to its length is $mL^2/3$. Why is this moment of inertia greater than it would be if you spun a point mass m at the location of the center of mass of the rod (at $L/2$) (that would be $mL^2/4$)?

18. Why is the moment of inertia of a hoop that has a mass M and a radius R greater than the moment of inertia of a disk that has the same mass and radius?

10.6 Torque

19. What three factors affect the torque created by a force relative to a specific pivot point?

20. Give an example in which a small force exerts a large torque. Give another example in which a large force exerts a small torque.

21. When reducing the mass of a racing bike, the greatest benefit is realized from reducing the mass of the tires and wheel rims. Why does this allow a racer to achieve greater accelerations than would an identical reduction in the mass of the bicycle's frame?

22. Can a single force produce a zero torque?

23. Can a set of forces have a net torque that is zero and a net force that is not zero?

24. Can a set of forces have a net force that is zero and a net torque that is not zero?

25. In the expression $\vec{\mathbf{r}} \times \vec{\mathbf{F}}$ can $|\vec{\mathbf{r}}|$ ever be less than the lever arm? Can it be equal to the lever arm?

10.7 Newton's Second Law for Rotation

26. If you were to stop a spinning wheel with a constant force, where on the wheel would you apply the force to produce the maximum negative acceleration?

27. A rod is pivoted about one end. Two forces $\vec{\mathbf{F}}$ and $-\vec{\mathbf{F}}$ are applied to it. Under what circumstances will the rod not rotate?

Problems

10.1 Rotational Variables

28. Calculate the angular velocity of Earth.

29. A track star runs a 400-m race on a 400-m circular track in 45 s. What is his angular velocity assuming a constant speed?

30. A wheel rotates at a constant rate of 2.0×10^3 rev/min. (a) What is its angular velocity in radians per second? (b) Through what angle does it turn in 10 s? Express the solution in radians and degrees.

31. A particle moves 3.0 m along a circle of radius 1.5 m. (a) Through what angle does it rotate? (b) If the particle makes this trip in 1.0 s at a

constant speed, what is its angular velocity? (c) What is its acceleration?


32. A compact disc rotates at 500 rev/min. If the diameter of the disc is 120 mm, (a) what is the tangential speed of a point at the edge of the disc? (b) At a point halfway to the center of the disc?

33. **Unreasonable results.** The propeller of an aircraft is spinning at 10 rev/s when the pilot shuts off the engine. The propeller reduces its angular velocity at a constant $2.0\ \text{rad/s}^2$ for a time period of 40 s. What is the rotation rate of the propeller in 40 s? Is this a reasonable situation?

34. A gyroscope slows from an initial rate of 32.0 rad/s at a rate of $0.700\ \text{rad/s}^2$. How long does it take to come to rest?

35. On takeoff, the propellers on a UAV (unmanned aerial vehicle) increase their angular velocity for 3.0 s from rest at a rate of $\omega = (25.0t)$ rad/s where t is measured in seconds. (a) What is the instantaneous angular velocity of the propellers at $t = 2.0$ s? (b) What is the angular acceleration?

36. The angular position of a rod varies as $20.0t^2$ radians from time $t = 0$. The rod has two beads on it as shown in the following figure, one at 10 cm from the rotation axis and the other at 20 cm from the rotation axis. (a) What is the instantaneous angular velocity of the rod at $t = 5$ s? (b) What is the angular acceleration of the rod? (c) What are the tangential speeds of the beads at $t = 5$ s? (d) What are the tangential accelerations of the beads at $t = 5$ s? (e) What are the centripetal accelerations of the beads at $t = 5$ s?

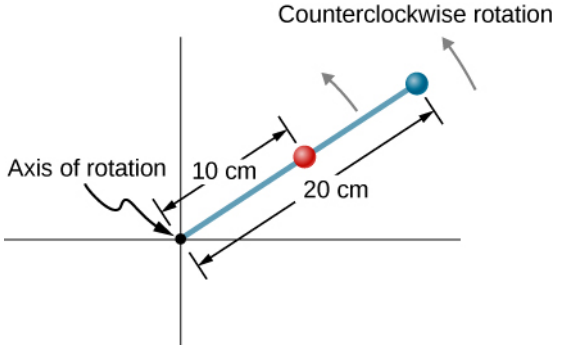

10.2 Rotation with Constant Angular Acceleration

37. A wheel has a constant angular acceleration of $5.0\ \text{rad/s}^2$. Starting from rest, it turns through 300 rad. (a) What is its final angular velocity? (b) How much time elapses while it turns through the 300 radians?

38. During a 6.0-s time interval, a flywheel with a constant angular acceleration turns through 500 radians that acquire an angular velocity of 100 rad/s. (a) What is the angular velocity at the beginning of the 6.0 s? (b) What is the angular acceleration of the flywheel?

39. The angular velocity of a rotating rigid body increases from 500 to 1500 rev/min in 120 s. (a) What is the angular acceleration of the body? (b) Through what angle does it turn in this 120 s?


40. A flywheel slows from 600 to 400 rev/min while rotating through 40 revolutions. (a) What is the angular acceleration of the flywheel? (b) How much time elapses during the 40 revolutions?

41. A wheel 1.0 m in radius rotates with an angular acceleration of $4.0\ \text{rad/s}^2$. (a) If the wheel's initial angular velocity is 2.0 rad/s, what is its angular velocity after 10 s? (b) Through what angle does it rotate in the 10-s interval? (c) What are the tangential speed and acceleration of a point on the rim of the wheel at the end of the 10-s interval?

42. A vertical wheel with a diameter of 50 cm starts from rest and rotates with a constant angular acceleration of $5.0\ \text{rad/s}^2$ around a fixed axis through its center counterclockwise. (a) Where is the point that is initially at the bottom of the wheel at $t = 10$ s? (b) What is the point's linear acceleration at this instant?

43. A circular disk of radius 10 cm has a constant angular acceleration of $1.0\ \text{rad/s}^2$; at $t = 0$ its angular velocity is 2.0 rad/s. (a) Determine the disk's angular velocity at $t = 5.0$ s. (b) What is the angle it has rotated through during this time? (c) What is the tangential acceleration of a point on the disk at $t = 5.0$ s?

44. The angular velocity vs. time for a fan on a hovercraft is shown below. (a) What is the angle through which the fan blades rotate in the first 8 seconds? (b) Verify your result using the kinematic equations.

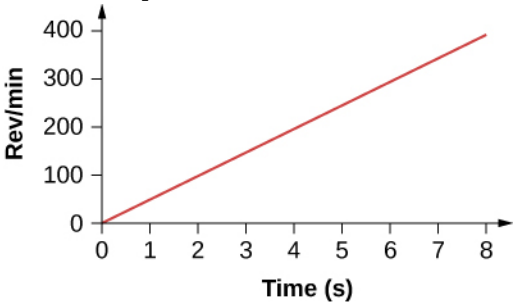

45. A rod of length 20 cm has two beads attached to

its ends. The rod with beads starts rotating from rest. If the beads are to have a tangential speed of 20 m/s in 7 s, what is the angular acceleration of the rod to achieve this?

10.3 Relating Angular and Translational Quantities

46. At its peak, a tornado is 60.0 m in diameter and carries 500 km/h winds. What is its angular velocity in revolutions per second?

47. A man stands on a merry-go-round that is rotating at 2.5 rad/s. If the coefficient of static friction between the man's shoes and the merry-go-round is $\mu_S = 0.5$, how far from the axis of rotation can he stand without sliding?

48. An ultracentrifuge accelerates from rest to 100,000 rpm in 2.00 min. (a) What is the average angular acceleration in rad/s^2? (b) What is the tangential acceleration of a point 9.50 cm from the axis of rotation? (c) What is the centripetal acceleration in m/s^2 and multiples of g of this point at full rpm? (d) What is the total distance traveled during the acceleration by a point 9.5 cm from the axis of rotation of the ultracentrifuge?

49. A wind turbine is rotating counterclockwise at 0.5 rev/s and slows to a stop in 10 s. Its blades are 20 m in length. (a) What is the angular acceleration of the turbine? (b) What is the centripetal acceleration of the tip of the blades at $t = 0$ s? (c) What is the magnitude and direction of the total linear acceleration of the tip of the blades at $t = 0$ s?

50. What is (a) the angular speed and (b) the linear speed of a point on Earth's surface at latitude 30° N. Take the radius of the Earth to be 6309 km. (c) At what latitude would your linear speed be 10 m/s?


51. A child with mass 40 kg sits on the edge of a merry-go-round at a distance of 3.0 m from its axis of rotation. The merry-go-round accelerates from rest up to 0.4 rev/s in 10 s. If the coefficient of static friction between the child and the surface of the merry-go-round is 0.6, does the child fall off before 5 s?

52. A bicycle wheel with radius 0.3 m rotates from rest to 3 rev/s in 5 s. What is the magnitude and direction of the total acceleration vector at the edge of the wheel at 1.0 s?

53. The angular velocity of a flywheel with radius 1.0 m varies according to $\omega(t) = 2.0t$. Plot $a_c(t)$ and $a_t(t)$ from $t = 0$ to 3.0 s for $r = 1.0$ m. Analyze these results to explain when $a_c \gg a_t$ and when $a_c \ll a_t$ for a point on the flywheel at a radius of 1.0 m.

10.4 Moment of Inertia and Rotational Kinetic Energy

54. A system of point particles is shown in the following figure. Each particle has mass 0.3 kg and they all lie in the same plane. (a) What is the moment of inertia of the system about the given axis? (b) If the system rotates at 5 rev/s, what is its rotational kinetic energy?

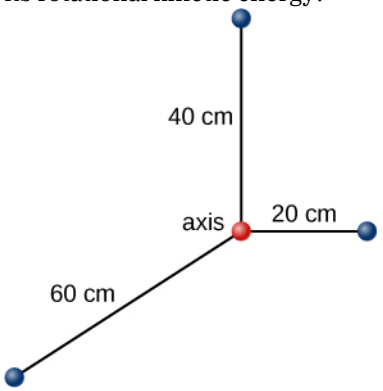

55. (a) Calculate the rotational kinetic energy of Earth on its axis. (b) What is the rotational kinetic energy of Earth in its orbit around the Sun?

56. Calculate the rotational kinetic energy of a 12-kg motorcycle wheel if its angular velocity is 120 rad/s and its inner radius is 0.280 m and outer radius 0.330 m.

57. A baseball pitcher throws the ball in a motion where there is rotation of the forearm about the elbow joint as well as other movements. If the linear velocity of the ball relative to the elbow joint is 20.0 m/s at a distance of 0.480 m from the joint and the moment of inertia of the forearm is $0.500\ \text{kg-m}^2$, what is the rotational kinetic energy of the forearm?

58. A diver goes into a somersault during a dive by tucking her limbs. If her rotational kinetic energy is 100 J and her moment of inertia in the tuck is $9.0\ \text{kg} \cdot \text{m}^2$, what is her rotational rate during the somersault?

59. An aircraft is coming in for a landing at 300 meters height when the propeller falls off. The aircraft is flying at 40.0 m/s horizontally. The propeller has a rotation rate of 20 rev/s, a moment of inertia of $70.0\ \text{kg-m}^2$, and a mass of 200 kg. Neglect air resistance. (a) With what translational velocity does the propeller hit the ground? (b) What is the rotation rate of the


propeller at impact?

60. If air resistance is present in the preceding problem and reduces the propeller's rotational kinetic energy at impact by 30%, what is the propeller's rotation rate at impact?

61. A neutron star of mass 2×10^{30} kg and radius 10 km rotates with a period of 0.02 seconds. What is its rotational kinetic energy?

62. An electric sander consisting of a rotating disk of mass 0.7 kg and radius 10 cm rotates at 15 rev/s. When applied to a rough wooden wall the rotation rate decreases by 20%. (a) What is the final rotational kinetic energy of the rotating disk? (b) How much has its rotational kinetic energy decreased?


63. A system consists of a disk of mass 2.0 kg and radius 50 cm upon which is mounted an annular cylinder of mass 1.0 kg with inner radius 20 cm and outer radius 30 cm (see below). The system rotates about an axis through the center of the disk and annular cylinder at 10 rev/s. (a) What is the moment of inertia of the system? (b) What is its rotational kinetic energy?

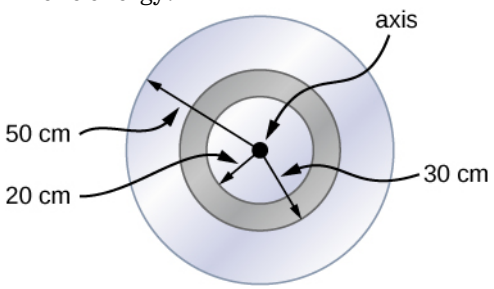

10.5 Calculating Moments of Inertia


64. While punting a football, a kicker rotates his leg about the hip joint. The moment of inertia of the leg is 3.75 kg-m^2 and its rotational kinetic energy is 175 J. (a) What is the angular velocity of the leg? (b) What is the velocity of tip of the punter's shoe if it is 1.05 m from the hip joint?

65. Using the parallel axis theorem, what is the moment of inertia of the rod of mass m about the axis shown below?

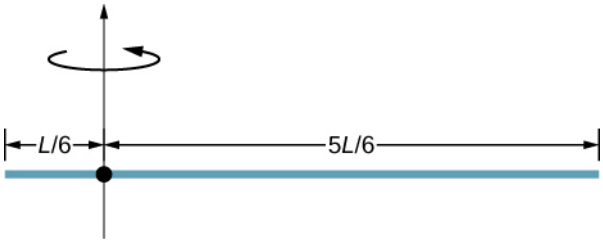


66. Find the moment of inertia of the rod in the previous problem by direct integration.


67. A uniform rod of mass 1.0 kg and length 2.0 m is free to rotate about one end (see the following figure). If the rod is released from rest at an angle of 60° with respect to the horizontal, what is the speed of the tip of the rod as it passes the horizontal position?



68. A pendulum consists of a rod of mass 2 kg and length 1 m with a solid sphere at one end with mass 0.3 kg and radius 20 cm (see the following figure). If the pendulum is released from rest at an angle of 30°, what is the angular velocity at the lowest point?

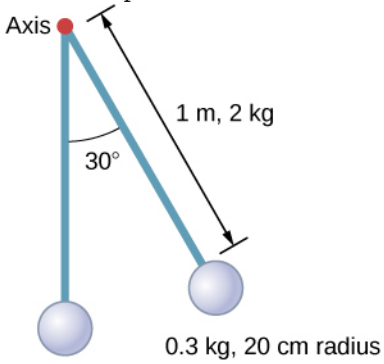

69. A solid sphere of radius 10 cm is allowed to rotate freely about an axis. The sphere is given a sharp blow so that its center of mass starts from the position shown in the following figure with speed 15 cm/s. What is the maximum angle that the diameter makes with the vertical?

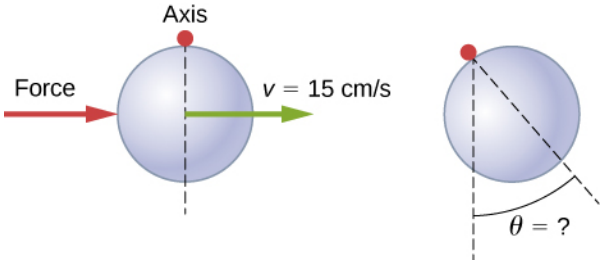


70. Calculate the moment of inertia by direct integration of a thin rod of mass M and length L about an axis through the rod at $L/3$, as shown below. Check your answer with the parallel-axis theorem.



10.6 Torque

71. Two flywheels of negligible mass and different radii are bonded together and rotate about a common axis (see below). The smaller flywheel of radius 30 cm has a cord that has a pulling force of 50 N on it. What pulling force needs to be applied to the cord connecting the larger flywheel of radius 50 cm such that the combination does not rotate?

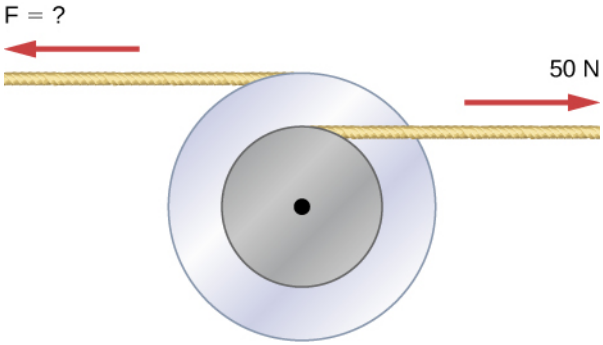


72. The cylinder head bolts on a car are to be tightened with a torque of 62.0 N·m. If a mechanic uses a wrench of length 20 cm, what perpendicular force must he exert on the end of the wrench to tighten a bolt correctly?

73. (a) When opening a door, you push on it perpendicularly with a force of 55.0 N at a distance of 0.850 m from the hinges. What torque are you exerting relative to the hinges? (b) Does it matter if you push at the same height as the hinges? There is only one pair of hinges.


74. When tightening a bolt, you push perpendicularly on a wrench with a force of 165 N at a distance of 0.140 m from the center of the bolt. How much torque are you exerting in newton-meters (relative to the center of the bolt)?

75. What hanging mass must be placed on the cord to keep the pulley from rotating (see the following figure)? The mass on the frictionless plane is 5.0 kg. The inner radius of the pulley is 20 cm and the outer radius is 30 cm.

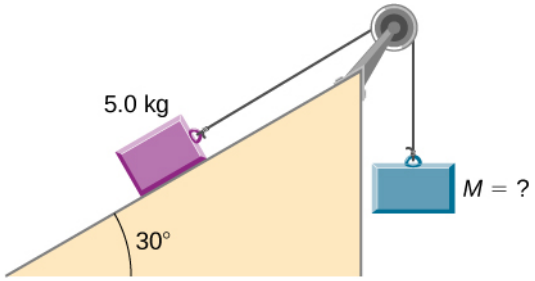


76. A simple pendulum consists of a massless tether 50 cm in length connected to a pivot and a small mass of 1.0 kg attached at the other end. What is the torque about the pivot when the pendulum makes an angle of 40° with respect to the vertical?

77. Calculate the torque about the z-axis that is out of the page at the origin in the following figure, given that $F_1 = 3\,\text{N}$, $F_2 = 2\,\text{N}$, $F_3 = 3\,\text{N}$, $F_4 = 1.8\,\text{N}$.

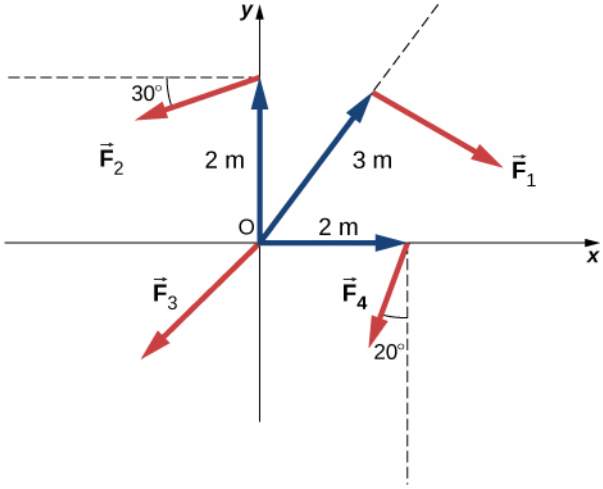


78. A seesaw has length 10.0 m and uniform mass 10.0 kg and is resting at an angle of 30° with respect to the ground (see the following figure). The pivot is located at 6.0 m. What magnitude of force needs to be applied perpendicular to the seesaw at the raised end so as to allow the seesaw to barely start to rotate?

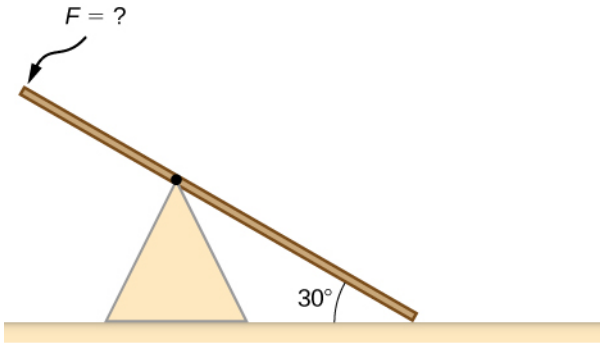


79. A pendulum consists of a rod of mass 1 kg and length 1 m connected to a pivot with a solid sphere attached at the other end with mass 0.5 kg and radius 30 cm. What is the torque about the pivot when the pendulum makes an angle of 30° with respect to the vertical?

80. A torque of $5.00 \times 10^3\,\text{N} \cdot \text{m}$ is required to raise a drawbridge (see the following figure). What is the tension necessary to produce this torque? Would it be easier to raise the drawbridge if the angle θ were larger or smaller?

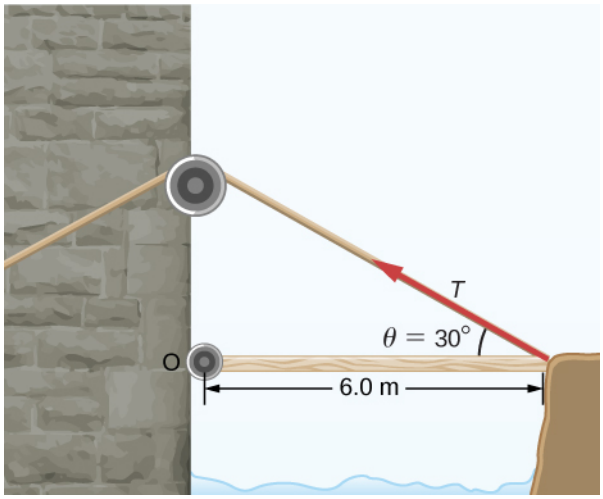

81. A horizontal beam of length 3 m and mass 2.0 kg has a mass of 1.0 kg and width 0.2 m sitting at the end of the beam (see the following figure). What is the torque of the system about the support at the wall?

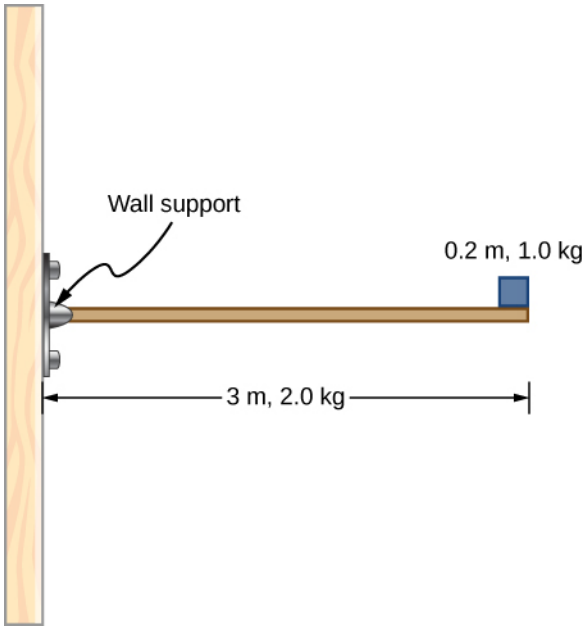

82. What force must be applied to end of a rod along the *x*-axis of length 2.0 m in order to produce a torque on the rod about the origin of $8.0\hat{\mathbf{k}}\ \text{N}\cdot\text{m}$?

83. What is the torque about the origin of the force $(5.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}} + 1.0\hat{\mathbf{k}})$ N if it is applied at the point whose position is: $\vec{\mathbf{r}} = \left(-2.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}}\right)$ m?

10.7 Newton's Second Law for Rotation

84. You have a grindstone (a disk) that is 90.0 kg, has a 0.340-m radius, and is turning at 90.0 rpm, and you press a steel axe against it with a radial force of 20.0 N. (a) Assuming the kinetic coefficient of friction between steel and stone is 0.20, calculate the angular acceleration of the grindstone. (b) How many turns will the stone make before coming to rest?

85. Suppose you exert a force of 180 N tangential to a 0.280-m-radius, 75.0-kg grindstone (a solid disk). (a)What torque is exerted? (b) What is the angular acceleration assuming negligible opposing friction? (c) What is the angular acceleration if there is an opposing frictional force of 20.0 N exerted 1.50 cm from the axis?

86. A flywheel ($I = 50\ \text{kg-m}^2$) starting from rest acquires an angular velocity of 200.0 rad/s while subject to a constant torque from a motor for 5 s. (a) What is the angular acceleration of the flywheel? (b) What is the magnitude of the torque?

87. A constant torque is applied to a rigid body whose moment of inertia is $4.0\ \text{kg-m}^2$ around the axis of rotation. If the wheel starts from rest and attains an angular velocity of 20.0 rad/s in 10.0 s, what is the applied torque?

88. A torque of 50.0 N-m is applied to a grinding wheel ($I = 20.0\ \text{kg-m}^2$) for 20 s. (a) If it starts from rest, what is the angular velocity of the grinding wheel after the torque is removed? (b) Through what angle does the wheel move while the torque is applied?


89. A flywheel ($I = 100.0\ \text{kg-m}^2$) rotating at 500.0 rev/min is brought to rest by friction in 2.0 min. What is the frictional torque on the flywheel?

90. A uniform cylindrical grinding wheel of mass 50.0 kg and diameter 1.0 m is turned on by an electric motor. The friction in the bearings is negligible. (a) What torque must be applied to the wheel to bring it from rest to 120 rev/min in 20 revolutions? (b) A tool whose coefficient of kinetic friction with the wheel is 0.60 is pressed perpendicularly against the wheel with a force of 40.0 N. What torque must be supplied by the motor to keep the wheel rotating at a constant angular velocity?


91. Suppose when Earth was created, it was not rotating. However, after the application of a uniform torque after 6 days, it was rotating at 1 rev/day. (a) What was the angular acceleration during the 6 days? (b) What torque was applied to Earth during this period? (c) What force tangent to Earth at its equator would produce this torque?

92. A pulley of moment of inertia $2.0\ \text{kg-m}^2$ is mounted on a wall as shown in the following figure. Light strings are wrapped around two circumferences of the pulley and weights are attached. What are (a) the


angular acceleration of the pulley and (b) the linear acceleration of the weights? Assume the following data:
$r_1 = 50\,\text{cm},\ r_2 = 20\,\text{cm},\ m_1 = 1.0\,\text{kg},\ m_2 = 2.0\,\text{kg}.$

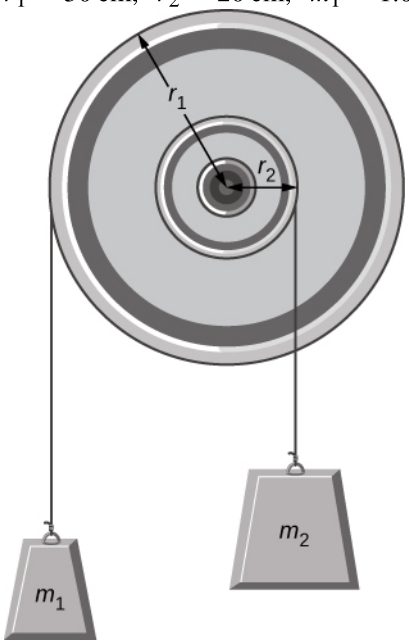

93. A block of mass 3 kg slides down an inclined plane at an angle of 45° with a massless tether attached to a pulley with mass 1 kg and radius 0.5 m at the top of the incline (see the following figure). The pulley can be approximated as a disk. The coefficient of kinetic friction on the plane is 0.4. What is the acceleration of the block?




94. The cart shown below moves across the table top as the block falls. What is the acceleration of the cart? Neglect friction and assume the following data:$m_1 = 2.0\,\text{kg}, m_2 = 4.0\,\text{kg}, I = 0.4\,\text{kg-m}^2, r = 20\,\text{cm}$

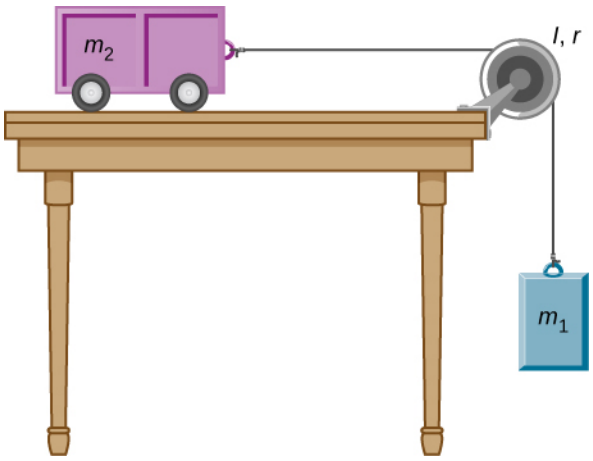

95. A uniform rod of mass and length is held vertically by two strings of negligible mass, as shown below. (a) Immediately after the string is cut, what is the linear acceleration of the free end of the stick? (b) Of the middle of the stick?



96. A thin stick of mass 0.2 kg and length $L = 0.5$ m is attached to the rim of a metal disk of mass $M = 2.0\,\text{kg}$ and radius $R = 0.3$ m. The stick is free to rotate around a horizontal axis through its other end (see the following figure). (a) If the combination is released with the stick horizontal, what is the speed of the center of the disk when the stick is vertical? (b) What is the acceleration of the center of the disk at the instant the stick is released? (c) At the instant the stick passes through the vertical?

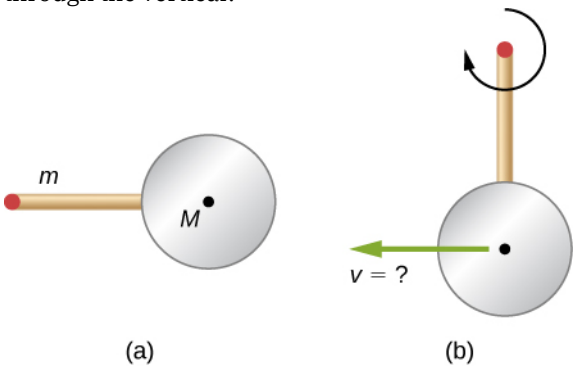

(a) (b)


10.8 Work and Power for Rotational Motion

97. A wind turbine rotates at 20 rev/min. If its power output is 2.0 MW, what is the torque produced on the turbine from the wind?

98. A clay cylinder of radius 20 cm on a potter's wheel spins at a constant rate of 10 rev/s. The potter applies a force of 10 N to the clay with his hands where the coefficient of friction is 0.1 between his hands and the clay. What is the power that the potter has to deliver to the wheel to keep it rotating at this constant rate?


99. A uniform cylindrical grindstone has a mass of 10 kg and a radius of 12 cm. (a) What is the rotational kinetic energy of the grindstone when it is rotating at 1.5×10^3 rev/min? (b) After the grindstone's motor is turned off, a knife blade is pressed against the outer edge of the grindstone with a perpendicular force of 5.0 N. The coefficient of kinetic friction between the grindstone and the blade is 0.80. Use the work energy theorem to determine how many turns the grindstone makes before it stops.

100. A uniform disk of mass 500 kg and radius 0.25 m is mounted on frictionless bearings so it can rotate freely around a vertical axis through its center (see the following figure). A cord is wrapped around the rim of the disk and pulled with a force of 10 N. (a) How much work has the force done at the instant the disk has completed three revolutions, starting from rest? (b) Determine the torque due to the force, then calculate the work done by this torque at the instant the disk has completed three revolutions? (c) What is the angular velocity at that instant? (d) What is the power output of the force at that instant?

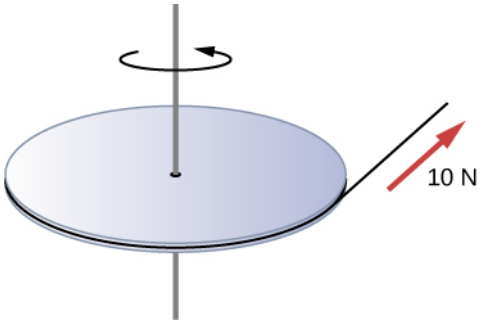


101. A propeller is accelerated from rest to an angular velocity of 1000 rev/min over a period of 6.0 seconds by a constant torque of $2.0 \times 10^3\,\text{N} \cdot \text{m}$. (a) What is the moment of inertia of the propeller? (b) What power is being provided to the propeller 3.0 s after it starts rotating?

102. A sphere of mass 1.0 kg and radius 0.5 m is attached to the end of a massless rod of length 3.0 m. The rod rotates about an axis that is at the opposite end of the sphere (see below). The system rotates horizontally about the axis at a constant 400 rev/min. After rotating at this angular speed in a vacuum, air resistance is introduced and provides a force 0.15 N on the sphere opposite to the direction of motion. What is the power provided by air resistance to the system 100.0 s after air resistance is introduced?

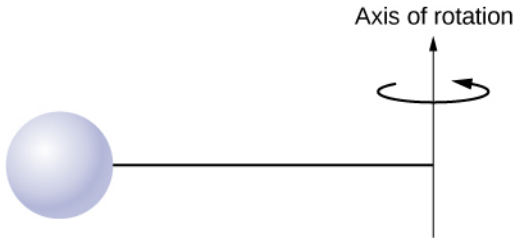


103. A uniform rod of length L and mass M is held vertically with one end resting on the floor as shown below. When the rod is released, it rotates around its lower end until it hits the floor. Assuming the lower end of the rod does not slip, what is the linear velocity of the upper end when it hits the floor?

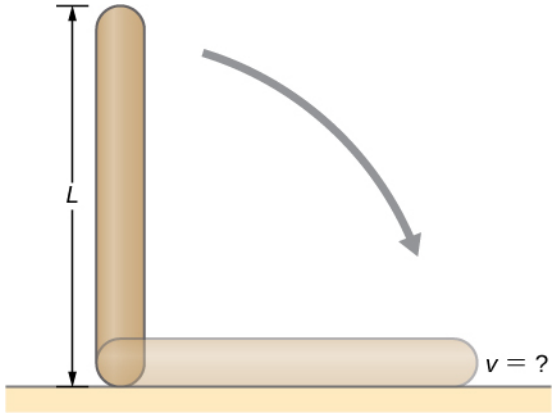


104. An athlete in a gym applies a constant force of 50 N to the pedals of a bicycle at a rate of the pedals moving 60 rev/min. The length of the pedal arms is 30 cm. What is the power delivered to the bicycle by the athlete?

105. A 2-kg block on a frictionless inclined plane at 40° has a cord attached to a pulley of mass 1 kg and radius 20 cm (see the following figure). (a) What is the acceleration of the block down the plane? (b) What is the work done by the cord on the pulley?

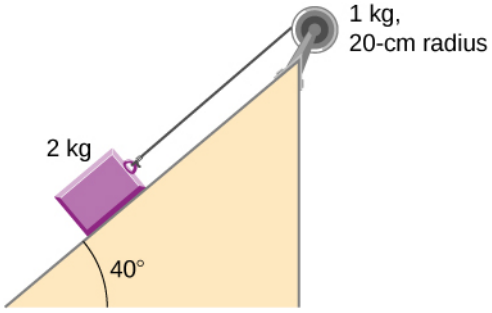

106. Small bodies of mass m_1 and m_2 are attached to opposite ends of a thin rigid rod of length L and mass M. The rod is mounted so that it is free to rotate in a horizontal plane around a vertical axis (see below). What distance d from m_1 should the rotational axis be so that a minimum amount of work is required to set the rod rotating at an angular velocity ω?

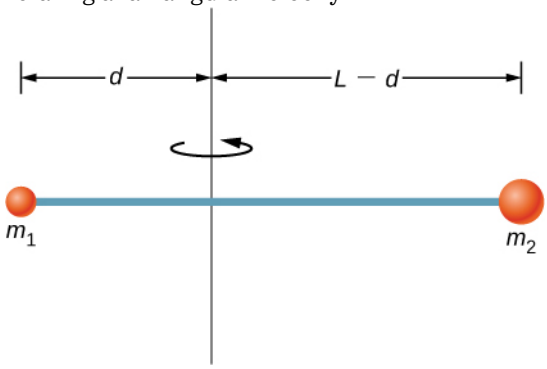

Additional Problems

107. A cyclist is riding such that the wheels of the bicycle have a rotation rate of 3.0 rev/s. If the cyclist brakes such that the rotation rate of the wheels decrease at a rate of 0.3 rev/s^2, how long does it take for the cyclist to come to a complete stop?

108. Calculate the angular velocity of the orbital motion of Earth around the Sun.

109. A phonograph turntable rotating at 33 1/3 rev/min slows down and stops in 1.0 min. (a) What is the turntable's angular acceleration assuming it is constant? (b) How many revolutions does the turntable make while stopping?


110. With the aid of a string, a gyroscope is accelerated from rest to 32 rad/s in 0.40 s under a constant angular acceleration. (a) What is its angular acceleration in rad/s^2? (b) How many revolutions does it go through in the process?

111. Suppose a piece of dust has fallen on a CD. If the spin rate of the CD is 500 rpm, and the piece of dust is 4.3 cm from the center, what is the total distance traveled by the dust in 3 minutes? (Ignore accelerations due to getting the CD rotating.)


112. A system of point particles is rotating about a fixed axis at 4 rev/s. The particles are fixed with respect to each other. The masses and distances to the axis of the point particles are $m_1 = 0.1$ kg, $r_1 = 0.2$ m, $m_2 = 0.05$ kg, $r_2 = 0.4$ m, $m_3 = 0.5$ kg, $r_3 = 0.01$ m. (a) What is the moment of inertia of the system? (b) What is the rotational kinetic energy of the system?

113. Calculate the moment of inertia of a skater given the following information. (a) The 60.0-kg skater is approximated as a cylinder that has a 0.110-m radius. (b) The skater with arms extended is approximated by a cylinder that is 52.5 kg, has a 0.110-m radius, and has two 0.900-m-long arms which are 3.75 kg each and extend straight out from the cylinder like rods rotated about their ends.


114. A stick of length 1.0 m and mass 6.0 kg is free to rotate about a horizontal axis through the center. Small bodies of masses 4.0 and 2.0 kg are attached to its two ends (see the following figure). The stick is released from the horizontal position. What is the angular velocity of the stick when it swings through the vertical?

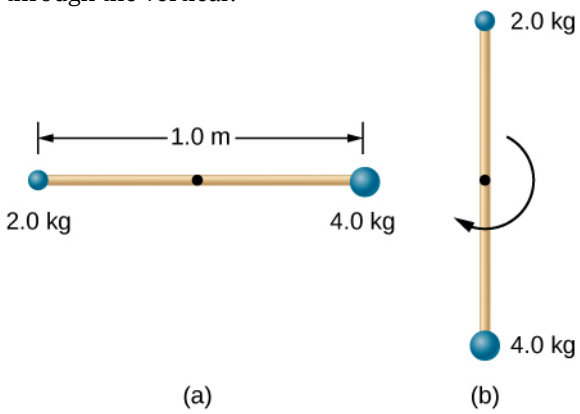

115. A pendulum consists of a rod of length 2 m and mass 3 kg with a solid sphere of mass 1 kg and radius 0.3 m attached at one end. The axis of rotation is as shown below. What is the angular velocity of the pendulum at its lowest point if it is released from rest at an angle of 30°?



116. Calculate the torque of the 40-N force around the axis through *O* and perpendicular to the plane of the page as shown below.

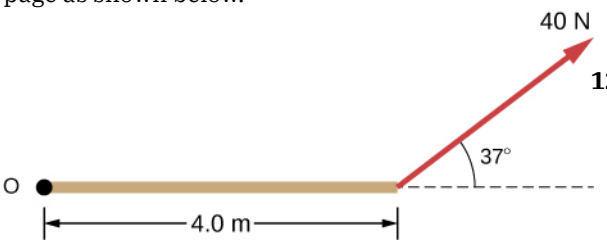

117. Two children push on opposite sides of a door during play. Both push horizontally and perpendicular to the door. One child pushes with a force of 17.5 N at a distance of 0.600 m from the hinges, and the second child pushes at a distance of 0.450 m. What force must the second child exert to keep the door from moving? Assume friction is negligible.

118. The force of $20\hat{\mathbf{j}}\,\text{N}$ is applied at $\vec{\mathbf{r}} = (4.0\hat{\mathbf{i}} - 2.0\hat{\mathbf{j}})$ m. What is the torque of this force about the origin?

119. An automobile engine can produce 200 N· m of torque. Calculate the angular acceleration produced if 95.0% of this torque is applied to the drive shaft, axle, and rear wheels of a car, given the following information. The car is suspended so that the wheels can turn freely. Each wheel acts like a 15.0-kg disk that has a 0.180-m radius. The walls of each tire act like a 2.00-kg annular ring that has inside radius of 0.180 m and outside radius of 0.320 m. The tread of each tire acts like a 10.0-kg hoop of radius 0.330 m. The 14.0-kg axle acts like a rod that has a 2.00-cm radius. The 30.0-kg drive shaft acts like a rod that has a 3.20-cm radius.


120. A grindstone with a mass of 50 kg and radius 0.8 m maintains a constant rotation rate of 4.0 rev/s by a motor while a knife is pressed against the edge with a force of 5.0 N. The coefficient of kinetic friction between the grindstone and the blade is 0.8. What is the power provided by the motor to keep the grindstone at the constant rotation rate?

Challenge Problems

121. The angular acceleration of a rotating rigid body is given by $\alpha = (2.0 - 3.0t)\ \text{rad/s}^2$. If the body starts rotating from rest at $t = 0$, (a) what is the angular velocity? (b) Angular position? (c) What angle does it rotate through in 10 s? (d) Where does the vector perpendicular to the axis of rotation indicating 0° at $t = 0$ lie at $t = 10$ s?


122. Earth's day has increased by 0.002 s in the last century. If this increase in Earth's period is constant, how long will it take for Earth to come to rest?

123. A disk of mass m, radius R, and area A has a surface mass density $\sigma = \frac{mr}{AR}$ (see the following figure). What is the moment of inertia of the disk about an axis through the center?

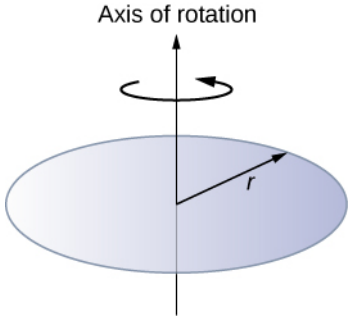

124. Zorch, an archenemy of Rotation Man, decides to slow Earth's rotation to once per 28.0 h by exerting an opposing force at and parallel to the equator. Rotation Man is not immediately concerned, because he knows Zorch can only exert a force of $4.00 \times 10^7 \text{N}$ (a little greater than a Saturn V rocket's thrust). How long must Zorch push with this force to accomplish his goal? (This period gives Rotation Man time to devote to other villains.)

125. A cord is wrapped around the rim of a solid cylinder of radius 0.25 m, and a constant force of 40 N is exerted on the cord shown, as shown in the following figure. The cylinder is mounted on frictionless bearings, and its moment of inertia is $6.0 \text{ kg} \cdot \text{m}^2$. (a) Use the work energy theorem to calculate the angular velocity of the cylinder after 5.0 m of cord have been removed. (b) If the 40-N force is replaced by a 40-N weight, what is the angular velocity of the cylinder after 5.0 m of cord have unwound?

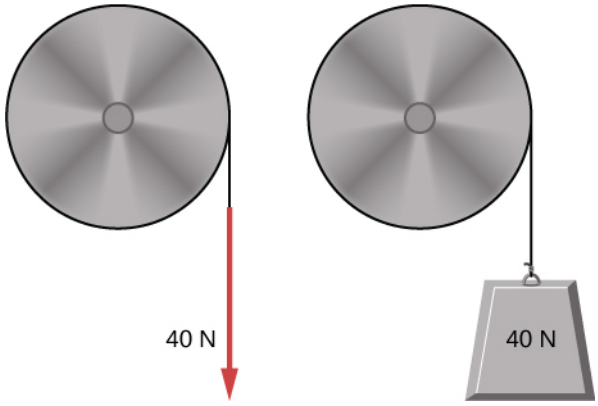

CHAPTER 11
Angular Momentum



Figure 11.1 A helicopter has its main lift blades rotating to keep the aircraft airborne. Due to conservation of angular momentum, the body of the helicopter would want to rotate in the opposite sense to the blades, if it were not for the small rotor on the tail of the aircraft, which provides thrust to stabilize it.

Chapter Outline

11.1 Rolling Motion

11.2 Angular Momentum

11.3 Conservation of Angular Momentum

11.4 Precession of a Gyroscope

INTRODUCTION Angular momentum is the rotational counterpart of linear momentum. Any massive object that rotates about an axis carries angular momentum, including rotating flywheels, planets, stars, hurricanes, tornadoes, whirlpools, and so on. The helicopter shown in the chapter-opening picture can be used to illustrate the concept of angular momentum. The lift blades spin about a vertical axis through the main body and carry angular momentum. The body of the helicopter tends to rotate in the opposite sense in order to conserve angular momentum. The small rotors at the tail of the aircraft provide a counter thrust against the body to prevent this from happening, and the helicopter stabilizes itself. The concept of conservation of angular momentum is discussed later in this chapter. In the main part of this chapter, we explore the intricacies of angular momentum of rigid bodies such as a top, and also of point particles and systems of particles. But to be complete, we start with a discussion of rolling motion, which builds upon the concepts of the previous chapter.

11.1 Rolling Motion

Learning Objectives

By the end of this section, you will be able to:

- Describe the physics of rolling motion without slipping
- Explain how linear variables are related to angular variables for the case of rolling motion without slipping
- Find the linear and angular accelerations in rolling motion with and without slipping
- Calculate the static friction force associated with rolling motion without slipping
- Use energy conservation to analyze rolling motion

Rolling motion is that common combination of rotational and translational motion that we see everywhere, every day. Think about the different situations of wheels moving on a car along a highway, or wheels on a plane landing on a runway, or wheels on a robotic explorer on another planet. Understanding the forces and torques involved in **rolling motion** is a crucial factor in many different types of situations.

For analyzing rolling motion in this chapter, refer to Figure 10.20 in Fixed-Axis Rotation to find moments of inertia of some common geometrical objects. You may also find it useful in other calculations involving rotation.

Rolling Motion without Slipping

People have observed rolling motion without slipping ever since the invention of the wheel. For example, we can look at the interaction of a car's tires and the surface of the road. If the driver depresses the accelerator to the floor, such that the tires spin without the car moving forward, there must be kinetic friction between the wheels and the surface of the road. If the driver depresses the accelerator slowly, causing the car to move forward, then the tires roll without slipping. It is surprising to most people that, in fact, the bottom of the wheel is at rest with respect to the ground, indicating there must be static friction between the tires and the road surface. In Figure 11.2, the bicycle is in motion with the rider staying upright. The tires have contact with the road surface, and, even though they are rolling, the bottoms of the tires deform slightly, do not slip, and are at rest with respect to the road surface for a measurable amount of time. There must be static friction between the tire and the road surface for this to be so.



(a) (b)

Figure 11.2 (a) The bicycle moves forward, and its tires do not slip. The bottom of the slightly deformed tire is at rest with respect to the road surface for a measurable amount of time. (b) This image shows that the top of a rolling wheel appears blurred by its motion, but the bottom of the wheel is instantaneously at rest. (credit a: modification of work by Nelson Lourenço; credit b: modification of work by Colin Rose)

To analyze rolling without slipping, we first derive the linear variables of velocity and acceleration of the center

of mass of the wheel in terms of the angular variables that describe the wheel's motion. The situation is shown in Figure 11.3.

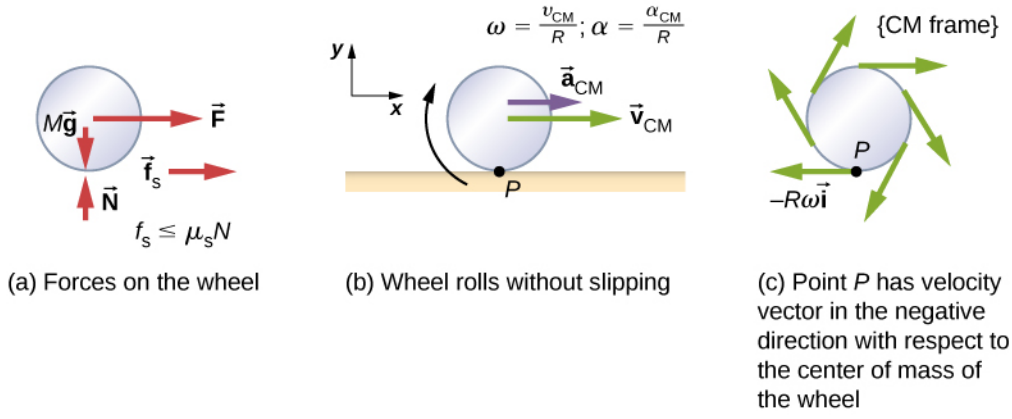


Figure 11.3 (a) A wheel is pulled across a horizontal surface by a force $\vec{\mathbf{F}}$. The force of static friction $\vec{\mathbf{f}}_s, \left|\vec{\mathbf{f}}_s\right| \leq \mu_s N$ is large enough to keep it from slipping. (b) The linear velocity and acceleration vectors of the center of mass and the relevant expressions for ω and α. Point P is at rest relative to the surface. (c) Relative to the center of mass (CM) frame, point P has linear velocity $-R\omega\hat{\mathbf{i}}$.

From Figure 11.3(a), we see the force vectors involved in preventing the wheel from slipping. In (b), point P that touches the surface is at rest relative to the surface. Relative to the center of mass, point P has velocity $-R\omega\hat{\mathbf{i}}$, where R is the radius of the wheel and ω is the wheel's angular velocity about its axis. Since the wheel is rolling, the velocity of P with respect to the surface is its velocity with respect to the center of mass plus the velocity of the center of mass with respect to the surface:

$$\vec{\mathbf{v}}_P = -R\omega\hat{\mathbf{i}} + v_{CM}\hat{\mathbf{i}}.$$

Since the velocity of P relative to the surface is zero, $v_P = 0$, this says that

$$v_{CM} = R\omega. \tag{11.1}$$

Thus, the velocity of the wheel's center of mass is its radius times the angular velocity about its axis. We show the correspondence of the linear variable on the left side of the equation with the angular variable on the right side of the equation. This is done below for the linear acceleration.

If we differentiate Equation 11.1 on the left side of the equation, we obtain an expression for the linear acceleration of the center of mass. On the right side of the equation, R is a constant and since $\alpha = \frac{d\omega}{dt}$, we have

$$a_{CM} = R\alpha. \tag{11.2}$$

Furthermore, we can find the distance the wheel travels in terms of angular variables by referring to Figure 11.4. As the wheel rolls from point A to point B, its outer surface maps onto the ground by exactly the distance travelled, which is d_{CM}. We see from Figure 11.4 that the length of the outer surface that maps onto the ground is the arc length $R\theta$. Equating the two distances, we obtain

$$d_{CM} = R\theta. \tag{11.3}$$

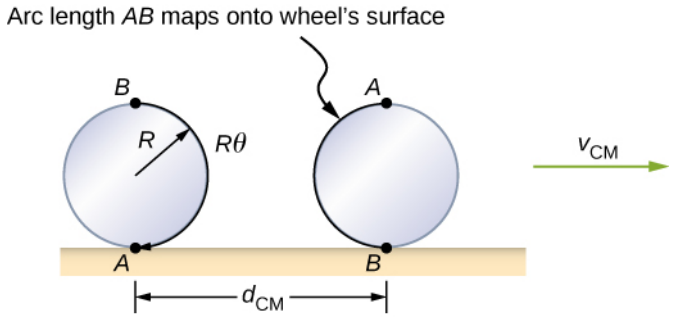


Figure 11.4 As the wheel rolls on the surface, the arc length $R\theta$ from *A* to *B* maps onto the surface, corresponding to the distance d_{CM} that the center of mass has moved.

EXAMPLE 11.1

Rolling Down an Inclined Plane

A solid cylinder rolls down an inclined plane without slipping, starting from rest. It has mass m and radius r. (a) What is its acceleration? (b) What condition must the coefficient of static friction μ_s satisfy so the cylinder does not slip?

Strategy

Draw a sketch and free-body diagram, and choose a coordinate system. We put x in the direction down the plane and y upward perpendicular to the plane. Identify the forces involved. These are the normal force, the force of gravity, and the force due to friction. Write down Newton's laws in the x- and y-directions, and Newton's law for rotation, and then solve for the acceleration and force due to friction.

Solution

a. The free-body diagram and sketch are shown in Figure 11.5, including the normal force, components of the weight, and the static friction force. There is barely enough friction to keep the cylinder rolling without slipping. Since there is no slipping, the magnitude of the friction force is less than or equal to $\mu_s N$. Writing down Newton's laws in the x- and y-directions, we have

$$\sum F_x = ma_x; \quad \sum F_y = ma_y.$$

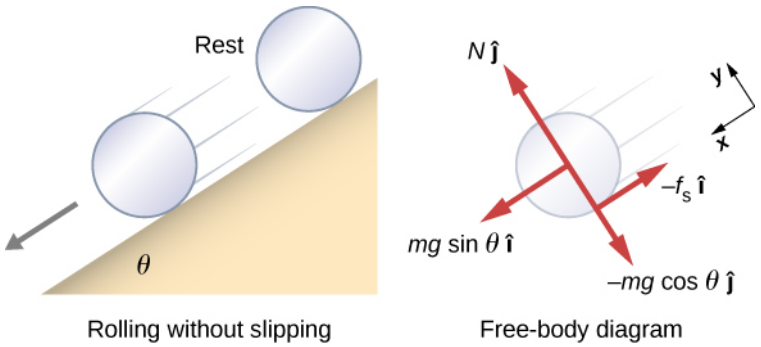


Figure 11.5 A solid cylinder rolls down an inclined plane without slipping from rest. The coordinate system has x in the direction down the inclined plane and y perpendicular to the plane. The free-body diagram is shown with the normal force, the static friction force, and the components of the weight $m\vec{g}$. Friction makes the cylinder roll down the plane rather than slip.

Substituting in from the free-body diagram,

$$\begin{aligned} mg\sin\theta - f_s &= m(a_{CM})_x, \\ N - mg\cos\theta &= 0 \end{aligned}$$

we can then solve for the linear acceleration of the center of mass from these equations:

$$a_{\text{CM}} = g\sin\theta - \frac{f_{\text{s}}}{m}$$

However, it is useful to express the linear acceleration in terms of the moment of inertia. For this, we write down Newton's second law for rotation,

$$\sum \tau_{\text{CM}} = I_{\text{CM}}\alpha.$$

The torques are calculated about the axis through the center of mass of the cylinder. The only nonzero torque is provided by the friction force. We have

$$f_{\text{s}}r = I_{\text{CM}}\alpha.$$

Finally, the linear acceleration is related to the angular acceleration by

$$(a_{\text{CM}})_x = r\alpha.$$

These equations can be used to solve for $a_{\text{CM}}, \alpha,$ and f_{s} in terms of the moment of inertia, where we have dropped the x-subscript. We rewrite a_{CM} in terms of the vertical component of gravity and the friction force, and make the following substitutions.

$$f_{\text{s}} = \frac{I_{\text{CM}}\alpha}{r} = \frac{I_{\text{CM}}a_{\text{CM}}}{r^2}$$

From this we obtain

$$\begin{aligned} a_{\text{CM}} &= g\sin\theta - \frac{I_{\text{CM}}a_{\text{CM}}}{mr^2}, \\ &= \frac{mg\sin\theta}{m+(I_{\text{CM}}/r^2)}. \end{aligned}$$

Note that this result is independent of the coefficient of static friction, μ_{s}.
Since we have a solid cylinder, from Figure 10.20, we have $I_{\text{CM}} = mr^2/2$ and

$$a_{\text{CM}} = \frac{mg\sin\theta}{m + (mr^2/2r^2)} = \frac{2}{3}g\sin\theta.$$

Therefore, we have

$$\alpha = \frac{a_{\text{CM}}}{r} = \frac{2}{3r}g\sin\theta.$$

b. Because slipping does not occur, $f_{\text{s}} \leq \mu_{\text{s}}N$. Solving for the friction force,

$$f_{\text{s}} = I_{\text{CM}}\frac{\alpha}{r} = I_{\text{CM}}\frac{(a_{\text{CM}})}{r^2} = \frac{I_{\text{CM}}}{r^2}\left(\frac{mg\sin\theta}{m + (I_{\text{CM}}/r^2)}\right) = \frac{mgI_{\text{CM}}\sin\theta}{mr^2 + I_{\text{CM}}}.$$

Substituting this expression into the condition for no slipping, and noting that $N = mg\cos\theta$, we have

$$\frac{mgI_{\text{CM}}\sin\theta}{mr^2 + I_{\text{CM}}} \leq \mu_{\text{s}}mg\cos\theta$$

or

$$\mu_{\text{s}} \geq \frac{\tan\theta}{1 + (mr^2/I_{\text{CM}})}.$$

For the solid cylinder, this becomes

$$\mu_s \geq \frac{\tan\theta}{1+(2mr^2/mr^2)} = \frac{1}{3}\tan\theta.$$

Significance

a. The linear acceleration is linearly proportional to $\sin\theta$. Thus, the greater the angle of the incline, the greater the linear acceleration, as would be expected. The angular acceleration, however, is linearly proportional to $\sin\theta$ and inversely proportional to the radius of the cylinder. Thus, the larger the radius, the smaller the angular acceleration.
b. For no slipping to occur, the coefficient of static friction must be greater than or equal to $(1/3)\tan\theta$. Thus, the greater the angle of incline, the greater the coefficient of static friction must be to prevent the cylinder from slipping.

CHECK YOUR UNDERSTANDING 11.1

A hollow cylinder is on an incline at an angle of 60°. The coefficient of static friction on the surface is $\mu_s = 0.6$. (a) Does the cylinder roll without slipping? (b) Will a solid cylinder roll without slipping?

It is worthwhile to repeat the equation derived in this example for the acceleration of an object rolling without slipping:

$$a_{CM} = \frac{mg\sin\theta}{m+(I_{CM}/r^2)}. \qquad 11.4$$

This is a very useful equation for solving problems involving rolling without slipping. Note that the acceleration is less than that for an object sliding down a frictionless plane with no rotation. The acceleration will also be different for two rotating objects with different rotational inertias.

Rolling Motion with Slipping

In the case of rolling motion with slipping, we must use the coefficient of kinetic friction, which gives rise to the kinetic friction force since static friction is not present. The situation is shown in Figure 11.6. In the case of slipping, $v_{CM} - R\omega \neq 0$, because point P on the wheel is not at rest on the surface, and $v_P \neq 0$. Thus, $\omega \neq \frac{v_{CM}}{R}, \alpha \neq \frac{a_{CM}}{R}$.

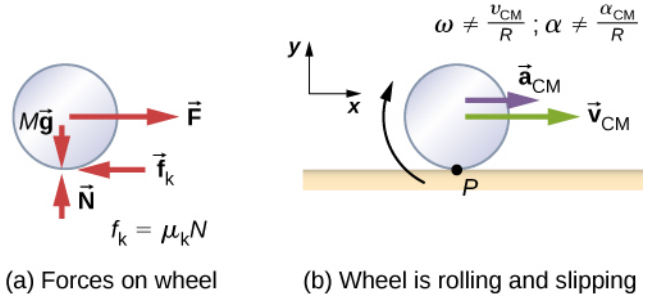


Figure 11.6 (a) Kinetic friction arises between the wheel and the surface because the wheel is slipping. (b) The simple relationships between the linear and angular variables are no longer valid.

EXAMPLE 11.2

Rolling Down an Inclined Plane with Slipping

A solid cylinder rolls down an inclined plane from rest and undergoes slipping (Figure 11.7). It has mass m and radius r. (a) What is its linear acceleration? (b) What is its angular acceleration about an axis through the center of mass?

Strategy

Draw a sketch and free-body diagram showing the forces involved. The free-body diagram is similar to the no-slipping case except for the friction force, which is kinetic instead of static. Use Newton's second law to solve for the acceleration in the x-direction. Use Newton's second law of rotation to solve for the angular acceleration.

Solution

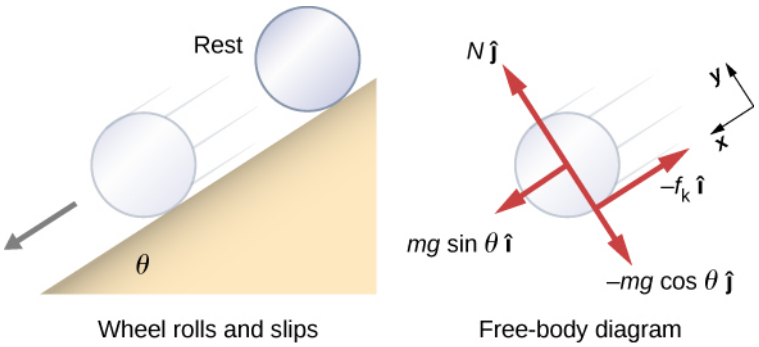


Figure 11.7 A solid cylinder rolls down an inclined plane from rest and undergoes slipping. The coordinate system has x in the direction down the inclined plane and y upward perpendicular to the plane. The free-body diagram shows the normal force, kinetic friction force, and the components of the weight $m\vec{g}$.

The sum of the forces in the y-direction is zero, so the friction force is now $f_\mathrm{k} = \mu_\mathrm{k} N = \mu_\mathrm{k} mg\cos\theta$.

Newton's second law in the x-direction becomes

$$\sum F_x = ma_x,$$
$$mg\sin\theta - \mu_\mathrm{k} mg\cos\theta = m(a_\mathrm{CM})_x,$$

or

$$(a_\mathrm{CM})_x = g(\sin\theta - \mu_\mathrm{k}\cos\theta).$$

The friction force provides the only torque about the axis through the center of mass, so Newton's second law of rotation becomes

$$\sum \tau_\mathrm{CM} = I_\mathrm{CM}\alpha,$$
$$f_\mathrm{k} r = I_\mathrm{CM}\alpha = \frac{1}{2}mr^2\alpha.$$

Solving for α, we have

$$\alpha = \frac{2f_\mathrm{k}}{mr} = \frac{2\mu_\mathrm{k} g\cos\theta}{r}.$$

Significance

We write the linear and angular accelerations in terms of the coefficient of kinetic friction. The linear acceleration is the same as that found for an object sliding down an inclined plane with kinetic friction. The angular acceleration about the axis of rotation is linearly proportional to the normal force, which depends on the cosine of the angle of inclination. As $\theta \to 90°$, this force goes to zero, and, thus, the angular acceleration goes to zero.

Conservation of Mechanical Energy in Rolling Motion

In the preceding chapter, we introduced rotational kinetic energy. Any rolling object carries rotational kinetic energy, as well as translational kinetic energy and potential energy if the system requires. Including the gravitational potential energy, the total mechanical energy of an object rolling is

$$E_{\mathrm{T}} = \frac{1}{2}mv_{\mathrm{CM}}^2 + \frac{1}{2}I_{\mathrm{CM}}\omega^2 + mgh.$$

In the absence of any nonconservative forces that would take energy out of the system in the form of heat, the total energy of a rolling object without slipping is conserved and is constant throughout the motion. Examples where energy is not conserved are a rolling object that is slipping, production of heat as a result of kinetic friction, and a rolling object encountering air resistance.

You may ask why a rolling object that is not slipping conserves energy, since the static friction force is nonconservative. The answer can be found by referring back to Figure 11.3. Point P in contact with the surface is at rest with respect to the surface. Therefore, its infinitesimal displacement $d\vec{\mathbf{r}}$ with respect to the surface is zero, and the incremental work done by the static friction force is zero. We can apply energy conservation to our study of rolling motion to bring out some interesting results.

EXAMPLE 11.3

Curiosity Rover

The *Curiosity* rover, shown in Figure 11.8, was deployed on Mars on August 6, 2012. The wheels of the rover have a radius of 25 cm. Suppose astronauts arrive on Mars in the year 2050 and find the now-inoperative *Curiosity* on the side of a basin. While they are dismantling the rover, an astronaut accidentally loses a grip on one of the wheels, which rolls without slipping down into the bottom of the basin 25 meters below. If the wheel has a mass of 5 kg, what is its velocity at the bottom of the basin?



Figure 11.8 The NASA Mars Science Laboratory rover *Curiosity* during testing on June 3, 2011. The location is inside the Spacecraft Assembly Facility at NASA's Jet Propulsion Laboratory in Pasadena, California. (credit: NASA/JPL-Caltech)

Strategy

We use mechanical energy conservation to analyze the problem. At the top of the hill, the wheel is at rest and has only potential energy. At the bottom of the basin, the wheel has rotational and translational kinetic energy,

which must be equal to the initial potential energy by energy conservation. Since the wheel is rolling without slipping, we use the relation $v_{\text{CM}} = r\omega$ to relate the translational variables to the rotational variables in the energy conservation equation. We then solve for the velocity. From Figure 11.8, we see that a hollow cylinder is a good approximation for the wheel, so we can use this moment of inertia to simplify the calculation.

Solution

Energy at the top of the basin equals energy at the bottom:

$$mgh = \frac{1}{2}mv_{\text{CM}}^2 + \frac{1}{2}I_{\text{CM}}\omega^2.$$

The known quantities are $I_{\text{CM}} = mr^2$, $r = 0.25$ m, and $h = 25.0$ m.

We rewrite the energy conservation equation eliminating ω by using $\omega = \frac{v_{\text{CM}}}{r}$. We have

$$mgh = \frac{1}{2}mv_{\text{CM}}^2 + \frac{1}{2}mr^2\frac{v_{\text{CM}}^2}{r^2}$$

or

$$gh = \frac{1}{2}v_{\text{CM}}^2 + \frac{1}{2}v_{\text{CM}}^2 \Rightarrow v_{\text{CM}} = \sqrt{gh}.$$

On Mars, the acceleration of gravity is $3.71\ \text{m/s}^2$, which gives the magnitude of the velocity at the bottom of the basin as

$$v_{\text{CM}} = \sqrt{(3.71\ \text{m/s}^2)25.0\ \text{m}} = 9.63\ \text{m/s}.$$

Significance

This is a fairly accurate result considering that Mars has very little atmosphere, and the loss of energy due to air resistance would be minimal. The result also assumes that the terrain is smooth, such that the wheel wouldn't encounter rocks and bumps along the way.

Also, in this example, the kinetic energy, or energy of motion, is equally shared between linear and rotational motion. If we look at the moments of inertia in Figure 10.20, we see that the hollow cylinder has the largest moment of inertia for a given radius and mass. If the wheels of the rover were solid and approximated by solid cylinders, for example, there would be more kinetic energy in linear motion than in rotational motion. This would give the wheel a larger linear velocity than the hollow cylinder approximation. Thus, the solid cylinder would reach the bottom of the basin faster than the hollow cylinder.

11.2 Angular Momentum

Learning Objectives

By the end of this section, you will be able to:

- Describe the vector nature of angular momentum
- Find the total angular momentum and torque about a designated origin of a system of particles
- Calculate the angular momentum of a rigid body rotating about a fixed axis
- Calculate the torque on a rigid body rotating about a fixed axis
- Use conservation of angular momentum in the analysis of objects that change their rotation rate

Why does Earth keep on spinning? What started it spinning to begin with? Why doesn't Earth's gravitational attraction not bring the Moon crashing in toward Earth? And how does an ice skater manage to spin faster and faster simply by pulling her arms in? Why does she not have to exert a torque to spin faster?

Questions like these have answers based in angular momentum, the rotational analog to linear momentum. In this chapter, we first define and then explore angular momentum from a variety of viewpoints. First, however, we investigate the angular momentum of a single particle. This allows us to develop angular momentum for a system of particles and for a rigid body that is cylindrically symmetric.

Angular Momentum of a Single Particle

Figure 11.9 shows a particle at a position $\vec{\mathbf{r}}$ with linear momentum $\vec{\mathbf{p}} = m\vec{\mathbf{v}}$ with respect to the origin. Even if the particle is not rotating about the origin, we can still define an angular momentum in terms of the position vector and the linear momentum.

Angular Momentum of a Particle

The **angular momentum** $\vec{\mathbf{l}}$ of a particle is defined as the cross-product of $\vec{\mathbf{r}}$ and $\vec{\mathbf{p}}$, and is perpendicular to the plane containing $\vec{\mathbf{r}}$ and $\vec{\mathbf{p}}$:

$$\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}. \qquad 11.5$$

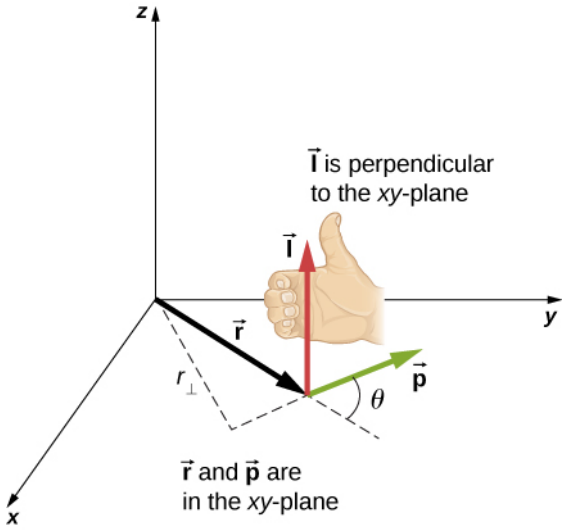


Figure 11.9 In three-dimensional space, the position vector $\vec{\mathbf{r}}$ locates a particle in the *xy*-plane with linear momentum $\vec{\mathbf{p}}$. The angular momentum with respect to the origin is $\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$, which is in the *z*-direction. The direction of $\vec{\mathbf{l}}$ is given by the right-hand rule, as shown.

The intent of choosing the direction of the angular momentum to be perpendicular to the plane containing $\vec{\mathbf{r}}$ and $\vec{\mathbf{p}}$ is similar to choosing the direction of torque to be perpendicular to the plane of $\vec{\mathbf{r}}$ and $\vec{\mathbf{F}}$, as discussed in Fixed-Axis Rotation. The magnitude of the angular momentum is found from the definition of the cross-product,

$$l = rp \sin\theta,$$

where θ is the angle between $\vec{\mathbf{r}}$ and $\vec{\mathbf{p}}$. The units of angular momentum are $\text{kg} \cdot \text{m}^2/\text{s}$.

As with the definition of torque, we can define a lever arm $r_\perp$ that is the perpendicular distance from the momentum vector $\vec{\mathbf{p}}$ to the origin, $r_\perp = r \sin\theta$. With this definition, the magnitude of the angular momentum becomes

$$l = r_\perp p = r_\perp mv.$$

We see that if the direction of $\vec{\mathbf{p}}$ is such that it passes through the origin, then $\theta = 0$, and the angular momentum is zero because the lever arm is zero. In this respect, the magnitude of the angular momentum depends on the choice of origin.

If we take the time derivative of the angular momentum, we arrive at an expression for the torque on the particle:

$$\frac{d\vec{\mathbf{l}}}{dt} = \frac{d\vec{\mathbf{r}}}{dt} \times \vec{\mathbf{p}} + \vec{\mathbf{r}} \times \frac{d\vec{\mathbf{p}}}{dt} = \vec{\mathbf{v}} \times m\vec{\mathbf{v}} + \vec{\mathbf{r}} \times \frac{d\vec{\mathbf{p}}}{dt} = \vec{\mathbf{r}} \times \frac{d\vec{\mathbf{p}}}{dt}.$$

Here we have used the definition of $\vec{\mathbf{p}}$ and the fact that a vector crossed into itself is zero. From Newton's second law, $\frac{d\vec{\mathbf{p}}}{dt} = \sum \vec{\mathbf{F}}$, the net force acting on the particle, and the definition of the net torque, we can write

$$\frac{d\vec{\mathbf{l}}}{dt} = \sum \vec{\boldsymbol{\tau}}. \qquad 11.6$$

Note the similarity with the linear result of Newton's second law, $\frac{d\vec{\mathbf{p}}}{dt} = \sum \vec{\mathbf{F}}$. The following problem-solving strategy can serve as a guideline for calculating the angular momentum of a particle.

PROBLEM-SOLVING STRATEGY

Angular Momentum of a Particle

1. Choose a coordinate system about which the angular momentum is to be calculated.
2. Write down the radius vector to the point particle in unit vector notation.
3. Write the linear momentum vector of the particle in unit vector notation.
4. Take the cross product $\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$ and use the right-hand rule to establish the direction of the angular momentum vector.
5. See if there is a time dependence in the expression of the angular momentum vector. If there is, then a torque exists about the origin, and use $\frac{d\vec{\mathbf{l}}}{dt} = \sum \vec{\boldsymbol{\tau}}$ to calculate the torque. If there is no time dependence in the expression for the angular momentum, then the net torque is zero.

EXAMPLE 11.4

Angular Momentum and Torque on a Meteor

A meteor enters Earth's atmosphere (Figure 11.10) and is observed by someone on the ground before it burns up in the atmosphere. The vector $\vec{\mathbf{r}} = 25\ \text{km}\hat{\mathbf{i}} + 25\ \text{km}\hat{\mathbf{j}}$ gives the position of the meteor with respect to the observer. At the instant the observer sees the meteor, it has linear momentum $\vec{\mathbf{p}} = 15.0\ \text{kg}(-2.0\text{km/s}\hat{\mathbf{j}})$, and it is accelerating at a constant $2.0\ \text{m/s}^2(-\hat{\mathbf{j}})$ along its path, which for our purposes can be taken as a straight line. (a) What is the angular momentum of the meteor about the origin, which is at the location of the observer? (b) What is the torque on the meteor about the origin?

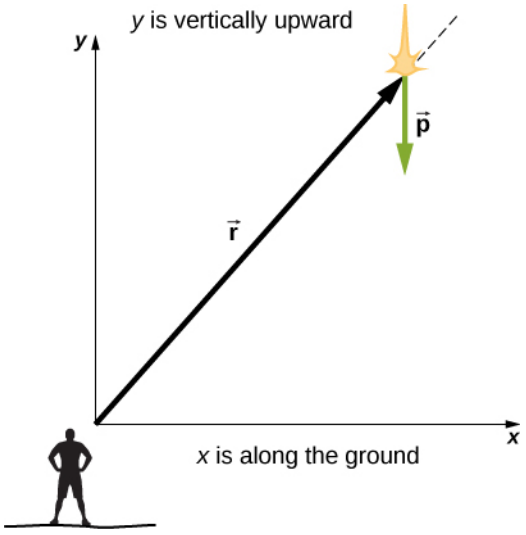


Figure 11.10 An observer on the ground sees a meteor at position $\vec{\mathbf{r}}$ with linear momentum $\vec{\mathbf{p}}$.

Strategy

We resolve the acceleration into x- and y-components and use the kinematic equations to express the velocity as a function of acceleration and time. We insert these expressions into the linear momentum and then calculate the angular momentum using the cross-product. Since the position and momentum vectors are in the xy-plane, we expect the angular momentum vector to be along the z-axis. To find the torque, we take the time derivative of the angular momentum.

Solution

The meteor is entering Earth's atmosphere at an angle of $90.0°$ below the horizontal, so the components of the acceleration in the x- and y-directions are

$$a_x = 0, \quad a_y = -2.0\ \text{m/s}^2.$$

We write the velocities using the kinematic equations.

$$v_x = 0, \quad v_y = -2.0 \times 10^3\ \text{m/s} - (2.0\ \text{m/s}^2)t.$$

a. The angular momentum is

$$\begin{aligned}\vec{\mathbf{l}} &= \vec{\mathbf{r}} \times \vec{\mathbf{p}} = (25.0\ \text{km}\hat{\mathbf{i}} + 25.0\ \text{km}\hat{\mathbf{j}}) \times 15.0\ \text{kg}(0\hat{\mathbf{i}} + v_y\hat{\mathbf{j}}) \\ &= 15.0\ \text{kg}[25.0\ \text{km}(v_y)\hat{\mathbf{k}}] \\ &= 15.0\ \text{kg}[2.50 \times 10^4\ \text{m}(-2.0 \times 10^3\ \text{m/s} - (2.0\ \text{m/s}^2)t)\hat{\mathbf{k}}].\end{aligned}$$

At $t = 0$, the angular momentum of the meteor about the origin is

$$\vec{\mathbf{l}}_0 = 15.0\ \text{kg}[2.50 \times 10^4\ \text{m}(-2.0 \times 10^3\ \text{m/s})\hat{\mathbf{k}}] = 7.50 \times 10^8\ \text{kg} \cdot \text{m}^2/\text{s}(-\hat{\mathbf{k}}).$$

This is the instant that the observer sees the meteor.

b. To find the torque, we take the time derivative of the angular momentum. Taking the time derivative of $\vec{\mathbf{l}}$ as a function of time, which is the second equation immediately above, we have

$$\frac{d\vec{\mathbf{l}}}{dt} = -15.0\ \text{kg}(2.50 \times 10^4\ \text{m})(2.0\ \text{m/s}^2)\hat{\mathbf{k}}.$$

Then, since $\frac{d\vec{\mathbf{l}}}{dt} = \sum \vec{\boldsymbol{\tau}}$, we have

$$\sum \vec{\boldsymbol{\tau}} = -7.5 \times 10^5\ \text{N} \cdot \text{m}\hat{\mathbf{k}}.$$

The units of torque are given as newton-meters, not to be confused with joules. As a check, we note that the lever arm is the x-component of the vector $\vec{\mathbf{r}}$ in Figure 11.10 since it is perpendicular to the force acting on the meteor, which is along its path. By Newton's second law, this force is

$$\vec{\mathbf{F}} = ma(-\hat{\mathbf{j}}) = 15.0\ \text{kg}(2.0\ \text{m/s}^2)(-\hat{\mathbf{j}}) = 30.0\ \text{kg} \cdot \text{m/s}^2(-\hat{\mathbf{j}}).$$

The lever arm is

$$\vec{\mathbf{r}}_\perp = 2.5 \times 10^4\ \text{m}\,\hat{\mathbf{i}}.$$

Thus, the torque is


$$\begin{aligned}\sum \vec{\boldsymbol{\tau}} = \vec{\mathbf{r}}_\perp \times \vec{\mathbf{F}} &= (2.5 \times 10^4\ \text{m}\,\hat{\mathbf{i}}) \times (-30.0\ \text{kg} \cdot \text{m/s}^2\hat{\mathbf{j}}), \\ &= 7.5 \times 10^5\ \text{N} \cdot \text{m}(-\hat{\mathbf{k}}).\end{aligned}$$

Significance

Since the meteor is accelerating downward toward Earth, its radius and velocity vector are changing. Therefore, since $\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$, the angular momentum is changing as a function of time. The torque on the meteor about the origin, however, is constant, because the lever arm $\vec{\mathbf{r}}_\perp$ and the force on the meteor are constants. This example is important in that it illustrates that the angular momentum depends on the choice of origin about which it is calculated. The methods used in this example are also important in developing angular momentum for a system of particles and for a rigid body.

CHECK YOUR UNDERSTANDING 11.2

A proton spiraling around a magnetic field executes circular motion in the plane of the paper, as shown below. The circular path has a radius of 0.4 m and the proton has velocity 4.0×10^6 m/s. What is the angular momentum of the proton about the origin?

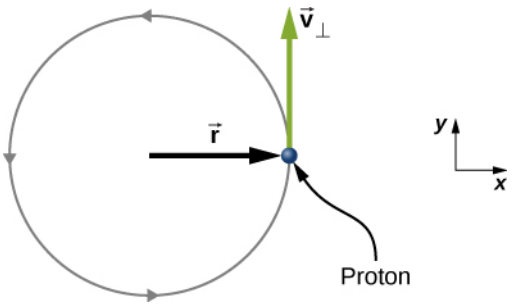

Angular Momentum of a System of Particles

The angular momentum of a system of particles is important in many scientific disciplines, one being astronomy. Consider a spiral galaxy, a rotating island of stars like our own Milky Way. The individual stars can be treated as point particles, each of which has its own angular momentum. The vector sum of the individual angular momenta give the total angular momentum of the galaxy. In this section, we develop the tools with which we can calculate the total angular momentum of a system of particles.

In the preceding section, we introduced the angular momentum of a single particle about a designated origin. The expression for this angular momentum is $\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$, where the vector $\vec{\mathbf{r}}$ is from the origin to the particle, and $\vec{\mathbf{p}}$ is the particle's linear momentum. If we have a system of N particles, each with position vector from the origin given by $\vec{\mathbf{r}}_i$ and each having momentum $\vec{\mathbf{p}}_i$, then the total angular momentum of the system of particles about the origin is the vector sum of the individual angular momenta about the origin. That is,

$$\vec{\mathbf{L}} = \vec{\mathbf{l}}_1 + \vec{\mathbf{l}}_2 + \cdots + \vec{\mathbf{l}}_N. \tag{11.7}$$

Similarly, if particle i is subject to a net torque $\vec{\tau}_i$ about the origin, then we can find the net torque about the origin due to the system of particles by differentiating Equation 11.7:

$$\frac{d\vec{\mathbf{L}}}{dt} = \sum_i \frac{d\vec{\mathbf{l}}_i}{dt} = \sum_i \vec{\boldsymbol{\tau}}_i.$$

The sum of the individual torques produces a net external torque on the system, which we designate $\sum \vec{\boldsymbol{\tau}}$. Thus,

$$\frac{d\vec{\mathbf{L}}}{dt} = \sum \vec{\boldsymbol{\tau}}. \tag{11.8}$$

Equation 11.8 states that *the rate of change of the total angular momentum of a system is equal to the net external torque acting on the system when both quantities are measured with respect to a given origin.* Equation 11.8 can be applied to any system that has net angular momentum, including rigid bodies, as discussed in the next section.

EXAMPLE 11.5

Angular Momentum of Three Particles

Referring to Figure 11.11(a), determine the total angular momentum due to the three particles about the origin. (b) What is the rate of change of the angular momentum?

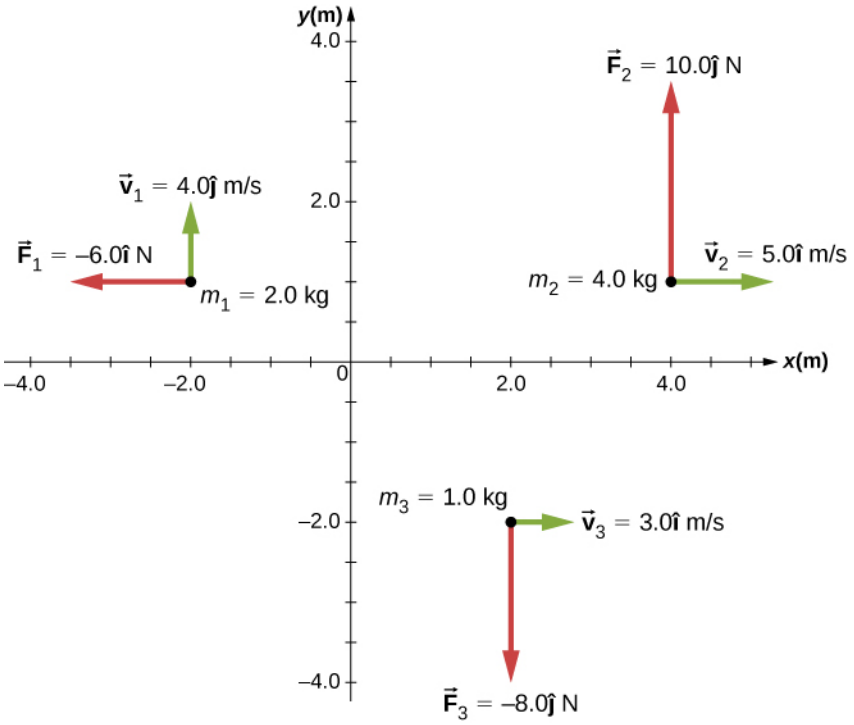


Figure 11.11 Three particles in the *xy*-plane with different position and momentum vectors.

Strategy

Write down the position and momentum vectors for the three particles. Calculate the individual angular momenta and add them as vectors to find the total angular momentum. Then do the same for the torques.

Solution

a. Particle 1: $\vec{\mathbf{r}}_1 = -2.0\,\text{m}\hat{\mathbf{i}} + 1.0\,\text{m}\hat{\mathbf{j}}$, $\vec{\mathbf{p}}_1 = 2.0\,\text{kg}(4.0\,\text{m/s}\hat{\mathbf{j}}) = 8.0\,\text{kg}\cdot\text{m/s}\hat{\mathbf{j}}$,
$\vec{\mathbf{l}}_1 = \vec{\mathbf{r}}_1 \times \vec{\mathbf{p}}_1 = -16.0\,\text{kg}\cdot\text{m}^2/\text{s}\hat{\mathbf{k}}$.

Particle 2: $\vec{\mathbf{r}}_2 = 4.0\,\text{m}\hat{\mathbf{i}} + 1.0\,\text{m}\hat{\mathbf{j}}$, $\vec{\mathbf{p}}_2 = 4.0\,\text{kg}(5.0\,\text{m/s}\hat{\mathbf{i}}) = 20.0\,\text{kg}\cdot\text{m/s}\hat{\mathbf{i}}$,
$\vec{\mathbf{l}}_2 = \vec{\mathbf{r}}_2 \times \vec{\mathbf{p}}_2 = -20.0\,\text{kg}\cdot\text{m}^2/\text{s}\hat{\mathbf{k}}$.

Particle 3: $\vec{\mathbf{r}}_3 = 2.0\,\text{m}\hat{\mathbf{i}} - 2.0\,\text{m}\hat{\mathbf{j}}$, $\vec{\mathbf{p}}_3 = 1.0\,\text{kg}(3.0\,\text{m/s}\hat{\mathbf{i}}) = 3.0\,\text{kg}\cdot\text{m/s}\hat{\mathbf{i}}$,
$\vec{\mathbf{l}}_3 = \vec{\mathbf{r}}_3 \times \vec{\mathbf{p}}_3 = 6.0\,\text{kg}\cdot\text{m}^2/\text{s}\hat{\mathbf{k}}$.

We add the individual angular momenta to find the total about the origin:

$$\vec{\mathbf{l}}_T = \vec{\mathbf{l}}_1 + \vec{\mathbf{l}}_2 + \vec{\mathbf{l}}_3 = -30\,\text{kg}\cdot\text{m}^2/\text{s}\hat{\mathbf{k}}.$$

b. The individual forces and lever arms are

$$\vec{\mathbf{r}}_{1\perp} = 1.0\,\text{m}\hat{\mathbf{j}},\quad \vec{\mathbf{F}}_1 = -6.0\,\text{N}\hat{\mathbf{i}},\quad \vec{\tau}_1 = 6.0\mathbf{N}\cdot\mathbf{m}\hat{\mathbf{k}}$$
$$\vec{\mathbf{r}}_{2\perp} = 4.0\,\text{m}\hat{\mathbf{i}},\quad \vec{\mathbf{F}}_2 = 10.0\,\text{N}\hat{\mathbf{j}},\quad \vec{\tau}_2 = 40.0\,\text{N}\cdot\text{m}\hat{\mathbf{k}}$$
$$\vec{\mathbf{r}}_{3\perp} = 2.0\,\text{m}\hat{\mathbf{i}},\quad \vec{\mathbf{F}}_3 = -8.0\,\text{N}\hat{\mathbf{j}},\quad \vec{\tau}_3 = -16.0\,\text{N}\cdot\text{m}\hat{\mathbf{k}}.$$

Therefore:

$$\sum_i \vec{\boldsymbol{\tau}}_i = \vec{\boldsymbol{\tau}}_1 + \vec{\boldsymbol{\tau}}_2 + \vec{\boldsymbol{\tau}}_3 = 30\,\text{N}\cdot\text{m}\hat{\mathbf{k}}.$$

Significance

This example illustrates the superposition principle for angular momentum and torque of a system of particles. Care must be taken when evaluating the radius vectors $\vec{\mathbf{r}}_i$ of the particles to calculate the angular momenta, and the lever arms, $\vec{\mathbf{r}}_{i\perp}$ to calculate the torques, as they are completely different quantities.

Angular Momentum of a Rigid Body

We have investigated the angular momentum of a single particle, which we generalized to a system of particles. Now we can use the principles discussed in the previous section to develop the concept of the angular momentum of a rigid body. Celestial objects such as planets have angular momentum due to their spin and orbits around stars. In engineering, anything that rotates about an axis carries angular momentum, such as flywheels, propellers, and rotating parts in engines. Knowledge of the angular momenta of these objects is crucial to the design of the system in which they are a part.

To develop the angular momentum of a rigid body, we model a rigid body as being made up of small mass segments, Δm_i. In Figure 11.12, a rigid body is constrained to rotate about the z-axis with angular velocity ω. All mass segments that make up the rigid body undergo circular motion about the z-axis with the same angular velocity. Part (a) of the figure shows mass segment Δm_i with position vector $\vec{\mathbf{r}}_i$ from the origin and radius R_i to the z-axis. The magnitude of its tangential velocity is $v_i = R_i\omega$. Because the vectors $\vec{\mathbf{v}}_i$ and $\vec{\mathbf{r}}_i$ are perpendicular to each other, the magnitude of the angular momentum of this mass segment is

$$l_i = r_i(\Delta m v_i)\sin 90°.$$

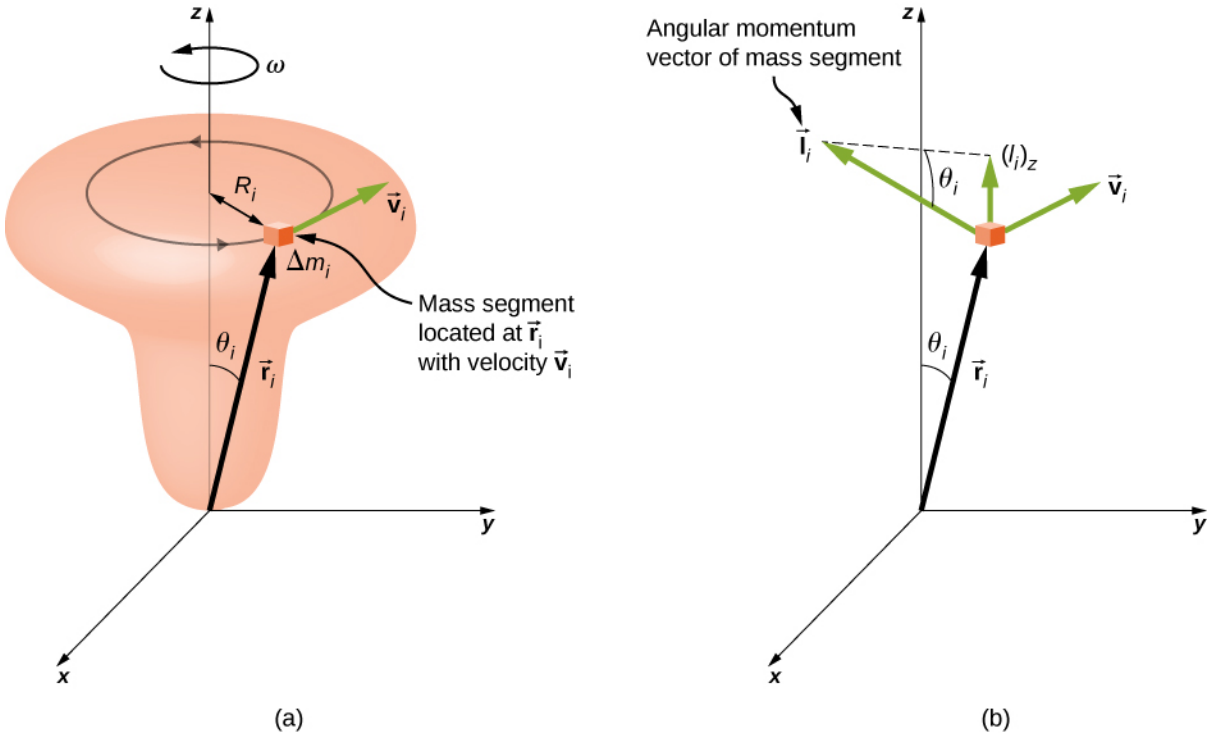


Figure 11.12 (a) A rigid body is constrained to rotate around the z-axis. The rigid body is symmetrical about the z-axis. A mass segment Δm_i is located at position $\vec{\mathbf{r}}_i$, which makes angle θ_i with respect to the z-axis. The circular motion of an infinitesimal mass segment is shown. (b) $\vec{\mathbf{l}}_i$ is the angular momentum of the mass segment and has a component along the z-axis $(\vec{\mathbf{l}}_i)_z$.

Using the right-hand rule, the angular momentum vector points in the direction shown in part (b). The sum of the angular momenta of all the mass segments contains components both along and perpendicular to the axis of rotation. Every mass segment has a perpendicular component of the angular momentum that will be cancelled by the perpendicular component of an identical mass segment on the opposite side of the rigid body, because it is cylindrically symmetric. Thus, the component along the axis of rotation is the only component that gives a nonzero value when summed over all the mass segments. From part (b), the component of $\vec{\mathbf{l}}_i$ along the axis of rotation is

$$\begin{aligned}(l_i)_z &= l_i\sin\theta_i = (r_i\Delta m_i v_i)\sin\theta_i,\\ &= (r_i\sin\theta_i)(\Delta m_i v_i) = R_i\Delta m_i v_i.\end{aligned}$$

The net angular momentum of the rigid body along the axis of rotation is

$$L = \sum_i (\vec{\mathbf{l}}_i)_z = \sum_i R_i \Delta m_i v_i = \sum_i R_i \Delta m_i (R_i \omega) = \omega \sum_i \Delta m_i (R_i)^2.$$

The summation $\sum_i \Delta m_i (R_i)^2$ is simply the moment of inertia I of the rigid body about the axis of rotation. For a thin hoop rotating about an axis perpendicular to the plane of the hoop, all of the R_i's are equal to R so the summation reduces to $R^2 \sum_i \Delta m_i = mR^2$, which is the moment of inertia for a thin hoop found in Figure 10.20. Thus, the magnitude of the angular momentum along the axis of rotation of a rigid body rotating with angular velocity ω about the axis is

$$L = I\omega. \tag{11.9}$$

This equation is analogous to the magnitude of the linear momentum $p = mv$. The direction of the angular momentum vector is directed along the axis of rotation given by the right-hand rule.

EXAMPLE 11.6

Angular Momentum of a Robot Arm

A robot arm on a Mars rover like *Curiosity* shown in Figure 11.8 is 1.0 m long and has forceps at the free end to pick up rocks. The mass of the arm is 2.0 kg and the mass of the forceps is 1.0 kg. See Figure 11.13. The robot arm and forceps move from rest to $\omega = 0.1\pi$ rad/s in 0.1 s. It rotates down and picks up a Mars rock that has mass 1.5 kg. The axis of rotation is the point where the robot arm connects to the rover. (a) What is the angular momentum of the robot arm by itself about the axis of rotation after 0.1 s when the arm has stopped accelerating? (b) What is the angular momentum of the robot arm when it has the Mars rock in its forceps and is rotating upwards? (c) When the arm does not have a rock in the forceps, what is the torque about the point where the arm connects to the rover when it is accelerating from rest to its final angular velocity?

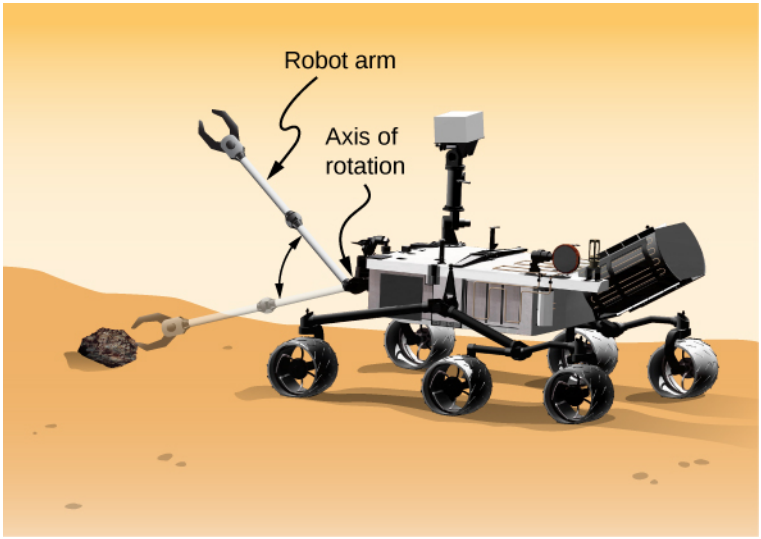


Figure 11.13 A robot arm on a Mars rover swings down and picks up a Mars rock. (credit: modification of work by NASA/JPL-Caltech)

Strategy

We use Equation 11.9 to find angular momentum in the various configurations. When the arm is rotating downward, the right-hand rule gives the angular momentum vector directed out of the page, which we will call the positive z-direction. When the arm is rotating upward, the right-hand rule gives the direction of the angular momentum vector into the page or in the negative z-direction. The moment of inertia is the sum of the individual moments of inertia. The arm can be approximated with a solid rod, and the forceps and Mars rock can be approximated as point masses located at a distance of 1 m from the origin. For part (c), we use Newton's

second law of motion for rotation to find the torque on the robot arm.

Solution

a. Writing down the individual moments of inertia, we have
Robot arm: $I_{\text{R}} = \frac{1}{3}m_{\text{R}}r^2 = \frac{1}{3}(2.00\,\text{kg})(1.00\,\text{m})^2 = \frac{2}{3}\,\text{kg}\cdot\text{m}^2$.
Forceps: $I_{\text{F}} = m_{\text{F}}r^2 = (1.0\,\text{kg})(1.0\,\text{m})^2 = 1.0\,\text{kg}\cdot\text{m}^2$.
Mars rock: $I_{\text{MR}} = m_{\text{MR}}r^2 = (1.5\,\text{kg})(1.0\,\text{m})^2 = 1.5\,\text{kg}\cdot\text{m}^2$.
Therefore, without the Mars rock, the total moment of inertia is
$$I_{\text{Total}} = I_{\text{R}} + I_{\text{F}} = 1.67\,\text{kg}\cdot\text{m}^2$$
and the magnitude of the angular momentum is
$$L = I\omega = 1.67\,\text{kg}\cdot\text{m}^2(0.1\pi\,\text{rad/s}) = 0.17\pi\,\text{kg}\cdot\text{m}^2/\text{s}.$$
The angular momentum vector is directed out of the page in the $\hat{\mathbf{k}}$ direction since the robot arm is rotating counterclockwise.

b. We must include the Mars rock in the calculation of the moment of inertia, so we have
$$I_{\text{Total}} = I_{\text{R}} + I_{\text{F}} + I_{\text{MR}} = 3.17\,\text{kg}\cdot\text{m}^2$$
and
$$L = I\omega = 3.17\,\text{kg}\cdot\text{m}^2(0.1\pi\,\text{rad/s}) = 0.32\pi\,\text{kg}\cdot\text{m}^2/\text{s}.$$
Now the angular momentum vector is directed into the page in the $-\hat{\mathbf{k}}$ direction, by the right-hand rule, since the robot arm is now rotating clockwise.

c. We find the torque when the arm does not have the rock by taking the derivative of the angular momentum using Equation 11.8 $\frac{d\vec{\mathbf{L}}}{dt} = \sum\vec{\boldsymbol{\tau}}$. But since $L = I\omega$, and understanding that the direction of the angular momentum and torque vectors are along the axis of rotation, we can suppress the vector notation and find
$$\frac{dL}{dt} = \frac{d(I\omega)}{dt} = I\frac{d\omega}{dt} = I\alpha = \sum\tau,$$
which is Newton's second law for rotation. Since $\alpha = \frac{0.1\pi\,\text{rad/s}}{0.1\,\text{s}} = \pi\,\text{rad/s}^2$, we can calculate the net torque:
$$\sum\tau = I\alpha = 1.67\,\text{kg}\cdot\text{m}^2(\pi\,\text{rad/s}^2) = 1.67\pi\,\text{N}\cdot\text{m}.$$

Significance

The angular momentum in (a) is less than that of (b) due to the fact that the moment of inertia in (b) is greater than (a), while the angular velocity is the same.

CHECK YOUR UNDERSTANDING 11.3

Which has greater angular momentum: a solid sphere of mass m rotating at a constant angular frequency ω_0 about the z-axis, or a solid cylinder of same mass and rotation rate about the z-axis?

INTERACTIVE

Visit the University of Colorado's Interactive Simulation of Angular Momentum (https://openstax.org/l/21angmomintsim) to learn more about angular momentum.

11.3 Conservation of Angular Momentum

Learning Objectives

By the end of this section, you will be able to:

- Apply conservation of angular momentum to determine the angular velocity of a rotating system in which the moment of inertia is changing
- Explain how the rotational kinetic energy changes when a system undergoes changes in both moment of inertia and angular velocity

So far, we have looked at the angular momentum of systems consisting of point particles and rigid bodies. We have also analyzed the torques involved, using the expression that relates the external net torque to the change in angular momentum, Equation 11.8. Examples of systems that obey this equation include a freely spinning bicycle tire that slows over time due to torque arising from friction, or the slowing of Earth's rotation over millions of years due to frictional forces exerted on tidal deformations.

However, suppose there is no net external torque on the system, $\sum \vec{\boldsymbol{\tau}} = 0$. In this case, Equation 11.8 becomes the **law of conservation of angular momentum**.

Law of Conservation of Angular Momentum

The angular momentum of a system of particles around a point in a fixed inertial reference frame is conserved if there is no net external torque around that point:

$$\frac{d\vec{\mathbf{L}}}{dt} = 0 \tag{11.10}$$

or

$$\vec{\mathbf{L}} = \vec{\mathbf{l}}_1 + \vec{\mathbf{l}}_2 + \cdots + \vec{\mathbf{l}}_N = \text{constant}. \tag{11.11}$$

Note that the *total* angular momentum $\vec{\mathbf{L}}$ is conserved. Any of the individual angular momenta can change as long as their sum remains constant. This law is analogous to linear momentum being conserved when the external force on a system is zero.

As an example of conservation of angular momentum, Figure 11.14 shows an ice skater executing a spin. The net torque on her is very close to zero because there is relatively little friction between her skates and the ice. Also, the friction is exerted very close to the pivot point. Both $|\vec{\mathbf{F}}|$ and $|\vec{\mathbf{r}}|$ are small, so $|\vec{\boldsymbol{\tau}}|$ is negligible. Consequently, she can spin for quite some time. She can also increase her rate of spin by pulling her arms and legs in. Why does pulling her arms and legs in increase her rate of spin? The answer is that her angular momentum is constant, so that

$$L' = L$$

or

$$I'\omega' = I\omega,$$

where the primed quantities refer to conditions after she has pulled in her arms and reduced her moment of inertia. Because I' is smaller, the angular velocity ω' must increase to keep the angular momentum constant.

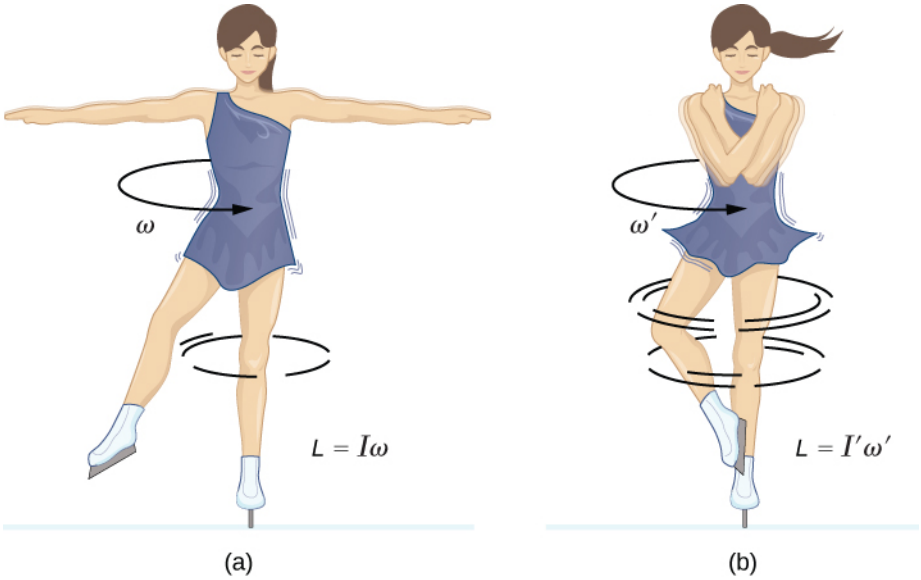


Figure 11.14 (a) An ice skater is spinning on the tip of her skate with her arms extended. Her angular momentum is conserved because the net torque on her is negligibly small. (b) Her rate of spin increases greatly when she pulls in her arms, decreasing her moment of inertia. The work she does to pull in her arms results in an increase in rotational kinetic energy.

It is interesting to see how the rotational kinetic energy of the skater changes when she pulls her arms in. Her initial rotational energy is

$$K_{\text{Rot}} = \frac{1}{2} I\omega^2,$$

whereas her final rotational energy is

$$K'_{\text{Rot}} = \frac{1}{2} I'(\omega')^2.$$

Since $I'\omega' = I\omega$, we can substitute for ω' and find

$$K'_{\text{Rot}} = \frac{1}{2} I'(\omega')^2 = \frac{1}{2} I' \left(\frac{I}{I'} \omega \right)^2 = \frac{1}{2} I\omega^2 \left(\frac{I}{I'} \right) = K_{\text{Rot}} \left(\frac{I}{I'} \right) \quad .$$

Because her moment of inertia has decreased, $I' < I$, her final rotational kinetic energy has increased. The source of this additional rotational kinetic energy is the work required to pull her arms inward. Note that the skater's arms do not move in a perfect circle—they spiral inward. This work causes an increase in the rotational kinetic energy, while her angular momentum remains constant. Since she is in a frictionless environment, no energy escapes the system. Thus, if she were to extend her arms to their original positions, she would rotate at her original angular velocity and her kinetic energy would return to its original value.

The solar system is another example of how conservation of angular momentum works in our universe. Our solar system was born from a huge cloud of gas and dust that initially had rotational energy. Gravitational forces caused the cloud to contract, and the rotation rate increased as a result of conservation of angular momentum (Figure 11.15).

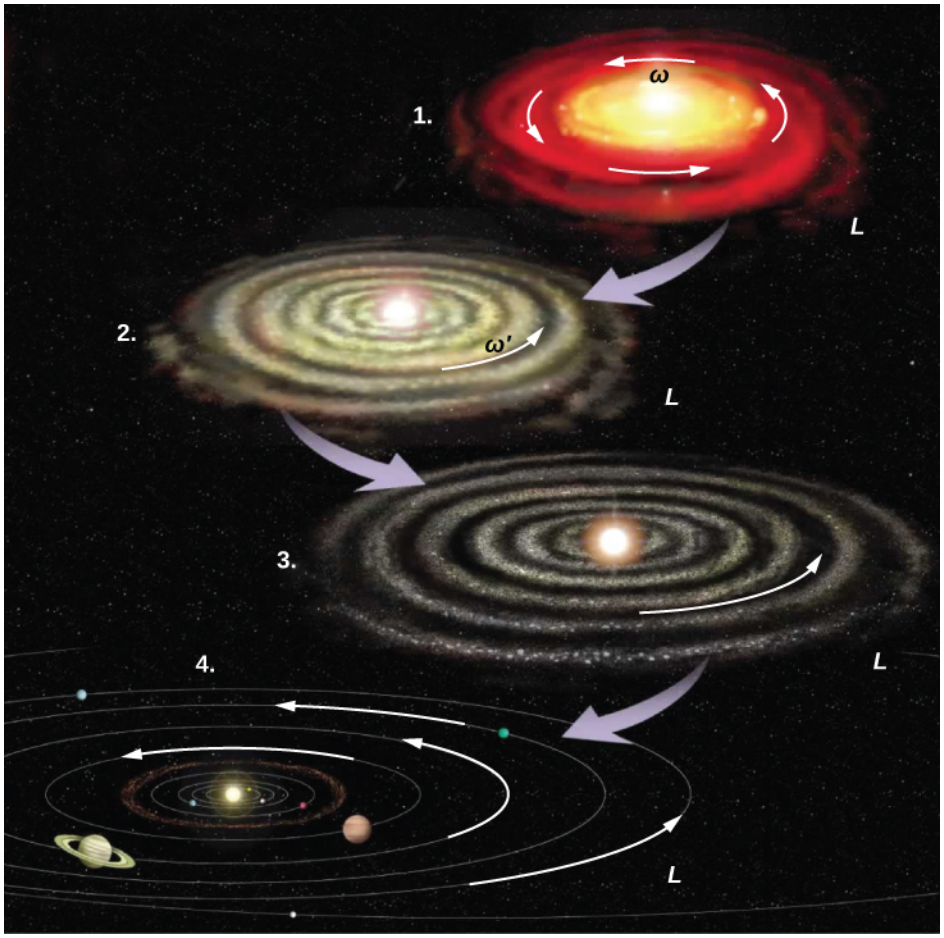


Figure 11.15 The solar system coalesced from a cloud of gas and dust that was originally rotating. The orbital motions and spins of the planets are in the same direction as the original spin and conserve the angular momentum of the parent cloud. (credit: modification of work by NASA)

We continue our discussion with an example that has applications to engineering.

EXAMPLE 11.7

Coupled Flywheels

A flywheel rotates without friction at an angular velocity $\omega_0 = 600$ rev/min on a frictionless, vertical shaft of negligible rotational inertia. A second flywheel, which is at rest and has a moment of inertia three times that of the rotating flywheel, is dropped onto it (Figure 11.16). Because friction exists between the surfaces, the flywheels very quickly reach the same rotational velocity, after which they spin together. (a) Use the law of conservation of angular momentum to determine the angular velocity ω of the combination. (b) What fraction of the initial kinetic energy is lost in the coupling of the flywheels?

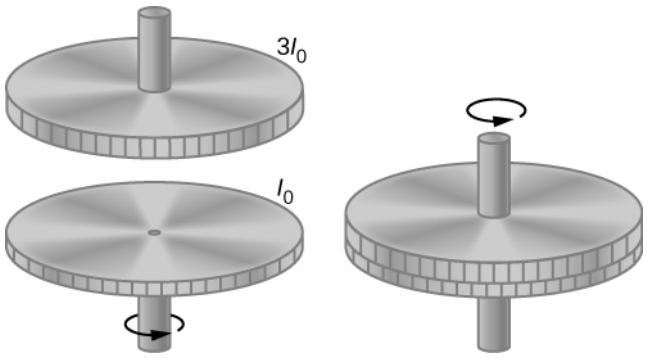


Figure 11.16 Two flywheels are coupled and rotate together.

Strategy

Part (a) is straightforward to solve for the angular velocity of the coupled system. We use the result of (a) to compare the initial and final kinetic energies of the system in part (b).

Solution

a. No external torques act on the system. The force due to friction produces an internal torque, which does not affect the angular momentum of the system. Therefore conservation of angular momentum gives

$$I_0\omega_0 = (I_0 + 3I_0)\omega,$$
$$\omega = \tfrac{1}{4}\omega_0 = 150\,\text{rev/min} = 15.7\,\text{rad/s}.$$

b. Before contact, only one flywheel is rotating. The rotational kinetic energy of this flywheel is the initial rotational kinetic energy of the system, $\frac{1}{2}I_0\omega_0^2$. The final kinetic energy is $\frac{1}{2}(4I_0)\omega^2 = \frac{1}{2}(4I_0)\left(\frac{\omega_0}{4}\right)^2 = \frac{1}{8}I_0\omega_0^2$.

Therefore, the ratio of the final kinetic energy to the initial kinetic energy is

$$\frac{\frac{1}{8}I_0\omega_0^2}{\frac{1}{2}I_0\omega_0^2} = \frac{1}{4}.$$

Thus, 3/4 of the initial kinetic energy is lost to the coupling of the two flywheels.

Significance

Since the rotational inertia of the system increased, the angular velocity decreased, as expected from the law of conservation of angular momentum. In this example, we see that the final kinetic energy of the system has decreased, as energy is lost to the coupling of the flywheels. Compare this to the example of the skater in Figure 11.14 doing work to bring her arms inward and adding rotational kinetic energy.

CHECK YOUR UNDERSTANDING 11.4

A merry-go-round at a playground is rotating at 4.0 rev/min. Three children jump on and increase the moment of inertia of the merry-go-round/children rotating system by 25%. What is the new rotation rate?

EXAMPLE 11.8

Dismount from a High Bar

An 80.0-kg gymnast dismounts from a high bar. He starts the dismount at full extension, then tucks to complete a number of revolutions before landing. His moment of inertia when fully extended can be approximated as a rod of length 1.8 m and when in the tuck a rod of half that length. If his rotation rate at full extension is 1.0 rev/s and he enters the tuck when his center of mass is at 3.0 m height moving horizontally to

the floor, how many revolutions can he execute if he comes out of the tuck at 1.8 m height? See Figure 11.17.

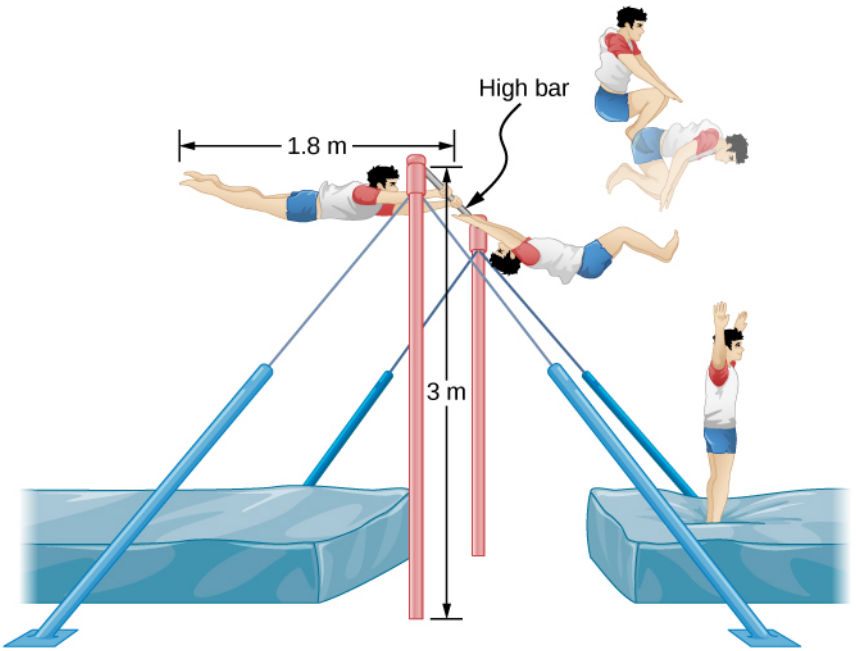


Figure 11.17 A gymnast dismounts from a high bar and executes a number of revolutions in the tucked position before landing upright.

Strategy

Using conservation of angular momentum, we can find his rotation rate when in the tuck. Using the equations of kinematics, we can find the time interval from a height of 3.0 m to 1.8 m. Since he is moving horizontally with respect to the ground, the equations of free fall simplify. This will allow the number of revolutions that can be executed to be calculated. Since we are using a ratio, we can keep the units as rev/s and don't need to convert to radians/s.

Solution

The moment of inertia at full extension is $I_0 = \frac{1}{12}mL^2 = \frac{1}{12}80.0\,\text{kg}(1.8\,\text{m})^2 = 21.6\,\text{kg}\cdot\text{m}^2$.

The moment of inertia in the tuck is $I_\text{f} = \frac{1}{12}mL_\text{f}^2 = \frac{1}{12}80.0\,\text{kg}(0.9\,\text{m})^2 = 5.4\,\text{kg}\cdot\text{m}^2$.

Conservation of angular momentum: $I_\text{f}\omega_\text{f} = I_0\omega_0 \Rightarrow \omega_\text{f} = \frac{I_0\omega_0}{I_\text{f}} = \frac{21.6\,\text{kg}\cdot\text{m}^2(1.0\,\text{rev/s})}{5.4\,\text{kg}\cdot\text{m}^2} = 4.0\,\text{rev/s}.$

Time interval in the tuck: $t = \sqrt{\frac{2h}{g}} = \sqrt{\frac{2(3.0-1.8)\text{m}}{9.8\,\text{m/s}}} = 0.5\,\text{s}.$

In 0.5 s, he will be able to execute two revolutions at 4.0 rev/s.

Significance

Note that the number of revolutions he can complete will depend on how long he is in the air. In the problem, he is exiting the high bar horizontally to the ground. He could also exit at an angle with respect to the ground, giving him more or less time in the air depending on the angle, positive or negative, with respect to the ground. Gymnasts must take this into account when they are executing their dismounts.

EXAMPLE 11.9

Conservation of Angular Momentum of a Collision

A bullet of mass $m = 2.0$ g is moving horizontally with a speed of 500.0 m/s. The bullet strikes and becomes embedded in the edge of a solid disk of mass $M = 3.2$ kg and radius $R = 0.5$ m. The cylinder is free to rotate

around its axis and is initially at rest (Figure 11.18). What is the angular velocity of the disk immediately after the bullet is embedded?

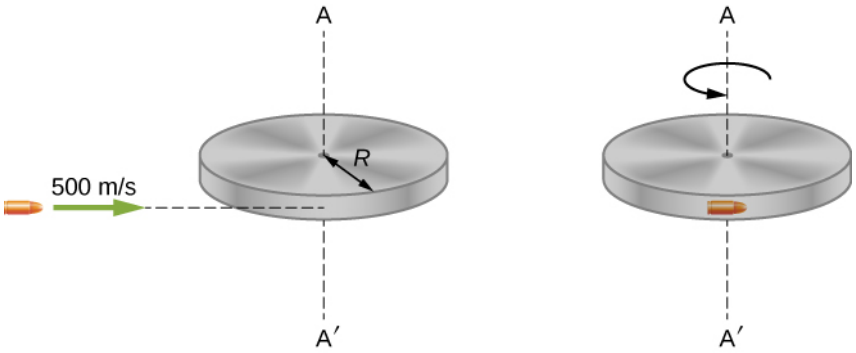


Figure 11.18 A bullet is fired horizontally and becomes embedded in the edge of a disk that is free to rotate about its vertical axis.

Strategy

For the system of the bullet and the cylinder, no external torque acts along the vertical axis through the center of the disk. Thus, the angular momentum along this axis is conserved. The initial angular momentum of the bullet is mvR, which is taken about the rotational axis of the disk the moment before the collision. The initial angular momentum of the cylinder is zero. Thus, the net angular momentum of the system is mvR. Since angular momentum is conserved, the initial angular momentum of the system is equal to the angular momentum of the bullet embedded in the disk immediately after impact.

Solution

The initial angular momentum of the system is

$$L_i = mvR.$$

The moment of inertia of the system with the bullet embedded in the disk is

$$I = mR^2 + \frac{1}{2}MR^2 = \left(m + \frac{M}{2}\right)R^2.$$

The final angular momentum of the system is

$$L_f = I\omega_f.$$

Thus, by conservation of angular momentum, $L_i = L_f$ and

$$mvR = \left(m + \frac{M}{2}\right)R^2\omega_f.$$

Solving for ω_f,

$$\omega_f = \frac{mvR}{(m + M/2)R^2} = \frac{(2.0 \times 10^{-3}\ \text{kg})(500.0\ \text{m/s})}{(2.0 \times 10^{-3}\ \text{kg} + 1.6\ \text{kg})(0.50\ \text{m})} = 1.2\ \text{rad/s}.$$

Significance

The system is composed of both a point particle and a rigid body. Care must be taken when formulating the angular momentum before and after the collision. Just before impact the angular momentum of the bullet is taken about the rotational axis of the disk.

11.4 Precession of a Gyroscope

Learning Objectives

By the end of this section, you will be able to:

- Describe the physical processes underlying the phenomenon of precession
- Calculate the precessional angular velocity of a gyroscope

Figure 11.19 shows a gyroscope, defined as a spinning disk in which the axis of rotation is free to assume any orientation. When spinning, the orientation of the spin axis is unaffected by the orientation of the body that encloses it. The body or vehicle enclosing the gyroscope can be moved from place to place and the orientation of the spin axis will remain the same. This makes gyroscopes very useful in navigation, especially where magnetic compasses can't be used, such as in piloted and unpiloted spacecrafts, intercontinental ballistic missiles, unmanned aerial vehicles, and satellites like the Hubble Space Telescope.




Figure 11.19 A gyroscope consists of a spinning disk about an axis that is free to assume any orientation.

We illustrate the **precession** of a gyroscope with an example of a top in the next two figures. If the top is placed on a flat surface near the surface of Earth at an angle to the vertical and is not spinning, it will fall over, due to the force of gravity producing a torque acting on its center of mass. This is shown in Figure 11.20(a). However, if the top is spinning on its axis, rather than topple over due to this torque, it precesses about the vertical, shown in part (b) of the figure. This is due to the torque on the center of mass, which provides the change in angular momentum.

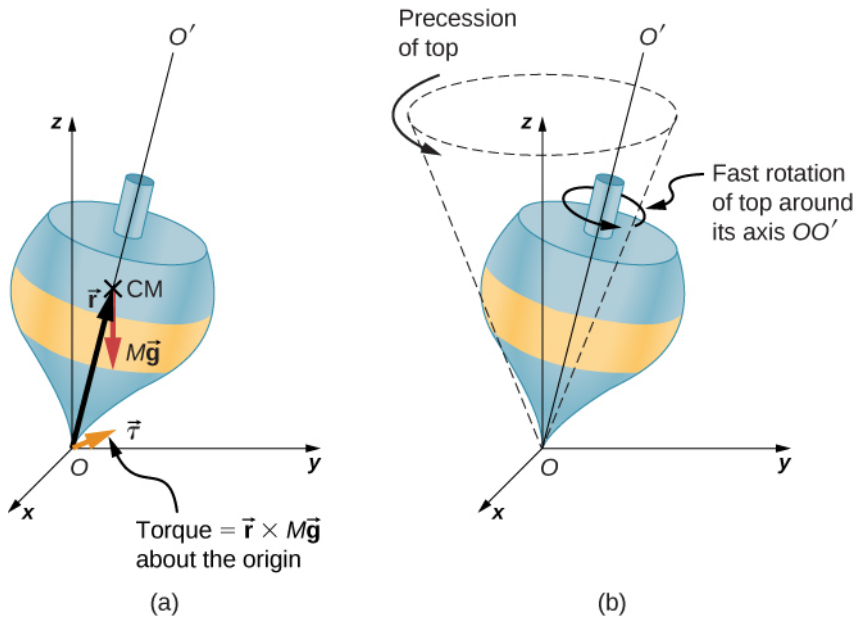


Figure 11.20 (a) If the top is not spinning, there is a torque $\vec{\mathbf{r}} \times M\vec{\mathbf{g}}$ about the origin, and the top falls over. (b) If the top is spinning about its axis OO', it doesn't fall over but precesses about the z-axis.

Figure 11.21 shows the forces acting on a spinning top. The torque produced is perpendicular to the angular momentum vector. This changes the direction of the angular momentum vector $\vec{\mathbf{L}}$ according to $d\vec{\mathbf{L}} = \vec{\boldsymbol{\tau}}dt$, but

not its magnitude. The top *precesses* around a vertical axis, since the torque is always horizontal and perpendicular to $\vec{\mathbf{L}}$. If the top is *not* spinning, it acquires angular momentum in the direction of the torque, and it rotates around a horizontal axis, falling over just as we would expect.

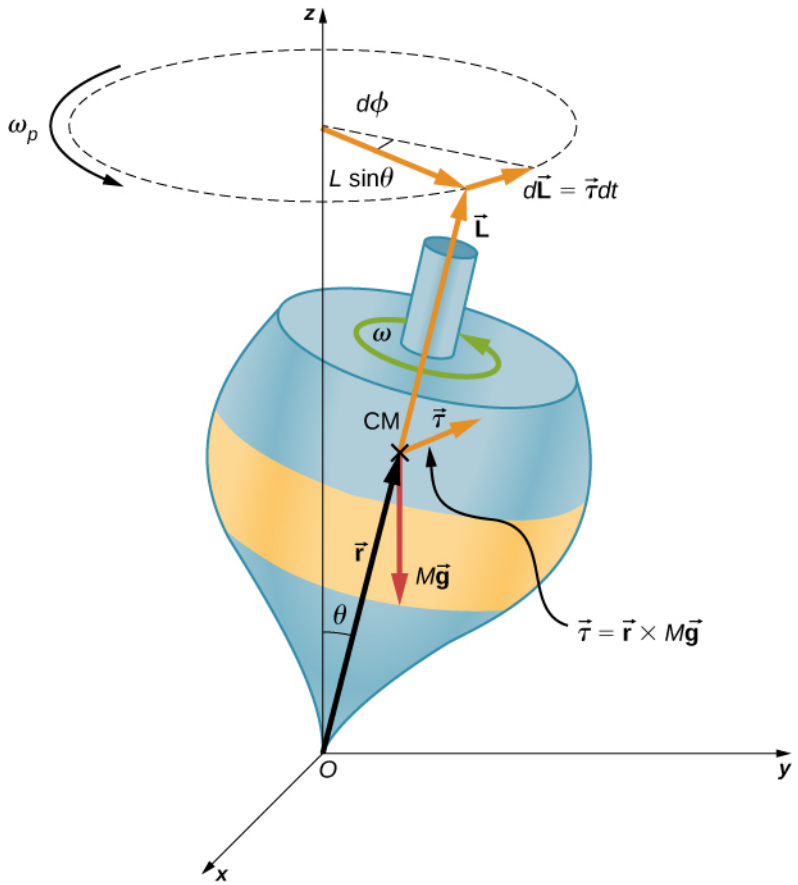


Figure 11.21 The force of gravity acting on the center of mass produces a torque $\vec{\tau}$ in the direction perpendicular to $\vec{\mathbf{L}}$. The magnitude of $\vec{\mathbf{L}}$ doesn't change but its direction does, and the top precesses about the *z*-axis.

We can experience this phenomenon first hand by holding a spinning bicycle wheel and trying to rotate it about an axis perpendicular to the spin axis. As shown in Figure 11.22, the person applies forces perpendicular to the spin axis in an attempt to rotate the wheel, but instead, the wheel axis starts to change direction to her left due to the applied torque.

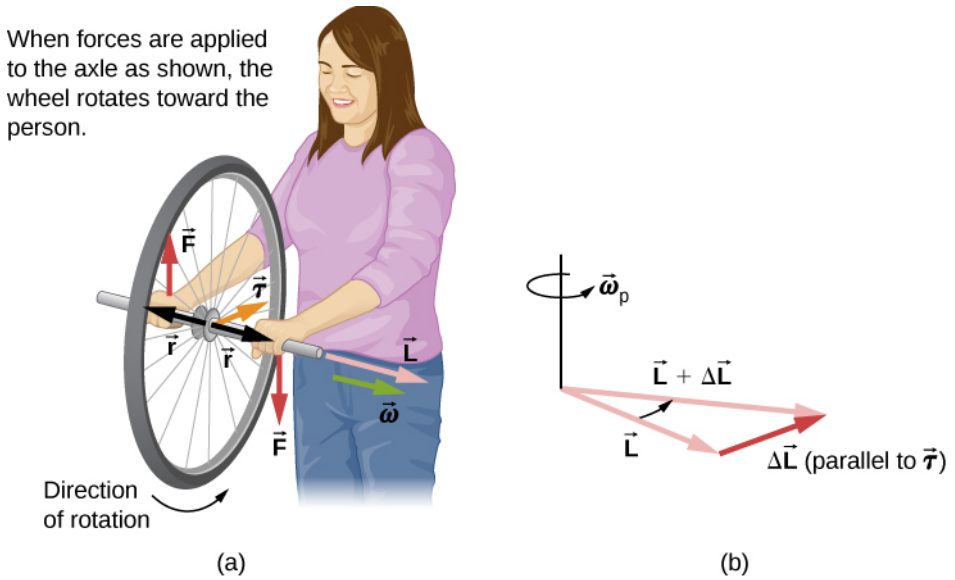


Figure 11.22 (a) A person holding the spinning bike wheel lifts it with her right hand and pushes down with her left hand in an attempt to rotate the wheel. This action creates a torque directly toward her. This torque causes a change in angular momentum $\Delta\vec{\mathbf{L}}$ in exactly the same direction. (b) A vector diagram depicting how $\Delta\vec{\mathbf{L}}$ and $\vec{\mathbf{L}}$ add, producing a new angular momentum pointing more toward the person. The wheel moves toward the person, perpendicular to the forces she exerts on it.

We all know how easy it is for a bicycle to tip over when sitting on it at rest. But when riding the bicycle at a good pace, tipping it over involves changing the angular momentum vector of the spinning wheels.

INTERACTIVE

View the video on gyroscope precession (https://openstax.org/l/21gyrovideo) for a complete demonstration of precession of the bicycle wheel.

Also, when a spinning disk is put in a box such as a Blu-Ray player, try to move it. It is easy to translate the box in a given direction but difficult to rotate it about an axis perpendicular to the axis of the spinning disk, since we are putting a torque on the box that will cause the angular momentum vector of the spinning disk to precess.

We can calculate the precession rate of the top in Figure 11.21. From Figure 11.21, we see that the magnitude of the torque is

$$\tau = rMg \sin\theta.$$

Thus,

$$dL = rMg \sin\theta \, dt.$$

The angle the top precesses through in time dt is

$$d\phi = \frac{dL}{L\sin\theta} = \frac{rMg\sin\theta}{L\sin\theta}dt = \frac{rMg}{L}dt.$$

The precession angular velocity is $\omega_P = \frac{d\phi}{dt}$ and from this equation we see that

$$\omega_P = \frac{rMg}{L}. \text{ or, since } L = I\omega,$$

$$\omega_P = \frac{rMg}{I\omega}. \tag{11.12}$$

In this derivation, we assumed that $\omega_P \ll \omega$, that is, that the precession angular velocity is much less than the

angular velocity of the gyroscope disk. The precession angular velocity adds a small component to the angular momentum along the z-axis. This is seen in a slight bob up and down as the gyroscope precesses, referred to as nutation.

Earth itself acts like a gigantic gyroscope. Its angular momentum is along its axis and currently points at Polaris, the North Star. But Earth is slowly precessing (once in about 26,000 years) due to the torque of the Sun and the Moon on its nonspherical shape.

EXAMPLE 11.10

Period of Precession

A gyroscope spins with its tip on the ground and is spinning with negligible frictional resistance. The disk of the gyroscope has mass 0.3 kg and is spinning at 20 rev/s. Its center of mass is 5.0 cm from the pivot and the radius of the disk is 5.0 cm. What is the precessional period of the gyroscope?

Strategy

We use Equation 11.12 to find the precessional angular velocity of the gyroscope. This allows us to find the period of precession.

Solution

The moment of inertia of the disk is

$$I = \frac{1}{2}mr^2 = \frac{1}{2}(0.30\,\text{kg})(0.05\,\text{m})^2 = 3.75 \times 10^{-4}\,\text{kg}\cdot\text{m}^2.$$

The angular velocity of the disk is

$$20.0\,\text{rev/s} = 20.0(2\pi)\,\text{rad/s} = 125.66\,\text{rad/s}.$$

We can now substitute in Equation 11.12. The precessional angular velocity is

$$\omega_P = \frac{rMg}{I\omega} = \frac{(0.05\,\text{m})(0.3\,\text{kg})(9.8\,\text{m/s}^2)}{(3.75 \times 10^{-4}\,\text{kg}\cdot\text{m}^2)(125.66\,\text{rad/s})} = 3.12\,\text{rad/s}.$$

The precessional period of the gyroscope is

$$T_P = \frac{2\pi}{3.12\,\text{rad/s}} = 2.0\,\text{s}.$$

Significance

The precessional angular frequency of the gyroscope, 3.12 rad/s, or about 0.5 rev/s, is much less than the angular velocity 20 rev/s of the gyroscope disk. Therefore, we don't expect a large component of the angular momentum to arise due to precession, and Equation 11.12 is a good approximation of the precessional angular velocity.

CHECK YOUR UNDERSTANDING 11.5

A top has a precession frequency of 5.0 rad/s on Earth. What is its precession frequency on the Moon?

CHAPTER REVIEW

Key Terms

angular momentum rotational analog of linear momentum, found by taking the product of moment of inertia and angular velocity

law of conservation of angular momentum angular momentum is conserved, that is, the initial angular momentum is equal to the final angular momentum when no external torque is applied to the system

precession circular motion of the pole of the axis of a spinning object around another axis due to a torque

rolling motion combination of rotational and translational motion with or without slipping

Key Equations

Velocity of center of mass of rolling object	$v_{\text{CM}} = R\omega$
Acceleration of center of mass of rolling object	$a_{\text{CM}} = R\alpha$
Displacement of center of mass of rolling object	$d_{\text{CM}} = R\theta$
Acceleration of an object rolling without slipping	$a_{\text{CM}} = \frac{mg\sin\theta}{m+(I_{\text{CM}}/r^2)}$
Angular momentum	$\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$
Derivative of angular momentum equals torque	$\frac{d\vec{\mathbf{l}}}{dt} = \sum \vec{\boldsymbol{\tau}}$
Angular momentum of a system of particles	$\vec{\mathbf{L}} = \vec{\mathbf{l}}_1 + \vec{\mathbf{l}}_2 + \cdots + \vec{\mathbf{l}}_N$
For a system of particles, derivative of angular momentum equals torque	$\frac{d\vec{\mathbf{L}}}{dt} = \sum \vec{\boldsymbol{\tau}}$
Angular momentum of a rotating rigid body	$L = I\omega$
Conservation of angular momentum	$\frac{d\vec{\mathbf{L}}}{dt} = 0$
Conservation of angular momentum	$\vec{\mathbf{L}} = \vec{\mathbf{l}}_1 + \vec{\mathbf{l}}_2 + \cdots + \vec{\mathbf{l}}_N = \text{constant}$
Precessional angular velocity	$\omega_P = \frac{rMg}{I\omega}$

Summary

11.1 Rolling Motion

- In rolling motion without slipping, a static friction force is present between the rolling object and the surface. The relations $v_{\text{CM}} = R\omega, a_{\text{CM}} = R\alpha,$ and $d_{\text{CM}} = R\theta$ all apply, such that the linear velocity, acceleration, and distance of the center of mass are the angular variables multiplied by the radius of the object.
- In rolling motion with slipping, a kinetic friction force arises between the rolling object and the surface. In this case, $v_{\text{CM}} \neq R\omega, a_{\text{CM}} \neq R\alpha,$ and $d_{\text{CM}} \neq R\theta$.
- Energy conservation can be used to analyze rolling motion. Energy is conserved in rolling motion without slipping. Energy is not conserved in rolling motion with slipping due to

the heat generated by kinetic friction.

11.2 Angular Momentum

- The angular momentum $\vec{\mathbf{l}} = \vec{\mathbf{r}} \times \vec{\mathbf{p}}$ of a single particle about a designated origin is the vector product of the position vector in the given coordinate system and the particle's linear momentum.
- The angular momentum $\vec{\mathbf{l}} = \sum_i \vec{\mathbf{l}}_i$ of a system of particles about a designated origin is the vector sum of the individual momenta of the particles that make up the system.
- The net torque on a system about a given origin is the time derivative of the angular momentum about that origin: $\frac{d\vec{\mathbf{L}}}{dt} = \sum \vec{\boldsymbol{\tau}}$.
- A rigid rotating body has angular momentum $L = I\omega$ directed along the axis of rotation. The time derivative of the angular momentum $\frac{dL}{dt} = \sum \tau$ gives the net torque on a rigid body and is directed along the axis of rotation.

11.3 Conservation of Angular Momentum

- In the absence of external torques, a system's total angular momentum is conserved. This is the rotational counterpart to linear momentum being conserved when the external force on a system is zero.
- For a rigid body that changes its angular momentum in the absence of a net external torque, conservation of angular momentum gives $I_f\omega_f = I_i\omega_i$. This equation says that the angular velocity is inversely proportional to the moment of inertia. Thus, if the moment of inertia decreases, the angular velocity must increase to conserve angular momentum.
- Systems containing both point particles and rigid bodies can be analyzed using conservation of angular momentum. The angular momentum of all bodies in the system must be taken about a common axis.

11.4 Precession of a Gyroscope

- When a gyroscope is set on a pivot near the surface of Earth, it precesses around a vertical axis, since the torque is always horizontal and perpendicular to $\vec{\mathbf{L}}$. If the gyroscope is not spinning, it acquires angular momentum in the direction of the torque, and it rotates about a horizontal axis, falling over just as we would expect.
- The precessional angular velocity is given by $\omega_P = \frac{rMg}{I\omega}$, where r is the distance from the pivot to the center of mass of the gyroscope, I is the moment of inertia of the gyroscope's spinning disk, M is its mass, and ω is the angular frequency of the gyroscope disk.

Conceptual Questions

11.1 Rolling Motion

1. Can a round object released from rest at the top of a frictionless incline undergo rolling motion?

2. A cylindrical can of radius R is rolling across a horizontal surface without slipping. (a) After one complete revolution of the can, what is the distance that its center of mass has moved? (b) Would this distance be greater or smaller if slipping occurred?

3. A wheel is released from the top on an incline. Is the wheel most likely to slip if the incline is steep or gently sloped?

4. Which rolls down an inclined plane faster, a hollow cylinder or a solid sphere? Both have the same mass and radius.

5. A hollow sphere and a hollow cylinder of the same radius and mass roll up an incline without slipping and have the same initial center of mass velocity. Which object reaches a greater height before stopping?

11.2 Angular Momentum

6. Can you assign an angular momentum to a particle without first defining a reference point?

7. For a particle traveling in a straight line, are there any points about which the angular momentum is zero? Assume the line intersects the origin.

8. Under what conditions does a rigid body have angular momentum but not linear momentum?

9. If a particle is moving with respect to a chosen origin it has linear momentum. What conditions must exist for this particle's angular momentum to be zero about the chosen origin?

10. If you know the velocity of a particle, can you say anything about the particle's angular momentum?

11.3 Conservation of Angular Momentum

11. What is the purpose of the small propeller at the

back of a helicopter that rotates in the plane perpendicular to the large propeller?


12. Suppose a child walks from the outer edge of a rotating merry-go-round to the inside. Does the angular velocity of the merry-go-round increase, decrease, or remain the same? Explain your answer. Assume the merry-go-round is spinning without friction.

13. As the rope of a tethered ball winds around a pole, what happens to the angular velocity of the ball?

14. Suppose the polar ice sheets broke free and floated toward Earth's equator without melting. What would happen to Earth's angular velocity?

15. Explain why stars spin faster when they collapse.

16. Competitive divers pull their limbs in and curl up their bodies when they do flips. Just before entering the water, they fully extend their limbs to enter straight down (see below). Explain the effect of both actions on their angular velocities. Also explain the effect on their angular momentum.

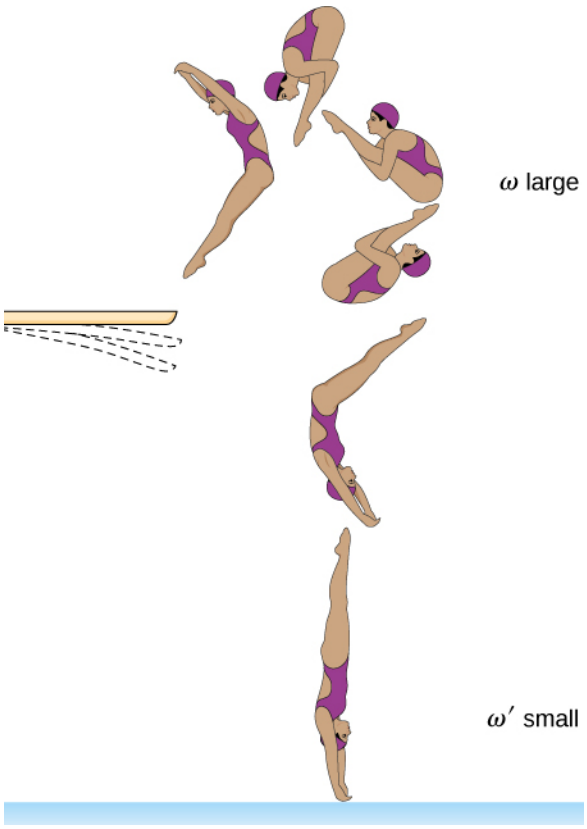

11.4 Precession of a Gyroscope

17. Gyroscopes used in guidance systems to indicate directions in space must have an angular momentum that does not change in direction. When placed in the vehicle, they are put in a compartment that is separated from the main fuselage, such that changes in the orientation of the fuselage does not affect the orientation of the gyroscope. If the space vehicle is subjected to large forces and accelerations how can the direction of the gyroscopes angular momentum be constant at all times?

18. Earth precesses about its vertical axis with a period of 26,000 years. Discuss whether Equation 11.12 can be used to calculate the precessional angular velocity of Earth.

Problems

11.1 Rolling Motion

19. What is the angular velocity of a 75.0-cm-diameter tire on an automobile traveling at 90.0 km/h?

20. A boy rides his bicycle 2.00 km. The wheels have radius 30.0 cm. What is the total angle the tires rotate through during his trip?

21. If the boy on the bicycle in the preceding problem accelerates from rest to a speed of 10.0 m/s in 10.0 s, what is the angular acceleration of the tires?


22. Formula One race cars have 66-cm-diameter tires. If a Formula One averages a speed of 300 km/h during a race, what is the angular displacement in revolutions of the wheels if the race car maintains this speed for 1.5 hours?

23. A marble rolls down an incline at 30° from rest. (a) What is its acceleration? (b) How far does it go in 3.0 s?

24. Repeat the preceding problem replacing the marble with a solid cylinder. Explain the new result.

25. A rigid body with a cylindrical cross-section is released from the top of a 30° incline. It rolls 10.0 m to the bottom in 2.60 s. Find the moment of inertia of the body in terms of its mass m and radius r.

26. A yo-yo can be thought of a solid cylinder of mass m and radius r that has a light string wrapped around its circumference (see below). One end of the string is held fixed in space. If the cylinder falls as the string unwinds without slipping, what is the acceleration of the cylinder?



27. A solid cylinder of radius 10.0 cm rolls down an incline with slipping. The angle of the incline is 30°. The coefficient of kinetic friction on the surface is 0.400. What is the angular acceleration of the solid cylinder? What is the linear acceleration?


28. A bowling ball rolls up a ramp 0.5 m high without slipping to storage. It has an initial velocity of its center of mass of 3.0 m/s. (a) What is its velocity at the top of the ramp? (b) If the ramp is 1 m high does it make it to the top?

29. A 40.0-kg solid cylinder is rolling across a horizontal surface at a speed of 6.0 m/s. How much work is required to stop it?

30. A 40.0-kg solid sphere is rolling across a horizontal surface with a speed of 6.0 m/s. How much work is required to stop it? Compare results with the preceding problem.

31. A solid cylinder rolls up an incline at an angle of 20°. If it starts at the bottom with a speed of 10 m/s, how far up the incline does it travel?

32. A solid cylindrical wheel of mass M and radius R is pulled by a force $\vec{\mathbf{F}}$ applied to the center of the wheel at 37° to the horizontal (see the following figure). If the wheel is to roll without slipping, what is the maximum value of $|\vec{\mathbf{F}}|$? The coefficients of static and kinetic friction are $\mu_S = 0.40$ and $\mu_k = 0.30$.

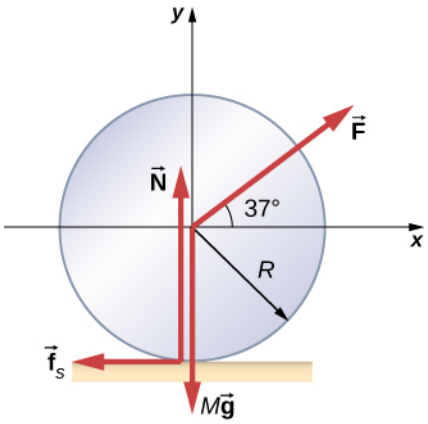

33. A hollow cylinder that is rolling without slipping is given a velocity of 5.0 m/s and rolls up an incline to a vertical height of 1.0 m. If a hollow sphere of the same mass and radius is given the same initial velocity, how high vertically does it roll up the incline?

11.2 Angular Momentum

34. A 0.2-kg particle is travelling along the line $y = 2.0$ m with a velocity 5.0 m/s. What is the angular momentum of the particle about the origin?


35. A bird flies overhead from where you stand at an altitude of 300.0 m and at a speed horizontal to the ground of 20.0 m/s. The bird has a mass of 2.0 kg. The radius vector to the bird makes an angle θ with respect to the ground. The radius vector to the bird and its momentum vector lie in the xy-plane. What is the bird's angular momentum about the point where you are standing?

36. A Formula One race car with mass 750.0 kg is speeding through a course in Monaco and enters a circular turn at 220.0 km/h in the counterclockwise direction about the origin of the circle. At another part of the course, the car enters a second circular turn at 180 km/h also in the counterclockwise direction. If the radius of curvature of the first turn is 130.0 m and that of the second is 100.0 m, compare the angular momenta of the race car in each turn taken about the origin of the circular turn.

37. A particle of mass 5.0 kg has position vector $\vec{\mathbf{r}} = (2.0\hat{\mathbf{i}} - 3.0\hat{\mathbf{j}})$m at a particular instant of time when its velocity is $\vec{\mathbf{v}} = (3.0\hat{\mathbf{i}})$m/s with respect to the origin. (a) What is the angular momentum of the particle? (b) If a force $\vec{\mathbf{F}} = 5.0\hat{\mathbf{j}}$ N acts on the particle at this instant,

what is the torque about the origin?

38. Use the right-hand rule to determine the directions of the angular momenta about the origin of the particles as shown below. The z-axis is out of the page.

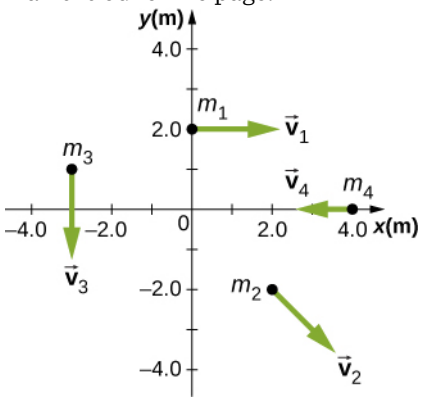


39. Suppose the particles in the preceding problem have masses $m_1 = 0.10\,\text{kg},\ m_2 = 0.20\,\text{kg},\ m_3 = 0.30\,\text{kg},$ $m_4 = 0.40\,\text{kg}$. The velocities of the particles are $v_1 = 2.0\hat{\mathbf{i}}\text{m/s}, v_2 = (3.0\hat{\mathbf{i}} - 3.0\hat{\mathbf{j}})\text{m/s},$ $v_3 = -1.5\hat{\mathbf{j}}\,\text{m/s}, v_4 = -4.0\hat{\mathbf{i}}\text{m/s}$. (a) Calculate the angular momentum of each particle about the origin. (b) What is the total angular momentum of the four-particle system about the origin?

40. Two particles of equal mass travel with the same speed in opposite directions along parallel lines separated by a distance d. Show that the angular momentum of this two-particle system is the same no matter what point is used as the reference for calculating the angular momentum.

41. An airplane of mass 4.0×10^4 kg flies horizontally at an altitude of 10 km with a constant speed of 250 m/s relative to Earth. (a) What is the magnitude of the airplane's angular momentum relative to a ground observer directly below the plane? (b) Does the angular momentum change as the airplane flies along a constant altitude?

42. At a particular instant, a 1.0-kg particle's position is $\vec{\mathbf{r}} = (2.0\hat{\mathbf{i}} - 4.0\hat{\mathbf{j}} + 6.0\hat{\mathbf{k}})\text{m}$, its velocity is $\vec{\mathbf{v}} = (-1.0\hat{\mathbf{i}} + 4.0\hat{\mathbf{j}} + 1.0\hat{\mathbf{k}})\text{m/s}$, and the force on it is $\vec{\mathbf{F}} = (10.0\hat{\mathbf{i}} + 15.0\hat{\mathbf{j}})\text{N}$. (a) What is the angular momentum of the particle about the origin? (b) What is the torque on the particle about the origin? (c) What is the time rate of change of the particle's angular momentum at this instant?

43. A particle of mass m is dropped at the point $(-d, 0)$ and falls vertically in Earth's gravitational field $-g\hat{\mathbf{j}}$. (a) What is the expression for the angular momentum of the particle around the z-axis, which points directly out of the page as shown below? (b) Calculate the torque on the particle around the z-axis. (c) Is the torque equal to the time rate of change of the angular momentum?

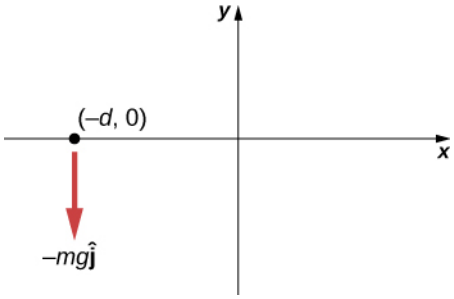

44. (a) Calculate the angular momentum of Earth in its orbit around the Sun. (b) Compare this angular momentum with the angular momentum of Earth about its axis.

45. A boulder of mass 20 kg and radius 20 cm rolls down a hill 15 m high from rest. What is its angular momentum when it is half way down the hill? (b) At the bottom?

46. A satellite is spinning at 6.0 rev/s. The satellite consists of a main body in the shape of a sphere of radius 2.0 m and mass 10,000 kg, and two antennas projecting out from the center of mass of the main body that can be approximated with rods of length 3.0 m each and mass 10 kg. The antenna's lie in the plane of rotation. What is the angular momentum of the satellite?

47. A propeller consists of two blades each 3.0 m in length and mass 120 kg each. The propeller can be approximated by a single rod rotating about its center of mass. The propeller starts from rest and rotates up to 1200 rpm in 30 seconds at a constant rate. (a) What is the angular momentum of the propeller at $t = 10\,\text{s}; t = 20\,\text{s}$? (b) What is the torque on the propeller?

48. A pulsar is a rapidly rotating neutron star. The Crab nebula pulsar in the constellation Taurus has a period of 33.5×10^{-3} s, radius 10.0 km, and mass 2.8×10^{30} kg. The pulsar's rotational period will increase over time due to the release of electromagnetic radiation, which doesn't change its radius but reduces its rotational energy. (a) What is the angular momentum of the pulsar? (b) Suppose the angular velocity decreases at a rate of 10^{-14} rad/s^2. What is the torque on the pulsar?

49. The blades of a wind turbine are 30 m in length and rotate at a maximum rotation rate of 20 rev/

min. (a) If the blades are 6000 kg each and the rotor assembly has three blades, calculate the angular momentum of the turbine at this rotation rate. (b) What is the torque require to rotate the blades up to the maximum rotation rate in 5 minutes?

50. A roller coaster has mass 3000.0 kg and needs to make it safely through a vertical circular loop of radius 50.0 m. What is the minimum angular momentum of the coaster at the bottom of the loop to make it safely through? Neglect friction on the track. Take the coaster to be a point particle.

51. A mountain biker takes a jump in a race and goes airborne. The mountain bike is travelling at 10.0 m/s before it goes airborne. If the mass of the front wheel on the bike is 750 g and has radius 35 cm, what is the angular momentum of the spinning wheel in the air the moment the bike leaves the ground?

11.3 Conservation of Angular Momentum


52. A disk of mass 2.0 kg and radius 60 cm with a small mass of 0.05 kg attached at the edge is rotating at 2.0 rev/s. The small mass, while attached to the disk, slides gradually to the center of the disk. What is the disk's final rotation rate?

53. The Sun's mass is 2.0×10^{30}kg, its radius is 7.0×10^5 km, and it has a rotational period of approximately 28 days. If the Sun should collapse into a white dwarf of radius 3.5×10^3 km, what would its period be if no mass were ejected and a sphere of uniform density can model the Sun both before and after?


54. A cylinder with rotational inertia $I_1 = 2.0\,\text{kg} \cdot \text{m}^2$ rotates clockwise about a vertical axis through its center with angular speed $\omega_1 = 5.0$ rad/s. A second cylinder with rotational inertia $I_2 = 1.0\,\text{kg} \cdot \text{m}^2$ rotates counterclockwise about the same axis with angular speed $\omega_2 = 8.0$ rad/s. If the cylinders couple so they have the same rotational axis what is the angular speed of the combination? What percentage of the original kinetic energy is lost to friction?

55. A diver off the high board imparts an initial rotation with his body fully extended before going into a tuck and executing three back somersaults before hitting the water. If his moment of inertia before the tuck is $16.9\,\text{kg} \cdot \text{m}^2$ and after the tuck during the somersaults is $4.2\,\text{kg} \cdot \text{m}^2$, what rotation rate must he impart to his body directly off the board and before the tuck if he takes 1.4 s to execute the somersaults before hitting the water?


56. An Earth satellite has its apogee at 2500 km above the surface of Earth and perigee at 500 km above the surface of Earth. At apogee its speed is 6260 m/s. What is its speed at perigee? Earth's radius is 6370 km (see below).

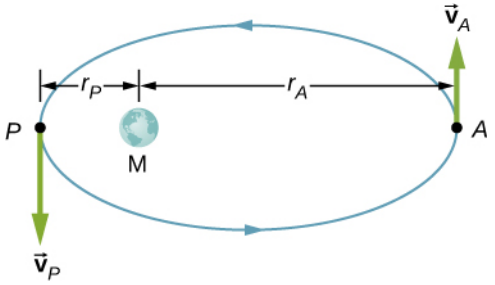

57. A Molniya orbit is a highly eccentric orbit of a communication satellite so as to provide continuous communications coverage for Scandinavian countries and adjacent Russia. The orbit is positioned so that these countries have the satellite in view for extended periods in time (see below). If a satellite in such an orbit has an apogee at 40,000.0 km as measured from the center of Earth and a velocity of 3.0 km/s, what would be its velocity at perigee measured at 200.0 km altitude?

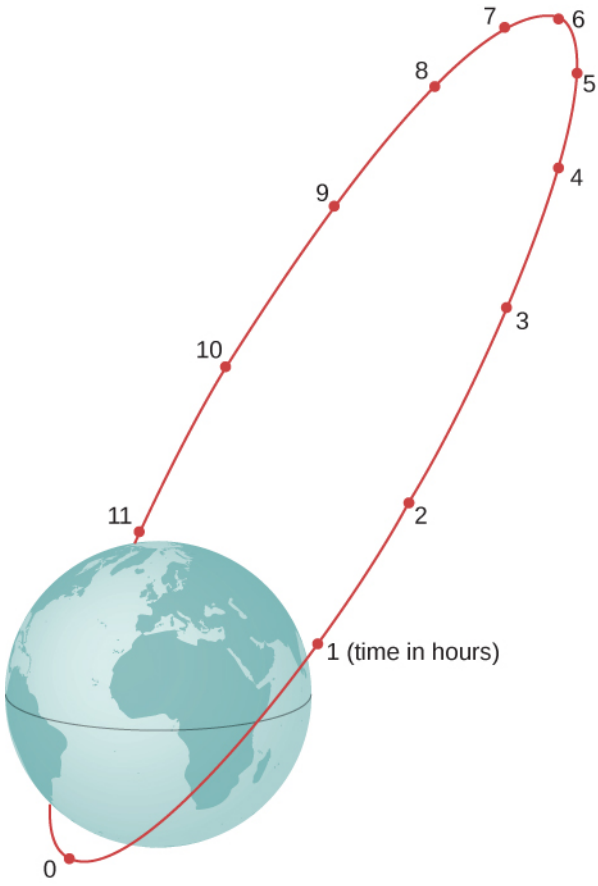

58. Shown below is a small particle of mass 20 g that is moving at a speed of 10.0 m/s when it collides and sticks to the edge of a uniform solid cylinder. The cylinder is free to rotate about its axis through its center and is perpendicular to the page. The cylinder has a mass of 0.5 kg and a radius of 10 cm, and is initially at rest. (a) What is the angular velocity of the system after the collision? (b) How much kinetic energy is lost in the collision?

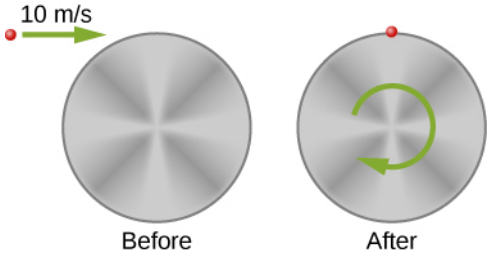

59. A bug of mass 0.020 kg is at rest on the edge of a solid cylindrical disk ($M = 0.10\,\text{kg}$, $R = 0.10\,\text{m}$) rotating in a horizontal plane around the vertical axis through its center. The disk is rotating at 10.0 rad/s. The bug crawls to the center of the disk. (a) What is the new angular velocity of the disk? (b) What is the change in the kinetic energy of the system? (c) If the bug crawls back to the outer edge of the disk, what is the angular velocity of the disk then? (d) What is the new kinetic energy of the system? (e) What is the cause of the increase and decrease of kinetic energy?

60. A uniform rod of mass 200 g and length 100 cm is free to rotate in a horizontal plane around a fixed vertical axis through its center, perpendicular to its length. Two small beads, each of mass 20 g, are mounted in grooves along the rod. Initially, the two beads are held by catches on opposite sides of the rod's center, 10 cm from the axis of rotation. With the beads in this position, the rod is rotating with an angular velocity of 10.0 rad/s. When the catches are released, the beads slide outward along the rod. (a) What is the rod's angular velocity when the beads reach the ends of the rod? (b) What is the rod's angular velocity if the beads fly off the rod?

61. A merry-go-round has a radius of 2.0 m and a moment of inertia $300\,\text{kg} \cdot \text{m}^2$. A boy of mass 50 kg runs tangent to the rim at a speed of 4.0 m/s and jumps on. If the merry-go-round is initially at rest, what is the angular velocity after the boy jumps on?


62. A playground merry-go-round has a mass of 120 kg and a radius of 1.80 m and it is rotating with an angular velocity of 0.500 rev/s. What is its angular velocity after a 22.0-kg child gets onto it by grabbing its outer edge? The child is initially at rest.

63. Three children are riding on the edge of a merry-go-round that is 100 kg, has a 1.60-m radius, and is spinning at 20.0 rpm. The children have masses of 22.0, 28.0, and 33.0 kg. If the child who has a mass of 28.0 kg moves to the center of the merry-go-round, what is the new angular velocity in rpm?

64. (a) Calculate the angular momentum of an ice skater spinning at 6.00 rev/s given his moment of inertia is $0.400\,\text{kg} \cdot \text{m}^2$. (b) He reduces his rate of spin (his angular velocity) by extending his arms and increasing his moment of inertia. Find the value of his moment of inertia if his angular velocity decreases to 1.25 rev/s. (c) Suppose instead he keeps his arms in and allows friction of the ice to slow him to 3.00 rev/s. What average torque was exerted if this takes 15.0 s?

65. Twin skaters approach one another as shown below and lock hands. (a) Calculate their final angular velocity, given each had an initial speed of 2.50 m/s

relative to the ice. Each has a mass of 70.0 kg, and each has a center of mass located 0.800 m from their locked hands. You may approximate their moments of inertia to be that of point masses at this radius. (b) Compare the initial kinetic energy and final kinetic energy.

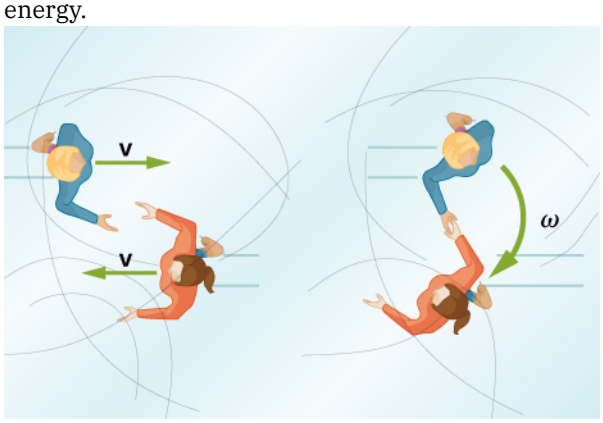

(a) (b)

66. A baseball catcher extends his arm straight up to catch a fast ball with a speed of 40 m/s. The baseball is 0.145 kg and the catcher's arm length is 0.5 m and mass 4.0 kg. (a) What is the angular velocity of the arm immediately after catching the ball as measured from the arm socket? (b) What is the torque applied if the catcher stops the rotation of his arm 0.3 s after catching the ball?

67. In 2015, in Warsaw, Poland, Olivia Oliver of Nova Scotia broke the world record for being the fastest spinner on ice skates. She achieved a record 342 rev/min, beating the existing Guinness World Record by 34 rotations. If an ice skater extends her arms at that rotation rate, what would be her new rotation rate? Assume she can be approximated by a 45-kg rod that is 1.7 m tall with a radius of 15 cm in the record spin. With her arms stretched take the approximation of a rod of length 130 cm with 10% of her body mass aligned perpendicular to the spin axis. Neglect frictional forces.

68. A satellite in a geosynchronous circular orbit is 42,164.0 km from the center of Earth. A small asteroid collides with the satellite sending it into an elliptical orbit of apogee 45,000.0 km. What is the speed of the satellite at apogee? Assume its angular momentum is conserved.

69. A gymnast does cartwheels along the floor and then launches herself into the air and executes several flips in a tuck while she is airborne. If her moment of inertia when executing the cartwheels is $13.5\ \text{kg} \cdot \text{m}^2$ and her spin rate is 0.5 rev/s, how many revolutions does she do in the air if her moment of inertia in the tuck is $3.4\ \text{kg} \cdot \text{m}^2$ and she has 2.0 s to do the flips in the air?

70. The centrifuge at NASA Ames Research Center has a radius of 8.8 m and can produce forces on its payload of 20 *g*s or 20 times the force of gravity on Earth. (a) What is the angular momentum of a 20-kg payload that experiences 10 *g*s in the centrifuge? (b) If the driver motor was turned off in (a) and the payload lost 10 kg, what would be its new spin rate, taking into account there are no frictional forces present?

71. A ride at a carnival has four spokes to which pods are attached that can hold two people. The spokes are each 15 m long and are attached to a central axis. Each spoke has mass 200.0 kg, and the pods each have mass 100.0 kg. If the ride spins at 0.2 rev/s with each pod containing two 50.0-kg children, what is the new spin rate if all the children jump off the ride?

72. An ice skater is preparing for a jump with turns and has his arms extended. His moment of inertia is $1.8\ \text{kg} \cdot \text{m}^2$ while his arms are extended, and he is spinning at 0.5 rev/s. If he launches himself into the air at 9.0 m/s at an angle of 45° with respect to the ice, how many revolutions can he execute while airborne if his moment of inertia in the air is $0.5\ \text{kg} \cdot \text{m}^2$?

73. A space station consists of a giant rotating hollow cylinder of mass 10^6 kg including people on the station and a radius of 100.00 m. It is rotating in space at 3.30 rev/min in order to produce artificial gravity. If 100 people of an average mass of 65.00 kg spacewalk to an awaiting spaceship, what is the new rotation rate when all the people are off the station?

74. Neptune has a mass of 1.0×10^{26} kg and is 4.5×10^9 km from the Sun with an orbital period of 165 years. Planetesimals in the outer primordial solar system 4.5 billion years ago coalesced into Neptune over hundreds of millions of years. If the primordial disk that evolved into our present day solar system had a radius of 10^{11} km and if the matter that made up these planetesimals that later became Neptune was spread out evenly on the edges of it, what was the orbital period of the outer edges of the primordial disk?


11.4 Precession of a Gyroscope

75. A gyroscope has a 0.5-kg disk that spins at 40 rev/s. The center of mass of the disk is 5 cm

from a pivot with a radius of the disk of 10 cm. What is the precession angular velocity?

76. The precession angular velocity of a gyroscope is 1.0 rad/s. If the mass of the rotating disk is 0.4 kg and its radius is 30 cm, and the distance from the center of mass to the pivot is 40 cm, what is the rotation rate in rev/s of the disk?

77. The axis of Earth makes a $23.5°$ angle with a direction perpendicular to the plane of Earth's orbit. As shown below, this axis precesses, making one complete rotation in 25,780 y.
(a) Calculate the change in angular momentum in half this time.
(b) What is the average torque producing this change in angular momentum?
(c) If this torque were created by a pair of forces acting at the most effective point on the equator, what would the magnitude of each force be?

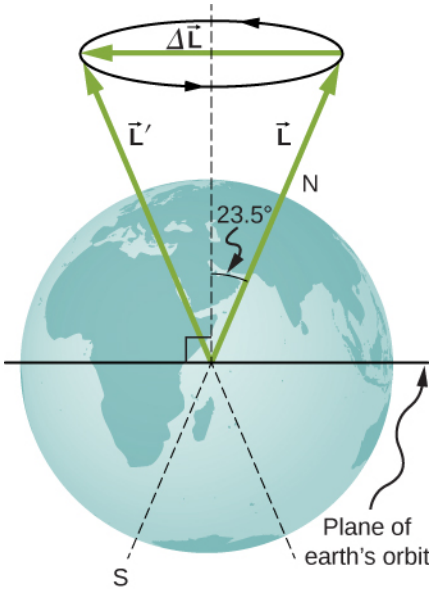

Additional Problems

78. A marble is rolling across the floor at a speed of 7.0 m/s when it starts up a plane inclined at $30°$ to the horizontal. (a) How far along the plane does the marble travel before coming to a rest? (b) How much time elapses while the marble moves up the plane?

79. Repeat the preceding problem replacing the marble with a hollow sphere. Explain the new results.

80. The mass of a hoop of radius 1.0 m is 6.0 kg. It rolls across a horizontal surface with a speed of 10.0 m/s. (a) How much work is required to stop the hoop? (b) If the hoop starts up a surface at $30°$ to the horizontal with a speed of 10.0 m/s, how far along the incline will it travel before stopping and rolling back down?

81. Repeat the preceding problem for a hollow sphere of the same radius and mass and initial speed. Explain the differences in the results.

82. A particle has mass 0.5 kg and is traveling along the line $x = 5.0$ m at 2.0 m/s in the positive y-direction. What is the particle's angular momentum about the origin?

83. A 4.0-kg particle moves in a circle of radius 2.0 m. The angular momentum of the particle varies in time according to $l = 5.0t^2$. (a) What is the torque on the particle about the center of the circle at $t = 3.4$ s? (b) What is the angular velocity of the particle at $t = 3.4$ s?

84. A proton is accelerated in a cyclotron to 5.0×10^6 m/s in 0.01 s. The proton follows a circular path. If the radius of the cyclotron is 0.5 km, (a) What is the angular momentum of the proton about the center at its maximum speed? (b) What is the torque on the proton about the center as it accelerates to maximum speed?

85. (a) What is the angular momentum of the Moon in its orbit around Earth? (b) How does this angular momentum compare with the angular momentum of the Moon on its axis? Remember that the Moon keeps one side toward Earth at all times.

86. A DVD is rotating at 500 rpm. What is the angular momentum of the DVD if has a radius of 6.0 cm and mass 20.0 g?

87. A potter's disk spins from rest up to 10 rev/s in 15 s. The disk has a mass 3.0 kg and radius 30.0 cm. What is the angular momentum of the disk at $t = 5$ s, $t = 10$ s?

88. Suppose you start an antique car by exerting a force of 300 N on its crank for 0.250 s. What is the angular momentum given to the engine if the handle of the crank is 0.300 m from the pivot and the force is exerted to create maximum torque the entire time?

89. A solid cylinder of mass 2.0 kg and radius 20 cm is rotating counterclockwise around a vertical axis through its center at 600 rev/min. A second solid cylinder of the same mass and radius is rotating clockwise around the same vertical axis at 900 rev/min. If the cylinders couple so that they rotate about the same vertical axis, what is the angular velocity of the combination?

90. A boy stands at the center of a platform that is rotating without friction at 1.0 rev/s. The boy holds weights as far from his body as possible. At this position the total moment of inertia of the boy, platform, and weights is $5.0\ \text{kg} \cdot \text{m}^2$. The boy draws the weights in close to his body, thereby decreasing the total moment of inertia to $1.5\ \text{kg} \cdot \text{m}^2$. (a) What is the final angular velocity of the platform? (b) By how much does the rotational kinetic energy increase?

91. Eight children, each of mass 40 kg, climb on a small merry-go-round. They position themselves evenly on the outer edge and join hands. The merry-go-round has a radius of 4.0 m and a moment of inertia $1000.0\ \text{kg} \cdot \text{m}^2$. After the merry-go-round is given an angular velocity of 6.0 rev/min, the children walk inward and stop when they are 0.75 m from the axis of rotation. What is the new angular velocity of the merry-go-round? Assume there is negligible frictional torque on the structure.


92. A thin meter stick of mass 150 g rotates around an axis perpendicular to the stick's long axis at an angular velocity of 240 rev/min. What is the angular momentum of the stick if the rotation axis (a) passes through the center of the stick? (b) Passes through one end of the stick?

93. A satellite in the shape of a sphere of mass 20,000 kg and radius 5.0 m is spinning about an axis through its center of mass. It has a rotation rate of 8.0 rev/s. Two antennas deploy in the plane of rotation extending from the center of mass of the satellite. Each antenna can be approximated as a rod has mass 200.0 kg and length 7.0 m. What is the new rotation rate of the satellite?

94. A top has moment of inertia $3.2 \times 10^{-4}\ \text{kg} \cdot \text{m}^2$ and radius 4.0 cm from the center of mass to the pivot point. If it spins at 20.0 rev/s and is precessing, how many revolutions does it precess in 10.0 s?


Challenge Problems

95. The truck shown below is initially at rest with solid cylindrical roll of paper sitting on its bed. If the truck moves forward with a uniform acceleration *a*, what distance *s* does it move before the paper rolls off its back end? (*Hint*: If the roll accelerates forward with a', then is accelerates backward relative to the truck with an acceleration $a - a'$. Also, $R\alpha = a - a'$.)

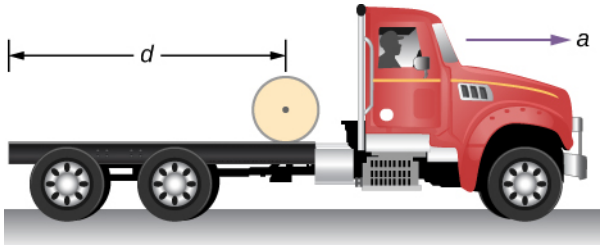

96. A bowling ball of radius 8.5 cm is tossed onto a bowling lane with speed 9.0 m/s. The direction of the toss is to the left, as viewed by the observer, so the bowling ball starts to rotate counterclockwise when in contact with the floor. The coefficient of kinetic friction on the lane is 0.3. (a) What is the time required for the ball to come to the point where it is not slipping? What is the distance d to the point where the ball is rolling without slipping?

97. A small ball of mass 0.50 kg is attached by a massless string to a vertical rod that is spinning as shown below. When the rod has an angular velocity of 6.0 rad/s, the string makes an angle of 30° with respect to the vertical. (a) If the angular velocity is increased to 10.0 rad/s, what is the new angle of the string? (b) Calculate the initial and final angular momenta of the ball. (c) Can the rod spin fast enough so that the ball is horizontal?

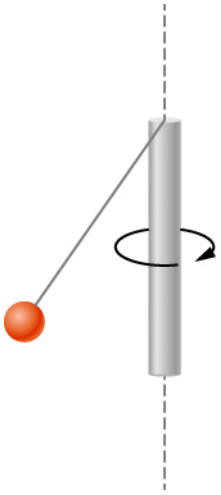

98. A bug flying horizontally at 1.0 m/s collides and sticks to the end of a uniform stick hanging vertically. After the impact, the stick swings out to a maximum angle of 5.0° from the vertical before rotating back. If the mass of the stick is 10 times that of the bug, calculate the length of the stick.

CHAPTER 12
Static Equilibrium and Elasticity



Figure 12.1 Two stilt walkers in standing position. All forces acting on each stilt walker balance out; neither changes its translational motion. In addition, all torques acting on each person balance out, and thus neither of them changes its rotational motion. The result is static equilibrium. (credit: modification of work by Stuart Redler)

Chapter Outline

12.1 Conditions for Static Equilibrium

12.2 Examples of Static Equilibrium

12.3 Stress, Strain, and Elastic Modulus

12.4 Elasticity and Plasticity

INTRODUCTION In earlier chapters, you learned about forces and Newton's laws for translational motion. You then studied torques and the rotational motion of a body about a fixed axis of rotation. You also learned that static equilibrium means no motion at all and that dynamic equilibrium means motion without acceleration.

In this chapter, we combine the conditions for static translational equilibrium and static rotational equilibrium to describe situations typical for any kind of construction. What type of cable will support a suspension bridge? What type of foundation will support an office building? Will this prosthetic arm function correctly? These are examples of questions that contemporary engineers must be able to answer.

The elastic properties of materials are especially important in engineering applications, including bioengineering. For example, materials that can stretch or compress and then return to their original form or position make good shock absorbers. In this chapter, you will learn about some applications that combine

equilibrium with elasticity to construct real structures that last.

12.1 Conditions for Static Equilibrium

Learning Objectives

By the end of this section, you will be able to:

- Identify the physical conditions of static equilibrium.
- Draw a free-body diagram for a rigid body acted on by forces.
- Explain how the conditions for equilibrium allow us to solve statics problems.

We say that a rigid body is in **equilibrium** when both its linear and angular acceleration are zero relative to an inertial frame of reference. This means that a body in equilibrium can be moving, but if so, its linear and angular velocities must be constant. We say that a rigid body is in **static equilibrium** when it is at rest *in our selected frame of reference*. Notice that the distinction between the state of rest and a state of uniform motion is artificial—that is, an object may be at rest in our selected frame of reference, yet to an observer moving at constant velocity relative to our frame, the same object appears to be in uniform motion with constant velocity. Because the motion is *relative*, what is in static equilibrium to us is in dynamic equilibrium to the moving observer, and vice versa. Since the laws of physics are identical for all inertial reference frames, in an inertial frame of reference, there is no distinction between static equilibrium and equilibrium.

According to Newton's second law of motion, the linear acceleration of a rigid body is caused by a net force acting on it, or

$$\sum_k \vec{\mathbf{F}}_k = m\vec{\mathbf{a}}_{\text{CM}}. \tag{12.1}$$

Here, the sum is of all external forces acting on the body, where m is its mass and $\vec{\mathbf{a}}_{\text{CM}}$ is the linear acceleration of its center of mass (a concept we discussed in Linear Momentum and Collisions on linear momentum and collisions). In equilibrium, the linear acceleration is zero. If we set the acceleration to zero in Equation 12.1, we obtain the following equation:

First Equilibrium Condition

The first equilibrium condition for the static equilibrium of a rigid body expresses *translational* equilibrium:

$$\sum_k \vec{\mathbf{F}}_k = \vec{\mathbf{0}}. \tag{12.2}$$

The first equilibrium condition, Equation 12.2, is the equilibrium condition for forces, which we encountered when studying applications of Newton's laws.

This vector equation is equivalent to the following three scalar equations for the components of the net force:

$$\sum_k F_{kx} = 0, \quad \sum_k F_{ky} = 0, \quad \sum_k F_{kz} = 0. \tag{12.3}$$

Analogously to Equation 12.1, we can state that the rotational acceleration $\vec{\boldsymbol{\alpha}}$ of a rigid body about a fixed axis of rotation is caused by the net torque acting on the body, or

$$\sum_k \vec{\boldsymbol{\tau}}_k = I\vec{\boldsymbol{\alpha}}. \tag{12.4}$$

Here I is the rotational inertia of the body in rotation about this axis and the summation is over *all* torques $\vec{\boldsymbol{\tau}}_k$ of external forces in Equation 12.2. In equilibrium, the rotational acceleration is zero. By setting to zero the right-hand side of Equation 12.4, we obtain the second equilibrium condition:

Second Equilibrium Condition

The second equilibrium condition for the static equilibrium of a rigid body expresses *rotational* equilibrium:

$$\sum_k \vec{\boldsymbol{\tau}}_k = \vec{\mathbf{0}}. \tag{12.5}$$

The second equilibrium condition, Equation 12.5, is the equilibrium condition for torques that we encountered when we studied rotational dynamics. It is worth noting that this equation for equilibrium is generally valid for rotational equilibrium about any axis of rotation (fixed or otherwise). Again, this vector equation is equivalent to three scalar equations for the vector components of the net torque:

$$\sum_k \tau_{kx} = 0, \quad \sum_k \tau_{ky} = 0, \quad \sum_k \tau_{kz} = 0. \tag{12.6}$$

The second equilibrium condition means that in equilibrium, there is no net external torque to cause rotation about any axis.

The first and second equilibrium conditions are stated in a particular reference frame. The first condition involves only forces and is therefore independent of the origin of the reference frame. However, the second condition involves torque, which is defined as a cross product, $\vec{\boldsymbol{\tau}}_k = \vec{\mathbf{r}}_k \times \vec{\mathbf{F}}_k$, where the position vector $\vec{\mathbf{r}}_k$ with respect to the axis of rotation of the point where the force is applied enters the equation. Therefore, torque depends on the location of the axis in the reference frame. However, when rotational and translational equilibrium conditions hold simultaneously in one frame of reference, then they also hold in any other inertial frame of reference, so that the net torque about any axis of rotation is still zero. The explanation for this is fairly straightforward.

Suppose vector $\vec{\mathbf{R}}$ is the position of the origin of a new inertial frame of reference S' in the old inertial frame of reference S. From our study of relative motion, we know that in the new frame of reference S', the position vector $\vec{\mathbf{r}}'_k$ of the point where the force $\vec{\mathbf{F}}_k$ is applied is related to $\vec{\mathbf{r}}_k$ via the equation

$$\vec{\mathbf{r}}'_k = \vec{\mathbf{r}}_k - \vec{\mathbf{R}}.$$

Now, we can sum all torques $\vec{\boldsymbol{\tau}}'_k = \vec{\mathbf{r}}'_k \times \vec{\mathbf{F}}_k$ of all external forces in a new reference frame, S' :

$$\sum_k \vec{\boldsymbol{\tau}}'_k = \sum_k \vec{\mathbf{r}}'_k \times \vec{\mathbf{F}}_k = \sum_k (\vec{\mathbf{r}}_k - \vec{\mathbf{R}}) \times \vec{\mathbf{F}}_k = \sum_k \vec{\mathbf{r}}_k \times \vec{\mathbf{F}}_k - \sum_k \vec{\mathbf{R}} \times \vec{\mathbf{F}}_k = \sum_k \vec{\boldsymbol{\tau}}_k - \vec{\mathbf{R}} \times \sum_k \vec{\mathbf{F}}_k = \vec{\mathbf{0}}.$$

In the final step in this chain of reasoning, we used the fact that in equilibrium in the old frame of reference, S, the first term vanishes because of Equation 12.5 and the second term vanishes because of Equation 12.2. Hence, we see that the net torque in any inertial frame of reference S' is zero, provided that both conditions for equilibrium hold in an inertial frame of reference S.

The practical implication of this is that when applying equilibrium conditions for a rigid body, we are free to choose any point as the origin of the reference frame. Our choice of reference frame is dictated by the physical specifics of the problem we are solving. In one frame of reference, the mathematical form of the equilibrium conditions may be quite complicated, whereas in another frame, the same conditions may have a simpler mathematical form that is easy to solve. The origin of a selected frame of reference is called the pivot point.

In the most general case, equilibrium conditions are expressed by the six scalar equations (Equation 12.3 and Equation 12.6). For planar equilibrium problems with rotation about a fixed axis, which we consider in this chapter, we can reduce the number of equations to three. The standard procedure is to adopt a frame of reference where the z-axis is the axis of rotation. With this choice of axis, the net torque has only a z-component, all forces that have non-zero torques lie in the xy-plane, and therefore contributions to the net torque come from only the x- and y-components of external forces. Thus, for planar problems with the axis of rotation perpendicular to the xy-plane, we have the following three equilibrium conditions for forces and

torques:

$$F_{1x} + F_{2x} + \cdots + F_{Nx} = 0 \quad \textbf{12.7}$$

$$F_{1y} + F_{2y} + \cdots + F_{Ny} = 0 \quad \textbf{12.8}$$

$$\tau_1 + \tau_2 + \cdots + \tau_N = 0 \quad \textbf{12.9}$$

where the summation is over all N external forces acting on the body and over their torques. In Equation 12.9, we simplified the notation by dropping the subscript z, but we understand here that the summation is over all contributions along the z-axis, which is the axis of rotation. In Equation 12.9, the z-component of torque $\vec{\tau}_k$ from the force $\vec{\mathbf{F}}_k$ is

$$\tau_k = r_k F_k \sin\theta \quad \textbf{12.10}$$

where r_k is the length of the lever arm of the force and F_k is the magnitude of the force (as you saw in Fixed-Axis Rotation). The angle θ is the angle between vectors $\vec{\mathbf{r}}_k$ and $\vec{\mathbf{F}}_k$, measuring *from vector* $\vec{\mathbf{r}}_k$ *to vector* $\vec{\mathbf{F}}_k$ in the *counterclockwise* direction (Figure 12.2). When using Equation 12.10, we often compute the magnitude of torque and assign its sense as either positive (+) or negative (−), depending on the direction of rotation caused by this torque alone. In Equation 12.9, net torque is the sum of terms, with each term computed from Equation 12.10, and each term must have the correct *sense*. Similarly, in Equation 12.7, we assign the + sign to force components in the + x-direction and the − sign to components in the − x-direction. The same rule must be consistently followed in Equation 12.8, when computing force components along the y-axis.

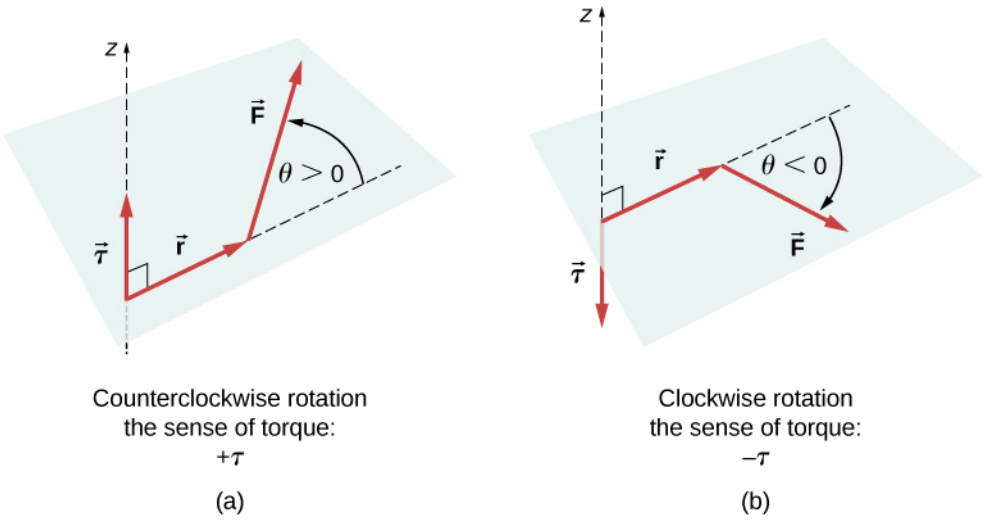


Figure 12.2 Torque of a force: (a) When the torque of a force causes counterclockwise rotation about the axis of rotation, we say that its *sense* is positive, which means the torque vector is parallel to the axis of rotation. (b) When torque of a force causes clockwise rotation about the axis, we say that its sense is negative, which means the torque vector is antiparallel to the axis of rotation.

INTERACTIVE

View this demonstration (https://openstax.org/l/21rigsquare) to see two forces act on a rigid square in two dimensions. At all times, the static equilibrium conditions given by Equation 12.7 through Equation 12.9 are satisfied. You can vary magnitudes of the forces and their lever arms and observe the effect these changes have on the square.

In many equilibrium situations, one of the forces acting on the body is its weight. In free-body diagrams, the weight vector is attached to the **center of gravity** of the body. For all practical purposes, the center of gravity is identical to the center of mass, as you learned in Linear Momentum and Collisions on linear momentum and collisions. Only in situations where a body has a large spatial extension so that the gravitational field is nonuniform throughout its volume, are the center of gravity and the center of mass located at different points. In practical situations, however, even objects as large as buildings or cruise ships are located in a uniform gravitational field on Earth's surface, where the acceleration due to gravity has a constant magnitude of

$g = 9.8\ \text{m/s}^2$. In these situations, the center of gravity is identical to the center of mass. Therefore, throughout this chapter, we use the center of mass (CM) as the point where the weight vector is attached. Recall that the CM has a special physical meaning: When an external force is applied to a body at exactly its CM, the body as a whole undergoes translational motion and such a force does not cause rotation.

When the CM is located off the axis of rotation, a net **gravitational torque** occurs on an object. Gravitational torque is the torque caused by weight. This gravitational torque may rotate the object if there is no support present to balance it. The magnitude of the gravitational torque depends on how far away from the pivot the CM is located. For example, in the case of a tipping truck (Figure 12.3), the pivot is located on the line where the tires make contact with the road's surface. If the CM is located high above the road's surface, the gravitational torque may be large enough to turn the truck over. Passenger cars with a low-lying CM, close to the pavement, are more resistant to tipping over than are trucks.

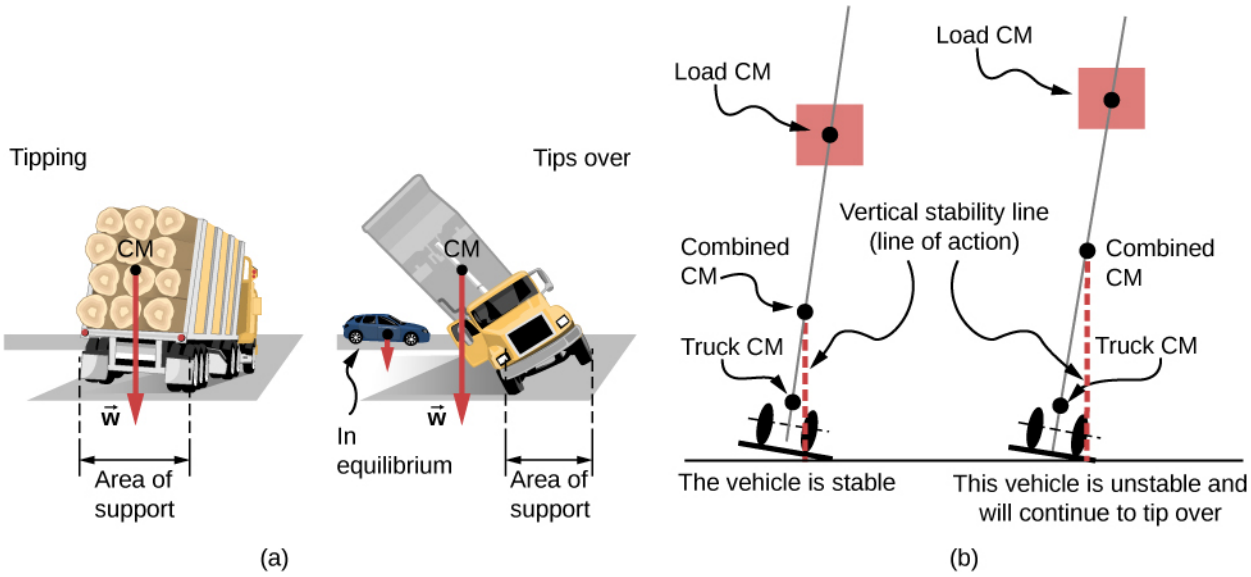


Figure 12.3 The distribution of mass affects the position of the center of mass (CM), where the weight vector $\vec{\mathbf{w}}$ is attached. If the center of gravity is within the area of support, the truck returns to its initial position after tipping [see the left panel in (b)]. But if the center of gravity lies outside the area of support, the truck turns over [see the right panel in (b)]. Both vehicles in (b) are out of equilibrium. Notice that the car in (a) is in equilibrium: The low location of its center of gravity makes it hard to tip over.

INTERACTIVE

If you tilt a box so that one edge remains in contact with the table beneath it, then one edge of the base of support becomes a pivot. As long as the center of gravity of the box remains over the base of support, gravitational torque rotates the box back toward its original position of stable equilibrium. When the center of gravity moves outside of the base of support, gravitational torque rotates the box in the opposite direction, and the box rolls over. View this demonstration (https://openstax.org/l/21unstable) to experiment with stable and unstable positions of a box.

EXAMPLE 12.1

Center of Gravity of a Car

A passenger car with a 2.5-m wheelbase has 52% of its weight on the front wheels on level ground, as illustrated in Figure 12.4. Where is the CM of this car located with respect to the rear axle?

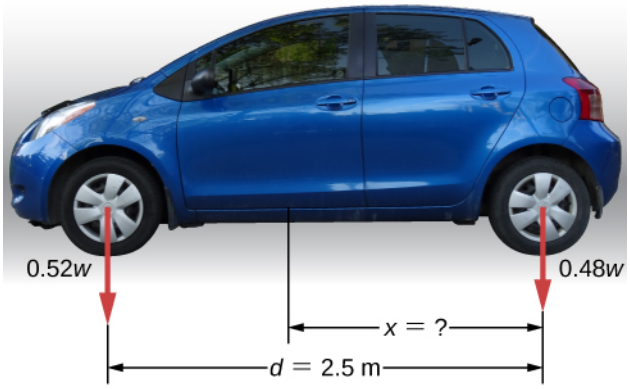


Figure 12.4 The weight distribution between the axles of a car. Where is the center of gravity located? (credit "car": modification of work by Jane Whitney)

Strategy

We do not know the weight w of the car. All we know is that when the car rests on a level surface, $0.52w$ pushes down on the surface at contact points of the front wheels and $0.48w$ pushes down on the surface at contact points of the rear wheels. Also, the contact points are separated from each other by the distance $d = 2.5$ m. At these contact points, the car experiences normal reaction forces with magnitudes $F_{\mathrm{F}} = 0.52w$ and $F_{\mathrm{R}} = 0.48w$ on the front and rear axles, respectively. We also know that the car is an example of a rigid body in equilibrium whose entire weight w acts at its CM. The CM is located somewhere between the points where the normal reaction forces act, somewhere at a distance x from the point where F_R acts. Our task is to find x. Thus, we identify three forces acting on the body (the car), and we can draw a free-body diagram for the extended rigid body, as shown in Figure 12.5.

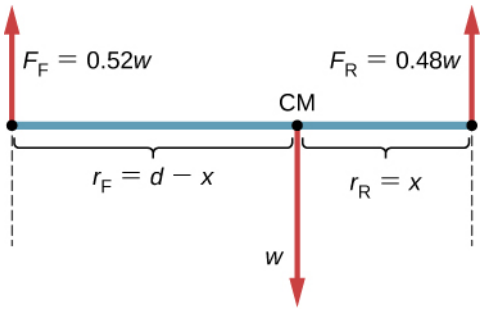


Figure 12.5 The free-body diagram for the car clearly indicates force vectors acting on the car and distances to the center of mass (CM). When CM is selected as the pivot point, these distances are lever arms of normal reaction forces. Notice that vector magnitudes and lever arms do not need to be drawn to scale, but all quantities of relevance must be clearly labeled.

We are almost ready to write down equilibrium conditions Equation 12.7 through Equation 12.9 for the car, but first we must decide on the reference frame. Suppose we choose the x-axis along the length of the car, the y-axis vertical, and the z-axis perpendicular to this xy-plane. With this choice we only need to write Equation 12.7 and Equation 12.9 because all the y-components are identically zero. Now we need to decide on the location of the pivot point. We can choose any point as the location of the axis of rotation (z-axis). Suppose we place the axis of rotation at CM, as indicated in the free-body diagram for the car. At this point, we are ready to write the equilibrium conditions for the car.

Solution

Each equilibrium condition contains only three terms because there are $N = 3$ forces acting on the car. The first equilibrium condition, Equation 12.7, reads

$$+F_{\mathrm{F}} - w + F_{\mathrm{R}} = 0. \tag{12.11}$$

This condition is trivially satisfied because when we substitute the data, Equation 12.11 becomes $+0.52w - w + 0.48w = 0$. The second equilibrium condition, Equation 12.9, reads

$$\tau_F + \tau_w + \tau_R = 0 \quad 12.12$$

where τ_F is the torque of force F_F, τ_w is the gravitational torque of force w, and τ_R is the torque of force F_R. When the pivot is located at CM, the gravitational torque is identically zero because the lever arm of the weight with respect to an axis that passes through CM is zero. The lines of action of both normal reaction forces are perpendicular to their lever arms, so in Equation 12.10, we have $|\sin\theta| = 1$ for both forces. From the free-body diagram, we read that torque τ_F causes clockwise rotation about the pivot at CM, so its sense is negative; and torque τ_R causes counterclockwise rotation about the pivot at CM, so its sense is positive. With this information, we write the second equilibrium condition as

$$-r_F F_F + r_R F_R = 0. \quad 12.13$$

With the help of the free-body diagram, we identify the force magnitudes $F_R = 0.48w$ and $F_F = 0.52w$, and their corresponding lever arms $r_R = x$ and $r_F = d - x$. We can now write the second equilibrium condition, Equation 12.13, explicitly in terms of the unknown distance x:

$$-0.52(d - x)w + 0.48xw = 0. \quad 12.14$$

Here the weight w cancels and we can solve the equation for the unknown position x of the CM. The answer is $x = 0.52d = 0.52(2.5\text{ m}) = 1.3\text{ m}$.

Solution

Choosing the pivot at the position of the front axle does not change the result. The free-body diagram for this pivot location is presented in Figure 12.6. For this choice of pivot point, the second equilibrium condition is

$$-r_w w + r_R F_R = 0. \quad 12.15$$

When we substitute the quantities indicated in the diagram, we obtain

$$-(d - x)w + 0.48dw = 0. \quad 12.16$$

The answer obtained by solving Equation 12.13 is, again, $x = 0.52d = 1.3\text{ m}$.

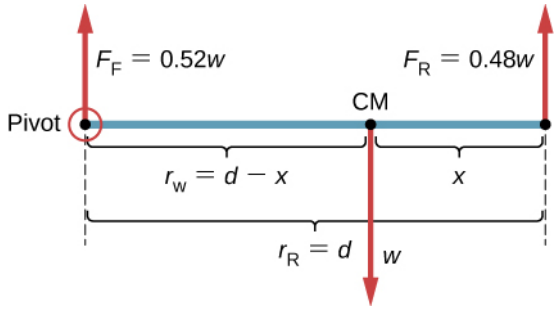


Figure 12.6 The equivalent free-body diagram for the car; the pivot is clearly indicated.

Significance

This example shows that when solving static equilibrium problems, we are free to choose the pivot location. For different choices of the pivot point we have different sets of equilibrium conditions to solve. However, all choices lead to the same solution to the problem.

CHECK YOUR UNDERSTANDING 12.1

Solve Example 12.1 by choosing the pivot at the location of the rear axle.

CHECK YOUR UNDERSTANDING 12.2

Explain which one of the following situations satisfies both equilibrium conditions: (a) a tennis ball that does not spin as it travels in the air; (b) a pelican that is gliding in the air at a constant velocity at one altitude; or (c) a crankshaft in the engine of a parked car.

A special case of static equilibrium occurs when all external forces on an object act at or along the axis of rotation or when the spatial extension of the object can be disregarded. In such a case, the object can be effectively treated like a point mass. In this special case, we need not worry about the second equilibrium condition, Equation 12.9, because all torques are identically zero and the first equilibrium condition (for forces) is the only condition to be satisfied. The free-body diagram and problem-solving strategy for this special case were outlined in Newton's Laws of Motion and Applications of Newton's Laws. You will see a typical equilibrium situation involving only the first equilibrium condition in the next example.

INTERACTIVE

View this demonstration (https://openstax.org/l/21pulleyknot) to see three weights that are connected by strings over pulleys and tied together in a knot. You can experiment with the weights to see how they affect the equilibrium position of the knot and, at the same time, see the vector-diagram representation of the first equilibrium condition at work.

EXAMPLE 12.2

A Breaking Tension

A small pan of mass 42.0 g is supported by two strings, as shown in Figure 12.7. The maximum tension that the string can support is 2.80 N. Mass is added gradually to the pan until one of the strings snaps. Which string is it? How much mass must be added for this to occur?

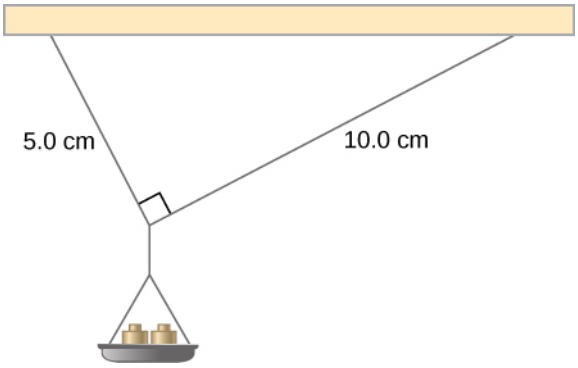


Figure 12.7 Mass is added gradually to the pan until one of the strings snaps.

Strategy

This mechanical system consisting of strings, masses, and the pan is in static equilibrium. Specifically, the knot that ties the strings to the pan is in static equilibrium. The knot can be treated as a point; therefore, we need only the first equilibrium condition. The three forces pulling at the knot are the tension $\vec{\mathbf{T}}_1$ in the 5.0-cm string, the tension $\vec{\mathbf{T}}_2$ in the 10.0-cm string, and the weight $\vec{\mathbf{w}}$ of the pan holding the masses. We adopt a rectangular coordinate system with the y-axis pointing opposite to the direction of gravity and draw the free-body diagram for the knot (see Figure 12.8). To find the tension components, we must identify the direction angles α_1 and α_2 that the strings make with the horizontal direction that is the x-axis. As you can see in Figure 12.7, the strings make two sides of a right triangle. We can use the Pythagorean theorem to solve this triangle, shown in Figure 12.8, and find the sine and cosine of the angles α_1 and α_2. Then we can resolve the tensions into their rectangular components, substitute in the first condition for equilibrium (Equation 12.7 and Equation 12.8), and solve for the tensions in the strings. The string with a greater tension will break first.

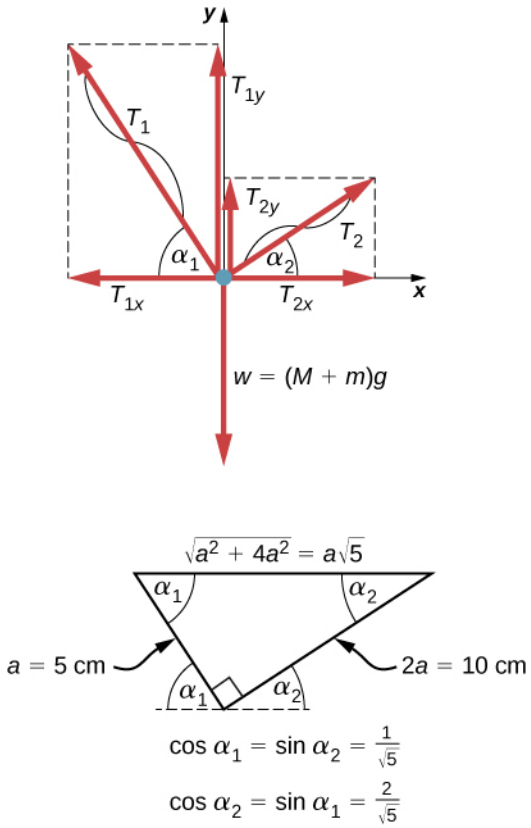


Figure 12.8 Free-body diagram for the knot in Example 12.2.

Solution

The weight w pulling on the knot is due to the mass M of the pan and mass m added to the pan, or $w = (M + m)g$. With the help of the free-body diagram in Figure 12.8, we can set up the equilibrium conditions for the knot:

$$\begin{aligned} \text{in the } x\text{-direction}, \quad -T_{1x} + T_{2x} &= 0 \\ \text{in the } y\text{-direction}, \quad +T_{1y} + T_{2y} - w &= 0. \end{aligned}$$

From the free-body diagram, the magnitudes of components in these equations are

$$\begin{aligned} T_{1x} &= T_1 \cos\alpha_1 = T_1/\sqrt{5}, \qquad T_{1y} = T_1 \sin\alpha_1 = 2T_1/\sqrt{5} \\ T_{2x} &= T_2 \cos\alpha_2 = 2T_2/\sqrt{5}, \qquad T_{2y} = T_2 \sin\alpha_2 = T_2/\sqrt{5}. \end{aligned}$$

We substitute these components into the equilibrium conditions and simplify. We then obtain two equilibrium equations for the tensions:

$$\begin{aligned} \text{in } x\text{-direction}, \quad T_1 &= 2T_2 \\ \text{in } y\text{-direction}, \quad \frac{2T_1}{\sqrt{5}} + \frac{T_2}{\sqrt{5}} &= (M + m)g. \end{aligned}$$

The equilibrium equation for the x-direction tells us that the tension T_1 in the 5.0-cm string is twice the tension T_2 in the 10.0-cm string. Therefore, the shorter string will snap. When we use the first equation to eliminate T_2 from the second equation, we obtain the relation between the mass m on the pan and the tension T_1 in the shorter string:

$$2.5T_1/\sqrt{5} = (M + m)g.$$

The string breaks when the tension reaches the critical value of $T_1 = 2.80$ N. The preceding equation can be solved for the critical mass m that breaks the string:

$$m = \frac{2.5}{\sqrt{5}}\frac{T_1}{g} - M = \frac{2.5}{\sqrt{5}}\frac{2.80\,\text{N}}{9.8\,\text{m/s}^2} - 0.042\,\text{kg} = 0.277\,\text{kg} = 277.0\,\text{g}.$$

Significance

Suppose that the mechanical system considered in this example is attached to a ceiling inside an elevator going up. As long as the elevator moves up at a constant speed, the result stays the same because the weight w does not change. If the elevator moves up with acceleration, the critical mass is smaller because the weight of $M + m$ becomes larger by an apparent weight due to the acceleration of the elevator. Still, in all cases the shorter string breaks first.

12.2 Examples of Static Equilibrium

Learning Objectives

By the end of this section, you will be able to:

- Identify and analyze static equilibrium situations
- Set up a free-body diagram for an extended object in static equilibrium
- Set up and solve static equilibrium conditions for objects in equilibrium in various physical situations

All examples in this chapter are planar problems. Accordingly, we use equilibrium conditions in the component form of Equation 12.7 to Equation 12.9. We introduced a problem-solving strategy in Example 12.1 to illustrate the physical meaning of the equilibrium conditions. Now we generalize this strategy in a list of steps to follow when solving static equilibrium problems for extended rigid bodies. We proceed in five practical steps.

PROBLEM-SOLVING STRATEGY

Static Equilibrium

1. Identify the object to be analyzed. For some systems in equilibrium, it may be necessary to consider more than one object. Identify all forces acting on the object. Identify the questions you need to answer. Identify the information given in the problem. In realistic problems, some key information may be implicit in the situation rather than provided explicitly.
2. Set up a free-body diagram for the object. (a) Choose the xy-reference frame for the problem. Draw a free-body diagram for the object, including only the forces that act on it. When suitable, represent the forces in terms of their components in the chosen reference frame. As you do this for each force, cross out the original force so that you do not erroneously include the same force twice in equations. Label all forces—you will need this for correct computations of net forces in the x- and y-directions. For an unknown force, the direction must be assigned arbitrarily; think of it as a 'working direction' or 'suspected direction.' The correct direction is determined by the sign that you obtain in the final solution. A plus sign (+) means that the working direction is the actual direction. A minus sign (−) means that the actual direction is opposite to the assumed working direction. (b) Choose the location of the rotation axis; in other words, choose the pivot point with respect to which you will compute torques of acting forces. On the free-body diagram, indicate the location of the pivot and the lever arms of acting forces—you will need this for correct computations of torques. In the selection of the pivot, keep in mind that the pivot can be placed anywhere you wish, but the guiding principle is that the best choice will simplify as much as possible the calculation of the net torque along the rotation axis.
3. Set up the equations of equilibrium for the object. (a) Use the free-body diagram to write a correct equilibrium condition Equation 12.7 for force components in the x-direction. (b) Use the free-body diagram to write a correct equilibrium condition Equation 12.11 for force components in the y-direction. (c) Use the free-body diagram to write a correct equilibrium condition Equation 12.9 for torques along the axis of rotation. Use Equation 12.10 to evaluate torque magnitudes and senses.
4. Simplify and solve the system of equations for equilibrium to obtain unknown quantities. At this point, your work involves algebra only. Keep in mind that the number of equations must be the same as the

number of unknowns. If the number of unknowns is larger than the number of equations, the problem cannot be solved.

5. Evaluate the expressions for the unknown quantities that you obtained in your solution. Your final answers should have correct numerical values and correct physical units. If they do not, then use the previous steps to track back a mistake to its origin and correct it. Also, you may independently check for your numerical answers by shifting the pivot to a different location and solving the problem again, which is what we did in Example 12.1.

Note that setting up a free-body diagram for a rigid-body equilibrium problem is the most important component in the solution process. Without the correct setup and a correct diagram, you will not be able to write down correct conditions for equilibrium. Also note that a free-body diagram for an extended rigid body that may undergo rotational motion is different from a free-body diagram for a body that experiences only translational motion (as you saw in the chapters on Newton's laws of motion). In translational dynamics, a body is represented as its CM, where all forces on the body are attached and no torques appear. This does not hold true in rotational dynamics, where an extended rigid body cannot be represented by one point alone. The reason for this is that in analyzing rotation, we must identify torques acting on the body, and torque depends both on the acting force and on its lever arm. Here, the free-body diagram for an extended rigid body helps us identify external torques.

EXAMPLE 12.3

The Torque Balance

Three masses are attached to a uniform meter stick, as shown in Figure 12.9. The mass of the meter stick is 150.0 g and the masses to the left of the fulcrum are $m_1 = 50.0$ g and $m_2 = 75.0$ g. Find the mass m_3 that balances the system when it is attached at the right end of the stick, and the normal reaction force at the fulcrum when the system is balanced.

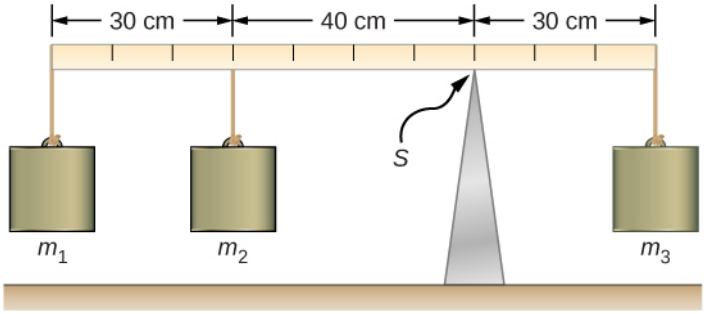


Figure 12.9 In a torque balance, a horizontal beam is supported at a fulcrum (indicated by *S*) and masses are attached to both sides of the fulcrum. The system is in static equilibrium when the beam does not rotate. It is balanced when the beam remains level.

Strategy

For the arrangement shown in the figure, we identify the following five forces acting on the meter stick:

$w_1 = m_1 g$ is the weight of mass m_1; $w_2 = m_2 g$ is the weight of mass m_2;

$w = mg$ is the weight of the entire meter stick; $w_3 = m_3 g$ is the weight of unknown mass m_3;

F_S is the normal reaction force at the support point S.

We choose a frame of reference where the direction of the y-axis is the direction of gravity, the direction of the x-axis is along the meter stick, and the axis of rotation (the z-axis) is perpendicular to the x-axis and passes through the support point S. In other words, we choose the pivot at the point where the meter stick touches the support. This is a natural choice for the pivot because this point does not move as the stick rotates. Now we are ready to set up the free-body diagram for the meter stick. We indicate the pivot and attach five vectors representing the five forces along the line representing the meter stick, locating the forces with respect to the

pivot Figure 12.10. At this stage, we can identify the lever arms of the five forces given the information provided in the problem. For the three hanging masses, the problem is explicit about their locations along the stick, but the information about the location of the weight w is given implicitly. The key word here is "uniform." We know from our previous studies that the CM of a uniform stick is located at its midpoint, so this is where we attach the weight w, at the 50-cm mark.

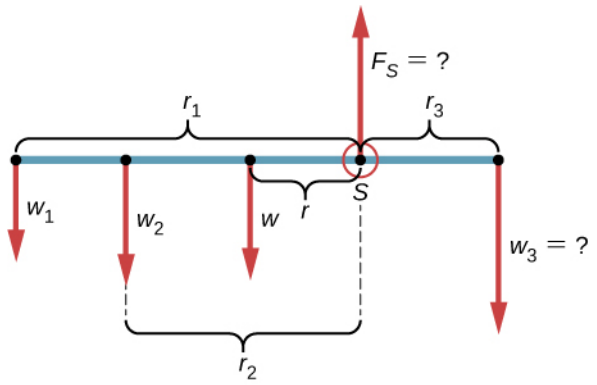


Figure 12.10 Free-body diagram for the meter stick. The pivot is chosen at the support point S.

Solution

With Figure 12.9 and Figure 12.10 for reference, we begin by finding the lever arms of the five forces acting on the stick:

$$\begin{aligned} r_1 &= 30.0\,\text{cm} + 40.0\,\text{cm} = 70.0\,\text{cm} \\ r_2 &= 40.0\,\text{cm} \\ r &= 50.0\,\text{cm} - 30.0\,\text{cm} = 20.0\,\text{cm} \\ r_S &= 0.0\,\text{cm (because } F_S \text{ is attached at the pivot)} \\ r_3 &= 30.0\,\text{cm}. \end{aligned}$$

Now we can find the five torques with respect to the chosen pivot:

$$\begin{aligned} \tau_1 &= +r_1 w_1 \sin 90^\circ = +r_1 m_1 g && \text{(counterclockwise rotation, positive sense)} \\ \tau_2 &= +r_2 w_2 \sin 90^\circ = +r_2 m_2 g && \text{(counterclockwise rotation, positive sense)} \\ \tau &= +rw \sin 90^\circ = +rmg && \text{(gravitational torque)} \\ \tau_S &= r_S F_S \sin\theta_S = 0 && \text{(because } r_S = 0\,\text{cm)} \\ \tau_3 &= -r_3 w_3 \sin 90^\circ = -r_3 m_3 g && \text{(clockwise rotation, negative sense)} \end{aligned}$$

The second equilibrium condition (equation for the torques) for the meter stick is

$$\tau_1 + \tau_2 + \tau + \tau_S + \tau_3 = 0.$$

When substituting torque values into this equation, we can omit the torques giving zero contributions. In this way the second equilibrium condition is

$$+r_1 m_1 g + r_2 m_2 g + rmg - r_3 m_3 g = 0. \qquad \textbf{12.17}$$

Selecting the $+y$-direction to be parallel to $\vec{F}_S$, the first equilibrium condition for the stick is

$$-w_1 - w_2 - w + F_S - w_3 = 0.$$

Substituting the forces, the first equilibrium condition becomes

$$-m_1 g - m_2 g - mg + F_S - m_3 g = 0. \qquad \textbf{12.18}$$

We solve these equations simultaneously for the unknown values m_3 and F_S. In Equation 12.17, we cancel the g factor and rearrange the terms to obtain

$$r_3 m_3 = r_1 m_1 + r_2 m_2 + rm.$$

To obtain m_3 we divide both sides by r_3, so we have

$$\begin{aligned} m_3 &= \frac{r_1}{r_3} m_1 + \frac{r_2}{r_3} m_2 + \frac{r}{r_3} m \\ &= \frac{70}{30}(50.0\,\text{g}) + \frac{40}{30}(75.0\,\text{g}) + \frac{20}{30}(150.0\,\text{g}) = 316.0\tfrac{2}{3}\,\text{g} \simeq 317\,\text{g}. \end{aligned} \quad \textbf{12.19}$$

To find the normal reaction force, we rearrange the terms in Equation 12.18, converting grams to kilograms:

$$\begin{aligned} F_S &= (m_1 + m_2 + m + m_3)g \\ &= (50.0 + 75.0 + 150.0 + 316.7) \times 10^{-3}\text{kg} \times 9.8\,\frac{\text{m}}{\text{s}^2} = 5.8\,\text{N}. \end{aligned} \quad \textbf{12.20}$$

Significance

Notice that Equation 12.17 is independent of the value of g. The torque balance may therefore be used to measure mass, since variations in g-values on Earth's surface do not affect these measurements. This is not the case for a spring balance because it measures the force.

CHECK YOUR UNDERSTANDING 12.3

Repeat Example 12.3 using the left end of the meter stick to calculate the torques; that is, by placing the pivot at the left end of the meter stick.

In the next example, we show how to use the first equilibrium condition (equation for forces) in the vector form given by Equation 12.7 and Equation 12.8. We present this solution to illustrate the importance of a suitable choice of reference frame. Although all inertial reference frames are equivalent and numerical solutions obtained in one frame are the same as in any other, an unsuitable choice of reference frame can make the solution quite lengthy and convoluted, whereas a wise choice of reference frame makes the solution straightforward. We show this in the equivalent solution to the same problem. This particular example illustrates an application of static equilibrium to biomechanics.

EXAMPLE 12.4

Forces in the Forearm

A weightlifter is holding a 50.0-lb weight (equivalent to 222.4 N) with his forearm, as shown in Figure 12.11. His forearm is positioned at $\beta = 60^\circ$ with respect to his upper arm. The forearm is supported by a contraction of the biceps muscle, which causes a torque around the elbow. Assuming that the tension in the biceps acts along the vertical direction given by gravity, what tension must the muscle exert to hold the forearm at the position shown? What is the force on the elbow joint? Assume that the forearm's weight is negligible. Give your final answers in SI units.

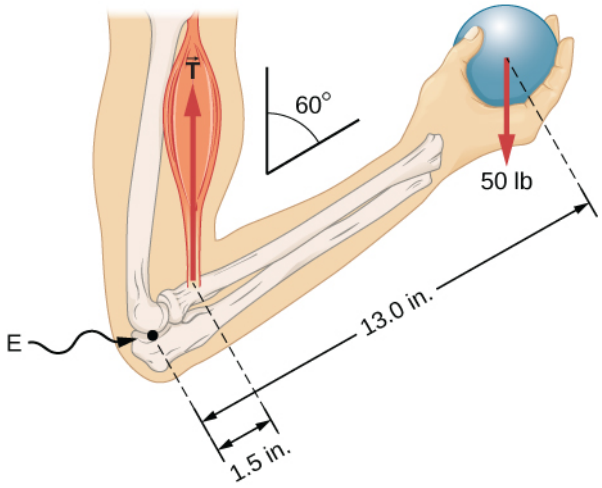


Figure 12.11 The forearm is rotated around the elbow (*E*) by a contraction of the biceps muscle, which causes tension $\vec{\mathbf{T}}_{\mathrm{M}}$.

Strategy

We identify three forces acting on the forearm: the unknown force $\vec{\mathbf{F}}$ at the elbow; the unknown tension $\vec{\mathbf{T}}_{\mathrm{M}}$ in the muscle; and the weight $\vec{\mathbf{w}}$ with magnitude $w = 50$ lb. We adopt the frame of reference with the x-axis along the forearm and the pivot at the elbow. The vertical direction is the direction of the weight, which is the same as the direction of the upper arm. The x-axis makes an angle $\beta = 60°$ with the vertical. The y-axis is perpendicular to the x-axis. Now we set up the free-body diagram for the forearm. First, we draw the axes, the pivot, and the three vectors representing the three identified forces. Then we locate the angle β and represent each force by its x- and y-components, remembering to cross out the original force vector to avoid double counting. Finally, we label the forces and their lever arms. The free-body diagram for the forearm is shown in Figure 12.12. At this point, we are ready to set up equilibrium conditions for the forearm. Each force has x- and y-components; therefore, we have two equations for the first equilibrium condition, one equation for each component of the net force acting on the forearm.

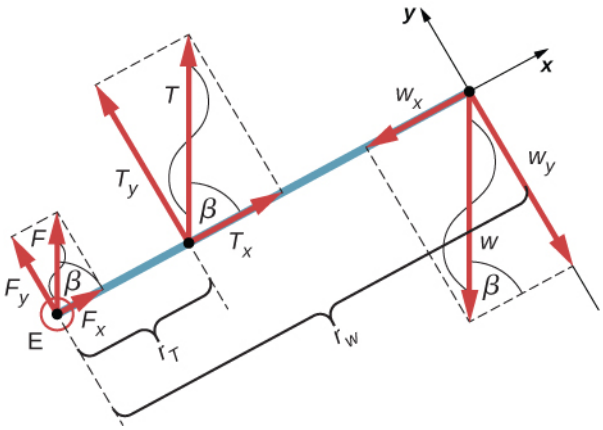


Figure 12.12 Free-body diagram for the forearm: The pivot is located at point *E* (elbow).

Notice that in our frame of reference, contributions to the second equilibrium condition (for torques) come only from the y-components of the forces because the x-components of the forces are all parallel to their lever arms, so that for any of them we have $\sin\theta = 0$ in Equation 12.10. For the y-components we have $\theta = \pm 90°$ in Equation 12.10. Also notice that the torque of the force at the elbow is zero because this force is attached at the pivot. So the contribution to the net torque comes only from the torques of T_y and of w_y.

Solution

We see from the free-body diagram that the x-component of the net force satisfies the equation

$$+F_x + T_x - w_x = 0 \tag{12.21}$$

and the y-component of the net force satisfies

$$+F_y + T_y - w_y = 0. \tag{12.22}$$

Equation 12.21 and Equation 12.22 are two equations of the first equilibrium condition (for forces). Next, we read from the free-body diagram that the net torque along the axis of rotation is

$$+r_T T_y - r_w w_y = 0. \tag{12.23}$$

Equation 12.23 is the second equilibrium condition (for torques) for the forearm. The free-body diagram shows that the lever arms are $r_T = 1.5$ in. and $r_w = 13.0$ in. At this point, we do not need to convert inches into SI units, because as long as these units are consistent in Equation 12.23, they cancel out. Using the free-body diagram again, we find the magnitudes of the component forces:

$$\begin{aligned} F_x &= F\cos\beta = F\cos 60^\circ = F/2 \\ T_x &= T\cos\beta = T\cos 60^\circ = T/2 \\ w_x &= w\cos\beta = w\cos 60^\circ = w/2 \\ F_y &= F\sin\beta = F\sin 60^\circ = F\sqrt{3}/2 \\ T_y &= T\sin\beta = T\sin 60^\circ = T\sqrt{3}/2 \\ w_y &= w\sin\beta = w\sin 60^\circ = w\sqrt{3}/2. \end{aligned}$$

We substitute these magnitudes into Equation 12.21, Equation 12.22, and Equation 12.23 to obtain, respectively,

$$F/2 + T/2 - w/2 = 0$$

$$F\sqrt{3}/2 + T\sqrt{3}/2 - w\sqrt{3}/2 = 0$$

$$r_T T\sqrt{3}/2 - r_w w\sqrt{3}/2 = 0.$$

When we simplify these equations, we see that we are left with only two independent equations for the two unknown force magnitudes, F and T, because Equation 12.21 for the x-component is equivalent to Equation 12.22 for the y-component. In this way, we obtain the first equilibrium condition for forces

$$F + T - w = 0 \tag{12.24}$$

and the second equilibrium condition for torques

$$r_T T - r_w w = 0. \tag{12.25}$$

The magnitude of tension in the muscle is obtained by solving Equation 12.25:

$$T = \frac{r_w}{r_T} w = \frac{13.0}{1.5}(50\text{ lb}) = 433\frac{1}{3}\text{lb} \simeq 433.3\text{ lb}.$$

The force at the elbow is obtained by solving Equation 12.24:

$$F = w - T = 50.0\text{ lb} - 433.3\text{ lb} = -383.3\text{ lb}.$$

The negative sign in the equation tells us that the actual force at the elbow is antiparallel to the working direction adopted for drawing the free-body diagram. In the final answer, we convert the forces into SI units of force. The answer is

$$F = 383.3\text{ lb} = 383.3(4.448\text{ N}) = 1705\text{ N downward}$$
$$T = 433.3\text{ lb} = 433.3(4.448\text{ N}) = 1927\text{ N upward}.$$

Significance

Two important issues here are worth noting. The first concerns conversion into SI units, which can be done at

the very end of the solution as long as we keep consistency in units. The second important issue concerns the hinge joints such as the elbow. In the initial analysis of a problem, hinge joints should always be assumed to exert a force in an *arbitrary direction*, and then you must solve for all components of a hinge force independently. In this example, the elbow force happens to be vertical because the problem assumes the tension by the biceps to be vertical as well. Such a simplification, however, is not a general rule.

Solution

Suppose we adopt a reference frame with the direction of the *y*-axis along the 50-lb weight and the pivot placed at the elbow. In this frame, all three forces have only *y*-components, so we have only one equation for the first equilibrium condition (for forces). We draw the free-body diagram for the forearm as shown in Figure 12.13, indicating the pivot, the acting forces and their lever arms with respect to the pivot, and the angles θ_T and θ_w that the forces $\vec{\mathbf{T}}_{\mathrm{M}}$ and $\vec{\mathbf{w}}$ (respectively) make with their lever arms. In the definition of torque given by Equation 12.10, the angle θ_T is the direction angle of the vector $\vec{T}_{\mathrm{M}}$, counted *counterclockwise* from the radial direction of the lever arm that always points away from the pivot. By the same convention, the angle θ_w is measured *counterclockwise* from the radial direction of the lever arm to the vector $\vec{\mathbf{w}}$. Done this way, the non-zero torques are most easily computed by directly substituting into Equation 12.10 as follows:

$$\tau_T = r_T T \sin\theta_T = r_T T \sin\beta = r_T T \sin 60^\circ = +r_T T\sqrt{3}/2$$
$$\tau_w = r_w w \sin\theta_w = r_w w \sin(\beta + 180^\circ) = -r_w w \sin\beta = -r_w w\sqrt{3}/2.$$

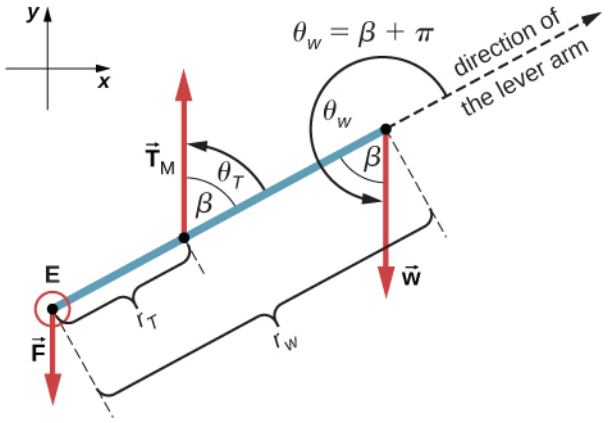


Figure 12.13 Free-body diagram for the forearm for the equivalent solution. The pivot is located at point E (elbow).

The second equilibrium condition, $\tau_T + \tau_w = 0$, can be now written as

$$r_T T\sqrt{3}/2 - r_w w\sqrt{3}/2 = 0. \qquad 12.26$$

From the free-body diagram, the first equilibrium condition (for forces) is

$$-F + T - w = 0. \qquad 12.27$$

Equation 12.26 is identical to Equation 12.25 and gives the result $T = 433.3$ lb. Equation 12.27 gives

$$F = T - w = 433.3\ \text{lb} - 50.0\ \text{lb} = 383.3\ \text{lb}.$$

We see that these answers are identical to our previous answers, but the second choice for the frame of reference leads to an equivalent solution that is simpler and quicker because it does not require that the forces be resolved into their rectangular components.

CHECK YOUR UNDERSTANDING 12.4

Repeat Example 12.4 assuming that the forearm is an object of uniform density that weighs 8.896 N.

EXAMPLE 12.5

A Ladder Resting Against a Wall

A uniform ladder is $L = 5.0$ m long and weighs 400.0 N. The ladder rests against a slippery vertical wall, as shown in Figure 12.14. The inclination angle between the ladder and the rough floor is $\beta = 53°$. Find the reaction forces from the floor and from the wall on the ladder and the coefficient of static friction μ_s at the interface of the ladder with the floor that prevents the ladder from slipping.

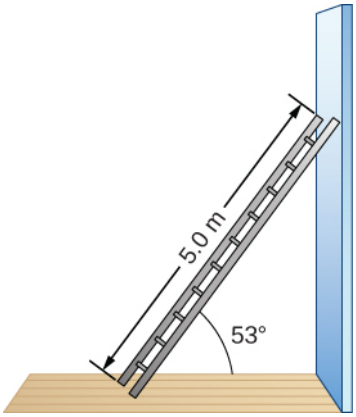


Figure 12.14 A 5.0-m-long ladder rests against a frictionless wall.

Strategy

We can identify four forces acting on the ladder. The first force is the normal reaction force N from the floor in the upward vertical direction. The second force is the static friction force $f = \mu_s N$ directed horizontally along the floor toward the wall—this force prevents the ladder from slipping. These two forces act on the ladder at its contact point with the floor. The third force is the weight w of the ladder, attached at its CM located midway between its ends. The fourth force is the normal reaction force F from the wall in the horizontal direction away from the wall, attached at the contact point with the wall. There are no other forces because the wall is slippery, which means there is no friction between the wall and the ladder. Based on this analysis, we adopt the frame of reference with the y-axis in the vertical direction (parallel to the wall) and the x-axis in the horizontal direction (parallel to the floor). In this frame, each force has either a horizontal component or a vertical component but not both, which simplifies the solution. We select the pivot at the contact point with the floor. In the free-body diagram for the ladder, we indicate the pivot, all four forces and their lever arms, and the angles between lever arms and the forces, as shown in Figure 12.15. With our choice of the pivot location, there is no torque either from the normal reaction force N or from the static friction f because they both act at the pivot.

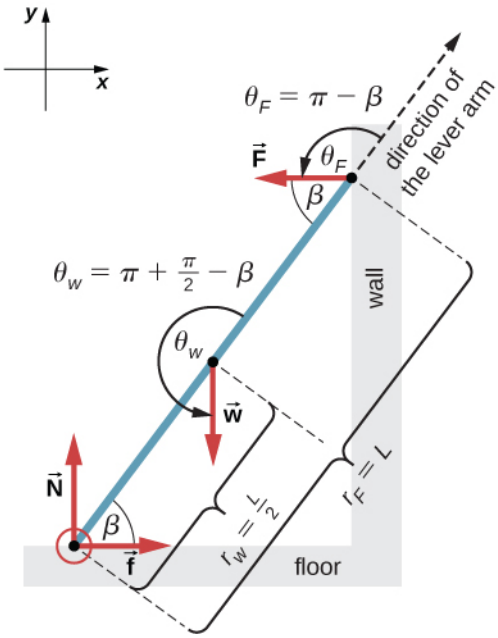


Figure 12.15 Free-body diagram for a ladder resting against a frictionless wall.

Solution

From the free-body diagram, the net force in the x-direction is

$$+f - F = 0 \qquad 12.28$$

the net force in the y-direction is

$$+N - w = 0 \qquad 12.29$$

and the net torque along the rotation axis at the pivot point is

$$\tau_w + \tau_F = 0. \qquad 12.30$$

where τ_w is the torque of the weight w and τ_F is the torque of the reaction F. From the free-body diagram, we identify that the lever arm of the reaction at the wall is $r_F = L = 5.0$ m and the lever arm of the weight is $r_w = L/2 = 2.5$ m. With the help of the free-body diagram, we identify the angles to be used in Equation 12.10 for torques: $\theta_F = 180° - \beta$ for the torque from the reaction force with the wall, and $\theta_w = 180° + (90° - \beta)$ for the torque due to the weight. Now we are ready to use Equation 12.10 to compute torques:

$$\tau_w = r_w w \sin\theta_w = r_w w \sin(180° + 90° - \beta) = -\tfrac{L}{2} w \sin(90° - \beta) = -\tfrac{L}{2} w \cos\beta$$
$$\tau_F = r_F F \sin\theta_F = r_F F \sin(180° - \beta) = LF \sin\beta.$$

We substitute the torques into Equation 12.30 and solve for F :

$$\begin{aligned} -\tfrac{L}{2} w \cos\beta + LF \sin\beta &= 0 \\ F = \tfrac{w}{2} \cot\beta = \tfrac{400.0\ \text{N}}{2} \cot 53° &= 150.7\ \text{N} \end{aligned} \qquad 12.31$$

We obtain the normal reaction force with the floor by solving Equation 12.29: $N = w = 400.0$ N. The magnitude of friction is obtained by solving Equation 12.28: $f = F = 150.7$ N. The coefficient of static friction is $\mu_s = f/N = 150.7/400.0 = 0.377$.

The net force on the ladder at the contact point with the floor is the vector sum of the normal reaction from the floor and the static friction forces:

$$\vec{\mathbf{F}}_{\text{floor}} = \vec{\mathbf{f}} + \vec{\mathbf{N}} = (150.7\text{ N})(-\hat{\mathbf{i}}) + (400.0\text{ N})(+\hat{\mathbf{j}}) = (-150.7\hat{\mathbf{i}} + 400.0\hat{\mathbf{j}})\text{ N}.$$

Its magnitude is

$$F_{\text{floor}} = \sqrt{f^2 + N^2} = \sqrt{150.7^2 + 400.0^2}\text{ N} = 427.4\text{ N}$$

and its direction is

$$\varphi = \tan^{-1}(N/f) = \tan^{-1}(400.0/150.7) = 69.3^\circ \text{ above the floor.}$$

We should emphasize here two general observations of practical use. First, notice that when we choose a pivot point, there is no expectation that the system will actually pivot around the chosen point. The ladder in this example is not rotating at all but firmly stands on the floor; nonetheless, its contact point with the floor is a good choice for the pivot. Second, notice when we use Equation 12.10 for the computation of individual torques, we do not need to resolve the forces into their normal and parallel components with respect to the direction of the lever arm, and we do not need to consider a sense of the torque. As long as the angle in Equation 12.10 is correctly identified—with the help of a free-body diagram—as the angle measured counterclockwise from the direction of the lever arm to the direction of the force vector, Equation 12.10 gives both the magnitude and the sense of the torque. This is because torque is the vector product of the lever-arm vector crossed with the force vector, and Equation 12.10 expresses the rectangular component of this vector product along the axis of rotation.

Significance

This result is independent of the length of the ladder because L is cancelled in the second equilibrium condition, Equation 12.31. No matter how long or short the ladder is, as long as its weight is 400 N and the angle with the floor is 53°, our results hold. But the ladder will slip if the net torque becomes negative in Equation 12.31. This happens for some angles when the coefficient of static friction is not great enough to prevent the ladder from slipping.

CHECK YOUR UNDERSTANDING 12.5

For the situation described in Example 12.5, determine the values of the coefficient μ_s of static friction for which the ladder starts slipping, given that β is the angle that the ladder makes with the floor.

EXAMPLE 12.6

Forces on Door Hinges

A swinging door that weighs $w = 400.0$ N is supported by hinges A and B so that the door can swing about a vertical axis passing through the hinges Figure 12.16. The door has a width of $b = 1.00$ m, and the door slab has a uniform mass density. The hinges are placed symmetrically at the door's edge in such a way that the door's weight is evenly distributed between them. The hinges are separated by distance $a = 2.00$ m. Find the forces on the hinges when the door rests half-open.

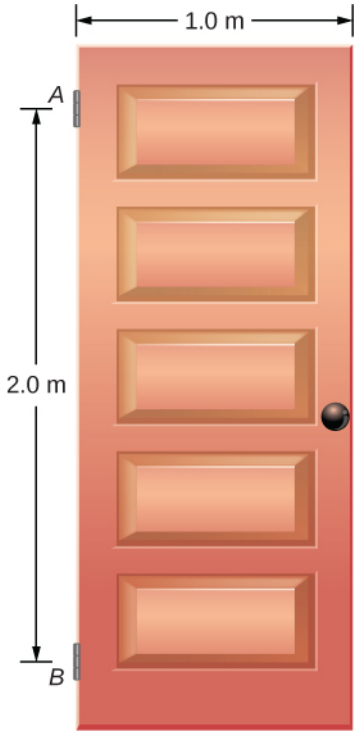


Figure 12.16 A 400-N swinging vertical door is supported by two hinges attached at points *A* and *B*.

Strategy

The forces that the door exerts on its hinges can be found by simply reversing the directions of the forces that the hinges exert on the door. Hence, our task is to find the forces from the hinges on the door. Three forces act on the door slab: an unknown force $\vec{\mathbf{A}}$ from hinge A, an unknown force $\vec{\mathbf{B}}$ from hinge B, and the known weight $\vec{\mathbf{w}}$ attached at the center of mass of the door slab. The CM is located at the geometrical center of the door because the slab has a uniform mass density. We adopt a rectangular frame of reference with the *y*-axis along the direction of gravity and the *x*-axis in the plane of the slab, as shown in panel (a) of Figure 12.17, and resolve all forces into their rectangular components. In this way, we have four unknown component forces: two components of force $\vec{\mathbf{A}}$ $(A_x$ and $A_y)$, and two components of force $\vec{\mathbf{B}}$ $(B_x$ and $B_y)$. In the free-body diagram, we represent the two forces at the hinges by their vector components, whose assumed orientations are arbitrary. Because there are four unknowns $(A_x, B_x, A_y,$ and $B_y)$, we must set up four independent equations. One equation is the equilibrium condition for forces in the *x*-direction. The second equation is the equilibrium condition for forces in the *y*-direction. The third equation is the equilibrium condition for torques in rotation about a hinge. Because the weight is evenly distributed between the hinges, we have the fourth equation, $A_y = B_y$. To set up the equilibrium conditions, we draw a free-body diagram and choose the pivot point at the upper hinge, as shown in panel (b) of Figure 12.17. Finally, we solve the equations for the unknown force components and find the forces.

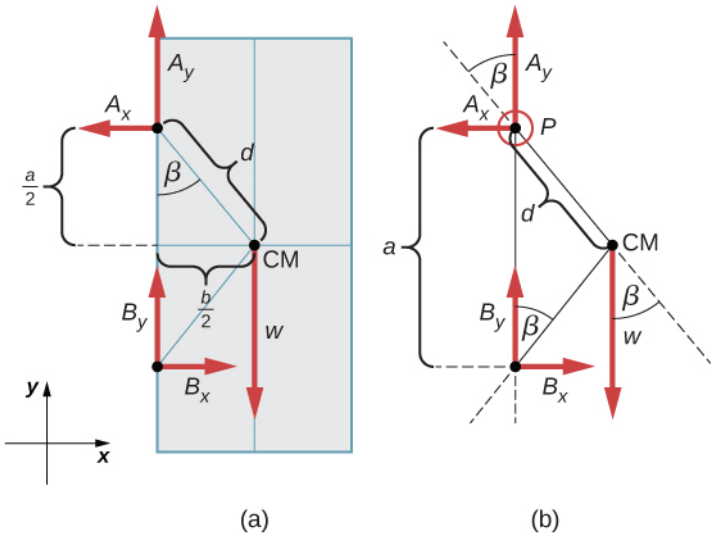


Figure 12.17 (a) Geometry and (b) free-body diagram for the door.

Solution

From the free-body diagram for the door we have the first equilibrium condition for forces:

$$\text{in } x\text{-direction:} \quad -A_x + B_x = 0 \;\Rightarrow\; A_x = B_x$$
$$\text{in } y\text{-direction:} \quad +A_y + B_y - w = 0 \;\Rightarrow\; A_y = B_y = \frac{w}{2} = \frac{400.0\text{ N}}{2} = 200.0\text{ N}.$$

We select the pivot at point P (upper hinge, per the free-body diagram) and write the second equilibrium condition for torques in rotation about point P:

$$\text{pivot at } P\text{: } \tau_w + \tau_{Bx} + \tau_{By} = 0. \qquad 12.32$$

We use the free-body diagram to find all the terms in this equation:

$$\begin{aligned} \tau_w &= dw\sin(-\beta) = -dw\sin\beta = -dw\frac{b/2}{d} = -w\frac{b}{2} \\ \tau_{Bx} &= aB_x\sin 90^\circ = +aB_x \\ \tau_{By} &= aB_y\sin 180^\circ = 0. \end{aligned}$$

In evaluating $\sin\beta$, we use the geometry of the triangle shown in part (a) of the figure. Now we substitute these torques into Equation 12.32 and compute B_x :

$$\text{pivot at } P\text{: } -w\frac{b}{2} + aB_x = 0 \;\Rightarrow\; B_x = w\frac{b}{2a} = (400.0\text{ N})\frac{1}{2\cdot 2} = 100.0\text{ N}.$$

Therefore the magnitudes of the horizontal component forces are $A_x = B_x = 100.0$ N. The forces on the door are

$$\text{at the upper hinge: } \vec{\mathbf{F}}_{A\text{ on door}} = -100.0\text{ N}\hat{\mathbf{i}} + 200.0\text{ N}\hat{\mathbf{j}}$$
$$\text{at the lower hinge: } \vec{\mathbf{F}}_{B\text{ on door}} = +100.0\text{ N}\hat{\mathbf{i}} + 200.0\text{ N}\hat{\mathbf{j}}.$$

The forces on the hinges are found from Newton's third law as

$$\text{on the upper hinge: } \vec{\mathbf{F}}_{\text{door on }A} = 100.0\text{ N}\hat{\mathbf{i}} - 200.0\text{ N}\hat{\mathbf{j}}$$
$$\text{on the lower hinge: } \vec{\mathbf{F}}_{\text{door on }B} = -100.0\text{ N}\hat{\mathbf{i}} - 200.0\text{ N}\hat{\mathbf{j}}.$$

Significance


Note that if the problem were formulated without the assumption of the weight being equally distributed between the two hinges, we wouldn't be able to solve it because the number of the unknowns would be greater than the number of equations expressing equilibrium conditions.

CHECK YOUR UNDERSTANDING 12.6

Solve the problem in Example 12.6 by taking the pivot position at the center of mass.


CHECK YOUR UNDERSTANDING 12.7

A 50-kg person stands 1.5 m away from one end of a uniform 6.0-m-long scaffold of mass 70.0 kg. Find the tensions in the two vertical ropes supporting the scaffold.

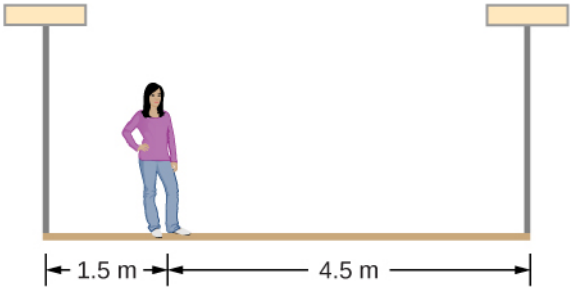

CHECK YOUR UNDERSTANDING 12.8

A 400.0-N sign hangs from the end of a uniform strut. The strut is 4.0 m long and weighs 600.0 N. The strut is supported by a hinge at the wall and by a cable whose other end is tied to the wall at a point 3.0 m above the left end of the strut. Find the tension in the supporting cable and the force of the hinge on the strut.

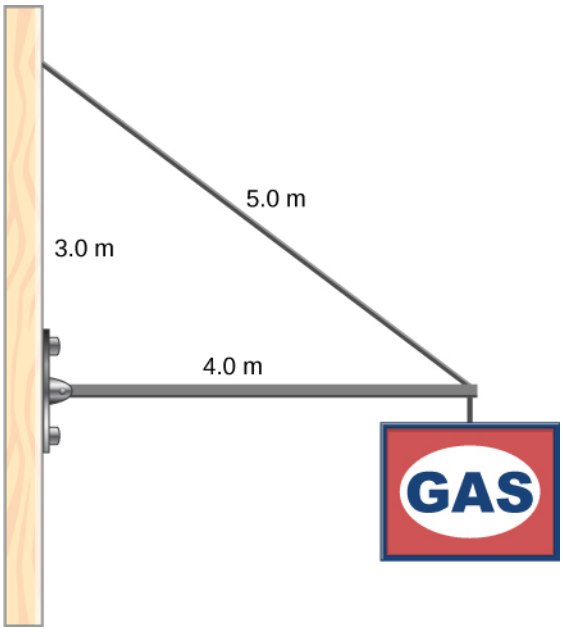

CHAPTER REVIEW

Key Terms

breaking stress (ultimate stress) value of stress at the fracture point
bulk modulus elastic modulus for the bulk stress
bulk strain (or **volume strain**) strain under the bulk stress, given as fractional change in volume
bulk stress (or **volume stress**) stress caused by compressive forces, in all directions
center of gravity point where the weight vector is attached
compressibility reciprocal of the bulk modulus
compressive strain strain that occurs when forces are contracting an object, causing its shortening
compressive stress stress caused by compressive forces, only in one direction
elastic object that comes back to its original size and shape when the load is no longer present
elastic limit stress value beyond which material no longer behaves elastically and becomes permanently deformed
elastic modulus proportionality constant in linear relation between stress and strain, in SI pascals
equilibrium body is in equilibrium when its linear and angular accelerations are both zero relative to an inertial frame of reference
first equilibrium condition expresses translational equilibrium; all external forces acting on the body balance out and their vector sum is zero
gravitational torque torque on the body caused by its weight; it occurs when the center of gravity of the body is not located on the axis of rotation
linearity limit (proportionality limit) largest stress value beyond which stress is no longer proportional to strain
normal pressure pressure of one atmosphere, serves as a reference level for pressure
pascal (Pa) SI unit of stress, SI unit of pressure
plastic behavior material deforms irreversibly, does not go back to its original shape and size when load is removed and stress vanishes
pressure force pressing in normal direction on a surface per the surface area, the bulk stress in fluids
second equilibrium condition expresses rotational equilibrium; all torques due to external forces acting on the body balance out and their vector sum is zero
shear modulus elastic modulus for shear stress
shear strain strain caused by shear stress
shear stress stress caused by shearing forces
static equilibrium body is in static equilibrium when it is at rest in our selected inertial frame of reference
strain dimensionless quantity that gives the amount of deformation of an object or medium under stress
stress quantity that contains information about the magnitude of force causing deformation, defined as force per unit area
stress-strain diagram graph showing the relationship between stress and strain, characteristic of a material
tensile strain strain under tensile stress, given as fractional change in length, which occurs when forces are stretching an object, causing its elongation
tensile stress stress caused by tensile forces, only in one direction, which occurs when forces are stretching an object, causing its elongation
Young's modulus elastic modulus for tensile or compressive stress

Key Equations

First Equilibrium Condition $$\sum_k \vec{\mathbf{F}}_k = \vec{\mathbf{0}}$$

Second Equilibrium Condition $$\sum_k \vec{\tau}_k = \vec{\mathbf{0}}$$

Linear relation between stress and strain $$\text{stress} = (\text{elastic modulus}) \times \text{strain}$$

Young's modulus	$Y = \frac{\text{tensile stress}}{\text{tensile strain}} = \frac{F_{\perp}}{A}\frac{L_0}{\Delta L}$
Bulk modulus	$B = \frac{\text{bulk stress}}{\text{bulk strain}} = -\Delta p \frac{V_0}{\Delta V}$
Shear modulus	$S = \frac{\text{shear stress}}{\text{shear strain}} = \frac{F_{\parallel}}{A}\frac{L_0}{\Delta x}$

Summary

12.1 Conditions for Static Equilibrium

- A body is in equilibrium when it remains either in uniform motion (both translational and rotational) or at rest. When a body in a selected inertial frame of reference neither rotates nor moves in translational motion, we say the body is in static equilibrium in this frame of reference.
- Conditions for equilibrium require that the sum of all external forces acting on the body is zero (first condition of equilibrium), and the sum of all external torques from external forces is zero (second condition of equilibrium). These two conditions must be simultaneously satisfied in equilibrium. If one of them is not satisfied, the body is not in equilibrium.
- The free-body diagram for a body is a useful tool that allows us to count correctly all contributions from all external forces and torques acting on the body. Free-body diagrams for the equilibrium of an extended rigid body must indicate a pivot point and lever arms of acting forces with respect to the pivot.

12.2 Examples of Static Equilibrium

- A variety of engineering problems can be solved by applying equilibrium conditions for rigid bodies.
- In applications, identify all forces that act on a rigid body and note their lever arms in rotation about a chosen rotation axis. Construct a free-body diagram for the body. Net external forces and torques can be clearly identified from a correctly constructed free-body diagram. In this way, you can set up the first equilibrium condition for forces and the second equilibrium condition for torques.
- In setting up equilibrium conditions, we are free to adopt any inertial frame of reference and any position of the pivot point. All choices lead to one answer. However, some choices can make the process of finding the solution unduly complicated. We reach the same answer no matter what choices we make. The only way to master this skill is to practice.

12.3 Stress, Strain, and Elastic Modulus

- External forces on an object (or medium) cause its deformation, which is a change in its size and shape. The strength of the forces that cause deformation is expressed by stress, which in SI units is measured in the unit of pressure (pascal). The extent of deformation under stress is expressed by strain, which is dimensionless.
- For a small stress, the relation between stress and strain is linear. The elastic modulus is the proportionality constant in this linear relation.
- Tensile (or compressive) strain is the response of an object or medium to tensile (or compressive) stress. Here, the elastic modulus is called Young's modulus. Tensile (or compressive) stress causes elongation (or shortening) of the object or medium and is due to an external forces acting along only one direction perpendicular to the cross-section.
- Bulk strain is the response of an object or medium to bulk stress. Here, the elastic modulus is called the bulk modulus. Bulk stress causes a change in the volume of the object or medium and is caused by forces acting on the body from all directions, perpendicular to its surface. Compressibility of an object or medium is the reciprocal of its bulk modulus.
- Shear strain is the deformation of an object or medium under shear stress. The shear modulus is the elastic modulus in this case. Shear stress is caused by forces acting along the object's two parallel surfaces.

12.4 Elasticity and Plasticity

- An object or material is elastic if it comes back to its original shape and size when the stress vanishes. In elastic deformations with stress values lower than the proportionality limit, stress is proportional to strain. When stress

goes beyond the proportionality limit, the deformation is still elastic but nonlinear up to the elasticity limit.
- An object or material has plastic behavior when stress is larger than the elastic limit. In the plastic region, the object or material does not come back to its original size or shape when stress vanishes but acquires a permanent deformation. Plastic behavior ends at the breaking point.

Conceptual Questions

12.1 Conditions for Static Equilibrium

1. What can you say about the velocity of a moving body that is in dynamic equilibrium?
2. Under what conditions can a rotating body be in equilibrium? Give an example.
3. What three factors affect the torque created by a force relative to a specific pivot point?
4. Mechanics sometimes put a length of pipe over the handle of a wrench when trying to remove a very tight bolt. How does this help?

For the next four problems, evaluate the statement as either true or false and explain your answer.

5. If there is only one external force (or torque) acting on an object, it cannot be in equilibrium.
6. If an object is in equilibrium there must be an even number of forces acting on it.
7. If an odd number of forces act on an object, the object cannot be in equilibrium.
8. A body moving in a circle with a constant speed is in rotational equilibrium.
9. What purpose is served by a long and flexible pole carried by wire-walkers?

12.2 Examples of Static Equilibrium

10. Is it possible to rest a ladder against a rough wall when the floor is frictionless?
11. Show how a spring scale and a simple fulcrum can be used to weigh an object whose weight is larger than the maximum reading on the scale.
12. A painter climbs a ladder. Is the ladder more likely to slip when the painter is near the bottom or near the top?
13. Why can a squirrel jump from a tree branch to the ground and run away undamaged, while a human could break a bone in such a fall?
14. When a glass bottle full of vinegar warms up, both the vinegar and the glass expand, but the vinegar expands significantly more with temperature than does the glass. The bottle will break if it is filled up to its very tight cap. Explain why and how a pocket of air above the vinegar prevents the bottle from breaking.
15. A thin wire strung between two nails in the wall is used to support a large picture. Is the wire likely to snap if it is strung tightly or if it is strung so that it sags considerably?

12.3 Stress, Strain, and Elastic Modulus

16. Review the relationship between stress and strain. Can you find any similarities between the two quantities?
17. What type of stress are you applying when you press on the ends of a wooden rod? When you pull on its ends?
18. Can compressive stress be applied to a rubber band?
19. Can Young's modulus have a negative value? What about the bulk modulus?
20. If a hypothetical material has a negative bulk modulus, what happens when you squeeze a piece of it?
21. Discuss how you might measure the bulk modulus of a liquid.

12.4 Elasticity and Plasticity

Note: Unless stated otherwise, the weights of the wires, rods, and other elements are assumed to be negligible. Elastic moduli of selected materials are given in Table 12.1.

22. What is meant when a fishing line is designated as "a 10-lb test?"
23. Steel rods are commonly placed in concrete before it sets. What is the purpose of these rods?

Problems


12.1 Conditions for Static Equilibrium

24. When tightening a bolt, you push perpendicularly on a wrench with a force of 165 N at a distance of 0.140 m from the center of the bolt. How much torque are you exerting relative


to the center of the bolt?

25. When opening a door, you push on it perpendicularly with a force of 55.0 N at a distance of 0.850 m from the hinges. What torque are you exerting relative to the hinges?


26. Find the magnitude of the tension in each supporting cable shown below. In each case, the weight of the suspended body is 100.0 N and the masses of the cables are negligible.




(a)



(b)




(c)

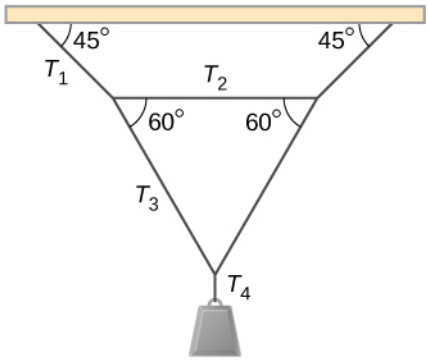


(d)

27. What force must be applied at point *P* to keep the structure shown in equilibrium? The weight of the structure is negligible.

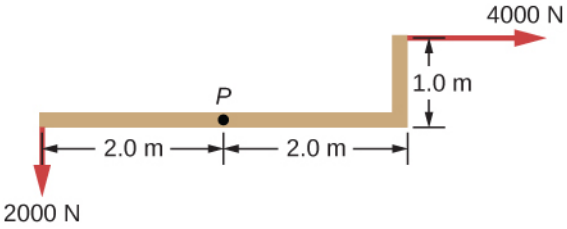


28. Is it possible to apply a force at *P* to keep in equilibrium the structure shown? The weight of the structure is negligible.

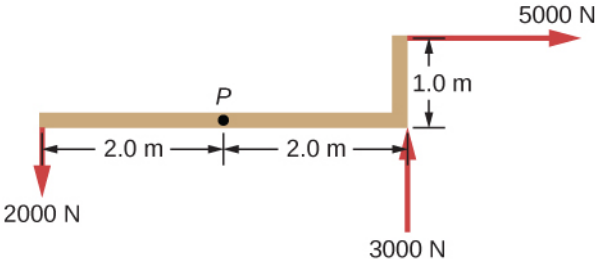

29. Two children push on opposite sides of a door during play. Both push horizontally and perpendicular to the door. One child pushes with a force of 17.5 N at a distance of 0.600 m from the hinges, and the second child pushes at a distance of 0.450 m. What force must the second child exert to keep the door from moving? Assume friction is negligible.


30. A small 1000-kg SUV has a wheel base of 3.0 m. If 60% if its weight rests on the front wheels, how far behind the front wheels is the wagon's center of mass?

31. The uniform seesaw is balanced at its center of mass, as seen below. The smaller boy on the right has a mass of 40.0 kg. What is the mass of his friend?

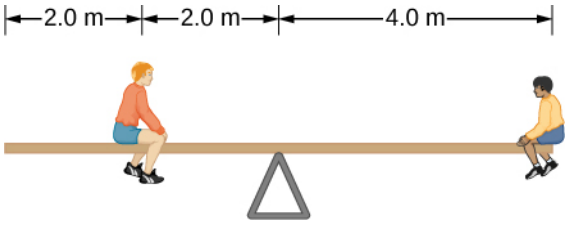


12.2 Examples of Static Equilibrium


32. A uniform plank rests on a level surface as shown below. The plank has a mass of 30 kg and is 6.0 m long. How much mass can be placed at its right end before it tips? (*Hint:* When the board is about to tip over, it makes contact with the surface only along the edge that becomes a momentary axis of rotation.)

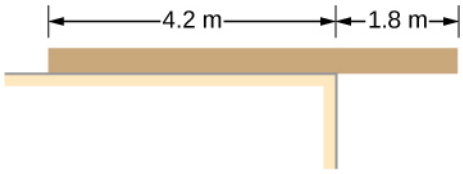

33. The uniform seesaw shown below is balanced on a fulcrum located 3.0 m from the left end. The smaller boy on the right has a mass of 40 kg and the bigger boy on the left has a mass 80 kg. What is the mass of the board?

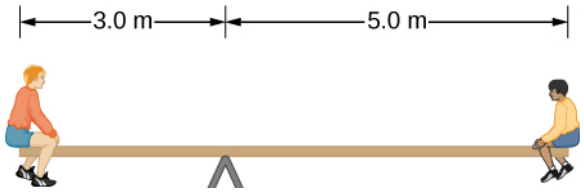


34. In order to get his car out of the mud, a man ties one end of a rope to the front bumper and the other end to a tree 15 m away, as shown below. He then pulls on the center of the rope with a force of 400 N, which causes its center to be displaced 0.30 m, as shown. What is the force of the rope on the car?

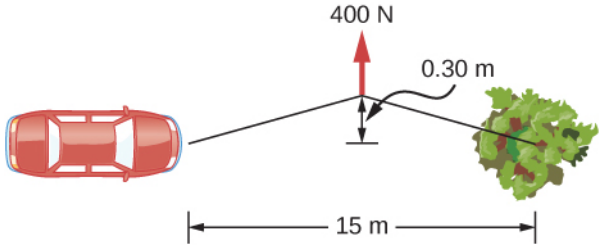

35. A uniform 40.0-kg scaffold of length 6.0 m is supported by two light cables, as shown below. An 80.0-kg painter stands 1.0 m from the left end of the scaffold, and his painting equipment is 1.5 m from the right end. If the tension in the left cable is twice that in the right cable, find the tensions in the cables and the mass of the equipment.




36. When the structure shown below is supported at point *P*, it is in equilibrium. Find the magnitude of force *F* and the force applied at *P*. The weight of the structure is negligible.

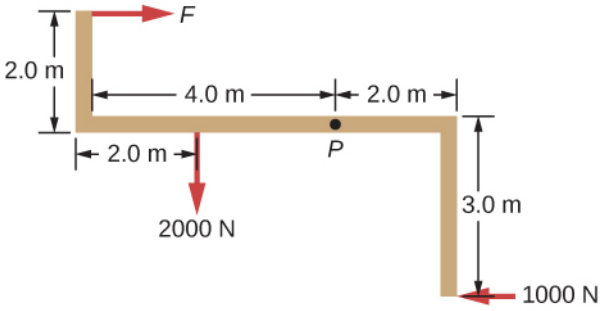


37. To get up on the roof, a person (mass 70.0 kg) places a 6.00-m aluminum ladder (mass 10.0 kg) against the house on a concrete pad with the base of the ladder 2.00 m from the house. The ladder rests against a plastic rain gutter, which we can assume to be frictionless. The center of mass of the ladder is 2.00 m from the bottom. The person is standing 3.00 m from the bottom. Find the normal reaction and friction forces on the ladder at its base.

38. A uniform horizontal strut weighs 400.0 N. One end of the strut is attached to a hinged support at the wall, and the other end of the strut is attached to a sign that weighs 200.0 N. The strut is also supported by a cable attached between the end of the strut and the wall. Assuming that the entire weight of the sign is attached at the very end of the strut, find the tension in the cable and the force at the hinge of the strut.

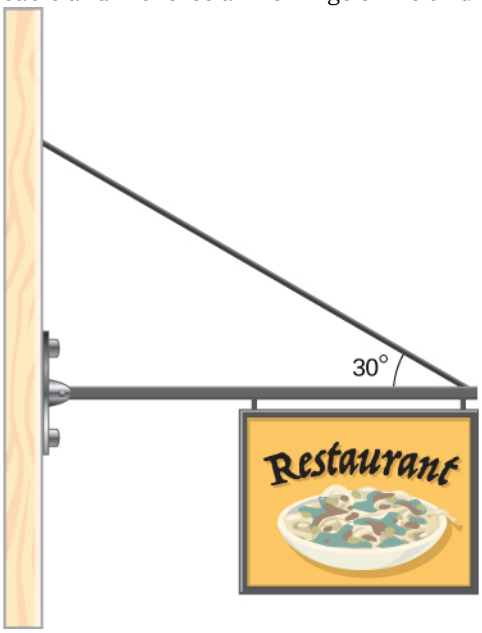


39. The forearm shown below is positioned at an angle θ with respect to the upper arm, and a 5.0-kg mass is held in the hand. The total mass of the forearm and hand is 3.0 kg, and their center of mass is 15.0 cm from the elbow. (a) What is the magnitude of the force that the


biceps muscle exerts on the forearm for $\theta = 60°$? (b) What is the magnitude of the force on the elbow joint for the same angle? (c) How do these forces depend on the angle θ?

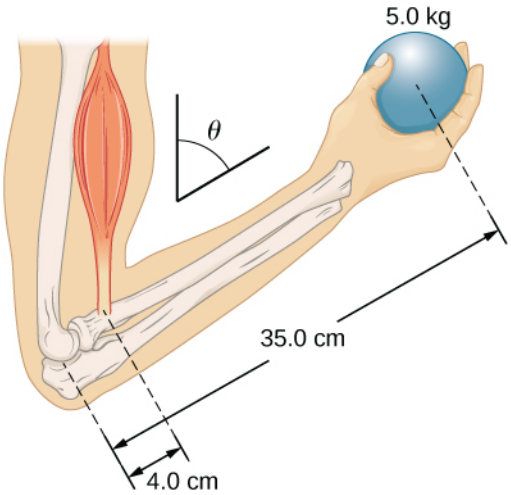


40. The uniform boom shown below weighs 3000 N. It is supported by the horizontal guy wire and by the hinged support at point *A*. What are the forces on the boom due to the wire and due to the support at *A*? Does the force at *A* act along the boom?

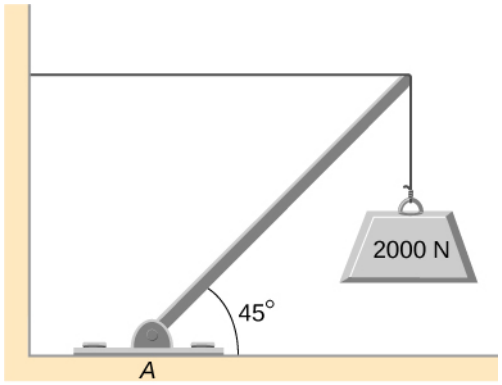


41. The uniform boom shown below weighs 700 N, and the object hanging from its right end weighs 400 N. The boom is supported by a light cable and by a hinge at the wall. Calculate the tension in the cable and the force on the hinge on the boom. Does the force on the hinge act along the boom?

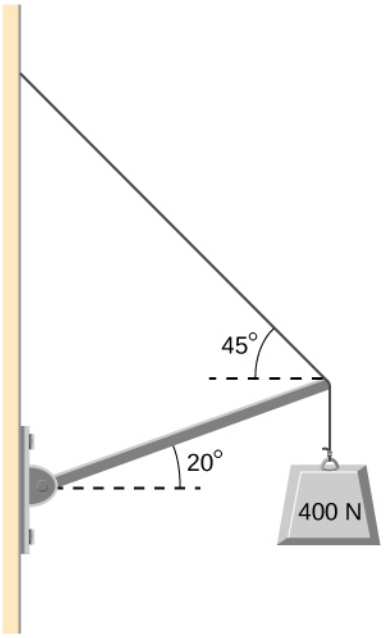

42. A 12.0-m boom, *AB*, of a crane lifting a 3000-kg load is shown below. The center of mass of the boom is at its geometric center, and the mass of the boom is 1000 kg. For the position shown, calculate tension *T* in the cable and the force at the axle *A*.

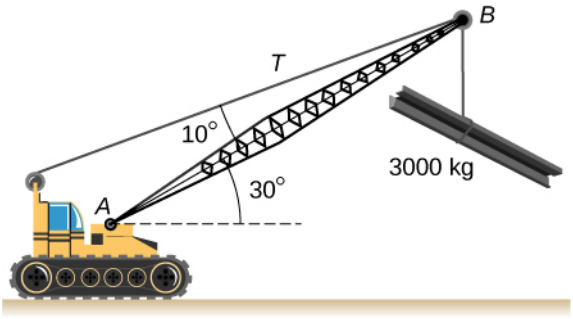


43. A uniform trapdoor shown below is 1.0 m by 1.5 m and weighs 300 N. It is supported by a single hinge (H), and by a light rope tied between the middle of the door and the floor. The door is held at the position shown, where its slab makes a 30° angle with the horizontal floor and the rope makes a 20° angle with the floor. Find the tension in the rope and the force at the hinge.

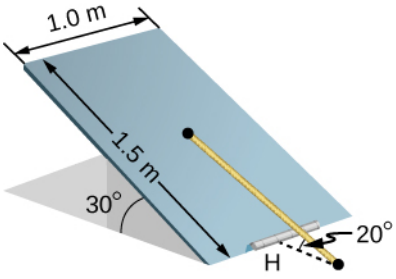

44. A 90-kg man walks on a sawhorse, as shown

below. The sawhorse is 2.0 m long and 1.0 m high, and its mass is 25.0 kg. Calculate the normal reaction force on each leg at the contact point with the floor when the man is 0.5 m from the far end of the sawhorse. (*Hint:* At each end, find the total reaction force first. This reaction force is the vector sum of two reaction forces, each acting along one leg. The normal reaction force at the contact point with the floor is the normal (with respect to the floor) component of this force.)

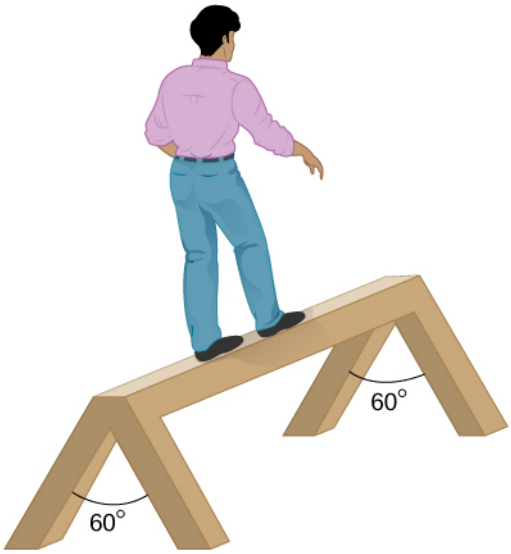

12.3 Stress, Strain, and Elastic Modulus

45. The "lead" in pencils is a graphite composition with a Young's modulus of approximately $1.0 \times 10^9 \text{N/m}^2$. Calculate the change in length of the lead in an automatic pencil if you tap it straight into the pencil with a force of 4.0 N. The lead is 0.50 mm in diameter and 60 mm long.

46. TV broadcast antennas are the tallest artificial structures on Earth. In 1987, a 72.0-kg physicist placed himself and 400 kg of equipment at the top of a 610-m-high antenna to perform gravity experiments. By how much was the antenna compressed, if we consider it to be equivalent to a steel cylinder 0.150 m in radius?

47. By how much does a 65.0-kg mountain climber stretch her 0.800-cm diameter nylon rope when she hangs 35.0 m below a rock outcropping? (For nylon, $Y = 1.35 \times 10^9 \text{Pa}$.)

48. When water freezes, its volume increases by 9.05%. What force per unit area is water capable of exerting on a container when it freezes?

49. A farmer making grape juice fills a glass bottle to the brim and caps it tightly. The juice expands more than the glass when it warms up, in such a way that the volume increases by 0.2%. Calculate the force exerted by the juice per square centimeter if its bulk modulus is $1.8 \times 10^9 \text{N/m}^2$, assuming the bottle does not break.

50. A disk between vertebrae in the spine is subjected to a shearing force of 600.0 N. Find its shear deformation, using the shear modulus of $1.0 \times 10^9 \text{ N/m}^2$. The disk is equivalent to a solid cylinder 0.700 cm high and 4.00 cm in diameter.

51. A vertebra is subjected to a shearing force of 500.0 N. Find the shear deformation, taking the vertebra to be a cylinder 3.00 cm high and 4.00 cm in diameter. How does your result compare with the result obtained in the preceding problem? Are spinal problems more common in disks than in vertebrae?

52. Calculate the force a piano tuner applies to stretch a steel piano wire by 8.00 mm, if the wire is originally 1.35 m long and its diameter is 0.850 mm.

53. A 20.0-m-tall hollow aluminum flagpole is equivalent in strength to a solid cylinder 4.00 cm in diameter. A strong wind bends the pole as much as a horizontal 900.0-N force on the top would do. How far to the side does the top of the pole flex?

54. A copper wire of diameter 1.0 cm stretches 1.0% when it is used to lift a load upward with an acceleration of 2.0 m/s^2. What is the weight of the load?

55. As an oil well is drilled, each new section of drill pipe supports its own weight and the weight of the pipe and the drill bit beneath it. Calculate the stretch in a new 6.00-m-long steel pipe that supports a 100-kg drill bit and a 3.00-km length of pipe with a linear mass density of 20.0 kg/m. Treat the pipe as a solid cylinder with a 5.00-cm diameter.

56. A large uniform cylindrical steel rod of density $\rho = 7.8 \text{ g/cm}^3$ is 2.0 m long and has a diameter of 5.0 cm. The rod is fastened to a concrete floor with its long axis vertical. What is the normal stress in the rod at the cross-section located at (a) 1.0 m from its lower end? (b) 1.5 m from the lower end?

57. A 90-kg mountain climber hangs from a nylon rope and stretches it by 25.0 cm. If the rope was originally 30.0 m long and its diameter is 1.0 cm, what is Young's modulus for the nylon?

58. A suspender rod of a suspension bridge is 25.0

m long. If the rod is made of steel, what must its diameter be so that it does not stretch more than 1.0 cm when a 2.5×10^4-kg truck passes by it? Assume that the rod supports all of the weight of the truck.

59. A copper wire is 1.0 m long and its diameter is 1.0 mm. If the wire hangs vertically, how much weight must be added to its free end in order to stretch it 3.0 mm?

60. A 100-N weight is attached to a free end of a metallic wire that hangs from the ceiling. When a second 100-N weight is added to the wire, it stretches 3.0 mm. The diameter and the length of the wire are 1.0 mm and 2.0 m, respectively. What is Young's modulus of the metal used to manufacture the wire?

61. The bulk modulus of a material is 1.0×10^{11} N/m^2. What fractional change in volume does a piece of this material undergo when it is subjected to a bulk stress increase of 10^7 N/m^2? Assume that the force is applied uniformly over the surface.

62. Normal forces of magnitude 1.0×10^6 N are applied uniformly to a spherical surface enclosing a volume of a liquid. This causes the radius of the surface to decrease from 50.000 cm to 49.995 cm. What is the bulk modulus of the liquid?

63. During a walk on a rope, a tightrope walker creates a tension of $3.94 \times 10^3\ N$ in a wire that is stretched between two supporting poles that are 15.0 m apart. The wire has a diameter of 0.50 cm when it is not stretched. When the walker is on the wire in the middle between the poles the wire makes an angle of 5.0° below the horizontal. How much does this tension stretch the steel wire when the walker is this position?

64. When using a pencil eraser, you exert a vertical force of 6.00 N at a distance of 2.00 cm from the hardwood-eraser joint. The pencil is 6.00 mm in diameter and is held at an angle of 20.0° to the horizontal. (a) By how much does the wood flex perpendicular to its length? (b) How much is it compressed lengthwise?


65. Normal forces are applied uniformly over the surface of a spherical volume of water whose radius is 20.0 cm. If the pressure on the surface is increased by 200 MPa, by how much does the radius of the sphere decrease?

12.4 Elasticity and Plasticity

66. A uniform rope of cross-sectional area 0.50 cm^2 breaks when the tensile stress in it reaches 6.00×10^6 N/m^2. (a) What is the maximum load that can be lifted slowly at a constant speed by the rope? (b) What is the maximum load that can be lifted by the rope with an acceleration of 4.00 m/s^2?

67. One end of a vertical metallic wire of length 2.0 m and diameter 1.0 mm is attached to a ceiling, and the other end is attached to a 5.0-N weight pan, as shown below. The position of the pointer before the pan is 4.000 cm. Different weights are then added to the pan area, and the position of the pointer is recorded in the table shown. Plot stress versus strain for this wire, then use the resulting curve to determine Young's modulus and the proportionality limit of the metal. What metal is this most likely to be?


Added load (including pan) (N)	Scale reading (cm)
0	4.000
15	4.036
25	4.073
35	4.109
45	4.146
55	4.181
65	4.221
75	4.266
85	4.316

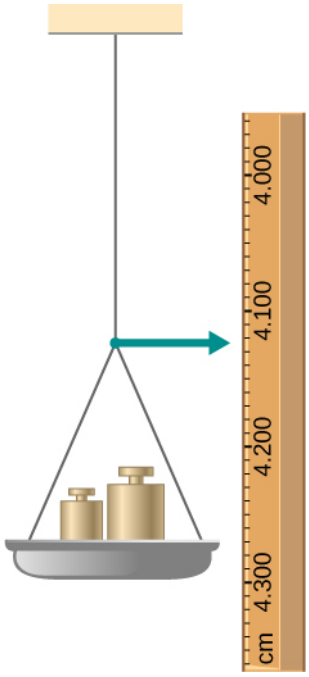


68. An aluminum $(\rho = 2.7\ \text{g/cm}^3)$ wire is suspended from the ceiling and hangs vertically. How long must the wire be before the stress at its upper end reaches the proportionality limit, which is $8.0 \times 10^7\ \text{N/m}^2$?

Additional Problems


69. The coefficient of static friction between the rubber eraser of the pencil and the tabletop is $\mu_s = 0.80$. If the force $\vec{\mathbf{F}}$ is applied along the axis of the pencil, as shown below, what is the minimum angle at which the pencil can stand without slipping? Ignore the weight of the pencil.

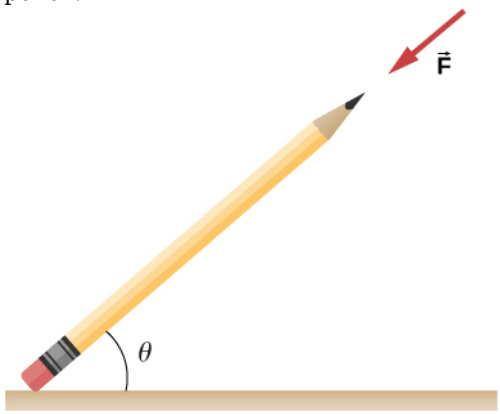

70. A pencil rests against a corner, as shown below. The sharpened end of the pencil touches a smooth vertical surface and the eraser end touches a rough horizontal floor. The coefficient of static friction between the eraser and the floor is $\mu_s = 0.80$. The center of mass of the pencil is located 9.0 cm from the tip of the eraser and 11.0 cm from the tip of the pencil lead. Find the minimum angle θ for which the pencil does not slip.

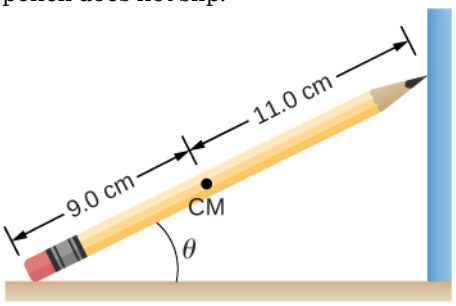

71. A uniform 4.0-m plank weighing 200.0 N rests against the corner of a wall, as shown below. There is no friction at the point where the plank meets the corner. (a) Find the forces that the corner and the floor exert on the plank. (b) What is the minimum coefficient of static friction between the floor and the plank to prevent the plank from slipping?

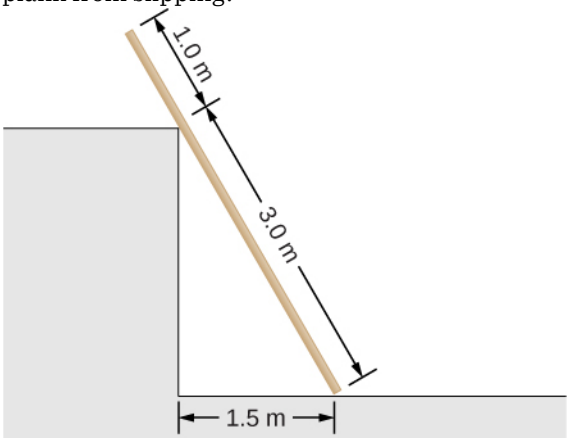


72. A 40-kg boy jumps from a height of 3.0 m, lands on one foot and comes to rest in 0.10 s after he hits the ground. Assume that he comes to rest with a constant acceleration opposite to the motion. If the total cross-sectional area of the bones in his legs just above his ankles is $3.0\ \text{cm}^2$, what is the compression stress in these bones? Leg bones can be fractured when they are subjected to stress greater than 1.7×10^8 Pa. Is the boy in danger of breaking his leg?

73. Two thin rods, one made of steel and the other of aluminum, are joined end to end. Each rod is 2.0 m long and has cross-sectional area $9.1\ \text{mm}^2$. If a 10,000-N tensile force is applied at each end of the combination, find: (a) stress in each rod; (b) strain in each rod; and, (c) elongation of each rod.


74. Two rods, one made of copper and the other of steel, have the same dimensions. If the copper rod stretches by 0.15 mm under some stress, how much does the steel rod stretch under the same stress?

Challenge Problems


75. A horizontal force $\vec{\mathbf{F}}$ is applied to a uniform sphere in direction exact toward the center of the sphere, as shown below. Find the magnitude of this force so that the sphere remains in static equilibrium. What is the frictional force of the incline on the sphere?

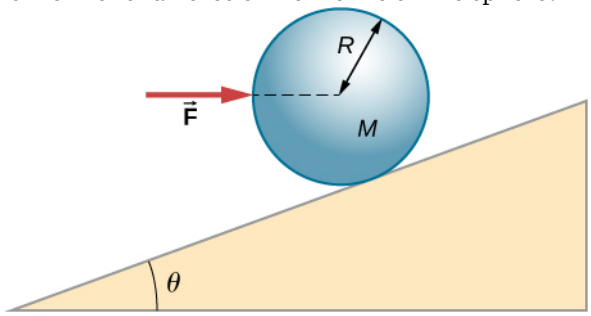


76. When a motor is set on a pivoted mount seen below, its weight can be used to maintain tension in the drive belt. When the motor is not running the tensions T_1 and T_2 are equal. The total mass of the platform and the motor is 100.0 kg, and the diameter of the drive belt pulley is 16.0 cm. when the motor is off, find: (a) the tension in the belt, and (b) the force at the hinged platform support at point *C*. Assume that the center of mass of the motor plus platform is at the center of the motor.

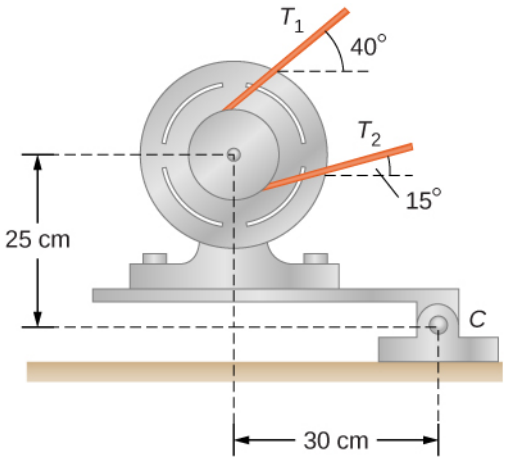


77. Two wheels A and B with weights w and $2w$, respectively, are connected by a uniform rod with weight $w/2$, as shown below. The wheels are free to roll on the sloped surfaces. Determine the angle that the rod forms with the horizontal when the system is in equilibrium. *Hint:* There are five forces acting on the rod, which is two weights of the wheels, two normal reaction forces at points where the wheels make contacts with the wedge, and the weight of the rod.

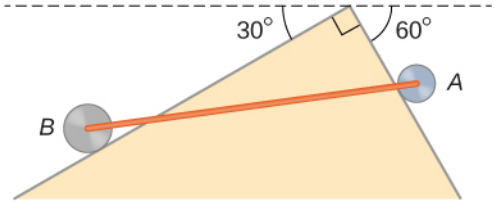


78. Weights are gradually added to a pan until a wheel of mass M and radius R is pulled over an obstacle of height d, as shown below. What is the minimum mass of the weights plus the pan needed to accomplish this?

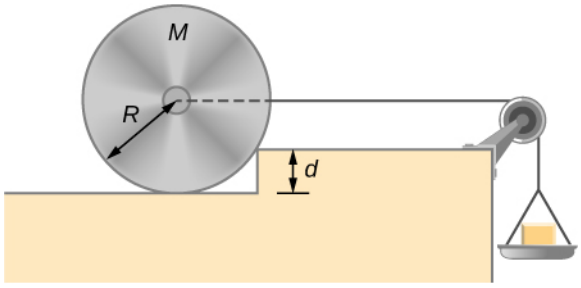


79. In order to lift a shovelful of dirt, a gardener pushes downward on the end of the shovel and pulls upward at distance l_2 from the end, as shown below. The weight of the shovel is $m\vec{g}$ and acts at the point of application of $\vec{F}_2$. Calculate the magnitudes of the forces $\vec{F}_1$ and $\vec{F}_2$ as functions of l_1, l_2, mg, and the weight W of the load. Why do your answers not depend on the angle θ that the shovel makes with the horizontal?

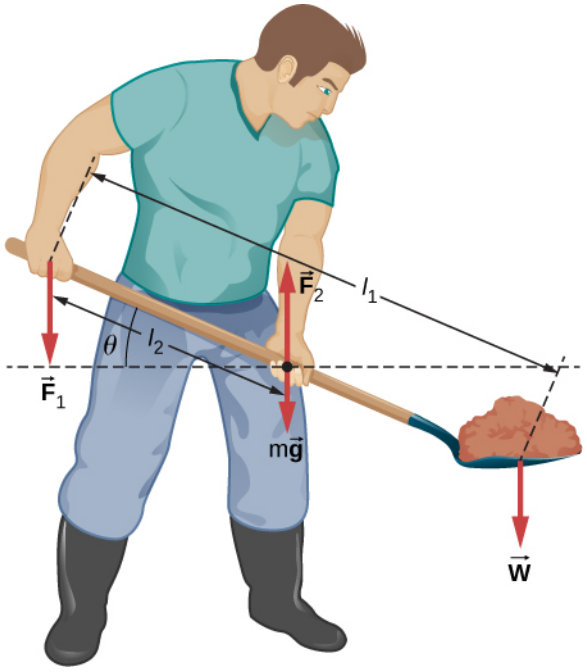

80. A uniform rod of length $2R$ and mass M is attached to a small collar C and rests on a cylindrical surface of radius R, as shown below. If the collar can slide without friction along the vertical guide, find the angle θ for which the rod is in static equilibrium.

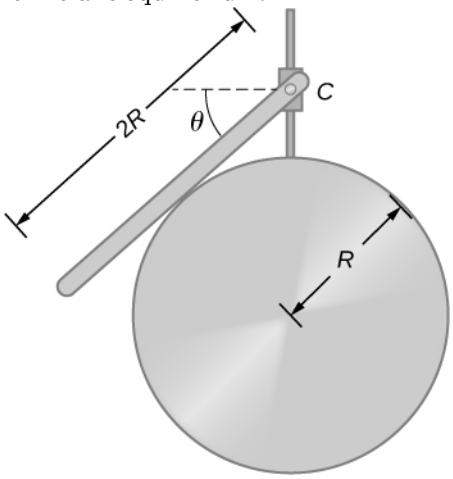

81. The pole shown below is at a $90.0°$ bend in a power line and is therefore subjected to more shear force than poles in straight parts of the line. The tension in each line is 4.00×10^4 N, at the angles shown. The pole is 15.0 m tall, has an 18.0 cm diameter, and can be considered to have half the strength of hardwood. (a) Calculate the compression of the pole. (b) Find how much it bends and in what direction. (c) Find the tension in a guy wire used to keep the pole straight if it is attached to the top of the pole at an angle of $30.0°$ with the vertical. The guy wire is in the opposite direction of the bend.

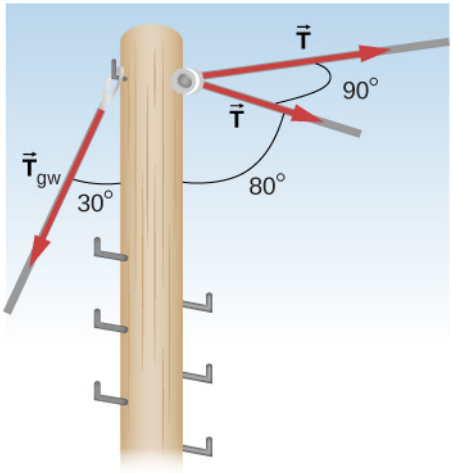

CHAPTER 13
Gravitation

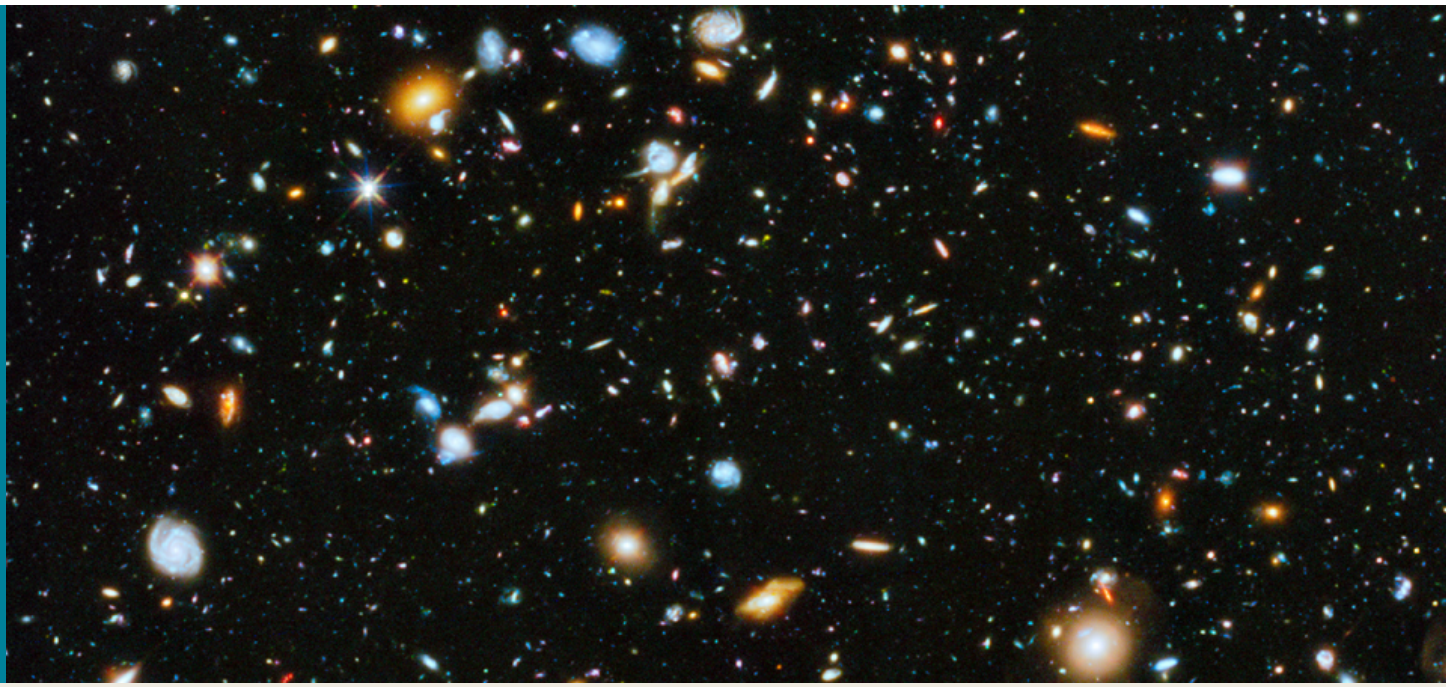


Figure 13.1 Our visible Universe contains billions of galaxies, whose very existence is due to the force of gravity. Gravity is ultimately responsible for the energy output of all stars—initiating thermonuclear reactions in stars, allowing the Sun to heat Earth, and making galaxies visible from unfathomable distances. Most of the dots you see in this image are not stars, but galaxies. (credit: modification of work by NASA/ESA)

Chapter Outline

13.1 Newton's Law of Universal Gravitation

13.2 Gravitation Near Earth's Surface

13.3 Gravitational Potential Energy and Total Energy

13.4 Satellite Orbits and Energy

13.5 Kepler's Laws of Planetary Motion

13.6 Tidal Forces

13.7 Einstein's Theory of Gravity

INTRODUCTION In this chapter, we study the nature of the gravitational force for objects as small as ourselves and for systems as massive as entire galaxies. We show how the gravitational force affects objects on Earth and the motion of the Universe itself. Gravity is the first force to be postulated as an action-at-a-distance force, that is, objects exert a gravitational force on one another without physical contact and that force falls to zero only at an infinite distance. Earth exerts a gravitational force on you, but so do our Sun, the Milky Way

galaxy, and the billions of galaxies, like those shown above, which are so distant that we cannot see them with the naked eye.

13.1 Newton's Law of Universal Gravitation

Learning Objectives

By the end of this section, you will be able to:

- List the significant milestones in the history of gravitation
- Calculate the gravitational force between two point masses
- Estimate the gravitational force between collections of mass

We first review the history of the study of gravitation, with emphasis on those phenomena that for thousands of years have inspired philosophers and scientists to search for an explanation. Then we examine the simplest form of Newton's law of universal gravitation and how to apply it.

The History of Gravitation

The earliest philosophers wondered why objects naturally tend to fall toward the ground. Aristotle (384–322 BCE) believed that it was the nature of rocks to seek Earth and the nature of fire to seek the Heavens. Brahmagupta (598~665 CE) postulated that Earth was a sphere and that objects possessed a natural affinity for it, falling toward the center from wherever they were located.

The motions of the Sun, our Moon, and the planets have been studied for thousands of years as well. These motions were described with amazing accuracy by Ptolemy (90–168 CE), whose method of epicycles described the paths of the planets as circles within circles. However, there is little evidence that anyone connected the motion of astronomical bodies with the motion of objects falling to Earth—until the seventeenth century.

Nicolaus Copernicus (1473–1543) is generally credited as being the first to challenge Ptolemy's geocentric (Earth-centered) system and suggest a heliocentric system, in which the Sun is at the center of the solar system. This idea was supported by the incredibly precise naked-eye measurements of planetary motions by Tycho Brahe and their analysis by Johannes Kepler and Galileo Galilei. Kepler showed that the motion of each planet is an ellipse (the first of his three laws, discussed in Kepler's Laws of Planetary Motion), and Robert Hooke (the same Hooke who formulated Hooke's law for springs) intuitively suggested that these motions are due to the planets being attracted to the Sun. However, it was Isaac Newton who connected the acceleration of objects near Earth's surface with the centripetal acceleration of the Moon in its orbit about Earth.

Finally, in Einstein's Theory of Gravity, we look at the theory of general relativity proposed by Albert Einstein in 1916. His theory comes from a vastly different perspective, in which gravity is a manifestation of mass warping space and time. The consequences of his theory gave rise to many remarkable predictions, essentially all of which have been confirmed over the many decades following the publication of the theory (including the 2015 measurement of gravitational waves from the merger of two black holes).

Newton's Law of Universal Gravitation

Newton noted that objects at Earth's surface (hence at a distance of R_E from the center of Earth) have an acceleration of g, but the Moon, at a distance of about $60\ R_E$, has a centripetal acceleration about $(60)^2$ times smaller than g. He could explain this by postulating that a force exists between any two objects, whose magnitude is given by the product of the two masses divided by the square of the distance between them. We now know that this inverse square law is ubiquitous in nature, a function of geometry for point sources. The strength of any source at a distance r is spread over the surface of a sphere centered about the mass. The surface area of that sphere is proportional to r^2. In later chapters, we see this same form in the electromagnetic force.

Newton's Law of Gravitation

Newton's law of gravitation can be expressed as

$$\vec{\mathbf{F}}_{12} = G\frac{m_1 m_2}{r^2}\hat{\mathbf{r}}_{12} \qquad 13.1$$

where $\vec{\mathbf{F}}_{12}$ is the force on object 1 exerted by object 2 and $\hat{\mathbf{r}}_{12}$ is a unit vector that points from object 1 toward object 2.

As shown in Figure 13.2, the $\vec{\mathbf{F}}_{12}$ vector points from object 1 toward object 2, and hence represents an attractive force between the objects. The equal but opposite force $\vec{\mathbf{F}}_{21}$ is the force on object 2 exerted by object 1.

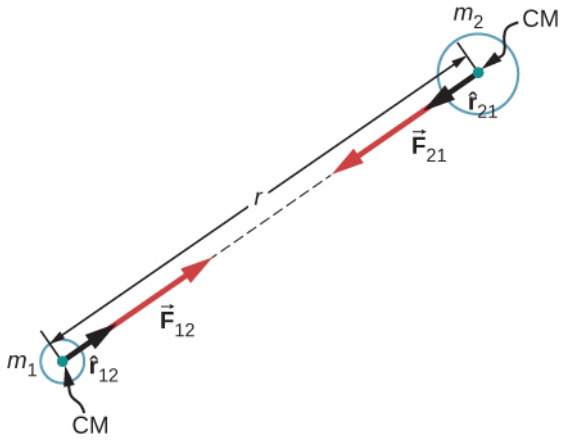


Figure 13.2 Gravitational force acts along a line joining the centers of mass of two objects.

These equal but opposite forces reflect Newton's third law, which we discussed earlier. Note that strictly speaking, Equation 13.1 applies to point masses—all the mass is located at one point. But it applies equally to any spherically symmetric objects, where r is the distance between the centers of mass of those objects. In many cases, it works reasonably well for nonsymmetrical objects, if their separation is large compared to their size, and we take r to be the distance between the center of mass of each body.

The Cavendish Experiment

A century after Newton published his law of universal gravitation, Henry Cavendish determined the proportionality constant G by performing a painstaking experiment. He constructed a device similar to that shown in Figure 13.3, in which small masses are suspended from a wire. Once in equilibrium, two fixed, larger masses are placed symmetrically near the smaller ones. The gravitational attraction creates a torsion (twisting) in the supporting wire that can be measured.

The constant G is called the **universal gravitational constant** and Cavendish determined it to be $G = 6.67 \times 10^{-11}\ \text{N} \cdot \text{m}^2/\text{kg}^2$. The word 'universal' indicates that scientists think that this constant applies to masses of any composition and that it is the same throughout the Universe. The value of G is an incredibly small number, showing that the force of gravity is very weak. The attraction between masses as small as our bodies, or even objects the size of skyscrapers, is incredibly small. For example, two 1.0-kg masses located 1.0 meter apart exert a force of 6.7×10^{-11} N on each other. This is the weight of a typical grain of pollen.

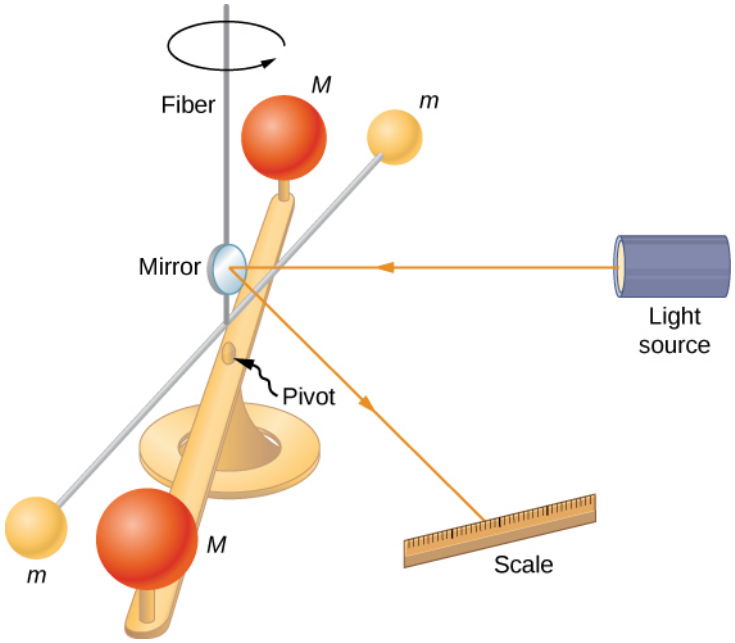


Figure 13.3 Cavendish used an apparatus similar to this to measure the gravitational attraction between two spheres (*m*) suspended from a wire and two stationary spheres (*M*). This is a common experiment performed in undergraduate laboratories, but it is quite challenging. Passing trucks outside the laboratory can create vibrations that overwhelm the gravitational forces.

Although gravity is the weakest of the four fundamental forces of nature, its attractive nature is what holds us to Earth, causes the planets to orbit the Sun and the Sun to orbit our galaxy, and binds galaxies into clusters, ranging from a few to millions. Gravity is the force that forms the Universe.

PROBLEM-SOLVING STRATEGY

Newton's Law of Gravitation

To determine the motion caused by the gravitational force, follow these steps:

1. Identify the two masses, one or both, for which you wish to find the gravitational force.
2. Draw a free-body diagram, sketching the force acting on each mass and indicating the distance between their centers of mass.
3. Apply Newton's second law of motion to each mass to determine how it will move.

EXAMPLE 13.1

A Collision in Orbit

Consider two nearly spherical *Soyuz* payload vehicles, in orbit about Earth, each with mass 9000 kg and diameter 4.0 m. They are initially at rest relative to each other, 10.0 m from center to center. (As we will see in Kepler's Laws of Planetary Motion, both orbit Earth at the same speed and interact nearly the same as if they were isolated in deep space.) Determine the gravitational force between them and their initial acceleration. Estimate how long it takes for them to drift together, and how fast they are moving upon impact.

Strategy

We use Newton's law of gravitation to determine the force between them and then use Newton's second law to find the acceleration of each. For the *estimate*, we assume this acceleration is constant, and we use the constant-acceleration equations from Motion along a Straight Line to find the time and speed of the collision.

Solution

The magnitude of the force is

$$\left|\vec{\mathbf{F}}_{12}\right| = F_{12} = G\frac{m_1 m_2}{r^2} = 6.67 \times 10^{-11}\ \text{N}\cdot\text{m}^2/\text{kg}^2\,\frac{(9000\ \text{kg})(9000\ \text{kg})}{(10\ \text{m})^2} = 5.4 \times 10^{-5}\text{N}.$$

The initial acceleration of each payload is

$$a = \frac{F}{m} = \frac{5.4 \times 10^{-5}\ \text{N}}{9000\ \text{kg}} = 6.0 \times 10^{-9}\text{m/s}^2.$$

The vehicles are 4.0 m in diameter, so the vehicles move from 10.0 m to 4.0 m apart, or a distance of 3.0 m each. A similar calculation to that above, for when the vehicles are 4.0 m apart, yields an acceleration of 3.8×10^{-8} m/s^2, and the average of these two values is 2.2×10^{-8} m/s^2. If we assume a constant acceleration of this value and they start from rest, then the vehicles collide with speed given by

$$v^2 = v_0^2 + 2a(x - x_0),\ \text{where } v_0 = 0,$$

so

$$v = \sqrt{2(2.2 \times 10^{-9}\ \text{N})(3.0\ \text{m})} = 3.6 \times 10^{-4}\ \text{m/s}.$$

We use $v = v_0 + at$ to find $t = v/a = 1.7 \times 10^4$ s or about 4.6 hours.

Significance

These calculations—including the initial force—are only estimates, as the vehicles are probably not spherically symmetrical. But you can see that the force is incredibly small. Astronauts must tether themselves when doing work outside even the massive International Space Station (ISS), as in Figure 13.4, because the gravitational attraction cannot save them from even the smallest push away from the station.



Figure 13.4 This photo shows Ed White tethered to the Space Shuttle during a spacewalk. (credit: NASA)

CHECK YOUR UNDERSTANDING 13.1

What happens to force and acceleration as the vehicles fall together? What will our estimate of the velocity at a collision higher or lower than the speed actually be? And finally, what would happen if the masses were not identical? Would the force on each be the same or different? How about their accelerations?

The effect of gravity between two objects with masses on the order of these space vehicles is indeed small. Yet, the effect of gravity on you from Earth is significant enough that a fall into Earth of only a few feet can be dangerous. We examine the force of gravity near Earth's surface in the next section.

EXAMPLE 13.2

Attraction between Galaxies

Find the acceleration of our galaxy, the Milky Way, due to the nearest comparably sized galaxy, the Andromeda galaxy (Figure 13.5). The approximate mass of each galaxy is 800 billion solar masses (a solar mass is the mass of our Sun), and they are separated by 2.5 million light-years. (Note that the mass of Andromeda is not so well known but is believed to be slightly larger than our galaxy.) Each galaxy has a diameter of roughly 100,000 light-years (1 light-year $= 9.5 \times 10^{15}$ m).



Figure 13.5 Galaxies interact gravitationally over immense distances. The Andromeda galaxy is the nearest spiral galaxy to the Milky Way, and they will eventually collide. (credit: Boris Štromar)

Strategy

As in the preceding example, we use Newton's law of gravitation to determine the force between them and then use Newton's second law to find the acceleration of the Milky Way. We can consider the galaxies to be point masses, since their sizes are about 25 times smaller than their separation. The mass of the Sun (see Appendix D) is 2.0×10^{30} kg and a light-year is the distance light travels in one year, 9.5×10^{15} m.

Solution

The magnitude of the force is

$$F_{12} = G\frac{m_1 m_2}{r^2} = (6.67 \times 10^{-11}\ \text{N} \cdot \text{m}^2/\text{kg}^2)\frac{[(800 \times 10^9)(2.0 \times 10^{30}\ \text{kg})]^2}{[(2.5 \times 10^6)(9.5 \times 10^{15}\ \text{m})]^2} = 3.0 \times 10^{29}\ \text{N}.$$

The acceleration of the Milky Way is

$$a = \frac{F}{m} = \frac{3.0 \times 10^{29}\ \text{N}}{(800 \times 10^9)(2.0 \times 10^{30}\ \text{kg})} = 1.9 \times 10^{-13}\text{m/s}^2.$$

Significance

Does this value of acceleration seem astoundingly small? If they start from rest, then they would accelerate

directly toward each other, "colliding" at their center of mass. Let's estimate the time for this to happen. The initial acceleration is ~10^{-13} m/s^2, so using $v = at$, we see that it would take ~10^{13} s for each galaxy to reach a speed of 1.0 m/s, and they would be only ~0.5×10^{13} m closer. That is nine orders of magnitude smaller than the initial distance between them. In reality, such motions are rarely simple. These two galaxies, along with about 50 other smaller galaxies, are all gravitationally bound into our local cluster. Our local cluster is gravitationally bound to other clusters in what is called a supercluster. All of this is part of the great cosmic dance that results from gravitation, as shown in Figure 13.6.

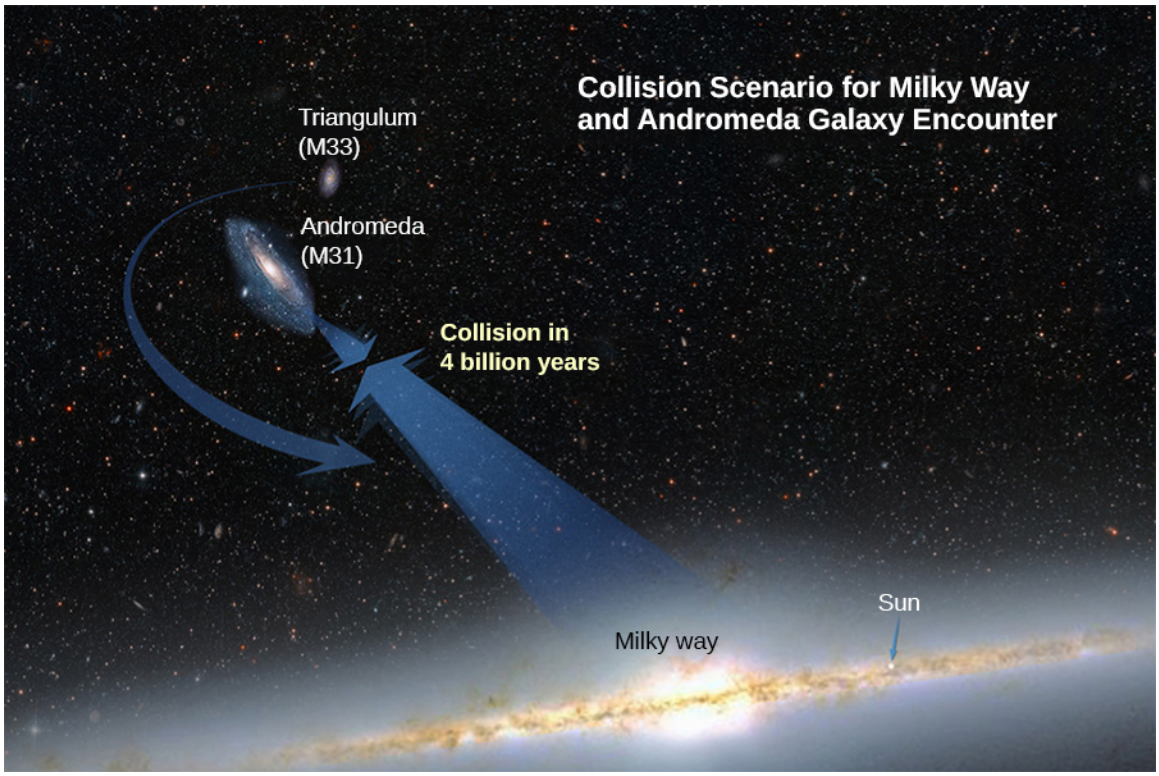


Figure 13.6 Based on the results of this example, plus what astronomers have observed elsewhere in the Universe, our galaxy will collide with the Andromeda Galaxy in about 4 billion years. (credit: modification of work by NASA; ESA; A. Feild and R. van der Marel, STScI)

13.2 Gravitation Near Earth's Surface

Learning Objectives

By the end of this section, you will be able to:

- Explain the connection between the constants G and g
- Determine the mass of an astronomical body from free-fall acceleration at its surface
- Describe how the value of g varies due to location and Earth's rotation

In this section, we observe how Newton's law of gravitation applies at the surface of a planet and how it connects with what we learned earlier about free fall. We also examine the gravitational effects within spherical bodies.

Weight

Recall that the acceleration of a free-falling object near Earth's surface is approximately $g = 9.80$ m/s^2. The force causing this acceleration is called the weight of the object, and from Newton's second law, it has the value mg. This weight is present regardless of whether the object is in free fall. We now know that this force is the gravitational force between the object and Earth. If we substitute mg for the magnitude of $\vec{\mathbf{F}}_{12}$ in Newton's law of universal gravitation, m for m_1, and M_E for m_2, we obtain the scalar equation

$$mg = G\frac{mM_E}{r^2}$$

where r is the distance between the centers of mass of the object and Earth. The average radius of Earth is about 6370 km. Hence, for objects within a few kilometers of Earth's surface, we can take $r = R_E$ (Figure 13.7). The mass m of the object cancels, leaving

$$g = G\frac{M_E}{r^2}. \qquad 13.2$$

This explains why all masses free fall with the same acceleration. We have ignored the fact that Earth also accelerates toward the falling object, but that is acceptable as long as the mass of Earth is much larger than that of the object.

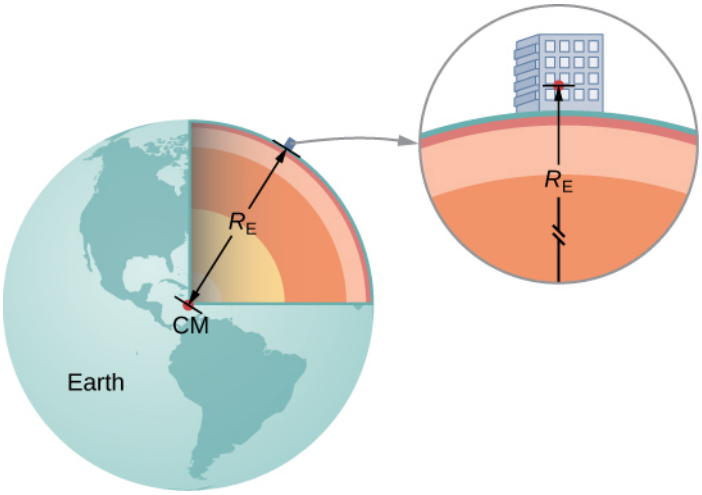


Figure 13.7 We can take the distance between the centers of mass of Earth and an object on its surface to be the radius of Earth, provided that its size is much less than the radius of Earth.

EXAMPLE 13.3

Masses of Earth and Moon

Have you ever wondered how we know the mass of Earth? We certainly can't place it on a scale. The values of g and the radius of Earth were measured with reasonable accuracy centuries ago.

a. Use the standard values of g, R_E, and Equation 13.2 to find the mass of Earth.
b. Estimate the value of g on the Moon. Use the fact that the Moon has a radius of about 1700 km (a value of this accuracy was determined many centuries ago) and assume it has the same average density as Earth, $5500\ \text{kg/m}^3$.

Strategy

With the known values of g and R_E, we can use Equation 13.2 to find M_E. For the Moon, we use the assumption of equal average density to determine the mass from a ratio of the volumes of Earth and the Moon.

Solution

a. Rearranging Equation 13.2, we have

$$M_E = \frac{gR_E^2}{G} = \frac{9.80\ \text{m/s}^2(6.37 \times 10^6\ \text{m})^2}{6.67 \times 10^{-11}\ \text{N} \cdot \text{m}^2/\text{kg}^2} = 5.95 \times 10^{24}\ \text{kg}.$$

b. The volume of a sphere is proportional to the radius cubed, so a simple ratio gives us

$$\frac{M_M}{M_E} = \frac{R_M^3}{R_E^3} \rightarrow M_M = \left(\frac{(1.7 \times 10^6 \text{ m})^3}{(6.37 \times 10^6 \text{ m})^3} \right) (5.95 \times 10^{24} \text{ kg}) = 1.1 \times 10^{23} \text{ kg}.$$

We now use Equation 13.2.

$$g_M = G\frac{M_M}{r_M^2} = (6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2)\frac{(1.1 \times 10^{23} \text{ kg})}{(1.7 \times 10^6 \text{ m})^2} = 2.5 \text{m/s}^2$$

Significance

As soon as Cavendish determined the value of G in 1798, the mass of Earth could be calculated. (In fact, that was the ultimate purpose of Cavendish's experiment in the first place.) The value we calculated for g of the Moon is incorrect. The average density of the Moon is actually only 3340 kg/m^3 and $g = 1.6 \text{ m/s}^2$ at the surface. Newton attempted to measure the mass of the Moon by comparing the effect of the Sun on Earth's ocean tides compared to that of the Moon. His value was a factor of two too small. The most accurate values for g and the mass of the Moon come from tracking the motion of spacecraft that have orbited the Moon. But the mass of the Moon can actually be determined accurately without going to the Moon. Earth and the Moon orbit about a common center of mass, and careful astronomical measurements can determine that location. The ratio of the Moon's mass to Earth's is the ratio of [the distance from the common center of mass to the Moon's center] to [the distance from the common center of mass to Earth's center].

Later in this chapter, we will see that the mass of other astronomical bodies also can be determined by the period of small satellites orbiting them. But until Cavendish determined the value of G, the masses of all these bodies were unknown.

EXAMPLE 13.4

Gravity above Earth's Surface

What is the value of g 400 km above Earth's surface, where the International Space Station is in orbit?

Strategy

Using the value of M_E and noting the radius is $r = R_E + 400 \text{ km}$, we use Equation 13.2 to find g.

From Equation 13.2 we have

$$g = G\frac{M_E}{r^2} = 6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2 \frac{5.96 \times 10^{24} \text{ kg}}{(6.37 \times 10^6 + 400 \times 10^3 \text{ m})^2} = 8.67 \text{ m/s}^2.$$

Significance

We often see video of astronauts in space stations, apparently weightless. But clearly, the force of gravity is acting on them. Comparing the value of g we just calculated to that on Earth (9.80 m/s^2), we see that the astronauts in the International Space Station still have 88% of their weight. They only appear to be weightless because they are in free fall. We will come back to this in Satellite Orbits and Energy.

CHECK YOUR UNDERSTANDING 13.2

How does your weight at the top of a tall building compare with that on the first floor? Do you think engineers need to take into account the change in the value of g when designing structural support for a very tall building?

The Gravitational Field

Equation 13.2 is a scalar equation, giving the magnitude of the gravitational acceleration as a function of the distance from the center of the mass that causes the acceleration. But we could have retained the vector form for the force of gravity in Equation 13.1, and written the acceleration in vector form as

$$\vec{\mathbf{g}} = G\frac{M}{r^2}\hat{\mathbf{r}}.$$

We identify the vector field represented by $\vec{\mathbf{g}}$ as the **gravitational field** caused by mass M. We can picture the field as shown Figure 13.8. The lines are directed radially inward and are symmetrically distributed about the mass.

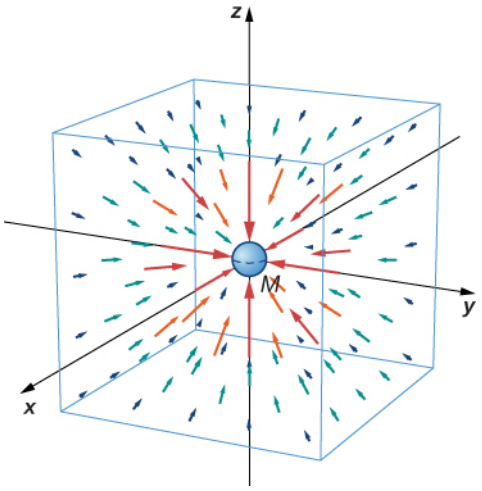


Figure 13.8 A three-dimensional representation of the gravitational field created by mass M. Note that the lines are uniformly distributed in all directions. (The box has been added only to aid in visualization.)

As is true for any vector field, the direction of $\vec{\mathbf{g}}$ is parallel to the field lines at any point. The strength of $\vec{\mathbf{g}}$ at any point is inversely proportional to the line spacing. Another way to state this is that the magnitude of the field in any region is proportional to the number of lines that pass through a unit surface area, effectively a density of lines. Since the lines are equally spaced in all directions, the number of lines per unit surface area at a distance r from the mass is the total number of lines divided by the surface area of a sphere of radius r, which is proportional to r^2. Hence, this picture perfectly represents the inverse square law, in addition to indicating the direction of the field. In the field picture, we say that a mass m interacts with the gravitational field of mass M. We will use the concept of fields to great advantage in the later chapters on electromagnetism.

Apparent Weight: Accounting for Earth's Rotation

As we saw in Applications of Newton's Laws, objects moving at constant speed in a circle have a centripetal acceleration directed toward the center of the circle, which means that there must be a net force directed toward the center of that circle. Since all objects on the surface of Earth move through a circle every 24 hours, there must be a net centripetal force on each object directed toward the center of that circle.

Let's first consider an object of mass m located at the equator, suspended from a scale (Figure 13.9). The scale exerts an upward force $\vec{\mathbf{F}}_{\mathrm{S}}$ away from Earth's center. This is the reading on the scale, and hence it is the **apparent weight** of the object. The weight (mg) points toward Earth's center. If Earth were not rotating, the acceleration would be zero and, consequently, the net force would be zero, resulting in $F_{\mathrm{S}} = mg$. This would be the true reading of the weight.

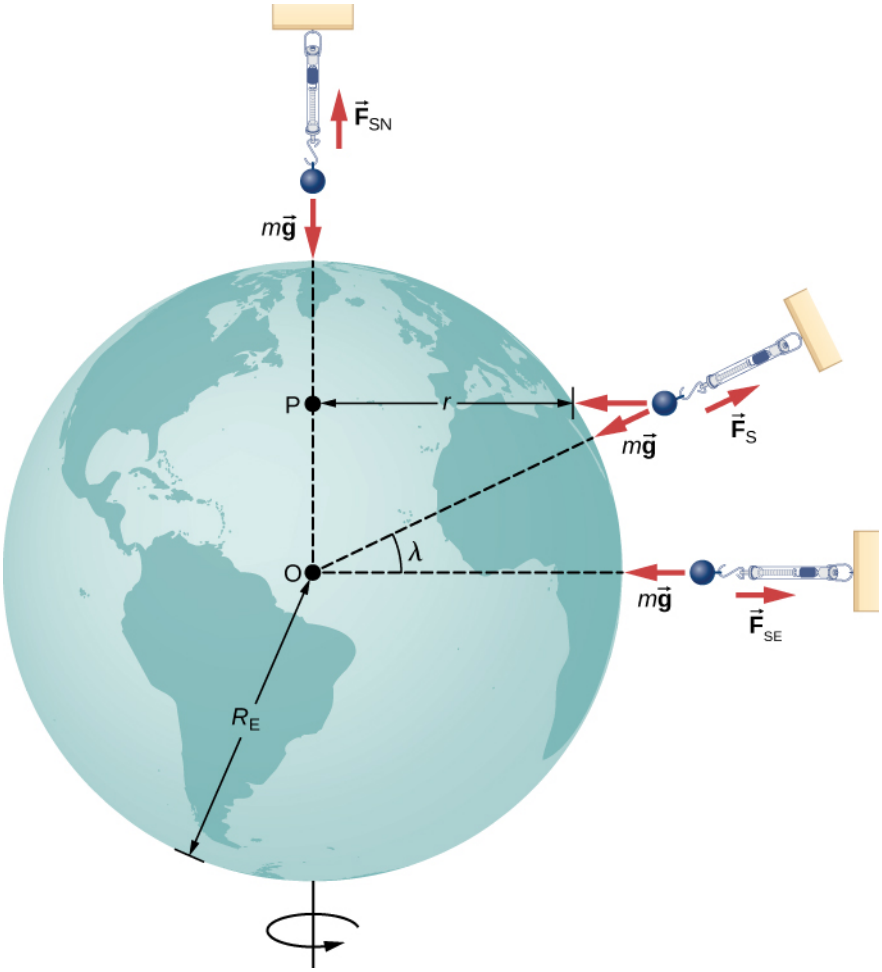


Figure 13.9 For a person standing at the equator, the centripetal acceleration (a_c) is in the same direction as the force of gravity. At latitude λ, the angle the between a_c and the force of gravity is λ and the magnitude of a_c decreases with $\cos\lambda$.

With rotation, the sum of these forces must provide the centripetal acceleration, a_c. Using Newton's second law, we have

$$\sum F = F_s - mg = ma_c \quad \text{where} \quad a_c = -\frac{v^2}{r}. \tag{13.3}$$

Note that a_c points in the same direction as the weight; hence, it is negative. The tangential speed v is the speed at the equator and r is R_E. We can calculate the speed simply by noting that objects on the equator travel the circumference of Earth in 24 hours. Instead, let's use the alternative expression for a_c from Motion in Two and Three Dimensions. Recall that the tangential speed is related to the angular speed (ω) by $v = r\omega$. Hence, we have $a_c = -r\omega^2$. By rearranging Equation 13.3 and substituting $r = R_E$, the apparent weight at the equator is

$$F_s = m\left(g - R_E\omega^2\right).$$

The angular speed of Earth everywhere is

$$\omega = \frac{2\pi \text{ rad}}{24 \text{ hr} \times 3600 \text{ s/hr}} = 7.27 \times 10^{-5} \text{ rad/s}.$$

Substituting for the values or R_E and ω, we have $R_E\omega^2 = 0.0337 \text{ m/s}^2$. This is only 0.34% of the value of gravity, so it is clearly a small correction.

EXAMPLE 13.5

Zero Apparent Weight

How fast would Earth need to spin for those at the equator to have zero apparent weight? How long would the length of the day be?

Strategy

Using Equation 13.3, we can set the apparent weight (F_s) to zero and determine the centripetal acceleration required. From that, we can find the speed at the equator. The length of day is the time required for one complete rotation.

Solution

From Equation 13.2, we have $\sum F = F_s - mg = ma_c$, so setting $F_s = 0$, we get $g = a_c$. Using the expression for a_c, substituting for Earth's radius and the standard value of gravity, we get

$$a_c = \frac{v^2}{r} = g$$
$$v = \sqrt{gr} = \sqrt{(9.80\ \text{m/s}^2)(6.37 \times 10^6\ \text{m})} = 7.91 \times 10^3\ \text{m/s}.$$

The period T is the time for one complete rotation. Therefore, the tangential speed is the circumference divided by T, so we have

$$v = \frac{2\pi r}{T}$$
$$T = \frac{2\pi r}{v} = \frac{2\pi(6.37 \times 10^6\ \text{m})}{7.91 \times 10^3\ \text{m/s}} = 5.06 \times 10^3\ \text{s}.$$

This is about 84 minutes.

Significance

We will see later in this chapter that this speed and length of day would also be the orbital speed and period of a satellite in orbit at Earth's surface. While such an orbit would not be possible near Earth's surface due to air resistance, it certainly is possible only a few hundred miles above Earth.

Results Away from the Equator

At the poles, $a_c \to 0$ and $F_s = mg$, just as is the case without rotation. At any other latitude λ, the situation is more complicated. The centripetal acceleration is directed toward point P in the figure, and the radius becomes $r = R_E \cos\lambda$. The *vector* sum of the weight and $\vec{\mathbf{F}}_s$ must point toward point P, hence $\vec{\mathbf{F}}_s$ no longer points away from the center of Earth. (The difference is small and exaggerated in the figure.) A plumb bob will always point along this deviated direction. All buildings are built aligned along this deviated direction, not along a radius through the center of Earth. For the tallest buildings, this represents a deviation of a few feet at the top.

It is also worth noting that Earth is not a perfect sphere. The interior is partially liquid, and this enhances Earth bulging at the equator due to its rotation. The radius of Earth is about 30 km greater at the equator compared to the poles. It is left as an exercise to compare the strength of gravity at the poles to that at the equator using Equation 13.2. The difference is comparable to the difference due to rotation and is in the same direction. Apparently, you really can lose "weight" by moving to the tropics.

Gravity Away from the Surface

Earlier we stated without proof that the law of gravitation applies to spherically symmetrical objects, where the

mass of each body acts as if it were at the center of the body. Since Equation 13.2 is derived from Equation 13.1, it is also valid for symmetrical mass distributions, but both equations are valid only for values of $r \geq R_E$. As we saw in Example 13.4, at 400 km above Earth's surface, where the International Space Station orbits, the value of g is $8.67\ \text{m/s}^2$. (We will see later that this is also the centripetal acceleration of the ISS.)

For $r < R_E$, Equation 13.1 and Equation 13.2 are not valid. However, we can determine g for these cases using a principle that comes from Gauss's law, which is a powerful mathematical tool that we study in more detail later in the course. A consequence of Gauss's law, applied to gravitation, is that only the mass *within* r contributes to the gravitational force. Also, that mass, just as before, can be considered to be located at the center. The gravitational effect of the mass *outside* r has zero net effect.

Two very interesting special cases occur. For a spherical planet with constant density, the mass within r is the density times the volume within r. This mass can be considered located at the center. Replacing M_E with only the mass within r, $M = \rho \times$ (volume of a sphere), and R_E with r, Equation 13.2 becomes

$$g = G\frac{M_E}{R_E^2} = G\frac{\rho\left(4/3\pi r^3\right)}{r^2} = \frac{4}{3}G\rho\pi r.$$

The value of g, and hence your weight, decreases linearly as you descend down a hole to the center of the spherical planet. At the center, you are weightless, as the mass of the planet pulls equally in all directions. Actually, Earth's density is not constant, nor is Earth solid throughout. Figure 13.10 shows the profile of g if Earth had constant density and the more likely profile based upon estimates of density derived from seismic data.

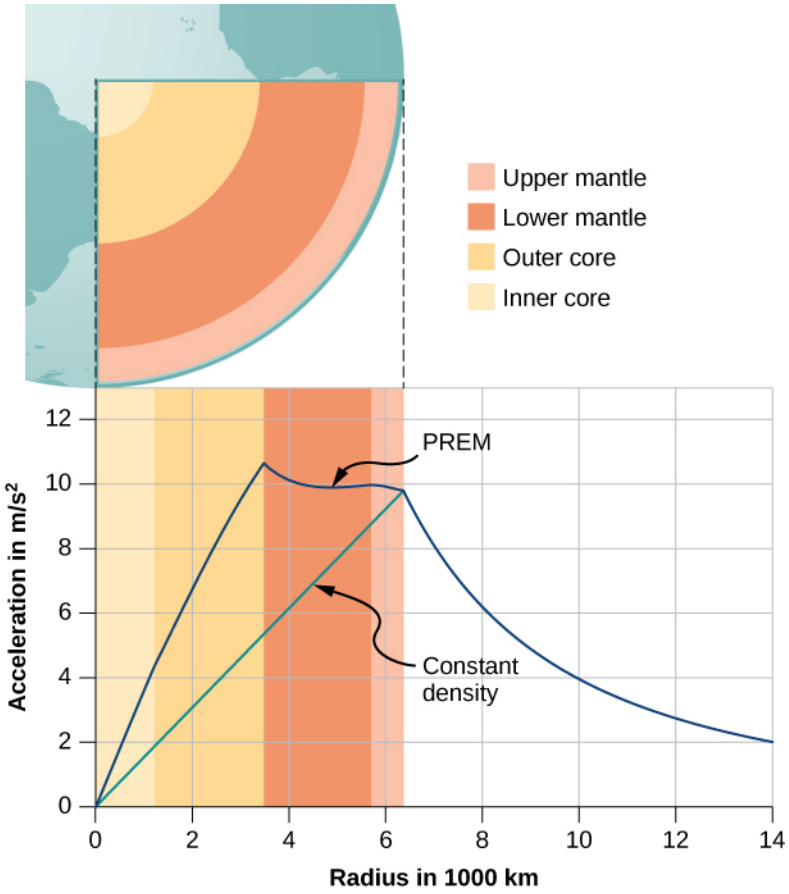


Figure 13.10 For $r < R_E$, the value of g for the case of constant density is the straight green line. The blue line from the PREM (Preliminary Reference Earth Model) is probably closer to the actual profile for g.

The second interesting case concerns living on a spherical shell planet. This scenario has been proposed in many science fiction stories. Ignoring significant engineering issues, the shell could be constructed with a

desired radius and total mass, such that g at the surface is the same as Earth's. Can you guess what happens once you descend in an elevator to the inside of the shell, where there is no mass between you and the center? What benefits would this provide for traveling great distances from one point on the sphere to another? And finally, what effect would there be if the planet was spinning?

13.3 Gravitational Potential Energy and Total Energy

Learning Objectives

By the end of this section, you will be able to:

- Determine changes in gravitational potential energy over great distances
- Apply conservation of energy to determine escape velocity
- Determine whether astronomical bodies are gravitationally bound

We studied gravitational potential energy in Potential Energy and Conservation of Energy, where the value of g remained constant. We now develop an expression that works over distances such that g is not constant. This is necessary to correctly calculate the energy needed to place satellites in orbit or to send them on missions in space.

Gravitational Potential Energy beyond Earth

We defined work and potential energy in Work and Kinetic Energy and Potential Energy and Conservation of Energy. The usefulness of those definitions is the ease with which we can solve many problems using conservation of energy. Potential energy is particularly useful for forces that change with position, as the gravitational force does over large distances. In Potential Energy and Conservation of Energy, we showed that the change in gravitational potential energy near Earth's surface is $\Delta U = mg(y_2 - y_1)$. This works very well if g does not change significantly between y_1 and y_2. We return to the definition of work and potential energy to derive an expression that is correct over larger distances.

Recall that work (W) is the integral of the dot product between force and distance. Essentially, it is the product of the component of a force along a displacement times that displacement. We define ΔU as the *negative* of the work done by the force we associate with the potential energy. For clarity, we derive an expression for moving a mass m from distance r_1 from the center of Earth to distance r_2. However, the result can easily be generalized to any two objects changing their separation from one value to another.

Consider Figure 13.11, in which we take m from a distance r_1 from Earth's center to a distance that is r_2 from the center. Gravity is a conservative force (its magnitude and direction are functions of location only), so we can take any path we wish, and the result for the calculation of work is the same. We take the path shown, as it greatly simplifies the integration. We first move *radially* outward from distance r_1 to distance r_2, and then move along the arc of a circle until we reach the final position. During the radial portion, $\vec{\mathbf{F}}$ is opposite to the direction we travel along $d\vec{\mathbf{r}}$, so $E = K_1 + U_1 = K_2 + U_2$. Along the arc, $\vec{\mathbf{F}}$ is perpendicular to $d\vec{\mathbf{r}}$, so $\vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = 0$. No work is done as we move along the arc. Using the expression for the gravitational force and noting the values for $\vec{\mathbf{F}} \cdot d\vec{\mathbf{r}}$ along the two segments of our path, we have

$$\Delta U = -\int_{r_1}^{r_2} \vec{\mathbf{F}} \cdot d\vec{\mathbf{r}} = GM_{\mathrm{E}}m \int_{r_1}^{r_2} \frac{dr}{r^2} = GM_{\mathrm{E}}m\left(\frac{1}{r_1} - \frac{1}{r_2}\right).$$

Since $\Delta U = U_2 - U_1$, we can adopt a simple expression for U:

$$U = -\frac{GM_{\mathrm{E}}m}{r}. \qquad 13.4$$

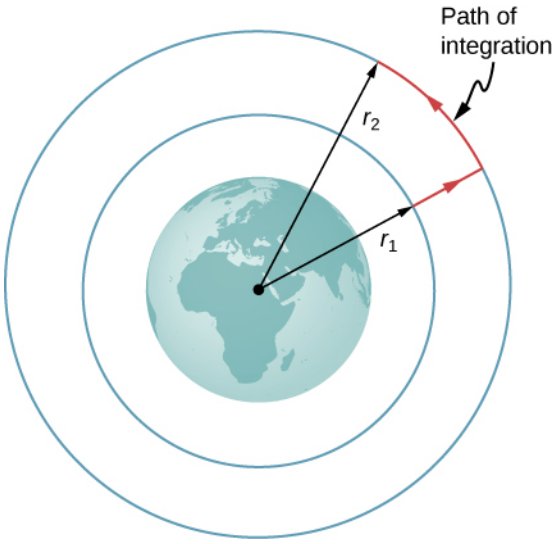


Figure 13.11 The work integral, which determines the change in potential energy, can be evaluated along the path shown in red.

Note two important items with this definition. First, $U \to 0$ as $r \to \infty$. The potential energy is zero when the two masses are infinitely far apart. Only the difference in U is important, so the choice of $U = 0$ for $r = \infty$ is merely one of convenience. (Recall that in earlier gravity problems, you were free to take $U = 0$ at the top or bottom of a building, or anywhere.) Second, note that U becomes increasingly more negative as the masses get closer. That is consistent with what you learned about potential energy in Potential Energy and Conservation of Energy. As the two masses are separated, positive work must be done against the force of gravity, and hence, U increases (becomes less negative). All masses naturally fall together under the influence of gravity, falling from a higher to a lower potential energy.

EXAMPLE 13.6

Lifting a Payload

How much energy is required to lift the 9000-kg *Soyuz* vehicle from Earth's surface to the height of the ISS, 400 km above the surface?

Strategy

Use Equation 13.2 to find the change in potential energy of the payload. That amount of work or energy must be supplied to lift the payload.

Solution

Paying attention to the fact that we start at Earth's surface and end at 400 km above the surface, the change in U is

$$\Delta U = U_{\text{orbit}} - U_{\text{Earth}} = -\frac{GM_{\text{E}}m}{R_{\text{E}} + 400\,\text{km}} - \left(-\frac{GM_{\text{E}}m}{R_{\text{E}}}\right).$$

We insert the values

$$m = 9000\,\text{kg}, \quad M_{\text{E}} = 5.96 \times 10^{24}\text{kg}, \quad R_{\text{E}} = 6.37 \times 10^{6}\,\text{m}$$

and convert 400 km into 4.00×10^{5} m. We find $\Delta U = 3.32 \times 10^{10}$ J. It is positive, indicating an increase in potential energy, as we would expect.

Significance

For perspective, consider that the average US household energy use in 2013 was 909 kWh per month. That is energy of

$$909\,\text{kWh} \times 1000\,\text{W/kW} \times 3600\,\text{s/h} = 3.27 \times 10^9\,\text{J per month.}$$

So our result is an energy expenditure equivalent to 10 months. But this is just the energy needed to raise the payload 400 km. If we want the *Soyuz* to be in orbit so it can rendezvous with the ISS and not just fall back to Earth, it needs a lot of kinetic energy. As we see in the next section, that kinetic energy is about five times that of ΔU. In addition, far more energy is expended lifting the propulsion system itself. Space travel is not cheap.

CHECK YOUR UNDERSTANDING 13.3

Why not use the simpler expression $\Delta U = mg(y_2 - y_1)$? How significant would the error be? (Recall the previous result, in Example 13.4, that the value g at 400 km above the Earth is $8.67\,\text{m/s}^2$.)

Conservation of Energy

In Potential Energy and Conservation of Energy, we described how to apply conservation of energy for systems with conservative forces. We were able to solve many problems, particularly those involving gravity, more simply using conservation of energy. Those principles and problem-solving strategies apply equally well here. The only change is to place the new expression for potential energy into the conservation of energy equation, $E = K_1 + U_1 = K_2 + U_2$.

$$\frac{1}{2}mv_1^2 - \frac{GMm}{r_1} = \frac{1}{2}mv_2^2 - \frac{GMm}{r_2} \qquad 13.5$$

Note that we use M, rather than M_E, as a reminder that we are not restricted to problems involving Earth. However, we still assume that $m << M$. (For problems in which this is not true, we need to include the kinetic energy of both masses and use conservation of momentum to relate the velocities to each other. But the principle remains the same.)

Escape velocity

Escape velocity is often defined to be the *minimum* initial velocity of an object that is required to escape the surface of a planet (or any large body like a moon) and never return. As usual, we assume no energy lost to an atmosphere, should there be any.

Consider the case where an object is launched from the surface of a planet with an initial velocity directed away from the planet. With the *minimum* velocity needed to escape, the object would *just* come to rest infinitely far away, that is, the object gives up the last of its kinetic energy just as it reaches infinity, where the force of gravity becomes zero. Since $U \to 0$ as $r \to \infty$, this means the total energy is zero. Thus, we find the escape velocity from the surface of an astronomical body of mass M and radius R by setting the total energy equal to zero. At the surface of the body, the object is located at $r_1 = R$ and it has escape velocity $v_1 = v_\text{esc}$. It reaches $r_2 = \infty$ with velocity $v_2 = 0$. Substituting into Equation 13.5, we have

$$\frac{1}{2}mv_\text{esc}^2 - \frac{GMm}{R} = \frac{1}{2}m0^2 - \frac{GMm}{\infty} = 0.$$

Solving for the escape velocity,

$$v_\text{esc} = \sqrt{\frac{2GM}{R}}. \qquad 13.6$$

Notice that m has canceled out of the equation. The escape velocity is the same for all objects, regardless of mass. Also, we are not restricted to the surface of the planet; R can be any starting point beyond the surface of the planet.

EXAMPLE 13.7

Escape from Earth

What is the escape speed from the surface of Earth? Assume there is no energy loss from air resistance. Compare this to the escape speed from the Sun, starting from Earth's orbit.

Strategy

We use Equation 13.6, clearly defining the values of R and M. To escape Earth, we need the mass and radius of Earth. For escaping the Sun, we need the mass of the Sun, and the orbital distance between Earth and the Sun.

Solution

Substituting the values for Earth's mass and radius directly into Equation 13.6, we obtain

$$v_{\text{esc}} = \sqrt{\frac{2GM}{R}} = \sqrt{\frac{2(6.67 \times 10^{-11}\ \text{N} \cdot \text{m}^2/\text{kg}^2)(5.96 \times 10^{24}\ \text{kg})}{6.37 \times 10^{6}\ \text{m}}} = 1.12 \times 10^{4}\ \text{m/s}.$$

That is about 11 km/s or 25,000 mph. To escape the Sun, starting from Earth's orbit, we use $R = R_{\text{ES}} = 1.50 \times 10^{11}$ m and $M_{\text{Sun}} = 1.99 \times 10^{30}$ kg. The result is $v_{\text{esc}} = 4.21 \times 10^{4}$ m/s or about 42 km/s.

Significance

The speed needed to escape the Sun (leave the solar system) is nearly four times the escape speed from Earth's surface. But there is help in both cases. Earth is rotating, at a speed of nearly 1.7 km/s at the equator, and we can use that velocity to help escape, or to achieve orbit. For this reason, many commercial space companies maintain launch facilities near the equator. To escape the Sun, there is even more help. Earth revolves about the Sun at a speed of approximately 30 km/s. By launching in the direction that Earth is moving, we need only an additional 12 km/s. The use of gravitational assist from other planets, essentially a gravity slingshot technique, allows space probes to reach even greater speeds. In this slingshot technique, the vehicle approaches the planet and is accelerated by the planet's gravitational attraction. It has its greatest speed at the closest point of approach, although it accelerates opposite to the motion in equal measure as it moves away. But relative to the planet, the vehicle's speed far before the approach, and long after, are the same. If the directions are chosen correctly, that can result in a significant increase (or decrease if needed) in the vehicle's speed relative to the rest of the solar system.

INTERACTIVE

Visit this website (https://openstax.org/l/21escapevelocit) to learn more about escape velocity.

CHECK YOUR UNDERSTANDING 13.4

If we send a probe out of the solar system starting from Earth's surface, do we only have to escape the Sun?

Energy and gravitationally bound objects

As stated previously, escape velocity can be defined as the initial velocity of an object that can escape the surface of a moon or planet. More generally, it is the speed at *any* position such that the *total* energy is zero. If the total energy is zero or greater, the object escapes. If the total energy is negative, the object cannot escape. Let's see why that is the case.

As noted earlier, we see that $U \to 0$ as $r \to \infty$. If the total energy is zero, then as m reaches a value of r that approaches infinity, U becomes zero and so must the kinetic energy. Hence, m comes to rest infinitely far away from M. It has "just escaped" M. If the total energy is positive, then kinetic energy remains at $r = \infty$ and certainly m does not return. When the total energy is zero or greater, then we say that m is not gravitationally

bound to M.

On the other hand, if the total energy is negative, then the kinetic energy must reach zero at some finite value of r, where U is negative and equal to the total energy. The object can never exceed this finite distance from M, since to do so would require the kinetic energy to become negative, which is not possible. We say m is **gravitationally bound** to M.

We have simplified this discussion by assuming that the object was headed directly away from the planet. What is remarkable is that the result applies for any velocity. Energy is a scalar quantity and hence Equation 13.5 is a scalar equation—the direction of the velocity plays no role in conservation of energy. It is possible to have a gravitationally bound system where the masses do not "fall together," but maintain an orbital motion about each other.

We have one important final observation. Earlier we stated that if the total energy is zero or greater, the object escapes. Strictly speaking, Equation 13.5 and Equation 13.6 apply for point objects. They apply to finite-sized, spherically symmetric objects as well, provided that the value for r in Equation 13.5 is always greater than the sum of the radii of the two objects. If r becomes less than this sum, then the objects collide. (Even for greater values of r, but near the sum of the radii, gravitational tidal forces could create significant effects if both objects are planet sized. We examine tidal effects in Tidal Forces.) Neither positive nor negative total energy precludes finite-sized masses from colliding. For real objects, direction is important.

EXAMPLE 13.8

How Far Can an Object Escape?

Let's consider the preceding example again, where we calculated the escape speed from Earth and the Sun, starting from Earth's orbit. We noted that Earth already has an orbital speed of 30 km/s. As we see in the next section, that is the tangential speed needed to stay in circular orbit. If an object had this speed at the distance of Earth's orbit, but was headed directly away from the Sun, how far would it travel before coming to rest? Ignore the gravitational effects of any other bodies.

Strategy

The object has initial kinetic and potential energies that we can calculate. When its speed reaches zero, it is at its maximum distance from the Sun. We use Equation 13.5, conservation of energy, to find the distance at which kinetic energy is zero.

Solution

The initial position of the object is Earth's radius of orbit and the intial speed is given as 30 km/s. The final velocity is zero, so we can solve for the distance at that point from the conservation of energy equation. Using $R_{\text{ES}} = 1.50 \times 10^{11}$ m and $M_{\text{Sun}} = 1.99 \times 10^{30}$ kg, we have

$$\frac{1}{2}mv_1^2 - \frac{GMm}{r_1} = \frac{1}{2}mv_2^2 - \frac{GMm}{r_2}$$

$$\frac{1}{2}\cancel{m}(3.0 \times 10^3 \text{ m/s})^2 - \frac{(6.67 \times 10^{-11} \text{ N·m/kg}^2)(1.99 \times 10^{30} \text{ kg})\cancel{m}}{1.50 \times 10^{11} \text{ m}}$$

$$= \frac{1}{2}\cancel{m}0^2 - \frac{(6.67 \times 10^{-11} \text{ N·m/kg}^2)(1.99 \times 10^{30} \text{ kg})\cancel{m}}{r_2}$$

where the mass m cancels. Solving for r_2 we get $r_2 = 3.0 \times 10^{11}$ m. Note that this is twice the initial distance from the Sun and takes us past Mars's orbit, but not quite to the asteroid belt.

Significance

The object in this case reached a distance *exactly* twice the initial orbital distance. We will see the reason for this in the next section when we calculate the speed for circular orbits.

CHECK YOUR UNDERSTANDING 13.5

Assume you are in a spacecraft in orbit about the Sun at Earth's orbit, but far away from Earth (so that it can be ignored). How could you redirect your tangential velocity to the radial direction such that you could then pass by Mars's orbit? What would be required to change just the direction of the velocity?

13.4 Satellite Orbits and Energy

Learning Objectives

By the end of this section, you will be able to:

- Describe the mechanism for circular orbits
- Find the orbital periods and speeds of satellites
- Determine whether objects are gravitationally bound

The Moon orbits Earth. In turn, Earth and the other planets orbit the Sun. The space directly above our atmosphere is filled with artificial satellites in orbit. We examine the simplest of these orbits, the circular orbit, to understand the relationship between the speed and period of planets and satellites in relation to their positions and the bodies that they orbit.

Circular Orbits

As noted at the beginning of this chapter, Nicolaus Copernicus first suggested that Earth and all other planets orbit the Sun in circles. He further noted that orbital periods increased with distance from the Sun. Later analysis by Kepler showed that these orbits are actually ellipses, but the orbits of most planets in the solar system are nearly circular. Earth's orbital distance from the Sun varies a mere 2%. The exception is the eccentric orbit of Mercury, whose orbital distance varies nearly 40%.

Determining the **orbital speed** and **orbital period** of a satellite is much easier for circular orbits, so we make that assumption in the derivation that follows. As we described in the previous section, an object with negative total energy is gravitationally bound and therefore is in orbit. Our computation for the special case of circular orbits will confirm this. We focus on objects orbiting Earth, but our results can be generalized for other cases.

Consider a satellite of mass m in a circular orbit about Earth at distance r from the center of Earth (Figure 13.12). It has centripetal acceleration directed toward the center of Earth. Earth's gravity is the only force acting, so Newton's second law gives

$$\frac{GmM_{\mathrm{E}}}{r^2} = ma_{\mathrm{c}} = \frac{mv_{\mathrm{orbit}}^2}{r}.$$

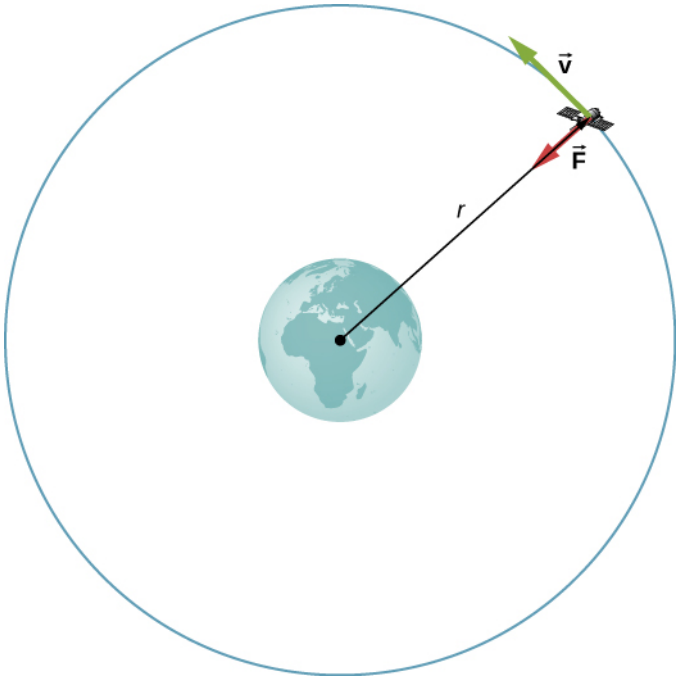


Figure 13.12 A satellite of mass m orbiting at radius r from the center of Earth. The gravitational force supplies the centripetal acceleration.

We solve for the speed of the orbit, noting that m cancels, to get the orbital speed

$$v_{\text{orbit}} = \sqrt{\frac{GM_{\text{E}}}{r}}. \tag{13.7}$$

Consistent with what we saw in Equation 13.2 and Equation 13.6, m does not appear in Equation 13.7. The value of g, the escape velocity, and orbital velocity depend only upon the distance from the center of the planet, and *not* upon the mass of the object being acted upon. Notice the similarity in the equations for v_{orbit} and v_{esc}. The escape velocity is exactly $\sqrt{2}$ times greater, about 40%, than the orbital velocity. This comparison was noted in Example 13.7, and it is true for a satellite at any radius.

To find the period of a circular orbit, we note that the satellite travels the circumference of the orbit $2\pi r$ in one period T. Using the definition of speed, we have $v_{\text{orbit}} = 2\pi r/T$. We substitute this into Equation 13.7 and rearrange to get

$$T = 2\pi\sqrt{\frac{r^3}{GM_{\text{E}}}}. \tag{13.8}$$

We see in the next section that this represents Kepler's third law for the case of circular orbits. It also confirms Copernicus's observation that the period of a planet increases with increasing distance from the Sun. We need only replace M_{E} with M_{Sun} in Equation 13.8.

We conclude this section by returning to our earlier discussion about astronauts in orbit appearing to be weightless, as if they were free-falling towards Earth. In fact, they are in free fall. Consider the trajectories shown in Figure 13.13. (This figure is based on a drawing by Newton in his *Principia* and also appeared earlier in Motion in Two and Three Dimensions.) All the trajectories shown that hit the surface of Earth have less than orbital velocity. The astronauts would accelerate toward Earth along the noncircular paths shown and feel weightless. (Astronauts actually train for life in orbit by riding in airplanes that free fall for 30 seconds at a time.) But with the correct orbital velocity, Earth's surface curves away from them at exactly the same rate as they fall toward Earth. Of course, staying the same distance from the surface is the point of a circular orbit.

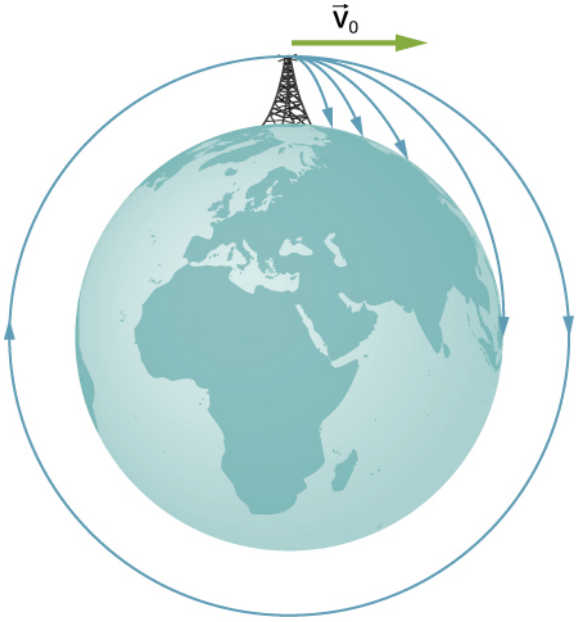


Figure 13.13 A circular orbit is the result of choosing a tangential velocity such that Earth's surface curves away at the same rate as the object falls toward Earth.

We can summarize our discussion of orbiting satellites in the following Problem-Solving Strategy.

PROBLEM-SOLVING STRATEGY

Orbits and Conservation of Energy

1. Determine whether the equations for speed, energy, or period are valid for the problem at hand. If not, start with the first principles we used to derive those equations.
2. To start from first principles, draw a free-body diagram and apply Newton's law of gravitation and Newton's second law.
3. Along with the definitions for speed and energy, apply Newton's second law of motion to the bodies of interest.

EXAMPLE 13.9

The International Space Station

Determine the orbital speed and period for the International Space Station (ISS).

Strategy

Since the ISS orbits 4.00×10^2 km above Earth's surface, the radius at which it orbits is $R_E + 4.00 \times 10^2$ km. We use Equation 13.7 and Equation 13.8 to find the orbital speed and period, respectively.

Solution

Using Equation 13.7, the orbital velocity is

$$v_{\text{orbit}} = \sqrt{\frac{GM_E}{r}} = \sqrt{\frac{6.67 \times 10^{-11}\ \text{N} \cdot \text{m}^2/\text{kg}^2 (5.96 \times 10^{24}\ \text{kg})}{(6.36 \times 10^6 + 4.00 \times 10^5\ \text{m})}} = 7.67 \times 10^3\ \text{m/s}$$

which is about 17,000 mph. Using Equation 13.8, the period is

$$T = 2\pi\sqrt{\frac{r^3}{GM_E}} = 2\pi\sqrt{\frac{(6.37 \times 10^6 + 4.00 \times 10^5 \text{ m})^3}{(6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2)(5.96 \times 10^{24} \text{ kg})}} = 5.55 \times 10^3 \text{ s}$$

which is just over 90 minutes.

Significance

The ISS is considered to be in low Earth orbit (LEO). Nearly all satellites are in LEO, including most weather satellites. GPS satellites, at about 20,000 km, are considered medium Earth orbit. The higher the orbit, the more energy is required to put it there and the more energy is needed to reach it for repairs. Of particular interest are the satellites in geosynchronous orbit. All fixed satellite dishes on the ground pointing toward the sky, such as TV reception dishes, are pointed toward geosynchronous satellites. These satellites are placed at the exact distance, and just above the equator, such that their period of orbit is 1 day. They remain in a fixed position relative to Earth's surface.

CHECK YOUR UNDERSTANDING 13.6

By what factor must the radius change to reduce the orbital velocity of a satellite by one-half? By what factor would this change the period?

EXAMPLE 13.10

Determining the Mass of Earth

Determine the mass of Earth from the orbit of the Moon.

Strategy

We use Equation 13.8, solve for M_E, and substitute for the period and radius of the orbit. The radius and period of the Moon's orbit was measured with reasonable accuracy thousands of years ago. From the astronomical data in Appendix D, the period of the Moon is 27.3 days $= 2.36 \times 10^6$ s, and the *average* distance between the centers of Earth and the Moon is 384,000 km.

Solution

Solving for M_E,

$$T = 2\pi\sqrt{\frac{r^3}{GM_E}}$$

$$M_E = \frac{4\pi^2 r^3}{GT^2} = \frac{4\pi^2(3.84 \times 10^8 \text{ m})^3}{(6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2)(2.36 \times 10^6 \text{ s})^2} = 6.01 \times 10^{24} \text{ kg}.$$

Significance

Compare this to the value of 5.96×10^{24} kg that we obtained in Example 13.5, using the value of g at the surface of Earth. Although these values are very close (~0.8%), both calculations use average values. The value of g varies from the equator to the poles by approximately 0.5%. But the Moon has an elliptical orbit in which the value of r varies just over 10%. (The apparent size of the full Moon actually varies by about this amount, but it is difficult to notice through casual observation as the time from one extreme to the other is many months.)

CHECK YOUR UNDERSTANDING 13.7

There is another consideration to this last calculation of M_E. We derived Equation 13.8 assuming that the satellite orbits around the center of the astronomical body at the same radius used in the expression for the gravitational force between them. What assumption is made to justify this? Earth is about 81 times more massive than the Moon. Does the Moon orbit about the exact center of Earth?

CHAPTER REVIEW

Key Terms

action-at-a-distance force type of force exerted without physical contact

aphelion farthest point from the Sun of an orbiting body; the corresponding term for the Moon's farthest point from Earth is the apogee

apparent weight reading of the weight of an object on a scale that does not account for acceleration

black hole mass that becomes so dense, that it collapses in on itself, creating a singularity at the center surround by an event horizon

escape velocity initial velocity an object needs to escape the gravitational pull of another; it is more accurately defined as the velocity of an object with zero total mechanical energy

event horizon location of the Schwarzschild radius and is the location near a black hole from within which no object, even light, can escape

gravitational field vector field that surrounds the mass creating the field; the field is represented by field lines, in which the direction of the field is tangent to the lines, and the magnitude (or field strength) is inversely proportional to the spacing of the lines; other masses respond to this field

gravitationally bound two object are gravitationally bound if their orbits are closed; gravitationally bound systems have a negative total mechanical energy

Kepler's first law law stating that every planet moves along an ellipse, with the Sun located at a focus of the ellipse

Kepler's second law law stating that a planet sweeps out equal areas in equal times, meaning it has a constant areal velocity

Kepler's third law law stating that the square of the period is proportional to the cube of the semi-major axis of the orbit

neap tide low tide created when the Moon and the Sun form a right triangle with Earth

neutron star most compact object known—outside of a black hole itself

Newton's law of gravitation every mass attracts every other mass with a force proportional to the product of their masses, inversely proportional to the square of the distance between them, and with direction along the line connecting the center of mass of each

non-Euclidean geometry geometry of curved space, describing the relationships among angles and lines on the surface of a sphere, hyperboloid, etc.

orbital period time required for a satellite to complete one orbit

orbital speed speed of a satellite in a circular orbit; it can be also be used for the instantaneous speed for noncircular orbits in which the speed is not constant

perihelion point of closest approach to the Sun of an orbiting body; the corresponding term for the Moon's closest approach to Earth is the perigee

principle of equivalence part of the general theory of relativity, it states that there no difference between free fall and being weightless, or a uniform gravitational field and uniform acceleration

Schwarzschild radius critical radius (R_S) such that if a mass were compressed to the extent that its radius becomes less than the Schwarzschild radius, then the mass will collapse to a singularity, and anything that passes inside that radius cannot escape

space-time concept of space-time is that time is essentially another coordinate that is treated the same way as any individual spatial coordinate; in the equations that represent both special and general relativity, time appears in the same context as do the spatial coordinates

spring tide high tide created when the Moon, the Sun, and Earth are along one line

theory of general relativity Einstein's theory for gravitation and accelerated reference frames; in this theory, gravitation is the result of mass and energy distorting the space-time around it; it is also often referred to as Einstein's theory of gravity

tidal force *difference* between the gravitational force at the center of a body and that at any other location on the body; the tidal force stretches the body

universal gravitational constant constant representing the strength of the gravitational force, that is believed to be the same throughout the universe

Key Equations

Newton's law of gravitation	$\vec{\mathbf{F}}_{12} = G\frac{m_1 m_2}{r^2}\hat{\mathbf{r}}_{12}$
Acceleration due to gravity at the surface of Earth	$g = G\frac{M_\text{E}}{r^2}$
Gravitational potential energy beyond Earth	$U = -\frac{GM_\text{E}m}{r}$
Conservation of energy	$\frac{1}{2}mv_1^2 - \frac{GMm}{r_1} = \frac{1}{2}mv_2^2 - \frac{GMm}{r_2}$
Escape velocity	$v_\text{esc} = \sqrt{\frac{2GM}{R}}$
Orbital speed	$v_\text{orbit} = \sqrt{\frac{\text{GM}_\text{E}}{r}}$
Orbital period	$T = 2\pi\sqrt{\frac{r^3}{\text{GM}_\text{E}}}$
Energy in circular orbit	$E = K + U = -\frac{Gm\text{M}_\text{E}}{2r}$
Conic sections	$\frac{\alpha}{r} = 1 + e\cos\theta$
Kepler's third law	$T^2 = \frac{4\pi^2}{GM}a^3$
Schwarzschild radius	$R_\text{S} = \frac{2GM}{c^2}$

Summary

13.1 Newton's Law of Universal Gravitation

- All masses attract one another with a gravitational force proportional to their masses and inversely proportional to the square of the distance between them.
- Spherically symmetrical masses can be treated as if all their mass were located at the center.
- Nonsymmetrical objects can be treated as if their mass were concentrated at their center of mass, provided their distance from other masses is large compared to their size.

13.2 Gravitation Near Earth's Surface

- The weight of an object is the gravitational attraction between Earth and the object.
- The gravitational field is represented as lines that indicate the direction of the gravitational force; the line spacing indicates the strength of the field.
- Apparent weight differs from actual weight due to the acceleration of the object.

13.3 Gravitational Potential Energy and Total Energy

- The acceleration due to gravity changes as we move away from Earth, and the expression for gravitational potential energy must reflect this change.
- The total energy of a system is the sum of kinetic and gravitational potential energy, and this total energy is conserved in orbital motion.
- Objects must have a minimum velocity, the escape velocity, to leave a planet and not return.
- Objects with total energy less than zero are bound; those with zero or greater are unbounded.

13.4 Satellite Orbits and Energy

- Orbital velocities are determined by the mass of the body being orbited and the distance from the center of that body, and not by the mass of a much smaller orbiting object.
- The period of the orbit is likewise independent of the orbiting object's mass.
- Bodies of comparable masses orbit about their common center of mass and their velocities and periods should be determined from Newton's second law and law of gravitation.

13.5 Kepler's Laws of Planetary Motion

- All orbital motion follows the path of a conic section. Bound or closed orbits are either a circle or an ellipse; unbounded or open orbits are either a parabola or a hyperbola.
- The areal velocity of any orbit is constant, a reflection of the conservation of angular momentum.
- The square of the period of an elliptical orbit is proportional to the cube of the semi-major axis of that orbit.

13.6 Tidal Forces

- Earth's tides are caused by the difference in gravitational forces from the Moon and the Sun on the different sides of Earth.
- Spring or neap (high) tides occur when Earth, the Moon, and the Sun are aligned, and neap or (low) tides occur when they form a right triangle.
- Tidal forces can create internal heating, changes in orbital motion, and even destruction of orbiting bodies.

13.7 Einstein's Theory of Gravity

- According to the theory of general relativity, gravity is the result of distortions in space-time created by mass and energy.
- The principle of equivalence states that that both mass and acceleration distort space-time and are indistinguishable in comparable circumstances.
- Black holes, the result of gravitational collapse, are singularities with an event horizon that is proportional to their mass.
- Evidence for the existence of black holes is still circumstantial, but the amount of that evidence is overwhelming.

Conceptual Questions

13.1 Newton's Law of Universal Gravitation

1. Action at a distance, such as is the case for gravity, was once thought to be illogical and therefore untrue. What is the ultimate determinant of the truth in science, and why was this action at a distance ultimately accepted?

2. In the law of universal gravitation, Newton assumed that the force was proportional to the product of the two masses ($\sim m_1 m_2$). While all scientific conjectures must be experimentally verified, can you provide arguments as to why this must be? (You may wish to consider simple examples in which any other form would lead to contradictory results.)

13.2 Gravitation Near Earth's Surface

3. Must engineers take Earth's rotation into account when constructing very tall buildings at any location other than the equator or very near the poles?

13.3 Gravitational Potential Energy and Total Energy

4. It was stated that a satellite with negative total energy is in a bound orbit, whereas one with zero or positive total energy is in an unbounded orbit. Why is this true? What choice for gravitational potential energy was made such that this is true?

5. It was shown that the energy required to lift a satellite into a *low* Earth orbit (the change in potential energy) is only a small fraction of the kinetic energy needed to keep it in orbit. Is this true for larger orbits? Is there a trend to the ratio of kinetic energy to change in potential energy as the size of the orbit increases?

13.4 Satellite Orbits and Energy

6. One student argues that a satellite in orbit is in free fall because the satellite keeps falling toward Earth. Another says a satellite in orbit is not in free fall because the acceleration due to gravity is not $9.80\ \text{m/s}^2$. With whom do you agree with and why?


7. Many satellites are placed in geosynchronous orbits. What is special about these orbits? For a

global communication network, how many of these satellites would be needed?

13.5 Kepler's Laws of Planetary Motion

8. Are Kepler's laws purely descriptive, or do they contain causal information?

9. In the diagram below for a satellite in an elliptical orbit about a much larger mass, indicate where its speed is the greatest and where it is the least. What conservation law dictates this behavior? Indicate the directions of the force, acceleration, and velocity at these points. Draw vectors for these same three quantities at the two points where the *y*-axis intersects (along the semi-minor axis) and from this determine whether the speed is increasing decreasing, or at a max/min.

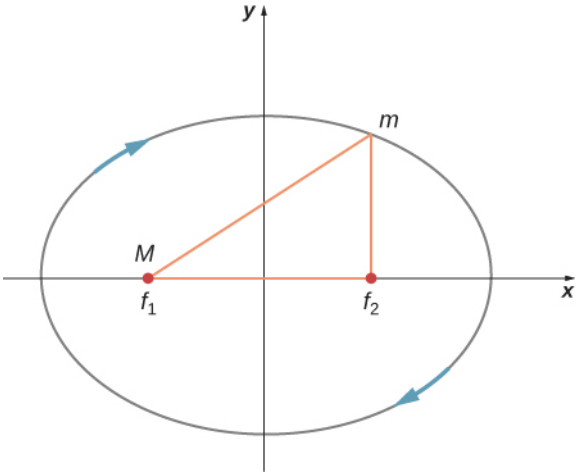

13.6 Tidal Forces

10. As an object falls into a black hole, tidal forces increase. Will these tidal forces always tear the object apart as it approaches the Schwarzschild radius? How does the mass of the black hole and size of the object affect your answer?

13.7 Einstein's Theory of Gravity

11. The principle of equivalence states that all experiments done in a lab in a uniform gravitational field cannot be distinguished from those done in a lab that is not in a gravitational field but is uniformly accelerating. For the latter case, consider what happens to a laser beam at some height shot perfectly horizontally to the floor, across the accelerating lab. (View this from a nonaccelerating frame outside the lab.) Relative to the height of the laser, where will the laser beam hit the far wall? What does this say about the effect of a gravitational field on light? Does the fact that light has no mass make any difference to the argument?

12. As a person approaches the Schwarzschild radius of a black hole, outside observers see all the processes of that person (their clocks, their heart rate, etc.) slowing down, and coming to a halt as they reach the Schwarzschild radius. (The person falling into the black hole sees their own processes unaffected.) But the speed of light is the same everywhere for all observers. What does this say about space as you approach the black hole?

Problems

13.1 Newton's Law of Universal Gravitation

13. Evaluate the magnitude of gravitational force between two 5-kg spherical steel balls separated by a center-to-center distance of 15 cm.

14. Estimate the gravitational force between two sumo wrestlers, with masses 220 kg and 240 kg, when they are embraced and their centers are 1.2 m apart.

15. Astrology makes much of the position of the planets at the moment of one's birth. The only known force a planet exerts on Earth is gravitational. (a) Calculate the gravitational force exerted on a 4.20-kg baby by a 100-kg father 0.200 m away at birth (he is assisting, so he is close to the child). (b) Calculate the force on the baby due to Jupiter if it is at its closest distance to Earth, some 6.29×10^{11} m away. How does the force of Jupiter on the baby compare to the force of the father on the baby? Other objects in the room and the hospital building also exert similar gravitational forces. (Of course, there could be an unknown force acting, but scientists first need to be convinced that there is even an effect, much less that an unknown force causes it.)

16. A mountain 10.0 km from a person exerts a gravitational force on him equal to 2.00% of his weight. (a) Calculate the mass of the mountain. (b) Compare the mountain's mass with that of Earth. (c) What is unreasonable about these results? (d) Which premises are unreasonable or inconsistent? (Note that accurate

gravitational measurements can easily detect the effect of nearby mountains and variations in local geology.)

17. The International Space Station has a mass of approximately 370,000 kg. (a) What is the force on a 150-kg suited astronaut if she is 20 m from the center of mass of the station? (b) How accurate do you think your answer would be?



Figure 13.33 (credit: ©ESA–David Ducros)

18. Asteroid Toutatis passed near Earth in 2006 at four times the distance to our Moon. This was the closest approach we will have until 2060. If it has mass of 5.0×10^{13} kg, what force did it exert on Earth at its closest approach?

19. (a) What was the acceleration of Earth caused by asteroid Toutatis (see previous problem) at its closest approach? (b) What was the acceleration of Toutatis at this point?

13.2 Gravitation Near Earth's Surface

20. (a) Calculate Earth's mass given the acceleration due to gravity at the North Pole is measured to be 9.832 m/s^2 and the radius of the Earth at the pole is 6356 km. (b) Compare this with the NASA's Earth Fact Sheet value of 5.9726×10^{24} kg.

21. (a) What is the acceleration due to gravity on the surface of the Moon? (b) On the surface of Mars? The mass of Mars is 6.418×10^{23} kg and its radius is 3.38×10^6 m.

22. (a) Calculate the acceleration due to gravity on the surface of the Sun. (b) By what factor would your weight increase if you could stand on the Sun? (Never mind that you cannot.)

23. The mass of a particle is 15 kg. (a) What is its weight on Earth? (b) What is its weight on the Moon? (c) What is its mass on the Moon? (d) What is its weight in outer space far from any celestial body? (e) What is its mass at this point?

24. On a planet whose radius is 1.2×10^7 m, the acceleration due to gravity is 18 m/s^2. What is the mass of the planet?

25. The mean diameter of the planet Saturn is 1.2×10^8 m, and its mean mass density is 0.69 g/cm^3. Find the acceleration due to gravity at Saturn's surface.

26. The mean diameter of the planet Mercury is 4.88×10^6 m, and the acceleration due to gravity at its surface is 3.78 m/s^2. Estimate the mass of this planet.

27. The acceleration due to gravity on the surface of a planet is three times as large as it is on the surface of Earth. The mass density of the planet is known to be twice that of Earth. What is the radius of this planet in terms of Earth's radius?

28. A body on the surface of a planet with the same radius as Earth's weighs 10 times more than it does on Earth. What is the mass of this planet in terms of Earth's mass?

13.3 Gravitational Potential Energy and Total Energy

29. Find the escape speed of a projectile from the surface of Mars.

30. Find the escape speed of a projectile from the surface of Jupiter.

31. What is the escape speed of a satellite located at the Moon's orbit about Earth? Assume the Moon is not nearby.

32. (a) Evaluate the gravitational potential energy between two 5.00-kg spherical steel balls separated by a center-to-center distance of 15.0 cm. (b) Assuming that they are both initially at rest relative to each other in deep space, use conservation of energy to find how fast will they be traveling upon impact. Each sphere has a radius of 5.10 cm.

33. An average-sized asteroid located 5.0×10^7 km from Earth with mass 2.0×10^{13} kg is detected headed directly toward Earth with speed of 2.0 km/s. What will its speed be just before it hits our atmosphere? (You may ignore the size of the asteroid.)

34. (a) What will be the kinetic energy of the asteroid in the previous problem just before it hits Earth? b) Compare this energy to the output of the largest fission bomb, 2100 TJ. What impact would this have on Earth?

35. (a) What is the change in energy of a 1000-kg payload taken from rest at the surface of Earth

and placed at rest on the surface of the Moon? (b) What would be the answer if the payload were taken from the Moon's surface to Earth? Is this a reasonable calculation of the energy needed to move a payload back and forth?

13.4 Satellite Orbits and Energy

36. If a planet with 1.5 times the mass of Earth was traveling in Earth's orbit, what would its period be?

37. Two planets in circular orbits around a star have speeds of v and $2v$. (a) What is the ratio of the orbital radii of the planets? (b) What is the ratio of their periods?

38. Using the average distance of Earth from the Sun, and the orbital period of Earth, (a) find the centripetal acceleration of Earth in its motion about the Sun. (b) Compare this value to that of the centripetal acceleration at the equator due to Earth's rotation.

39. (a) What is the orbital radius of an Earth satellite having a period of 1.00 h? (b) What is unreasonable about this result?

40. Calculate the mass of the Sun based on data for Earth's orbit and compare the value obtained with the Sun's actual mass.

41. Find the mass of Jupiter based on the fact that Io, its innermost moon, has an average orbital radius of 421,700 km and a period of 1.77 days.

42. Astronomical observations of our Milky Way galaxy indicate that it has a mass of about 8.0×10^{11} solar masses. A star orbiting on the galaxy's periphery is about 6.0×10^4 light-years from its center. (a) What should the orbital period of that star be? (b) If its period is 6.0×10^7 years instead, what is the mass of the galaxy? Such calculations are used to imply the existence of other matter, such as a very massive black hole at the center of the Milky Way.

43. (a) In order to keep a small satellite from drifting into a nearby asteroid, it is placed in orbit with a period of 3.02 hours and radius of 2.0 km. What is the mass of the asteroid? (b) Does this mass seem reasonable for the size of the orbit?

44. The Moon and Earth rotate about their common center of mass, which is located about 4700 km from the center of Earth. (This is 1690 km below the surface.) (a) Calculate the acceleration due to the Moon's gravity at that point. (b) Calculate the centripetal acceleration of the center of Earth as it rotates about that point once each lunar month (about 27.3 d) and compare it with the acceleration found in part (a). Comment on whether or not they are equal and why they should or should not be.

45. The Sun orbits the Milky Way galaxy once each 2.60×10^8 years, with a roughly circular orbit averaging a radius of 3.00×10^4 light-years. (A light-year is the distance traveled by light in 1 year.) Calculate the centripetal acceleration of the Sun in its galactic orbit. Does your result support the contention that a nearly inertial frame of reference can be located at the Sun? (b) Calculate the average speed of the Sun in its galactic orbit. Does the answer surprise you?

46. A geosynchronous Earth satellite is one that has an orbital period of precisely 1 day. Such orbits are useful for communication and weather observation because the satellite remains above the same point on Earth (provided it orbits in the equatorial plane in the same direction as Earth's rotation). Calculate the radius of such an orbit based on the data for Earth in Appendix D.

13.5 Kepler's Laws of Planetary Motion

47. Calculate the mass of the Sun based on data for average Earth's orbit and compare the value obtained with the Sun's commonly listed value of 1.989×10^{30} kg.

48. Io orbits Jupiter with an average radius of 421,700 km and a period of 1.769 days. Based upon these data, what is the mass of Jupiter?

49. The "mean" orbital radius listed for astronomical objects orbiting the Sun is typically not an integrated average but is calculated such that it gives the correct period when applied to the equation for circular orbits. Given that, what is the mean orbital radius in terms of aphelion and perihelion?

50. The perihelion of Halley's comet is 0.586 AU and the aphelion is 17.8 AU. Given that its speed at perihelion is 55 km/s, what is the speed at aphelion ($1\ \text{AU} = 1.496 \times 10^{11}$ m)? (*Hint:* You may use either conservation of energy or angular momentum, but the latter is much easier.)

51. The perihelion of the comet Lagerkvist is 2.61 AU and it has a period of 7.36 years. Show that the aphelion for this comet is 4.95 AU.

52. What is the ratio of the speed at perihelion to that at aphelion for the comet Lagerkvist in the previous problem?

53. Eros has an elliptical orbit about the Sun, with a

perihelion distance of 1.13 AU and aphelion distance of 1.78 AU. What is the period of its orbit?

13.6 Tidal Forces

54. (a) What is the difference between the forces on a 1.0-kg mass on the near side of Io and far side due to Jupiter? Io has a mean radius of 1821 km and a mean orbital radius about Jupiter of 421,700 km. (b) Compare this difference to that calculated for the difference for Earth due to the Moon calculated in Example 13.14. Tidal forces are the cause of Io's volcanic activity.

55. If the Sun were to collapse into a black hole, the point of no return for an investigator would be approximately 3 km from the center singularity. Would the investigator be able to survive visiting even 300 km from the center? Answer this by finding the difference in the gravitational attraction the black holes exerts on a 1.0-kg mass at the head and at the feet of the investigator.

56. Consider Figure 13.23 in Tidal Forces. This diagram represents the tidal forces for spring tides. Sketch a similar diagram for neap tides. (*Hint:* For simplicity, imagine that the Sun and the Moon contribute equally. Your diagram would be the vector sum of two force fields (as in Figure 13.23), reduced by a factor of two, and superimposed at right angles.)

13.7 Einstein's Theory of Gravity

57. What is the Schwarzschild radius for the black hole at the center of our galaxy if it has the mass of 4 million solar masses?

58. What would be the Schwarzschild radius, in light years, if our Milky Way galaxy of 100 billion stars collapsed into a black hole? Compare this to our distance from the center, about 13,000 light years.

Additional Problems

59. A neutron star is a cold, collapsed star with nuclear density. A particular neutron star has a mass twice that of our Sun with a radius of 12.0 km. (a) What would be the weight of a 100-kg astronaut on standing on its surface? (b) What does this tell us about landing on a neutron star?

60. (a) How far from the center of Earth would the net gravitational force of Earth and the Moon on an object be zero? (b) Setting the *magnitudes* of the forces equal should result in two answers from the quadratic. Do you understand why there are two positions, but only one where the net force is zero?

61. How far from the center of the Sun would the net gravitational force of Earth and the Sun on a spaceship be zero?

62. Calculate the values of g at Earth's surface for the following changes in Earth's properties: (a) its mass is doubled and its radius is halved; (b) its mass density is doubled and its radius is unchanged; (c) its mass density is halved and its mass is unchanged.

63. Suppose you can communicate with the inhabitants of a planet in another solar system. They tell you that on their planet, whose diameter and mass are 5.0×10^3 km and 3.6×10^{23} kg, respectively, the record for the high jump is 2.0 m. Given that this record is close to 2.4 m on Earth, what would you conclude about your extraterrestrial friends' jumping ability?

64. (a) Suppose that your measured weight at the equator is one-half your measured weight at the pole on a planet whose mass and diameter are equal to those of Earth. What is the rotational period of the planet? (b) Would you need to take the shape of this planet into account?

65. A body of mass 100 kg is weighed at the North Pole and at the equator with a spring scale. What is the scale reading at these two points? Assume that $g = 9.83$ m/s^2 at the pole.

66. Find the speed needed to escape from the solar system starting from the surface of Earth. Assume there are no other bodies involved and do not account for the fact that Earth is moving in its orbit. [*Hint:* Equation 13.6 does not apply. Use Equation 13.5 and include the potential energy of both Earth and the Sun.

67. Consider the previous problem and include the fact that Earth has an orbital speed about the Sun of 29.8 km/s. (a) What speed relative to Earth would be needed and in what direction should you leave Earth? (b) What will be the shape of the trajectory?

68. A comet is observed 1.50 AU from the Sun with a speed of 24.3 km/s. Is this comet in a bound or unbound orbit?

69. An asteroid has speed 15.5 km/s when it is located 2.00 AU from the sun. At its closest approach, it is 0.400 AU from the Sun. What is its speed at that point?

70. Space debris left from old satellites and their launchers is becoming a hazard to other satellites. (a) Calculate the speed of a satellite in an orbit 900 km above Earth's surface. (b) Suppose a loose rivet is in an orbit of the same radius that intersects the satellite's orbit at an angle of $90°$. What is the velocity of the rivet relative to the satellite just before striking it? (c) If its mass is 0.500 g, and it comes to rest inside the satellite, how much energy in joules is generated by the collision? (Assume the satellite's velocity does not change appreciably, because its mass is much greater than the rivet's.)

71. A satellite of mass 1000 kg is in circular orbit about Earth. The radius of the orbit of the satellite is equal to two times the radius of Earth. (a) How far away is the satellite? (b) Find the kinetic, potential, and total energies of the satellite.

72. After Ceres was promoted to a dwarf planet, we now recognize the largest known asteroid to be Vesta, with a mass of 2.67×10^{20} kg and a diameter ranging from 578 km to 458 km. Assuming that Vesta is spherical with radius 520 km, find the approximate escape velocity from its surface.

73. (a) Given the asteroid Vesta which has a diameter of 520 km and mass of 2.67×10^{20} kg, what would be the orbital period for a space probe in a circular orbit of 10.0 km from its surface? (b) Why is this calculation marginally useful at best?

74. What is the orbital velocity of our solar system about the center of the Milky Way? Assume that the mass within a sphere of radius equal to our distance away from the center is about a 100 billion solar masses. Our distance from the center is 27,000 light years.

75. (a) Using the information in the previous problem, what velocity do you need to escape the Milky Way galaxy from our present position? (b) Would you need to accelerate a spaceship to this speed relative to Earth?

76. Circular orbits in Equation 13.10 for conic sections must have eccentricity zero. From this, and using Newton's second law applied to centripetal acceleration, show that the value of α in Equation 13.10 is given by $\alpha = \frac{L^2}{GMm^2}$ where L is the angular momentum of the orbiting body. The value of α is constant and given by this expression regardless of the type of orbit.

77. Show that for eccentricity equal to one in Equation 13.10 for conic sections, the path is a parabola. Do this by substituting Cartesian coordinates, x and y, for the polar coordinates, r and θ, and showing that it has the general form for a parabola, $x = ay^2 + by + c$.

78. Using the technique shown in Satellite Orbits and Energy, show that two masses m_1 and m_2 in circular orbits about their common center of mass, will have total energy $E = K + E = K_1 + K_2 - \frac{Gm_1m_2}{r} = -\frac{Gm_1m_2}{2r}$. We have shown the kinetic energy of both masses explicitly. (*Hint:* The masses orbit at radii r_1 and r_2, respectively, where $r = r_1 + r_2$. Be sure not to confuse the radius needed for centripetal acceleration with that for the gravitational force.)

79. Given the perihelion distance, p, and aphelion distance, q, for an elliptical orbit, show that the velocity at perihelion, v_p, is given by $v_p = \sqrt{\frac{2GM_{\text{Sun}}}{(q+p)}\frac{q}{p}}$. (*Hint:* Use conservation of angular momentum to relate v_p and v_q, and then substitute into the conservation of energy equation.)

80. Comet P/1999 R1 has a perihelion of 0.0570 AU and aphelion of 4.99 AU. Using the results of the previous problem, find its speed at aphelion. (*Hint:* The expression is for the perihelion. Use symmetry to rewrite the expression for aphelion.)

Challenge Problems

81. A tunnel is dug through the center of a perfectly spherical and airless planet of radius R. Using the expression for g derived in Gravitation Near Earth's Surface for a uniform density, show that a particle of mass m dropped in the tunnel will execute simple harmonic motion. Deduce the period of oscillation of m and show that it has the same period as an orbit at the surface.

82. Following the technique used in Gravitation Near Earth's Surface, find the value of g as a function of the radius r from the center of a spherical shell planet of constant density ρ with inner and outer radii R_{in} and R_{out}. Find g for both $R_{\text{in}} < r < R_{\text{out}}$ and for $r < R_{\text{in}}$. Assuming the inside of the shell is kept airless, describe travel inside the spherical shell planet.

83. Show that the areal velocity for a circular orbit of radius r about a mass M is $\frac{\Delta A}{\Delta t} = \frac{1}{2}\sqrt{GMr}$. Does your expression give the correct value for Earth's areal velocity about the Sun?

84. Show that the period of orbit for two masses, m_1 and m_2, in circular orbits of radii r_1 and r_2, respectively, about their common center-of-mass, is given by $T = 2\pi\sqrt{\frac{r^3}{G(m_1+m_2)}}$ where $r = r_1 + r_2$. (*Hint:* The masses orbit at radii r_1 and r_2, respectively where $r = r_1 + r_2$. Use the expression for the center-of-mass to relate the two radii and note that the two masses must have equal but opposite momenta. Start with the relationship of the period to the circumference and speed of orbit for one of the masses. Use the result of the previous problem using momenta in the expressions for the kinetic energy.)

85. Show that for small changes in height h, such that $h << R_{\text{E}}$, Equation 13.4 reduces to the expression $\Delta U = mgh$.

86. Using Figure 13.9, carefully sketch a free body diagram for the case of a simple pendulum hanging at latitude lambda, labeling all forces acting on the point mass, m. Set up the equations of motion for equilibrium, setting one coordinate in the direction of the centripetal acceleration (toward P in the diagram), the other perpendicular to that. Show that the deflection angle ε, defined as the angle between the pendulum string and the radial direction toward the center of Earth, is given by the expression below. What is the deflection angle at latitude 45 degrees? Assume that Earth is a perfect sphere. $\tan(\lambda + \varepsilon) = \frac{g}{(g - \omega^2 R_{\text{E}})}\tan\lambda$, where ω is the angular velocity of Earth.

87. (a) Show that tidal force on a small object of mass m, defined as the *difference* in the gravitational force that would be exerted on m at a distance at the near and the far side of the object, due to the gravitation at a distance R from M, is given by $F_{\text{tidal}} = \frac{2GMm}{R^3}\Delta r$ where Δr is the distance between the near and far side and $\Delta r << R$. (b) Assume you are falling feet first into the black hole at the center of our galaxy. It has mass of 4 million solar masses. What would be the difference between the force at your head and your feet at the Schwarzschild radius (event horizon)? Assume your feet and head each have mass 5.0 kg and are 2.0 m apart. Would you survive passing through the event horizon?

88. Find the Hohmann transfer velocities, $\Delta v_{\text{EllipseEarth}}$ and $\Delta v_{\text{EllipseMars}}$, needed for a trip to Mars. Use Equation 13.7 to find the circular orbital velocities for Earth and Mars. Using Equation 13.4 and the total energy of the ellipse (with semi-major axis a), given by $E = -\frac{GmM_{\text{S}}}{2a}$, find the velocities at Earth (perihelion) and at Mars (aphelion) required to be on the transfer ellipse. The difference, Δv, at each point is the velocity boost or transfer velocity needed.

INDEX

A

absolute pressure 678
acceleration due to gravity 130
acceleration vector 157
accuracy 27
action-at-a-distance force 648
air resistance 129
airbag 393
amplitude 769
amplitude (A) 725
Andromeda galaxy 616
angle between two vectors 76
angular acceleration 466
angular frequency 175, 776
angular momentum 536
angular position 462
angular velocity 463
anticommutative property 79
antinode 801
antiparallel 46
aphelion 637
apparent weight 620
Archimedes 688
Archimedes' principle 688
artificial joint 271
associative 49
atmospheric pressure 672, 678
Atwood machine 261
average acceleration 110
average power 333
average speed 107
average velocity 102

B

banked curve 282
bar graphs of total energy 362
barometer 679
Barringer Crater 390
base quantities 13
base unit 13
beat frequency 856
beats 856
Bell 839
Bernoulli 696
Bernoulli's equation 696
Bernoulli's principle 698
black hole 650
boomerang 487
bow wake 866
Brahe 612
Brownian motion 153
bulk modulus 588, 837
bulk strain 587
bulk stress 587
bungee cord 339
bungee jumper 354
buoyant force 687

C

Cavendish 613
center of gravity 568
center of mass 430
centrifugal force 285
centrifuge 286
centripetal acceleration 174, 279, 477
centripetal force 279
Cerenkov radiation 866
chemical energy 369
closed system 404
coefficient of kinetic friction 268
coefficient of static friction 268
coefficient of viscosity 703
commutative 49
compressibility 594
compressions 825
compressive stress 587
conservative force 356
conserved quantity 360
constructive interference 794
contact forces 199
conversion factor 18
coordinate system 55
Copernicus 612
Coriolis force 287
corkscrew right-hand rule 79
critically damped 753
cross product 78
Curie 11

D

damped harmonic motion 750
dark matter 654
decibels 839
deformation 587
density 668
derived quantity 13
derived units 13
destructive interference 794
deuteron 413
difference of two vectors 48
dimension 21
dimensionally consistent 21
dimensionless 21
direction angle 58
discrepancy 28
displacement 45, 100
displacement vector 151
distance traveled 102
distributive 49
Doppler effect 857
Doppler shift 857
dot product 74
drag coefficient 289
drag force 256, 288
dynamics 196

E

Einstein 648
elapsed time 102
elastic 412, 587, 597
elastic limit 597
elastic potential energy 352, 734
elastic property 828
Electrical energy 369
Electromagnetic waves 769
elevator 257
energy conservation 360
English units 13
entrainment 699
equal vectors 66
equation of continuity 693
equilibrium 203, 566
equilibrium point 367

equilibrium position 726
escape velocity 626
estimation 24
event horizon 650
exact differential 357
explosion 412
external force 197, 427

F

Fermi 11
fictitious forces 232
field forces 199
fixed boundary condition 790
flow rate 692
fluids 666
flywheel 483
force 197
force constant (k) 726
fossil fuels 371
frame of reference 100
free boundary condition 790
free fall 129, 215
free-body diagram 197, 252
frequency 827
frequency (f) 725
friction 267
fundamental 849
fundamental frequency 802

G

Galileo 129, 612
Gases 666
gauge pressure 678
Geiger 418
geosynchronous 661
geothermal 371
gravitational field 620
gravitational potential energy 350
gravitational torque 569
gravitationally bound 628
gyroscope 550

H

Halley 642
Halley's comet 641
harmonics 849
Hearing 824
helicopter 486
heterogeneous substance 670
Hohmann transfer 638
homogeneous substance 670
Hooke's law 323, 725
hydraulic jack 684
hydraulics 682
Hydropower 371
hydrostatic equilibrium 682

I

I-beams 592
ideal banking 282
ideal fluid 691
impulse 388
impulse-momentum theorem 395
inclined plane 273
inelastic 412
inertia 202
inertial force 285
inertial property 828
inertial reference frame 202
instantaneous acceleration 113
instantaneous angular acceleration 466
instantaneous angular velocity 463
instantaneous power 333
instantaneous speed 107
instantaneous velocity 105
intensity (I) 789
interference 792
internal force 427
International Space Station 619, 631
Io 647
iPhone 397

J

joule 317

K

Kepler 612
Kepler's first law 636
Kepler's second law 640
Kepler's third law 641
kilogram 15
kinematics 99, 262
kinematics of rotational motion 471
kinetic energy 325
kinetic friction 267

L

laminar flow 692
law 12
law of conservation of angular momentum 544
Law of Conservation of Momentum 404
law of inertia 202
Lennard-Jones 6-12 potential 738
lever arm 497
limit 597
linear mass density 436, 490
linear wave equation 780
Liquids 666
longitudinal wave 770
loop-the-loop 331
loudness 842

M

Mach number 863
magnitude 45
manometer 679
Mars Climate Orbiter 20
Marsden 418
mass flow rate 695
Matter waves 769
mechanical energy 360
mechanical wave 768
medium 768
meter 15
method of adding percents 30
metric system 16
Milky Way 6, 616
model 11
modulus 587
Molniya orbit 559
moment of inertia 482
momentum 214, 386

N

natural angular frequency 752
neap tide 644
net external force 200
net work 329

neutron star 652
Newton 196, 199, 612
Newton's first law 200
Newton's laws of motion 252
Newton's second law 207
Newton's second law for rotation 502
Newton's third law 217
node 801
noise reduction 847
Non-conservative forces 356
Non-Euclidean geometry 649
non-renewable 370
noninertial frame of reference 285
normal force 224, 257
normal mode 803
normal pressure 594
notes 842
Nuclear energy 369
null vector 66

O

orbital period 629
orbital speed 629
order of magnitude 8
orthogonal vectors 46
oscillation 725
overdamped 753
overtone 803
overtones 849

P

parallel axis 491
parallel vectors 46
parallel-axis theorem 491
particle acceleration 256
particle equilibrium 254
pascal 681
Pascal's principle 682
pendulum bob 744
percent uncertainty 29
perfectly inelastic 412
perihelion 637
period (T) 724
periodic driving force 753
periodic motion 724
phase of the wave 777
phase shift 728, 797
phases of matter 666
Philae 410
phon 842
physical pendulum 746
physical quantity 13
physics 6
pitch 842
pivot point 567
plasma 667
plastic behavior 597
Poiseuille 706
Poiseuille's law 706
Poiseuille's law for resistance 706
polar coordinate system 61
polar coordinates 61
position 100
position vector 150
potential energy 348
potential energy diagram 365
potential energy difference 348
power 333
power of a mechanical wave 788
Prandtl tube 700
precession 550
precision 27
pressure 593, 671
principle of equivalence 648
principle of superposition. 781
projectile motion 163
proportionality 597
Ptolemy 612
pulsar 558
pulse 774

R

radial coordinate 61
radiant energy 369
range 169
rarefactions 825
red shift 863
reference frame 179
relative velocity 180
renewable 370
resonance 754, 799, 807, 848
resonant cavities 852
restoring force 198, 737
resultant vector 48
Reynolds number 708
right-hand rule 464
rigid body 462
rocket equation 443
rolling motion 528
rotational dynamics 502
rotational kinetic energy 481
rotational work 506
Rutherford 418

S

scalar 44
scalar component 56
scalar equation 47
scalar product 74
scalar quantity 44
Schwarzschild 650
Schwarzschild radius 651
seatbelt 393
second 14
Seismic waves 834
shear 587
shear modulus 588
shear stress 275, 587
shock wave 865
SI units 13
significant figures 30
simple harmonic motion (SHM) 725
simple harmonic oscillator 725, 734
simple pendulum 744
solar power 372
solids 666
sonic boom 865
sound 824
sound intensity level 839
sound pressure level 841
space-time 648
specific gravity 671
spring tide 644
Stability 737
stable equilibrium point 737
standing wave 799
standing waves 847
static equilibrium 566
static fluid 674
static friction 267
strain 587, 587

stress-strain diagram 597
superposition 793
surface mass density 492
system 404

T

tail-to-head geometric construction 53
tangential acceleration 177, 477
tangential velocity 743
tensile strain 587
tensile stress 587
tension 227
terminal velocity 291
the component form of a vector 56
the parallelogram rule 51
theory 12
theory of general relativity 648
thermal energy 369
thrust 218
tidal force 643
timbre 842
time of flight 169
torque 496
torr, 682
Torricelli 680
torsion constant 749
torsional pendulum 748
total acceleration 177
total displacement 101
total linear acceleration 478
trajectory 162, 169
transducer 838
transverse wave 770
tubes with anti-symmetrical boundary conditions 851
tubes with symmetrical boundary conditions 851
tuned-mass damper 724
tuning fork 848
turbulence 702
turbulent flow 692
turning point 366
turning points 737
tweeter 833
two-body pursuit problem 127
two-body pursuit problems 117

U

ultimate stress 598
uncertainty 28
underdamped 753
uniform circular motion 740
unit vector 49
Unit vectors of the axes 56
units 13
universal gravitational constant 613

V

vector components 56
vector equation 47
vector product 78
vector quantities 44
vector sum 48
vectors 44
velocity vector 154
Venturi 714
viscosity 691
volume strain 587
volume stress 587

W

wave 768
wave function 774
wave number 776
wave speed 770
wave velocity 770
wavelength 769, 827
weight 215
Wheeler 650
Whirlpool Galaxy 6
Wind power 371
wind tunnel 289
woofer 833
work 316
work-energy theorem 329

Y

Young's modulus 588, 828